


# HUVUDSAKLIG

EN  
ES  
FR

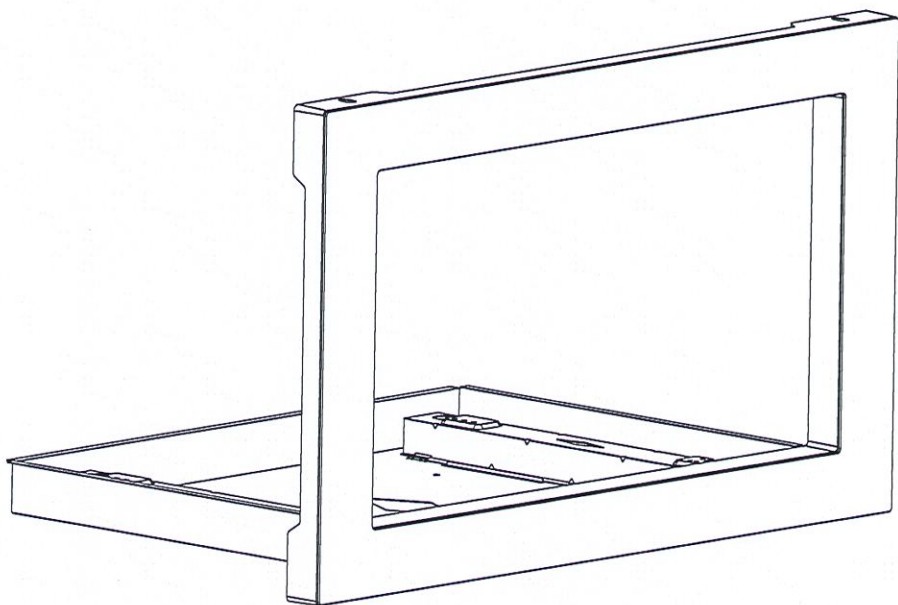

## WELCOME & CONGRATULATIONS

EN



Please record your model and serial numbers below for reference.

Registre su modelo y número de serie a continuación para referencia.

Veuillez enregistrer vos numéros de modèle et de série ci-dessous pour référence.

Purchase Date / Fecha de compra / Date d'achat

Model Number / Número de modelo / Numéro de modèle

Serial Number / Número de serie / Numéro de série

Please refer to the last page of this manual for the full list of IKEA appointed After Sales Service Provider and relative national phone numbers.

Consulte la última página de este manual para ver la lista completa de proveedores de servicios posventa designados por IKEA y los números de teléfono nacionales correspondientes.

Veuillez vous reporter à la dernière page de ce manuel pour obtenir la liste complète des fournisseurs de services après-vente désignés par IKEA et les numéros de téléphone nationaux correspondants.

<b>English</b>	<b>3</b>
<b>Español</b>	<b>10</b>
<b>Français</b>	<b>17</b>

### NOTE

Please attach sales receipt here for future reference.

Registre su modelo y número de serie a continuación para referencia.

Veuillez joindre le reçu de vente ici pour référence future.

Important Safety Information . . . . .	4
ASSEMBLY INSTRUCTIONS . . . . .	5
IKEA LIMITED GUARANTEE . . . . .	8

## **PRECAUTIONS TO AVOID POSSIBLE EXPOSURE TO EXCESSIVE MICROWAVE ENERGY**

- (a) Do not attempt to operate this oven with the door open since open-door operation can result in harmful exposure to microwave energy. It is important not to defeat or tamper with the safety interlocks.
- (b) Do not place any object between the oven front face and the door or allow soil or cleaner residue to accumulate on sealing surfaces.
- (c) Do not operate the oven if it is damaged. It is particularly important that the oven door close properly and that there is no damage to the: (1) door (bent), (2) hinges and latches (broken or loosened), (3) door seals and sealing surfaces.
- (d) The oven should not be adjusted or repaired by anyone except properly qualified service personnel.



**BEFORE YOU BEGIN**

- **IMPORTANT** – Save these instructions for local inspector's use.
- **IMPORTANT** – Observe all governing codes and ordinances.
- **Note to Installer** – Be sure to leave these instructions with the Consumer.
- **Note to Consumer** – Keep these instructions for future reference.
- **Skill level** - Installation of this appliance requires basic mechanical and electrical skills.

**Read these instructions completely and carefully.**

- Proper installation is the responsibility of the installer.
- Product failure due to improper installation is not covered under the Warranty.
- Unplug the microwave oven before attempting installation of this kit.
- Because the kit includes metal parts, caution should be used in handling and installation to avoid the possibility of injury.
- Do not remove permanently affixed labels, warnings, or plates from the product. This may void the warranty.

**QUESTIONS?**

Service Call: (833) 337-4006

**READ CAREFULLY.**

**KEEP THESE INSTRUCTIONS.**

**FOR YOUR SAFETY:**

**WARNING** – Before beginning the installation, switch power off at service panel and lock out to prevent being switched on accidentally. When the service cannot be locked, securely fasten a prominent warning device, such as a tag, to the service panel. Disconnect from power supply before service.

**IMPORTANT - PLEASE READ AND FOLLOW**

**THIS BUILT-IN KIT IS DESIGNED FOR USE ONLY WITH IKEA HUVUDSAKLIG MICROWAVE OVENS SPECIFYING BUILT-IN KIT**

**IMPORTANT:**

**Before installing the exhaust duct, confirm the floor is level. The level bubble should be equal distance from level guide lines.**



## PARTS INCLUDED IN THE KIT

1. Front Frame Assembly- QTY 1
2. Exhaust Duct - QTY 1
  - Bottom Mounting Rail - QTY 2
3. Screw A - QTY 11+3 extra
4. Screw B - QTY 4+2 extra

## CHOOSING A LOCATION FOR YOUR MICROWAVE OVEN IF BUILT-IN

Built-In Trim Kit allows for the installation of microwaves listed below to be built into a cabinet or wall by itself or over an electric wall oven\*.

### Microwave Models:

104.621.61    104.660.03  
904.621.62    904.660.04

See Illustration 1 for proper location and when building in above a wall oven. Carefully follow both the wall oven assembly instructions and IKEA's Built-in Kit instructions. If building over a wall oven, be sure the clearance between the wall oven and the microwave oven is a minimum of 3 inches. See illustration 2.

\*NOTE: Trim Kit and microwave can only be built-in over an electric self-clean or non self-clean single cavity wall oven.

## CABINET OR WALL CUTOUT

Cutout Dimensions( See illustration 3)

Height (A)

Minimum    16 3/4" (42.5 cm)  
Maximum    17" (43.2 cm)

Width (B)

Minimum    24 3/4" (62.9 cm)  
Maximum    25" ( 63.5 cm)

Depth (C)

Minimum    20" (50.8 cm)

## IMPORTANT:

**Before installing the exhaust duct, confirm the floor is level.**  
**The level bubble should be equal distance from level guide lines.**

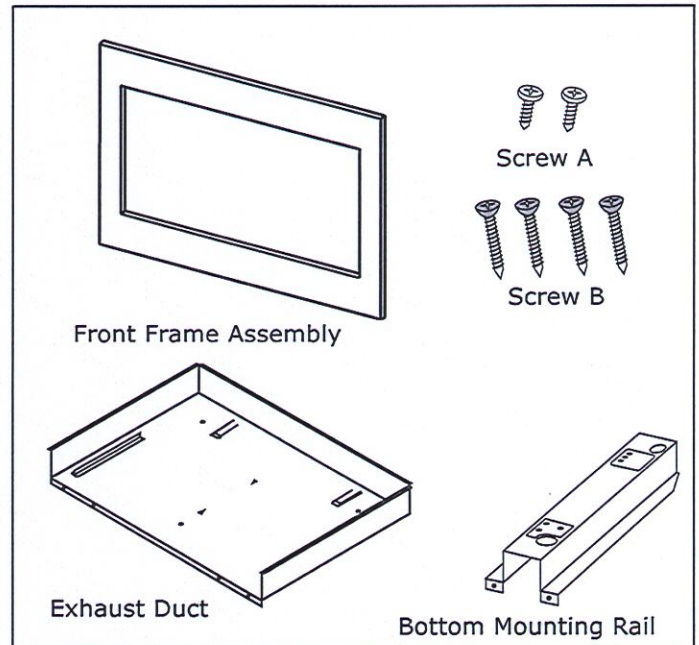


Illustration 1

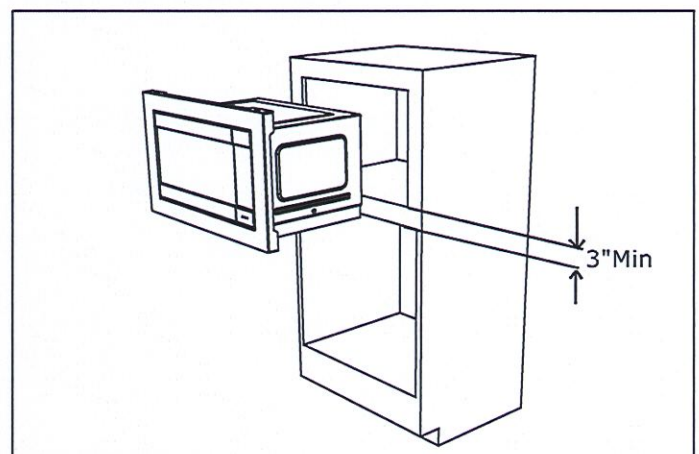


Illustration 2

Trim Kit Overall Dimensions	
Height	18" (458mm)
Width	30" (762mm)
Depth	1 1/2" (38.9cm)



## ASSEMBLY INSTRUCTIONS

EN

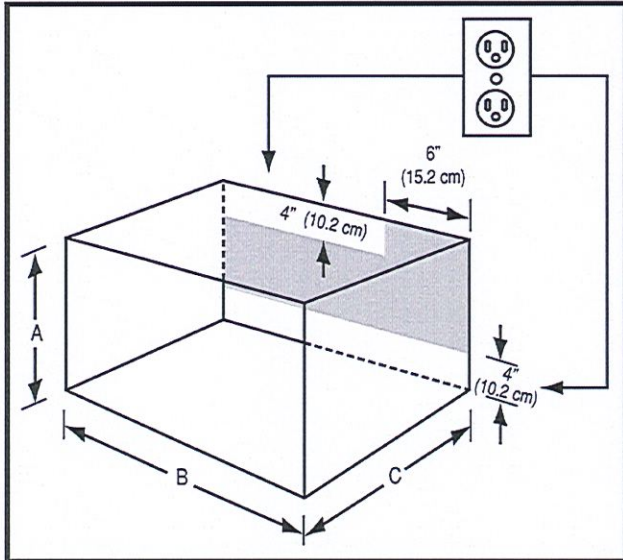


Illustration 3

### ELECTRICAL OUTLET LOCATION

Outlet should NOT be in the shaded area as indicated on Illustration 3

#### NOTE 1:

The floor of the opening should be constructed of plywood strong enough to support the weight of the oven and floor load (approximately 100 pounds). The floor should be level for proper operation of the oven. Be sure to check the local building code as it may require that the opening be enclosed with side, ceiling and rear partition. The proper functioning of the oven does not require the enclosure.

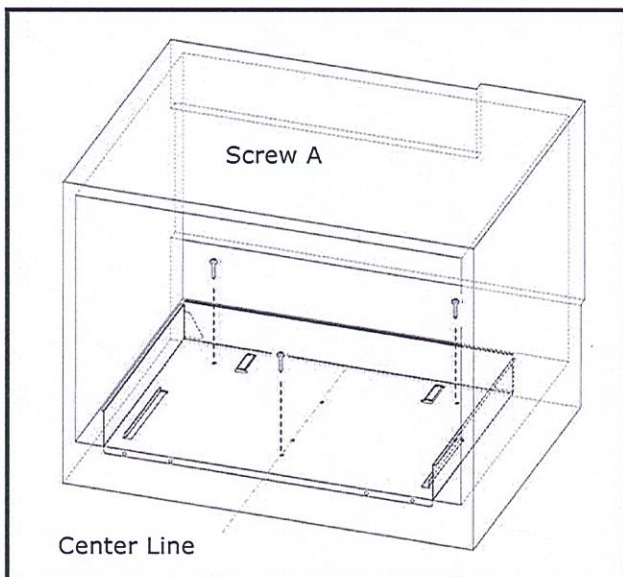


Illustration 4

### EXHAUST DUCT ASSEMBLY

1. Draw a Central Line on floor. Place the Exhaust Duct in the opening, When the Exhaust Duct Assembly is in the opening correctly, the Center Line is in the middle of the Exhaust Duct Assembly. See Illustration 4.
2. Secure the Exhaust Duct Assembly with the three screws A.

**IMPORTANT:** Secure screws in outer hole. 3 pcs are needed for exhaust duct assembly

### IMPORTANT:

Before installing the exhaust duct, confirm the floor is level. The level bubble should be equal distance from level guide lines.



### Bottom Mounting Rail

Turn microwave upside down so you are looking at oven bottom. Secure the bottom Mounting Rail on oven with four SCREWS A. See Illustration 5.

NOTE: Please make sure to align the holes (marked with "36") 6 of bottom mounting rail and the holes (marked with "36") of microwave oven's bottom plate.


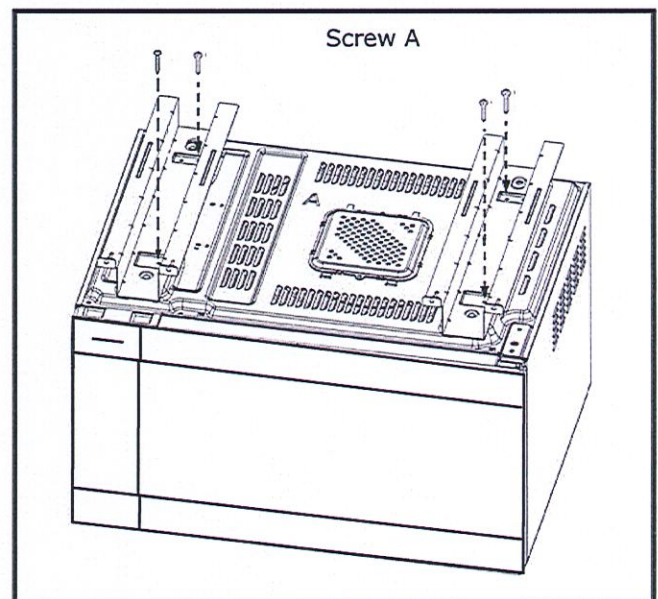


Illustration 5

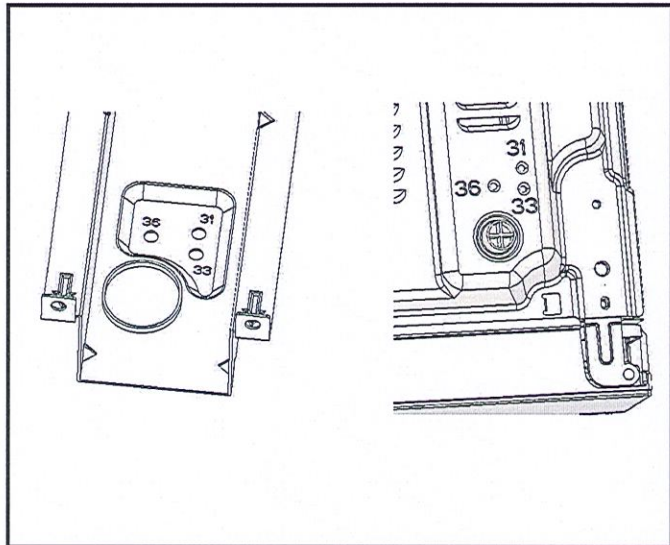

## OVEN INSTALLATION

1. Place the oven adjacent to the wall or cabinet opening. Plug the power cord into the electrical outlet.
2. Carefully guide the assembled oven into the prepared opening. Slide the oven on the Exhaust Duct Assembly. See Illustration 6
3. Secure the Exhaust Duct Assembly with the four screws A.

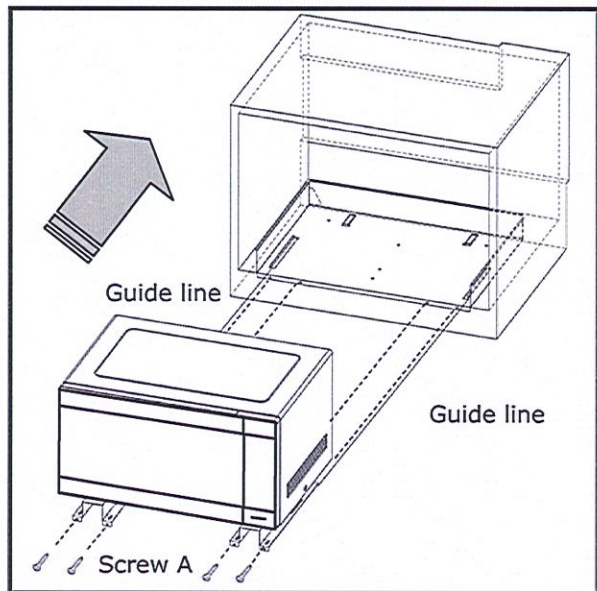


Illustration 6

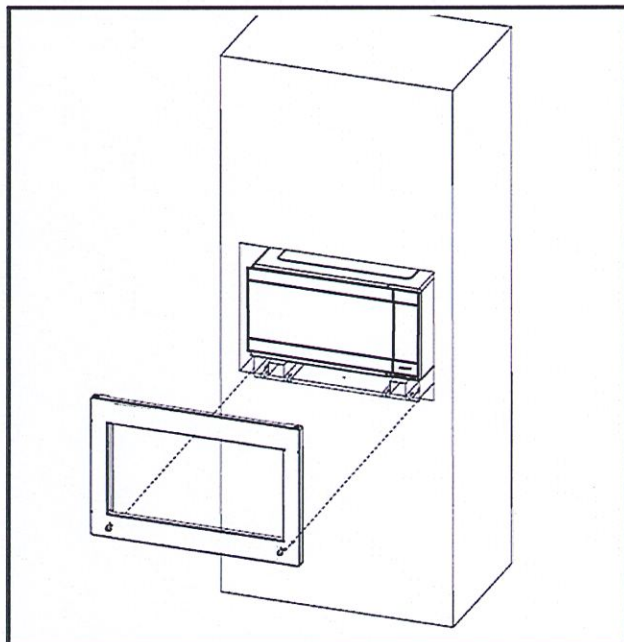


Illustration 7

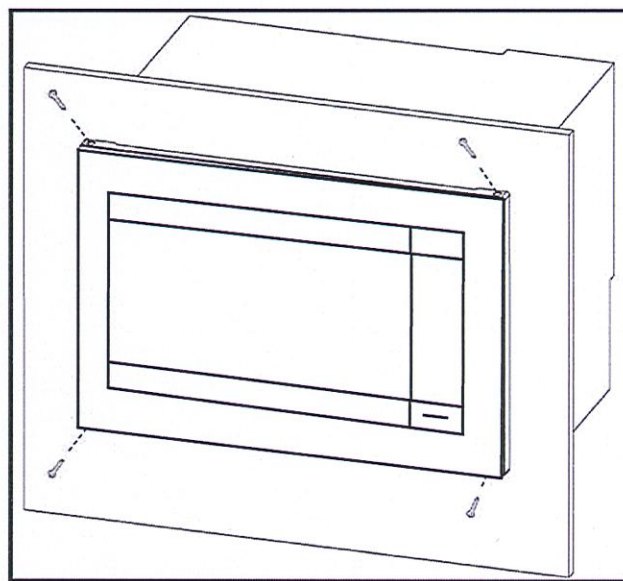


Illustration 8

## FRAME INSTALLATION

1. Position the FRAME ASSEMBLY to be square with the oven. Carefully place the FRAME ASSEMBLY on the oven. See Illustration 7.
2. Check that it is level and then secure with two SCREWS B. Secure the bottom portion of the FRAME ASSEMBLY with the two remaining SCREWS B. See Illustration 8.



## WELCOME & CONGRATULATIONS

EN



Please refer to the last page of this manual for the full list of IKEA appointed After Sales Service Provider and relative national phone numbers.

Veuillez vous reporter à la dernière page de ce manuel pour obtenir la liste complète des fournisseurs de services après-vente désignés par IKEA et les numéros de téléphone nationaux correspondants.

Please record your model and serial numbers below for reference.


Veuillez enregistrer vos numéros de modèle et de série ci-dessous pour référence.

Purchase Date / Date d'achat

Model Number / Numéro de modèle

Serial Number / Numéro de série

### Rating Plate Location / Emplacement de la plaque signalétique

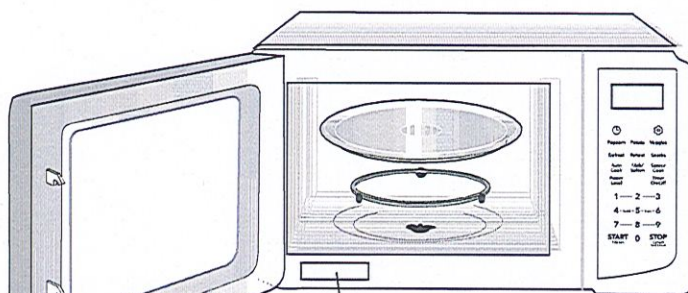

Rating Plate Location / Emplacement de la plaque signalétique

English

3

Français

16

#### NOTE

Please attach sales receipt here for future reference.

Veuillez joindre le reçu de vente ici pour référence future.