

Monitor 14 Series Contemporary Square Shower Kit

MODEL#: DF-KIT23-PBSBL-WS

Finish: **Matte Black**



- Monitor 14 Series valve-only trim with integrated diverter
- MultiChoice Universal Valve with stops
- H2Okinetic Touch-Clean raincan shower head
- 4-setting H2Okinetic hand shower with slide bar and hose
- Shower arm, flange and wall elbow included



TRINSIC®

Roman Tub Trim with Hand Shower

MODEL#: T4759-BL



- Valve is not included, must purchase separately
- 4-hole 8-16" installation
- Backed by Delta Faucet's Lifetime Limited Warranty



WaterSense® Labeled

Finish: **Matte Black**

Rough Valve



Two Handle Flexible
Mount with Hand
Shower

MODEL#: R4707

✓ SHOW MORE OPTION

Base Part



Roman Tub Trim with
Hand Shower
MODEL#: T4759-BL



Complete your bath with a beautifully designed Delta roman tub faucet, meticulously crafted to turn heads and enhance your experience. The included hand shower makes this a versatile addition to your bath, perfect for rinsing off, washing loved ones and pets or keeping your tub clean. Delta H2Okinetic Hand Showers look different because they are different. Using advanced technology, H2Okinetic Hand Showers sculpt water into a unique wave pattern, giving you 3X the coverage of a standard shower head.* The end result is a hand shower that provides more coverage, more warmth and more intensity for a truly drenching experience. Matte Black makes a statement in your space, cultivating a sophisticated air and coordinating flawlessly with most other fixtures and accents. With bright tones, Matte Black is undeniably modern with a strong contrast, but it can complement traditional or transitional spaces just as well when paired against warm neutrals for a rustic feel akin to cast iron. You can install with confidence, knowing that Delta faucets are backed by our Lifetime Limited Warranty. *Coverage measured in accordance with EPA WaterSense Specification for shower heads, March 4, 2010.

- Touch-Clean full body hand shower includes double check valves for backflow prevention
- Swivel slip-on spout
- Trim kit only, must purchase rough-in R4707 separately to complete the unit
- Temperature and volume controlled with handles
- Metal lever handles meet standards set by Americans with Disabilities Act (ADA)
- Red/blue indicator markings

Special Features




ADA Compliant 




Stainless Steel | 113.0045.211

FAMILY : Sinks | SERIES : Steel Queen | MODEL : QSL1515-6-2 | FINISH : Stainless Steel | PRODUCT LINE : Hospitality |
INSTALLATION TYPE : Topmount

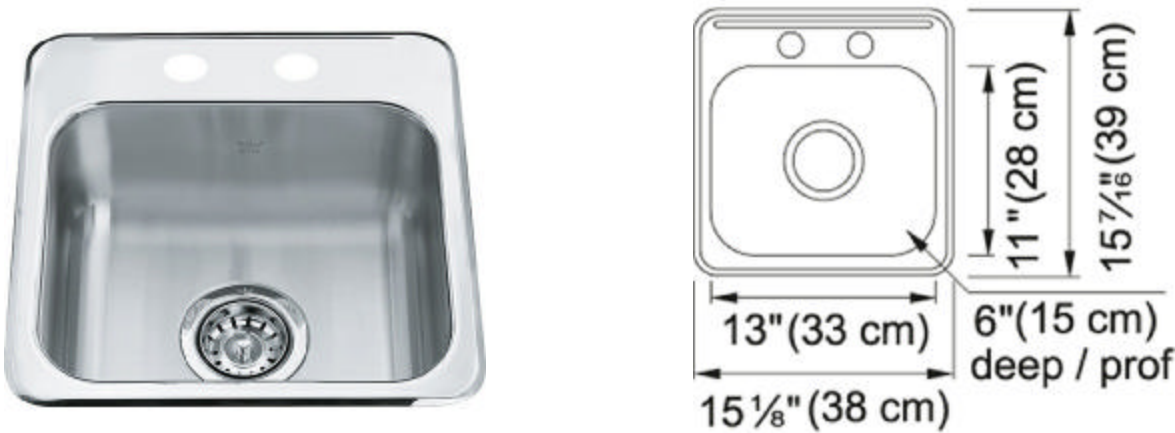



TECHNICAL DATA	
Width overall	15 7/16"
Length overall	15 1/8"
Width of large bowl	11"
Length of large bowl	13"
Depth of large bowl	6"
Cabinet Size	18"
Number of Bowls	1
Waste Outlet Diameter	3 1/2"
Cut-Out Template	Yes
Faucet Hole	2
Type of Material	20 Gauge Stainless Steel
Surface Finish	H-HIGH-GLOSS/MIRROR
Waste Kit Included	yes
EZ Torque Installation	YES

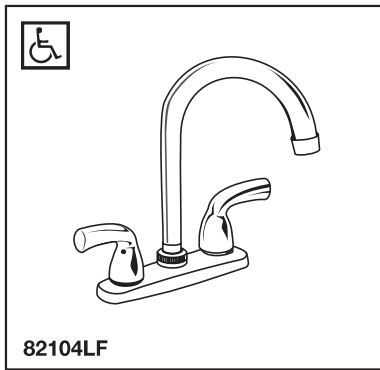

BAR FAUCET

Submitted Model No.: _____

Specific Features: _____

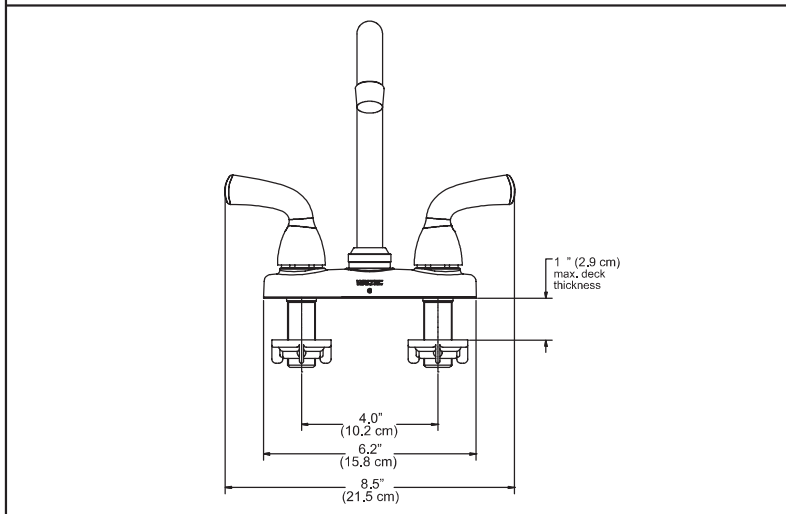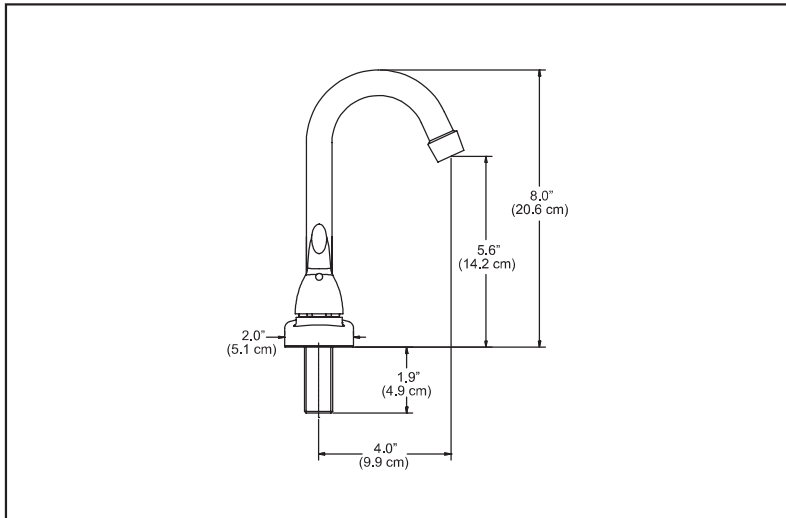

SUGGESTED SPECIFICATIONS:

- Two handle deck faucet for 10.2 cm (4") centre mounting.
- 9.9 cm (4") swing spout.
- Chrome handles and inlets for flex supply connection.
- Control mechanism shall be of the rotating cylinder type with 180° rotation.
- Replaceable non-metallic seats operating in sockets.
- Hot and cold stem units shall be interchangeable and have stainless steel seating surfaces.
- Metal lever handles.
- 1/4 turn feature.
- Brass stem washerless cartridge.

Aerator

- Flow restricting, 2.2 gpm maximum (8.3 L/min), chrome-plated brass housing.



COMPLIES WITH:

- ASME A112.18.1/CSA B125.1




Indicates ADA compliance to
ICC/ANSI A117.1

- "LF" suffix indicates model is verified to
<0.25% Pb average wetted surface regulation.

BRASS STEM – WASHERLESS

1	Brass stem cartridge
2	Full flow is reached with only a 1.27 cm (1/2") turn – built-in positive stop
3	Stainless steel shoe
4	Self-lubricating rubber seat
5	Stainless steel spring



Waltec Industries reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.specselect.com for finish options and product availability.

Waltec Industries
395 Matheson Blvd. E.
Mississauga, ON L4Z 2H2
© 2013 Masco Canada Limited
www.waltecfaucets.ca