



14-Jun-21

REVISED

PRE-Sales Selection Sheet

CHECKLIST

9 of 39 C2

LOT	00542	20-1783-AL ELEV B THE ROSEWOOD
PURCHASERS:	AZHERUDDIN SINDHA	CONTACT NO: 416-700-4020
VENDOR:	HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4	

* GREAT ROOM- WAFFLE CEILING

☐ FINISHED BASEMENT	
☐ COLD CELLAR	
UPGRADED / MODIFIED ELEVATION	
☐ CORNER UPGRADE	☐ WALK OUT DECK
☐ SIDE UPGRADE	☐ WALK OUT BASEMENT
☐ REAR UPGRADE	
CEILING UPGRADE - SMOOTH	
☒ MAIN FLOOR	☐ BASEMENT
☒ SECOND FLOOR	
ADDITIONAL ROUGH-INS	
☒ 200 AMP SERVICE	☒ HUMIDIFIER
☐ WET BAR ROUGH IN	☒ AIRCON
GAS ROUGH-IN	
☒ STOVE	☐ DRYER
☐ BBQ	☐ ADDITIONAL FIREPLACE
HOODFAN VENTING	
☒ 6" ROUND DUCT	
☐ 7" ROUND DUCT	

FULL BASEMENT STAIRS:	N/A
UPPER BASEMENT STAIRS:	ALL OAK
LOWER BASEMENT STAIRS:	PAINTE GRADE
STAIRS TO LOWER LEVEL:	N/A
STAIRS TO UPPER LEVEL:	N/A
MAIN STAIRS:	ALL OAK
MEDIA STAIRS (if applicable):	N/A

Date	June 14/21	Signature	June 14/21	IRIT SALEM
Purchaser	File	Date	June 14/21	Décor Consultant
Purchaser		Date	June 14 2021	
Date		Date Approved		HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4



28-May-21

Interior Finishing Selection Sheet

LOT 00542

20-1783-AL ELEV B THE ROSEWOOD

PURCHASERS: AZHERUDDIN SINDHA

CONTACT NO: 416-700-4020

VENDOR: HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4

UPG

Appliances

6-8894 Kitchen HoodFan

☐ CYCLONE 30" CANOPY CHIMNEY HOODFAN STAINLESS STEEL SCB51430 STD PAGE 27

Cabinetry

1-9111 Kitchen Cabinet Colour/Style

☐ SIMCOE ORCHID VIKING III STD 3DL

3-2098 Kitchen Cabinet Hardware

☐ HARDWARE 12801 STD

25-9157 Main Bathroom Cabinet Colour/Style

☐ SIMCOE MOONLIGHT Viking III STD 3DL

29-2093 Main Bathroom Cabinet Hardware

☐ HARDWARE 9671 STD

28-8827 Main Bathroom Countertop

☐ Countertop CALCUTTA MARBLE 4925K-07 Wilsonart

20-9157 Master Ensuite Cabinet Colour/Style

☐ SIMCOE MOONLIGHT Viking III STD 3DL

22-2093 Master Ensuite Cabinet Hardware

☐ HARDWARE 9671 STD

21-8827 Master Ensuite Countertop

☒ Countertop CALCUTTA MARBLE 4925K-07 Wilsonart

Carpet

37-9245 Bedroom 2 Flooring

☐ Dynasty Tex 40 oz Poly OVERCAST DY 87354 STD

38-9245 Bedroom 3 Flooring

☐ Dynasty Tex 40 oz Poly OVERCAST DY 87354 STD

36-9245 Master Bedroom Flooring

☐ Dynasty Tex 40 oz Poly OVERCAST DY 87354 STD

52-1079 Throughout Underpad

☐ Underpad 500 Series STD

Ceramics

16-9106 Foyer Flooring

☒ Madison Series White Matte GE.MD.WHT.1818.MT UPG 1 18" X 18" Matte

17-2225 Foyer Grout

☐ Grout (27) Silver STD

4-8640 Kitchen Backsplash

☒ Penny Rounds Snow White Glossy WB.PR.SWT.1212.GL UPG 4 12 x 12

5-2226 Kitchen Backsplash Grout

☐ Grout (00) White STD

140-2225 Landing at Garage Entry Flooring

☐ Grout (27) Silver STD

140-9106 Landing at Garage Entry Flooring

☒ Madison Series White Matte GE.MD.WHT.1818.MT UPG 1 18" X 18" Matte

1. The Purchaser acknowledges these selections are subject to the terms and conditions of the applicable Agreement of Purchase and Sale.
2. The Purchaser acknowledges that the Vendor accepts no responsibility in the event the Vendor is unable to supply a selection. The Purchaser agrees to reselect from the currently available selections immediately upon request.
3. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
4. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
5. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
6. Selections will not be processed unless signed by Heathwood Homes Head Office.
7. The colour selections made on the Colour Chart are final and cannot be changed once submitted.
8. The Purchaser has checked and acknowledges the accuracy of this Colour Chart.

May 28 2021

May 28 21

Date

Purchaser

Décor Consultant

Date

Purchaser

Date Approved

HEATHWOOD HOMES (WHITBY)

LIMITED - PHASE 4



28-May-21

Interior Finishing Selection Sheet

LOT 00542

20-1783-AL ELEV B THE ROSEWOOD

PURCHASERS: AZHERUDDIN SINDHA

CONTACT NO: 416-700-4020

VENDOR: HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4

UPG

Ceramics

- 30-9257 Main Bathroom Flooring

☐ CARRARA White / Grey GE.CR.WHIT.1313.MT STD 13 x 13
- 31-2225 Main Bathroom Grout

☐ Grout (27) Silver STD
- 112-9020 Main Bathroom Tub Wall Tile

☐ Weave White QT.WV.WHT.0810 STD 8 x 10 TOM BE INSTALLED VERTICALLY
- 113-2226 Main Bathroom Tub Wall Tile Grout

☐ Grout (00) White STD
- 23-8913 Master Ensuite Floor Tile

☒ Biel Bianco (White) UN.BL.BIA.1224 UPG_2 12 x 24 TO BE INSTALLED FROM FRONT TO BACK
- 24-2225 Master Ensuite Floor Tile Grout

☐ Grout (27) Silver STD
- 73-8661 Master Ensuite Shower Floor Tile

☐ Ontario Series Mosaic Snow White Matte OD.ON.SWT.0202.MT.N STD 2 x 2
- 74-2226 Master Ensuite Shower Floor Tile Grout

☐ Grout (00) White STD
- 147-8923 Master Ensuite Shower Jamb(s) and Sill(s)

☐ Shower Jamb / Sill Thassos White STD
- 104-9020 Master Ensuite Shower Wall Tile

☐ Weave White QT.WV.WHT.0810 STD 8 x 10 TO BE INSTALLED VERTICALLY
- 105-2226 Master Ensuite Shower Wall Tile Grout

☐ Grout (00) White STD
- 32-9106 Powder Room Flooring

☒ Madison Series White Matte GE.MD.WHT.1818.MT UPG 1 18" X 18" Matte
- 33-2225 Powder Room Grout

☐ Grout (27) Silver STD
- 53-2232 Throughout Thresholds

☐ Metal Thresholds STD

Electrical

90-5796 Throughout Switches and Plug

☐ Decora White Switches and Plugs STD

Fireplace

136-8892 Great Room Fireplace Mantle

☐ Paint Grade Mantle- 6" Deep Mantle (TV above Fireplace WHITE NF-17 UPG **PAGE 20**

8813
~~138-8896~~ Great Room Fireplace Surround

☐ **3** pc - 6" Marble Surround Nero Marquina

135-5529 Great Room Fireplace Type

☐ 36" Direct Vent Gas Fireplace

Granite

2-9069 Kitchen Countertop

☐ MSI Quartz ICED WHITE Group 1 STD 3/4"

- The Purchaser acknowledges these selections are subject to the terms and conditions of the applicable Agreement of Purchase and Sale.
- The Purchaser acknowledges that the Vendor accepts no responsibility in the event the Vendor is unable to supply a selection. The Purchaser agrees to reselect from the currently available selections immediately upon request.
- The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
- The Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
- The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
- Selections will not be processed unless signed by Heathwood Homes Head Office.
- The colour selections made on the Colour Chart are final and cannot be changed once submitted.
- The Purchaser has checked and acknowledges the accuracy of this Colour Chart.

May 28 2021 *[Signature]*

Date Purchaser


May 28 21 *[Signature]*

Date

Décor Consultant

Date Purchaser

Date Approved HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4



Interior Finishing Selection Sheet

28-May-21

LOT 00542

20-1783-AL ELEV B THE ROSEWOOD

PURCHASERS: AZHERUDDIN SINDHA

CONTACT NO: 416-700-4020

VENDOR: HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4

Hardwood

UPG

11-8501 Great Room Flooring

☐ Vintage Red Oak Solid Sculpted Character UVF Oil HIGHLAND Red Oak UVF 3/4" x 5"

7-8501 Kitchen/Breakfast Flooring

☒ Vintage Red Oak Solid Sculpted Character UVF Oil HIGHLAND Red Oak UVF 3/4" x 5"

98-8501 Main Hall Flooring

☒ Vintage Red Oak Solid Sculpted Character UVF Oil HIGHLAND Red Oak UVF 3/4" x 5"

78-8501 Stair Landing to Lower Level Flooring

☐ Vintage Red Oak Solid Sculpted Character UVF Oil HIGHLAND Red Oak UVF 3/4" x 5"

77-8501 Stair Landing to Upper Level Flooring

☐ Vintage Red Oak Solid Sculpted Character UVF Oil HIGHLAND Red Oak UVF 3/4" x 5"

35-8501 Upper Hall Flooring

☐ Vintage Red Oak Solid Sculpted Character UVF Oil HIGHLAND Red Oak UVF 3/4" x 5"

Interior Railings

43-8148 Stairs to Upper Level Handrail/Pickets/Posts Type

☐ Single Collar Alt. Plain w/ Shoes with 3 1/2" Square/Cap Post(s) BLACK METAL STD

Interior Stairs

45-1713 Stairs to Lower Level Type

☐ Paint Grade Stairs STD

39-1712 Stairs to Upper Level Type

☐ Oak Stairs UPG_1

Interior Trim

91-8704 Throughout Trim Size

☐ 5 1/4" Baseboards and 3" Integrated Backband Casings STD

Painting

40-7761 Stairs to Upper Level Colour

☐ Stain handrail, stringers, treads, risers, nosing & posts. (Metal pickets) TO COMPLEMENT HIGHLAND HARDWOOD SHADES WILL VARY

44-7761 Stairs to Upper Level Handrail/Pickets/Posts Colour

☐ Stain handrail, stringers, treads, risers, nosing & posts. (Metal pickets) TO COMPLEMENT HIGHLAND HARDWOOD SHADES WILL VARY

240-1716 Throughout Trim - Paint Colour

☐ Trim WHITE STD

51-1717 Throughout Walls - Paint Colour

☐ Wall WARM GREY 22 STD

Plumbing

266-1737 Main Bathroom Plumbing Fixture (Colour)

☐ Plumbing Fixtures WHITE STD

149-1737 Master Ensuite Plumbing Fixture (colour)

☐ Plumbing Fixtures WHITE STD

1. The Purchaser acknowledges these selections are subject to the terms and conditions of the applicable Agreement of Purchase and Sale.
2. The Purchaser acknowledges that the Vendor accepts no responsibility in the event the Vendor is unable to supply a selection. The Purchaser agrees to reselect from the currently available selections immediately upon request.
3. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
4. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
5. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
6. Selections will not be processed unless signed by Heathwood Homes Head Office.
7. The colour selections made on the Colour Chart are final and cannot be changed once submitted.
8. The Purchaser has checked and acknowledges the accuracy of this Colour Chart.

May 28 2021 *[Signature]*

Date

Purchaser

May 22 2021 *[Signature]*

Date

Décor Consultant

[Signature]

Date

Purchaser

HEATHWOOD HOMES (WHITBY)

LIMITED - PHASE 4



Interior Finishing Selection Sheet

39 of 39

28-May-21

LOT 00542

20-1783-AL ELEV B THE ROSEWOOD

PURCHASERS: AZHERUDDIN SINDHA

CONTACT NO: 416-700-4020

VENDOR: HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4

Plumbing

UPG

34-1737 Powder Room Plumbing Fixture (Colour)

☐ Plumbing Fixtures WHITE STD

1. The Purchaser acknowledges these selections are subject to the terms and conditions of the applicable Agreement of Purchase and Sale.
2. The Purchaser acknowledges that the Vendor accepts no responsibility in the event the Vendor is unable to supply a selection. The Purchaser agrees to reselect from the currently available selections immediately upon request.
3. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
4. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
5. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
6. Selections will not be processed unless signed by Heathwood Homes Head Office.
7. The colour selections made on the Colour Chart are final and cannot be changed once submitted.
8. The Purchaser has checked and acknowledges the accuracy of this Colour Chart.

MAY 28 2021

[Signature]

Date Purchaser

MAY 28 21

[Signature]

Décor Consultant

MAY 14 2021

[Signature]

Date Purchaser

HEATHWOOD HOMES (WHITBY)

LIMITED - PHASE 4



28-May-21

LOT 00542

PURCHASERS: AZHERUDDIN SINDHA

CONTACT NO: 416-700-4020

VENDOR: HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4

HST #

20-1783-AL ELEV B THE ROSEWOOD

It is herein understood and agreed between the undersigned parties hereto that the following changes shall be made to the above mentioned Agreement of Purchase and Sale in accordance with the agreement and except for such changes noted below, all other terms and conditions in the Agreement of Purchase and Sale shall remain as stated herein: It is further understood that and agreed that all changes and additions shall be installed as per builder's specifications, location and available selections. The Purchaser hereby agrees to purchase the following extras:

AMOUNT:

Appliances

2 SEE SPEC PAGE 3 27-39 Qty: 1

Cabinetry

1338 Optional Extras KITCHEN
30H- Wall cabinet with shelf for microwave (finished interior) (opening 24"W x 13 3/4"H x 17"D) * electrical priced separately Viking
TO BE INSTALLED BESIDE THE FRIDGE
SEE SKETCH 5 PAGE 18 ELECTRICAL PLUG ON PRE-SSS Qty: 1

Ceramics

1667 Upgrade 1 Tile Foyer Floor Qty: 1
1673 Upgrade 4 Tile Kit. Basplash Qty: 1
1672 Upgrade 2 Tile Master Bath Floor Qty: 1
1669 Upgrade 1 Tile Mud Room Floor Qty: 1
1668 Upgrade 1 Tile Powder Floor Qty: 1

Electrical

1. This Sales Selection Sheet when properly executed forms part of our Agreement of Purchase and Sale.
2. All extras and upgrades listed above are subject to Construction Progress and Architectural and Municipal requirements.
3. In the event the Vendor is unable to incorporate the work approved above in the construction of the house for any reason whatsoever, the Vendor will not be liable to the Purchaser in any way. The monies paid for any changes or optional extras not proceeded with shall be returned to the Purchaser, without interest. The cost of options or extras is non-refundable in all other circumstances. If for any reason whatsoever the Agreement of Purchase and Sale is not completed, the total cost of work approved above will be retained by the Vendor.
4. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
5. The Vendor acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
6. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
7. Selections will not be processed unless signed by Heathwood Homes Head Office.
8. The selections made on this schedule are final and cannot be changed once submitted.
9. The Purchaser has checked and acknowledges the accuracy of this schedule.

May 28 2021

Date

Purchaser

May 28 21

Date

Décor Consultant

Date

Purchaser

Date Approved
HEATHWOOD HOMES (WHITBY)
LIMITED - PHASE 4



28-May-21

Sales Selection Sheet
OF 39

LOT	00542	20-1783-AL ELEV B THE ROSEWOOD	
PURCHASERS: AZHERUDDIN SINDHA		CONTACT NO: 416-700-4020	
VENDOR: HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4		HST #	

It is herein understood and agreed between the undersigned parties hereto that the following changes shall be made to the above mentioned Agreement of Purchase and Sale in accordance with the agreement and except for such changes noted below, all other terms and conditions in the Agreement of Purchase and Sale shall remain as stated herein: It is further understood that and agreed that all changes and additions shall be installed as per builder's specifications, location and available selections. The Purchaser hereby agrees to purchase the following extras:

AMOUNT:

Qty: 1

344 **Optional Extras**
Ceiling rough-in (Capped)
TO BE INSTALLED ABOVE THE BREAKFAST BAR - SWITCH TO BE TOGETHER WITH
OTHER R/I CAP LIGHTS
SEE SKETCH 5 PAGE 18

KITCHEN

Hardwood

Qty: 1

965 **Vintage**
5" RED OAK SCULPTED NSS UV-Oil or Pearl

KIT / BREAK

Plumbing

Qty: 1

277 **STANDARD Kitchen Sink Option**
KINDRED Kitchen Sink Collection - Reginox NS1930U/9 Stainless Kitchen Single
Bowl Undermount Sink (or equivalent) PAGE 22

KITCHEN

Waffle Ceiling

Qty: 1

491 **Optional Extra**
Install Waffle Ceiling in main floor great room
SKETCH # 5 PAGE 18

GREAT ROOM

1. This Sales Selection Sheet when properly executed forms part of our Agreement of Purchase and Sale.
2. All extras and upgrades listed above are subject to Construction Progress and Architectural and Municipal requirements.
3. In the event the Vendor is unable to incorporate the work approved above in the construction of the house for any reason whatsoever, the Vendor will not be liable to the Purchaser in any way. The monies paid for any changes or optional extras not proceeded with shall be returned to the Purchaser, without interest. The cost of options or extras is non-refundable in all other circumstances. If for any reason whatsoever the Agreement of Purchase and Sale is not completed, the total cost of work approved above will be retained by the Vendor.
4. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
5. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
6. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
7. Selections will not be processed unless signed by Heathwood Homes Head Office.
8. The selections made on this schedule are final and cannot be changed once submitted.
9. The Purchaser has checked and acknowledges the accuracy of this schedule.

May 28 2021	May 22 21	
Date	Date	Date
Purchaser	Purchaser	Décor Consultant
Date	Date	Date
Purchaser	Purchaser	Décor Consultant

Date Approved: HEATHWOOD HOMES (WHITBY)
LIMITED - PHASE 4



28-May-21

LOT 00542

PURCHASERS: AZHERUDDIN SINDHA

CONTACT NO: 416-700-4020

VENDOR:

HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4

HST #

20-1783-AL ELEV B THE ROSEWOOD

It is herein understood and agreed between the undersigned parties hereto that the following changes shall be made to the above mentioned Agreement of Purchase and Sale in accordance with the agreement and except for such changes noted below, all other terms and conditions in the Agreement of Purchase and Sale shall remain as stated herein: It is further understood that and agreed that all changes and additions shall be installed as per builder's specifications, location and available selections. The Purchaser hereby agrees to purchase the following extras:

AMOUNT:

Sales Selection Sheet
10 of 31

1. This Sales Selection Sheet when properly executed forms part of our Agreement of Purchase and Sale.
2. All extras and upgrades listed above are subject to Construction Progress and Architectural and Municipal requirements.
3. In the event the Vendor is unable to incorporate the work approved above in the construction of the house for any reason whatsoever, the Vendor will not be liable to the Purchaser in any way. The monies paid for any changes or optional extras not proceeded with shall be returned to the Purchaser, without interest. The cost of options or extras is non-refundable in all other circumstances. If for any reason whatsoever the Agreement of Purchase and Sale is not completed, the total cost of work approved above will be retained by the Vendor.
4. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
5. The Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
6. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
7. Selections will not be processed unless signed by Heathwood Homes Head Office.
8. The selections made on this schedule are final and cannot be changed once submitted.
9. The Purchaser has checked and acknowledges the accuracy of this schedule.

May 28 2021
Date Purchaser

Aug 28 2021
Date APPROVED - Décor Consultant

Date Purchaser

My Rosen

Date Approved HEATHWOOD HOMES (WHITBY)
LIMITED - PHASE 4


C-2 COUNTRY LANE
LOT 542
20-1783 ALT ELEV.B
THE ROSEWOOD

17 of 39
The Rosewood

20-1783 ALT ELEV. B

ELEVATION B: 2,360 SQUARE FEET
{ Includes 549 square feet of finished Lower Level }

Sketch #4

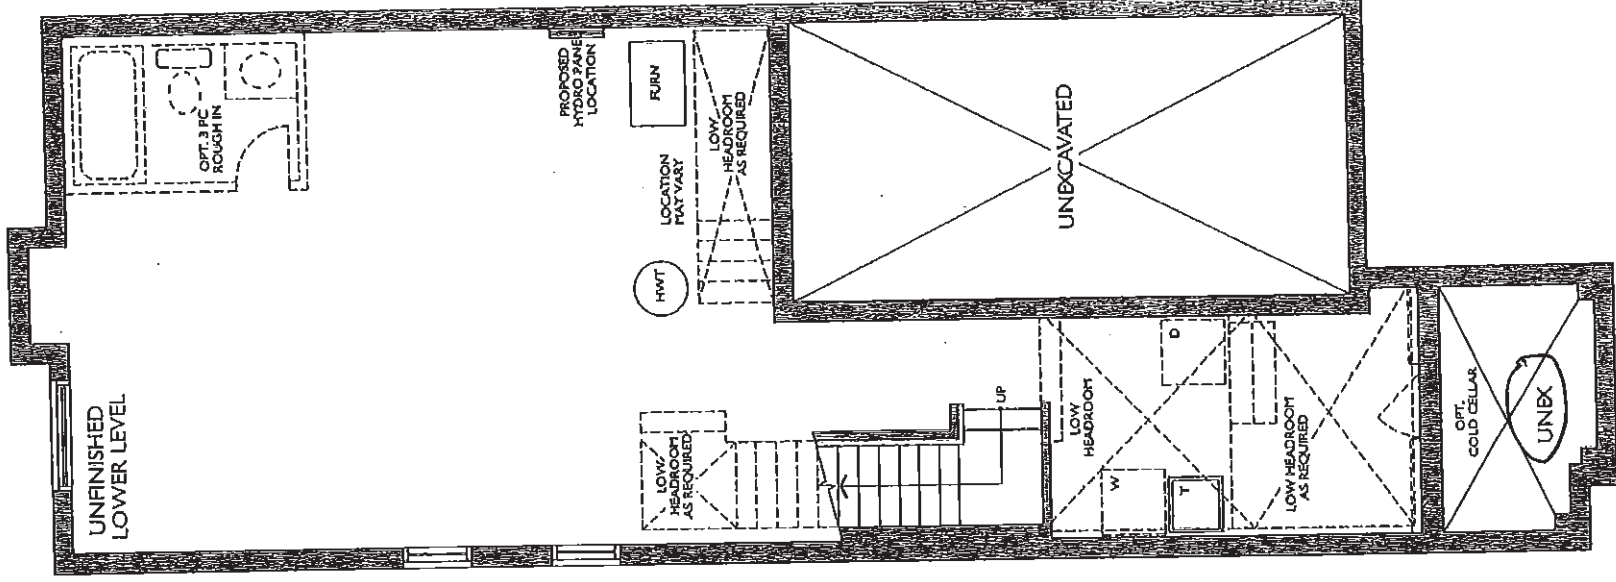


ALT. UNFINISHED LOWER LEVEL
ELEV. A & B (SIMILAR)

18 of 39

18 of 39

18 of 39

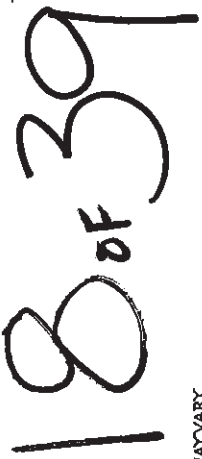

18 of 39

18 of 39

18 of 39


C-2 COUNTRY LANE
LOT 542
20-1783 ALT ELEV. B
THE ROSEWOOD

19 of 39
The Rosewood

20-1783 ALT ELEV. B

ELEVATION B: 2,360 SQUARE FEET
{ Includes 549 square feet of finished Lower Level }


Sketch #6

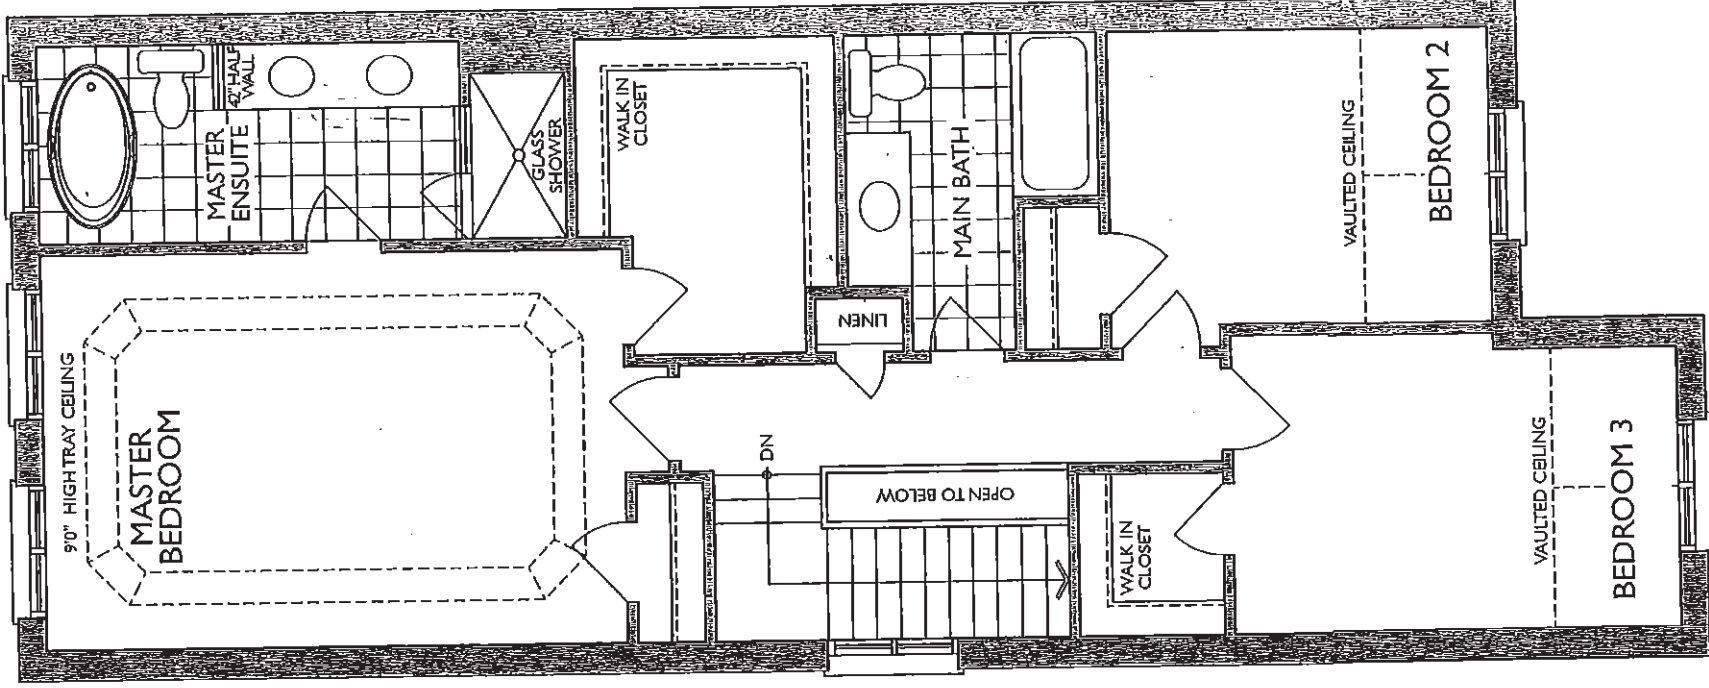

SECOND FLOOR
ELEV. B

C2 COUNTRY LANE
LOT 542
20-1783 ALT ELEV B
THE ROSEWOOD

20 of 39

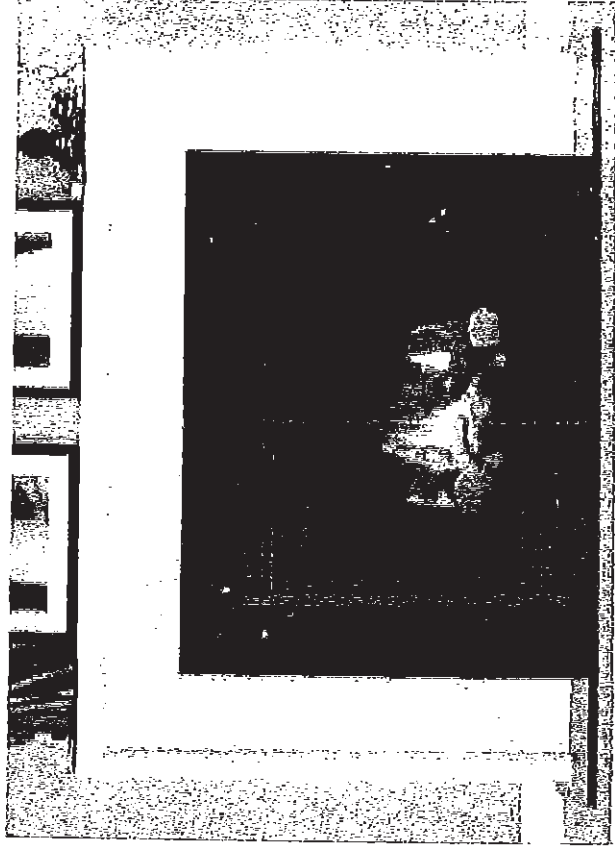

NFAS NF17 Mantel

AS


C2 COUNTRY LANE
LOT 542
20-1783 ALT ELEV B
THE ROSEWOOD

21 of 39

STANDARD KITCHEN FAUCET

Align

Modern

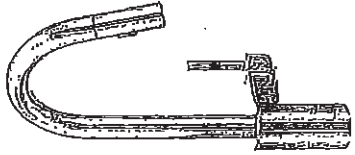

Single Handle Pull-Down Kitchen
Faucet*



Model 7565†

A-S

Stainless Steel | 122.0264.716

FAMILY : Sinks | SERIES : Reginox | MODEL : NS1930U/9 | FINISH : Stainless Steel | INSTALLATION TYPE : Undermount

C2 COUNTRY LANE
LOT 542
20-1783 ALT ELEV B
THE ROSEWOOD

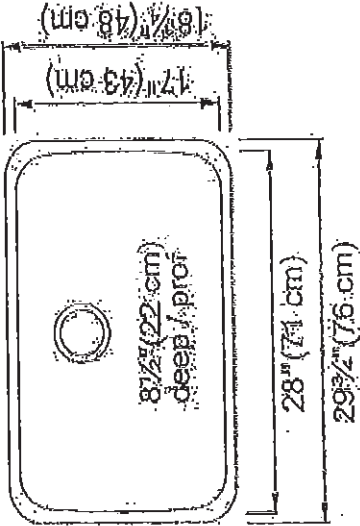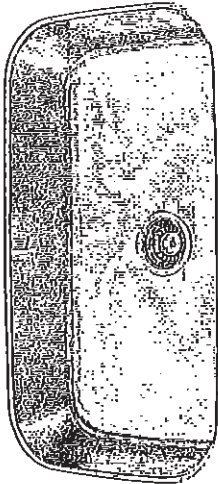

TECHNICAL DATA	
Width overall	18 3/4"
Length overall	29 3/4"
Width of large bowl	17"
Length of large bowl	28"
Depth of large bowl	8 1/2"
Cabinet Size	36"
Number of Bowls	1
Waste Outlet Diameter	3 1/2"
Cut-Out Template	Yes
Faucet Hole	None
Type of Material	18 Gauge Stainless Steel
Surface Finish	SILK
Special feature	Rear Drain Waste Hole Location
Waste Kit Included	YES



23 of 39

BOULEVARD®
PEDESTAL SINK
VITREOUS CHINA

BOULEVARD® PEDESTAL SINK

- ☐ 0641.800 Faucet holes on 8" (203mm) centers (Illustrated).
- ☒ 0641.400 Faucet holes on 4" (102mm) centers
- ☐ 0641.100 Center hole only
 - Classic styled rectangular pedestal lavatory
 - Vitreous china
 - Rear overflow
 - Supplied with mounting kit
 - Right Height® for greater comfort during use
 - Faucet ledge with large deck area (faucet not included)
 - Design coordinates with Boulevard® Toilet
 - Basin has flat bottom to also allow use as an above counter sink or a drop-in sink (with u-shaped cut out)

Nominal Dimensions:
24" x 19" x 35-1/2"
(610 x 483 x 902mm)

- ☐ 0641.008 Pedestal top-8" (203mm) centers
- ☐ 0641.004 Pedestal top-4" (102mm) centers
- ☐ 0641.001 Pedestal top-center hole only
- ☐ 0010.000 Pedestal only


Bowl sizes:
17" (432mm) wide,
12-1/2" (318mm) front to back,
5" (127mm) deep

Compliance Certifications -

Meets or Exceeds the Following Specifications:
• ASME A112.19.2 - 2008/CSA B45.1-08

To Be Specified:	
☐ Color:	☐ White ☐ Linen
☐ Faucet Finish:	
☐ Supplies:	
☐ 1-1/4" Trap:	
☐ Nipple:	

* See faucet section for additional models available

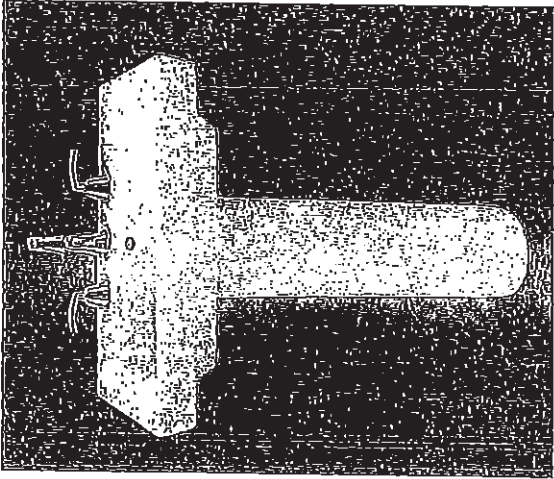

SEE REVERSE FOR ROUGHING-IN DIMENSIONS

AS

C2 COUNTRY LANE
LOT 542
20-1783 ALT ELEV B
THE ROSEWOOD

COUNTERTOP SINK

- Vitreous china
 - Self-rimming
 - Front overflow
 - Supplied with template
 - Faucet deck
- (Faucet shown not included)

☒ 0346 803

Faucet holes on 203mm (8") centres

☐ 0346 403 (Illustrated)

Faucet holes on 102mm (4") centres

☐ 0346 001

Centre hole only

Nominal Dimensions:

521 x 448mm (20-1/2" x 17-5/8")

Bowl sizes:

422mm (16-5/8") wide, 279mm (11") front to back, 143mm (5-5/8") deep

COMPLIANCE CERTIFICATIONS –

Meets or exceeds the following Specifications:

- ASME A112.19.2M for Vitreous China Fixtures.
- CAN/CSA B45 Series.

To Be Specified




- ☐ Colour: ☒ White ☐ Bone ☐ Silver Gray
- ☐ Linen
- ☐ Faucet**:
- ☐ Faucet Finish:
- ☐ Supplies & Stops:
- ☐ Trap 1-1/4" (32 mm):

** See faucet section for additional models available

BAS-198

© 2000 American Standard Inc.

01/07

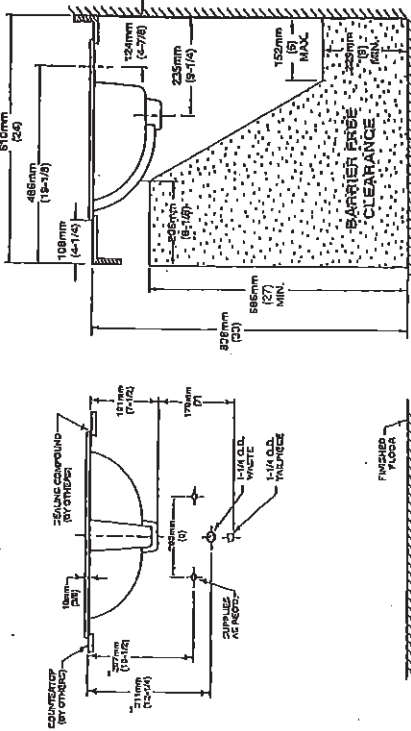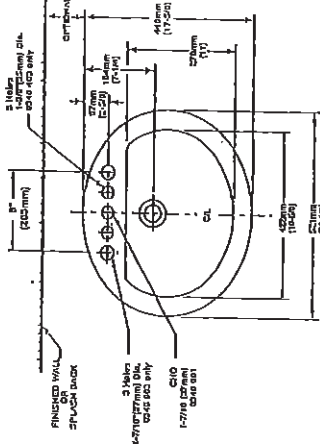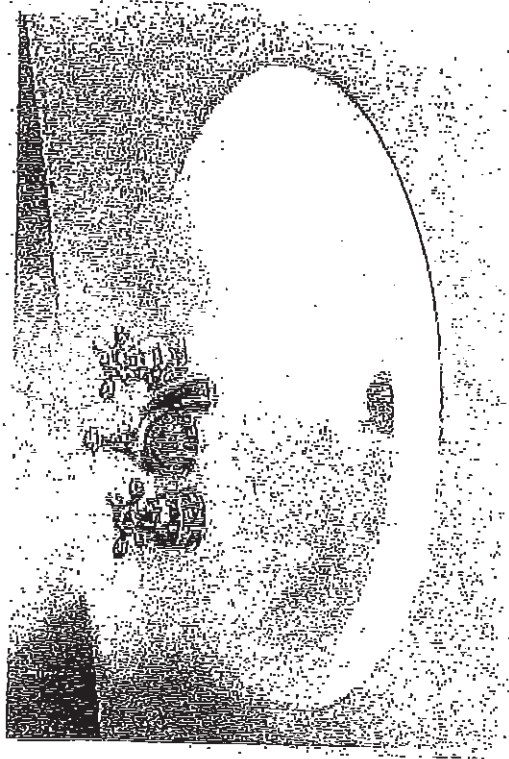


NOTES:
* DIMENSIONS SHOWN FOR LOCATION OF SUPPLIES AND "P" TRAP ARE SUGGESTED.
FOR COUNTERTOP CUTOUT AND INSTALLATION INSTRUCTIONS USE TEMPLATE
SUPPLIED WITH SINK.
FAUCETS NOT INCLUDED AND MUST BE ORDERED SEPARATELY.
IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances
established by ANSI Standard A112.19.2.
These measurements are subject to change or cancellation. No responsibility is assumed for use
of superseded or voided pages.

AS

C2 COUNTRY LANE
LOT 542
20-1783 ALT ELEV B
THE ROSEWOOD

25 of 39

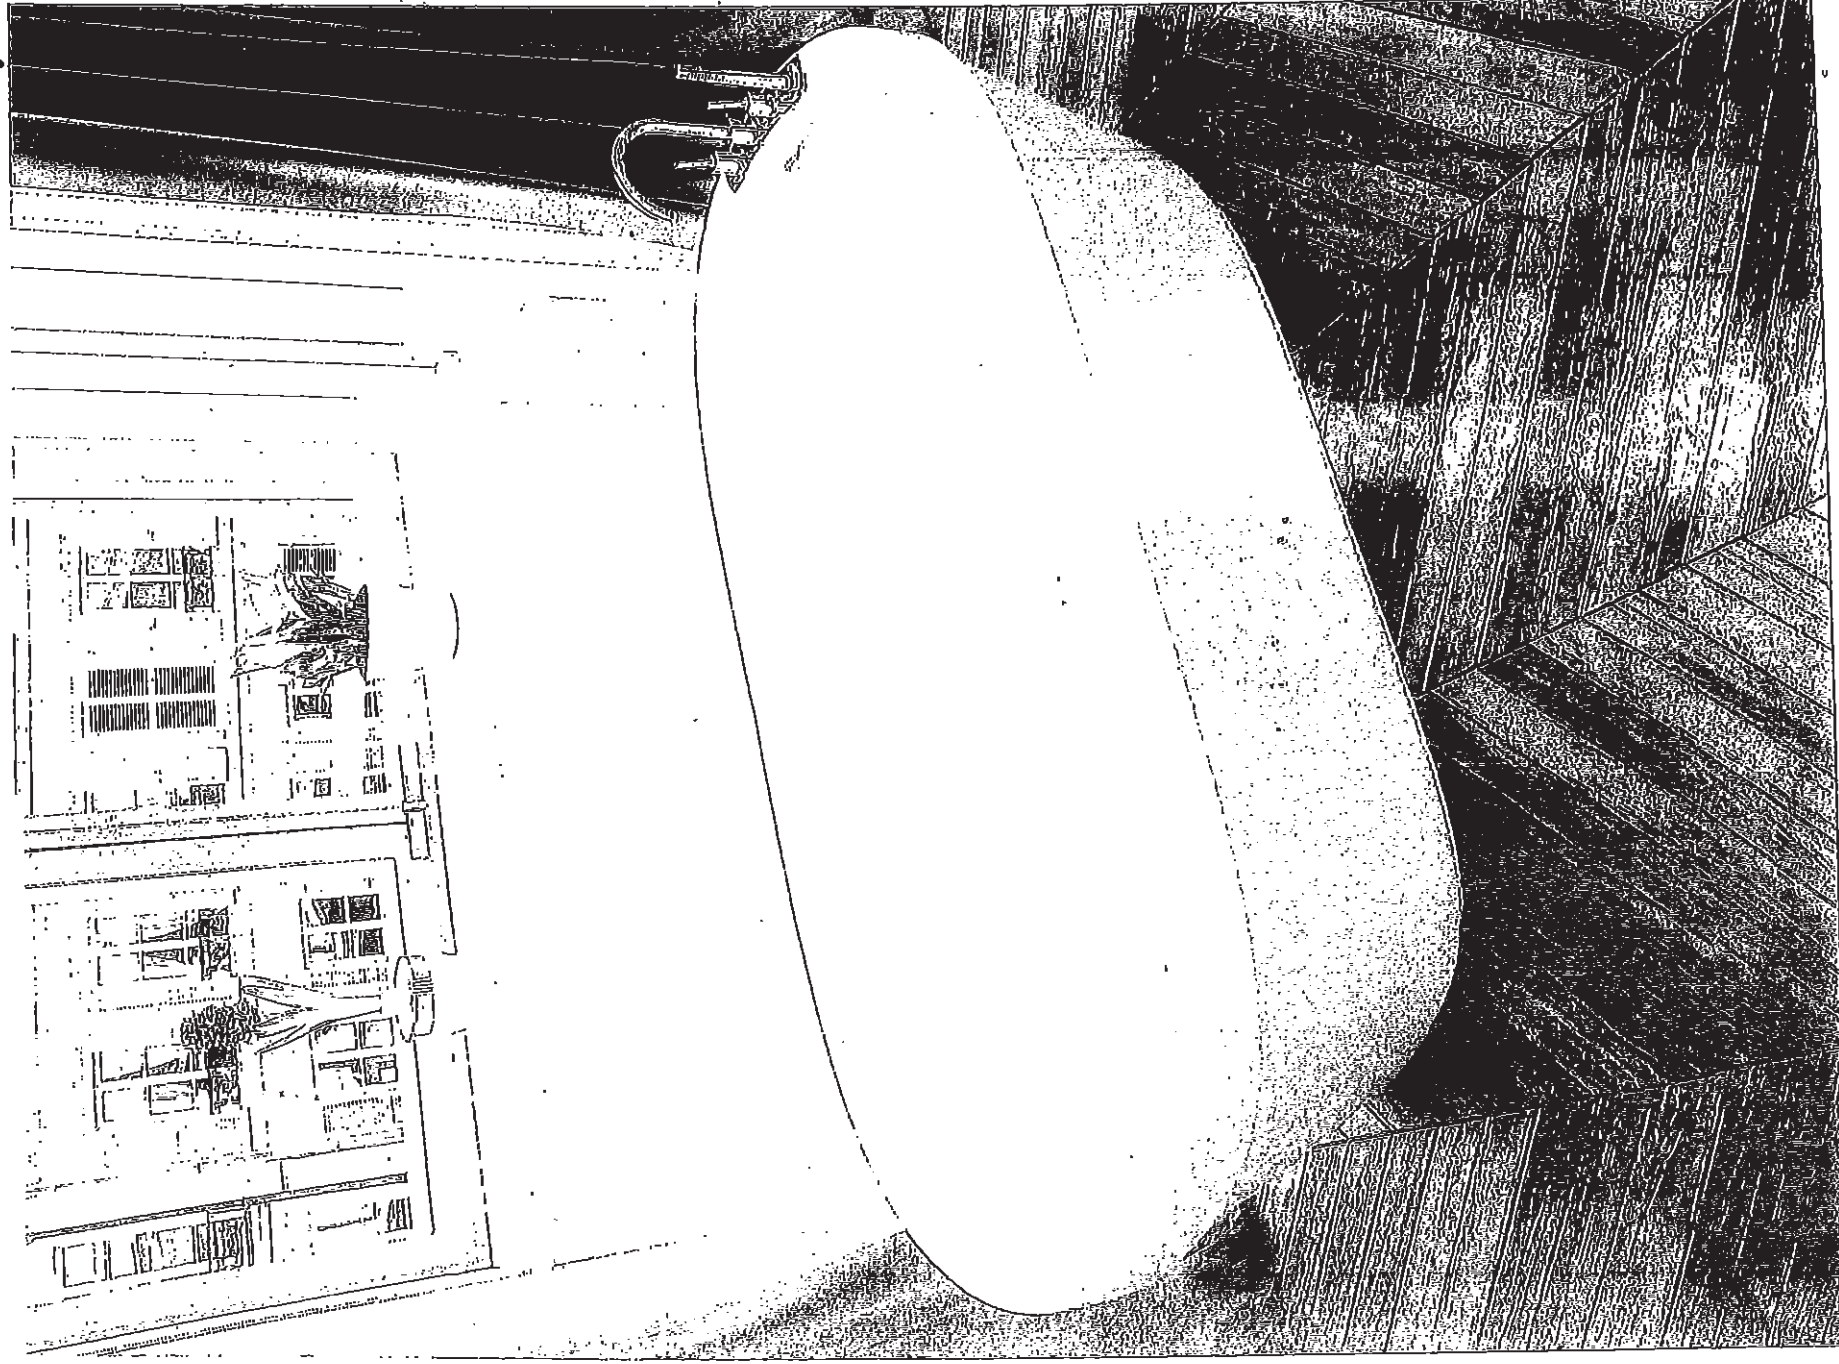

Demi CF2007

STANDARD MASTER ELSUITE
TUB


5
A

C2 COUNTRY LANE
LOT 542
20-1783 ALT ELEV B
THE ROSEWOOD

26 of 39


Chateau

Transitional



Lavatory Faucet with Pop-Up Drain
Model L4621†

VANITY SINKS AND PEDESTAL




Posi-Temp® Pressure Balancing Tub/Shower
Model 62320 / TL183†

OR

Posi-Temp Valve and Tub/Shower Trim
with Eco-Performance Easy Clean® XL
Model 62320 / TL183EP†
(TL183EP not available in BC)

SHOWER AND 5 TUB FAUCETS

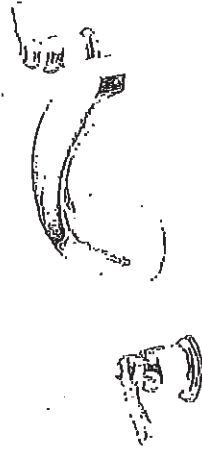

2 Handle Roman Tub with 9" Spout
Model 4796 / T990†

FREESTANDING TUB FAUCETS

AS

C2 COUNTRY LANE
 LOT 542
 20-1783 ALT ELEV B
 THE ROSEWOOD

27 of 39

Cyclone®





SCB51430 Canopy Hood

Alito Collection

Makes a statement of strength and power as the stainless steel frame gleams under your kitchen lights. It features baffle filters, tow bright LED lights in each corner, a three speed control panel, and a quiet, powerful motor. The bold design and strong stainless steel frame encasing the fan will make this machine the focus of your kitchen. Fitted with time-delay "OFF" options up to nine minutes.

Specifications

Air Flow Volume: 550 CFM
Colours: Stainless Steel
Dimensions: W:30" H:44.5" D:19.5"
Electrical Connection: 120V/60Hz
Electrical Consumption: 200 watts
Fan Speed: 1254 RPM
Sones: Min. at 2 and Max at 6
Venting: 6" Round (Top Only)

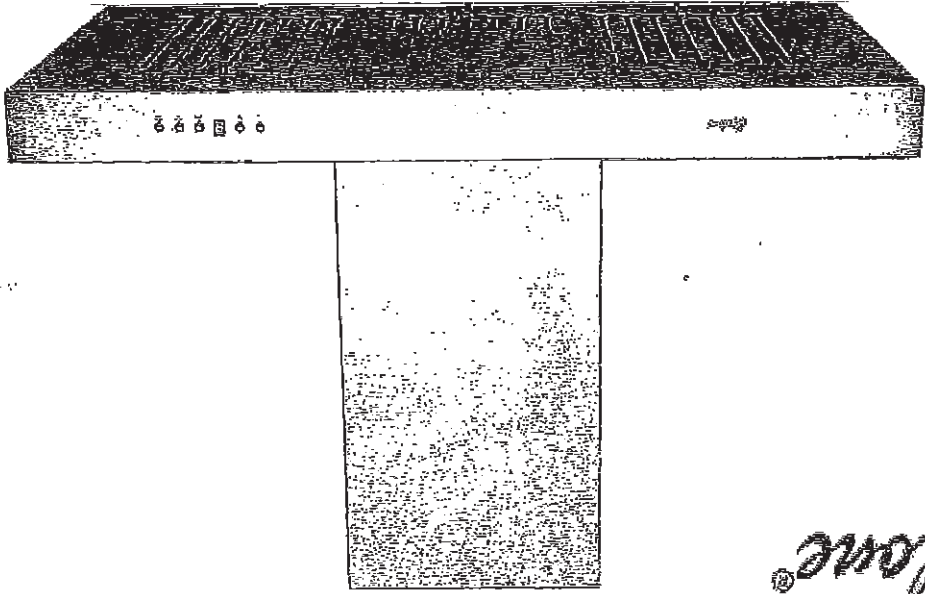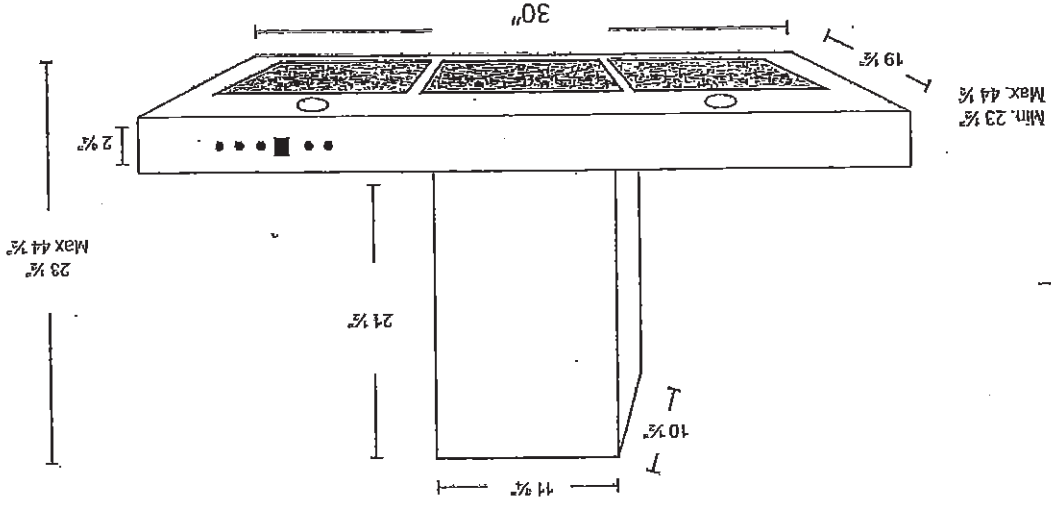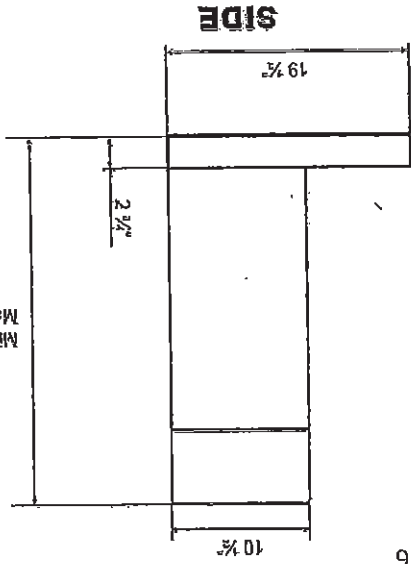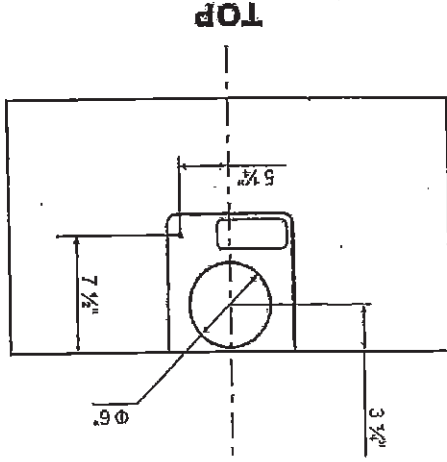

C2 COUNTRY LANE
LOT 542
20-1783 ALT ELEV B
THE ROSEWOOD

28 of 39



Bottom Mount Refrigerator

PRODUCT MODEL NUMBERS

WRF532SMB

WRF535SMB

WRF540CWB

Electrical: A 115-volt, 60-Hz, AC-only, 15- or 20-amp fused, grounded electrical supply is required. It is recommended that a separate circuit serving only your refrigerator be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.



NOTE: Before performing any type of installation, cleaning, or removing a light bulb, turn the control (Thermostat, Refrigerator or Freezer Control depending on the model) to OFF and then disconnect the refrigerator from the electrical source. When you are finished, reconnect the refrigerator to the electrical source and reset the control (Thermostat, Refrigerator or Freezer Control depending on the model) to the desired setting. See "Using the Controls."

Water: A cold water supply with water pressure between 30 and 120 psi (207 and 827 kPa) is required to operate the ice maker and water dispenser. If you have questions about your water pressure, call a licensed, qualified plumber.

IMPORTANT: The pressure of the water coming out of a reverse osmosis system going to the water inlet valve of the refrigerator needs to be between 35 and 120 psi (241 and 827 kPa).


Reverse Osmosis Water Supply: If a reverse osmosis water filtration system is connected to your cold water supply, the water pressure to the reverse osmosis system needs to be a minimum of 40 to 60 psi (276 to 414 kPa).

PRODUCT DIMENSIONS

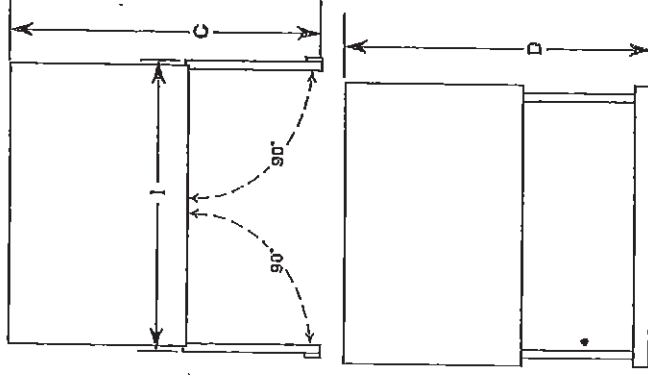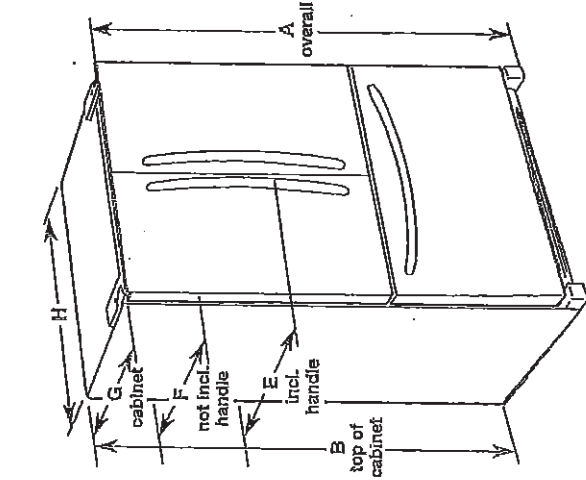

Model Number/Size	Height - Overall "A"	Height - Top of Cabinet "B"	Depth - Doors Open 90° "C"	Depth - Drawer Open "D"	Depth - With Handles "E"	Depth - Without Handles "F"	Depth - Cabinet Only "G"	Width - Cabinet "H"	Width - Door Open 90° "I"
WRF535SMB 25.2 cu. ft.	70 1/2" (178.1 cm)	68 3/4" (174.8 cm)	48 1/2" (122.1 cm)	53 1/4" (135 cm)	35 1/4" (90 cm)	32 1/2" (83.7 cm)	29 1/2" (74 cm)	35 1/4" (90.5 cm)	43 3/4" (110.2 cm)
WRF535SMB 25.2 cu. ft.	70 1/2" (178.1 cm)	68 3/4" (174.8 cm)	48 1/2" (122.1 cm)	53 1/4" (135 cm)	35 1/4" (90 cm)	32 1/2" (83.7 cm)	29 1/2" (74 cm)	35 1/4" (90.5 cm)	43 3/4" (110.2 cm)
WRF532SMB 22.1 cu. ft.	70 1/2" (178.1 cm)	68 3/4" (174.8 cm)	47 1/2" (119.5 cm)	52 1/2" (133.4 cm)	34 1/4" (87.5 cm)	31 1/4" (80.1 cm)	28 1/2" (72.4 cm)	32 1/2" (82.9 cm)	42 3/4" (107.6 cm)
WRF540CWB 20 cu. ft.	70 1/2" (178.1 cm)	68 3/4" (174.8 cm)	48" (121.9 cm)	44 1/4" (113.0 cm)	29 1/4" (74.6 cm)	28" (71.1 cm)	24 1/4" (61.3 cm)	35 1/4" (90.5 cm)	39 1/4" (100.0 cm)

LOCATION REQUIREMENTS

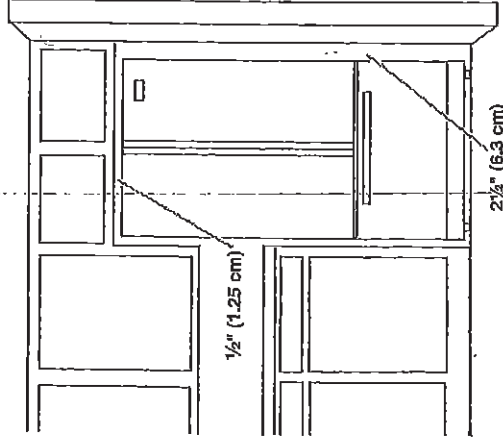

To ensure proper ventilation for your refrigerator, allow for a 1/2" (1.25 cm) space on each side and at the top. Allow for 1" (2.54 cm) of space behind the refrigerator. If your refrigerator has an ice maker, make sure you leave some extra space at the back for the water line connections.

If you are installing your refrigerator next to a fixed wall, leave 2 1/2" (6.3 cm) minimum on the hinge side (some models require more) to allow for the door to swing open.

NOTE: This refrigerator is intended for use in a location where the temperature ranges from a minimum of 55°F (13°C) to a maximum of 110°F (43°C). The preferred room temperature range for optimum performance, which reduces electricity usage and provides superior cooling, is between 60°F (15°C) and 90°F (32°C). It is recommended that you do not install the refrigerator near a heat source, such as an oven or radiator.

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

Ref. W10597594B
10/1/14


28

C2 COUNTRY LANE
LOT 542
20-1783 ALT ELEV B
THE ROSEWOOD

29 of 39

FRONT CONTROL
GAS RANGES

Whirlpool®

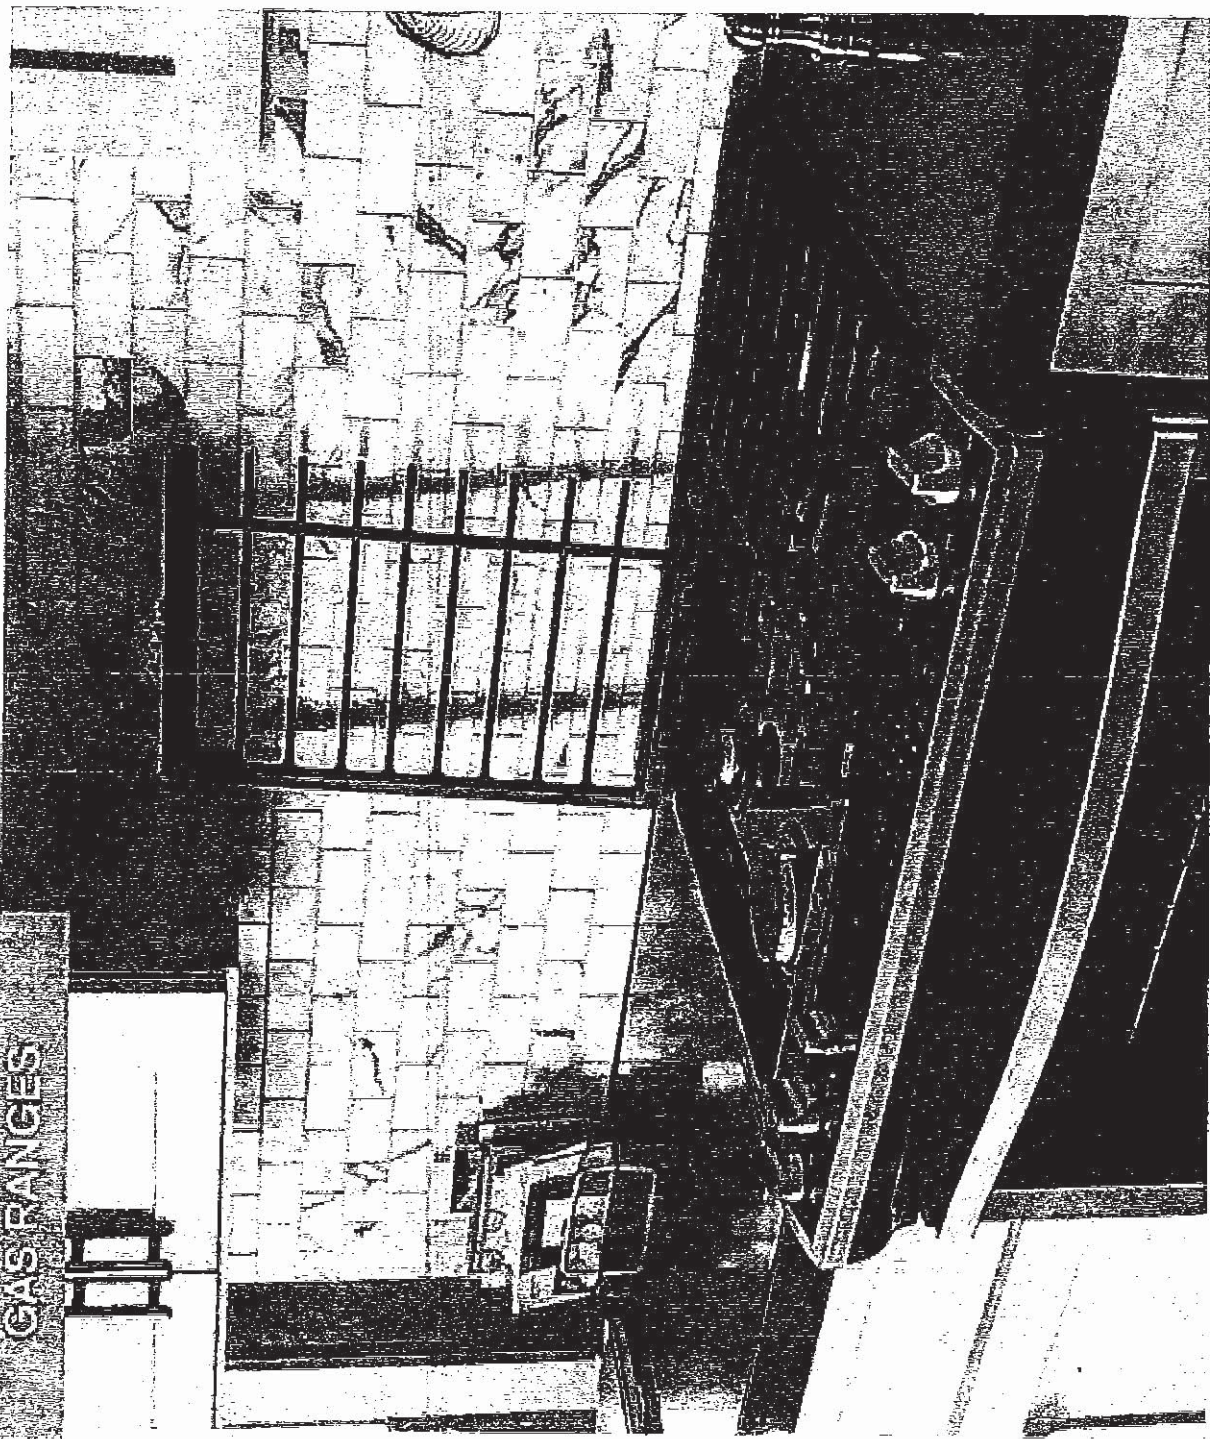

FEATURING



TimeSavor™ system

The TimeSavor™ system's Frozen Bake Technology allows you to skip preheating for favorites like pizza, lasagna, chicken nuggets, fries or pies so you can cook frozen foods faster.*



HeatRight™ system

The HeatRight™ system's True convection helps you to cook food faster with a rear fan and third heating element to circulate hot air over, under, and around food.



CompleteClean™ system



The CompleteClean™ system's Ez-2-Lift™ hinged grates give you quick access to spills on the cooktop. The industry first hinged design allows you to wipe up under them without removing them entirely. For a more thorough clean, the grates are also dishwasher-safe.

Every day, care.™


From the #1 Selling Appliance brand in the USA†

30th 39

30" Freestanding Range - 5.8 cu. ft.



This means: every word means a new world may appear before your eyes. It means more for you than for me. I shall be glad.

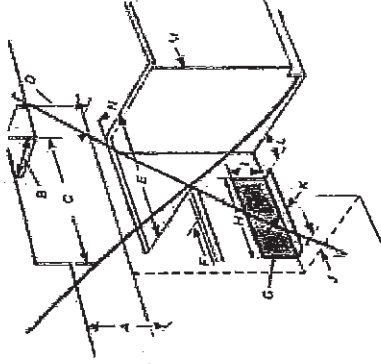

IMPORTANT: It's really a matter of *intensity* of the light. The light that is used in the experiments is a very bright light, and it's not the same as the light that you see in a normal room. The light that is used in the experiments is a very bright light, and it's not the same as the light that you see in a normal room.

- [illegible]

[illegible]

*Compared to a traditional preheat and bake cycle for pizza, nuggets/ies, pies and lasagna. **Compared to the most-baked cycle on the same month. †Based on 12-month average of unit sales. Refrigeration, Cooking, Dishwashers, and Laundry Appliances, Trane, 2014.

© 2016 Universal. All rights reserved. 576. Form No. WCT8089B



C2 COUNTRY LANE
LOT 542
20-1783 ALT ELEV B
THE ROSEWOOD

31 of 39

Whirlpool® 30" (76.2 cm) Slide-in Gas Range C

PRODUCT MODEL NUMBERS

WEG760H0D

WEG760H0D

WEG745H0F

GAS SUPPLY REQUIREMENTS

Gas supply line:

- Provide a gas supply line of $\frac{3}{4}$ " (1.9 cm) rigid pipe to the range location. A smaller size pipe or longer runs may result in insufficient gas supply. With LP gas, piping or tubing size can be $\frac{1}{2}$ " (1.3 cm) minimum. Usually, LP gas suppliers determine the size and materials used in the system.


NOTE: Pipe-joint compounds that resist the action of LP gas must be used. Do not use TEFLON® tape.

Flexible metal appliance connector:

- If local codes permit, a new CSA design-certified, 4 to 6 ft (122 to 182.4 cm) long, $\frac{1}{2}$ " (1.3 cm) or $\frac{3}{4}$ " (1.9 cm) I.D., flexible metal appliance connector may be used for connecting range to the gas supply line.



- A $\frac{1}{2}$ " (1.3 cm) male pipe thread is needed for connection to the female pipe threads of the inlet to the appliance pressure regulator.
- Do not kink or damage the flexible metal tubing when moving the range.
- Must include a shutoff valve:
The supply line must be equipped with a manual shutoff valve. This valve should be located in the same room but external to the range opening, such as an adjacent cabinet. It should be in a location that allows ease of opening and closing. Do not block access to shutoff valve. The valve is for turning on or shutting off gas to the range.



- A. Gas supply line
- B. Shutoff valve "open" position
- C. To range

Gas Pressure Regulator

The gas pressure regulator supplied with this range must be used. The inlet pressure to the regulator should be as follows for proper operation:

Natural gas:

Minimum pressure: 5" WCP

Maximum pressure: 14" WCP

LP gas:


Minimum pressure: 11" WCP

Maximum pressure: 14" WCP

Contact local gas supplier if you are not sure about the inlet pressure.

PRODUCT DIMENSIONS

This manual covers several models. Your model may appear different from the models depicted. Dimensions given are maximum dimensions across all models.

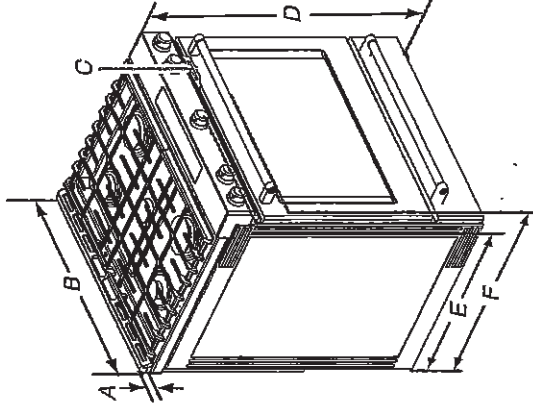

- A. $1\frac{1}{8}$ " (3.0 cm) height from cooktop to top of vent
- B. $29\frac{1}{4}$ " (75.9 cm)
- C. Model/serial number plate (located behind the oven door on the top right-hand side of the oven frame)
- D. $36\frac{1}{2}$ " (91.4 cm) height to top of cooktop edge with leveling legs screwed all the way in*
- E. $28\frac{3}{4}$ " (71.9 cm) max. depth from front of console to back of range.
- F. $28\frac{3}{4}$ " (73.3 cm) max. depth from handle to back of range.

IMPORTANT: Range must be level after installation. Follow the instructions in the "Level Range" section. Using the cooktop as a reference for leveling the range is not recommended.

* Range can be raised approximately 1" (2.5 cm) by adjusting the leveling legs.

Type of Gas

Natural gas:

- This range is factory set for use with Natural gas. See "Gas Conversions" section. The model/serial rating plate located behind the control panel has information on the types of gas that can be used. If the types of gas listed do not include the type of gas available, check with the local gas supplier.

LP gas conversion:

Conversion must be done by a qualified service technician. No attempt shall be made to convert the appliance from the gas specified on the model/serial rating plate for use with a different gas without consulting the serving gas supplier. See "Gas Conversions" section.

TEFLON is a registered trademark of Chemours.

C2 COUNTRY LANE
LOT 542
20-1783 ALT ELEV B
THE ROSEWOOD

32 of 39

Whirlpool® Undercounter Dishwasher

PRODUCT MODEL NUMBERS

WDF110PAB	WDF310PLA	WDE530PSY
WDF111PAB	WDF320PAD	WDF540PAD
WDF120PAF	WDF510PAY	WDF730PAY
WDF121PAF	WDF520PAD	WDT710PAY
WDF310PAA	WDF530PAY	WDT720PAD
WDF310PCA	WDF530PLY	WDT770PAY

Electrical Requirements: 120-volt, 60-Hz, AC only, 15- or 20-amp, fused electrical supply. Copper wire only. A time delay fuse or circuit breaker and separate circuit is recommended.

If direct wiring dishwasher: Use flexible, armored, or nonmetallic, sheathed copper wire with grounding wire that meets the wiring requirements for your home and local codes and ordinances.

Use a UL listed or CSA approved conduit connector.

If connecting dishwasher with a power supply cord:

Use Power Supply Cord Kit (Part No. 4317824) marked for use with dishwashers. Follow the kit's


instructions for installing the power supply cord.

Power supply cord must plug into a grounded 3 prong, outlet, located in the cabinet next to the dishwasher opening. Outlet must meet all local codes and ordinances.

Water Supply Requirements: A hot water line with 20 to 120 psi (138 to 862 kPa) water pressure. Water temperature must be 120°F (49°C) water at dishwasher. Use 3/8" O.D. copper tubing with compression fitting or flexible braided water supply line (1/2" minimum plastic tubing is not recommended). Use a 90° elbow with 3/4" N.P.T. external pipe threads on one end. Do not solder within 6" (15.2 cm) from water inlet valve.

Drain Requirements: A new drain hose is supplied with your dishwasher. If this is not long enough, use a new drain hose with a maximum length of 12' (3.7 m) (Part No. 3385556) that meets all current AHAM/IAPMO test standards, is resistant to heat and detergent, and fits the 1" (2.5 cm) drain connector of the dishwasher.

Make sure to connect the drain hose to waste tee or disposer inlet above drain trap in house plumbing and 20" (50.8 cm) minimum above the floor. It is recommended




that the drain hose either be looped up and securely fastened to the underside of the counter or be connected to an air gap.

Make sure to use an air gap if the drain hose is connected to house plumbing lower than 20" (50.8 cm) above subfloor or floor.

Use 1/2" (1.3 cm) minimum I.D. drain line fittings.

If required, the air gap should be installed in accordance with the air gap installation instructions. When connecting the air gap, a rubber hose (not provided) will be needed to connect to the waste tee or disposer inlet.

PRODUCT DIMENSIONS

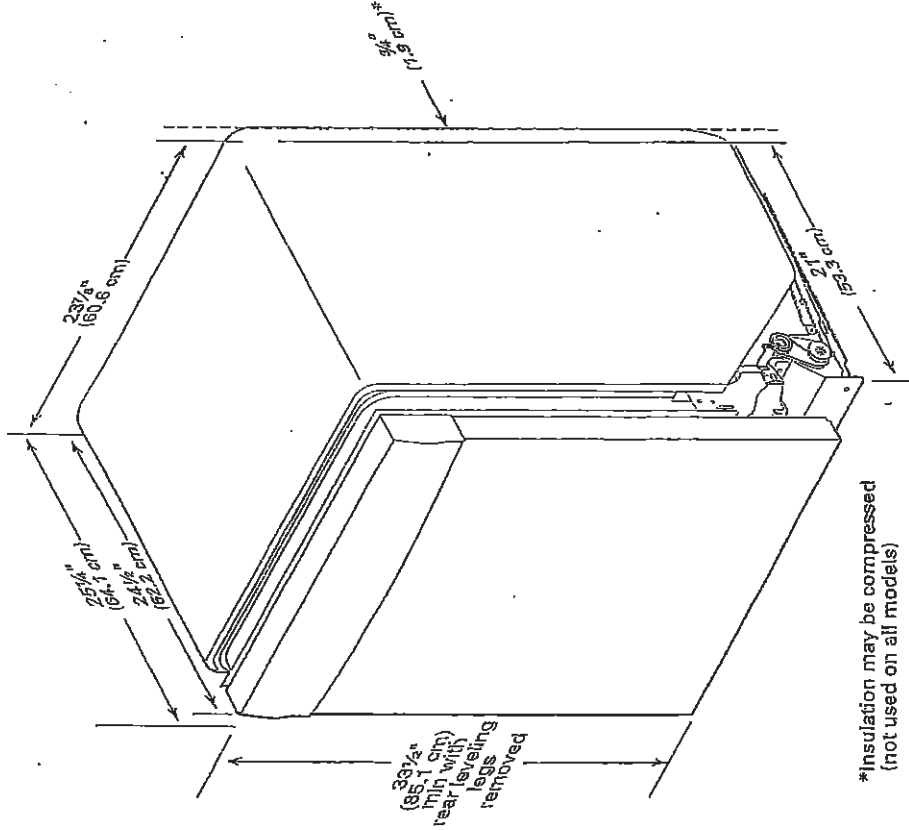

*Insulation may be compressed (not used on all models)

4-5

C2 COUNTRY LANE
LOT 542
20-1783 ALT ELEV B
THE ROSEWOOD


33 of 39

CABINET CUTOUT DIMENSIONS

NOTE: Shaded areas of cabinet walls show where utility connections may be installed.

*Measure from the lowest point on the underside of the countertop. May be reduced to 33½" (85.1 cm) by removing the rear leveling legs from dishwasher.

**Minimum, measured from narrowest point of opening.

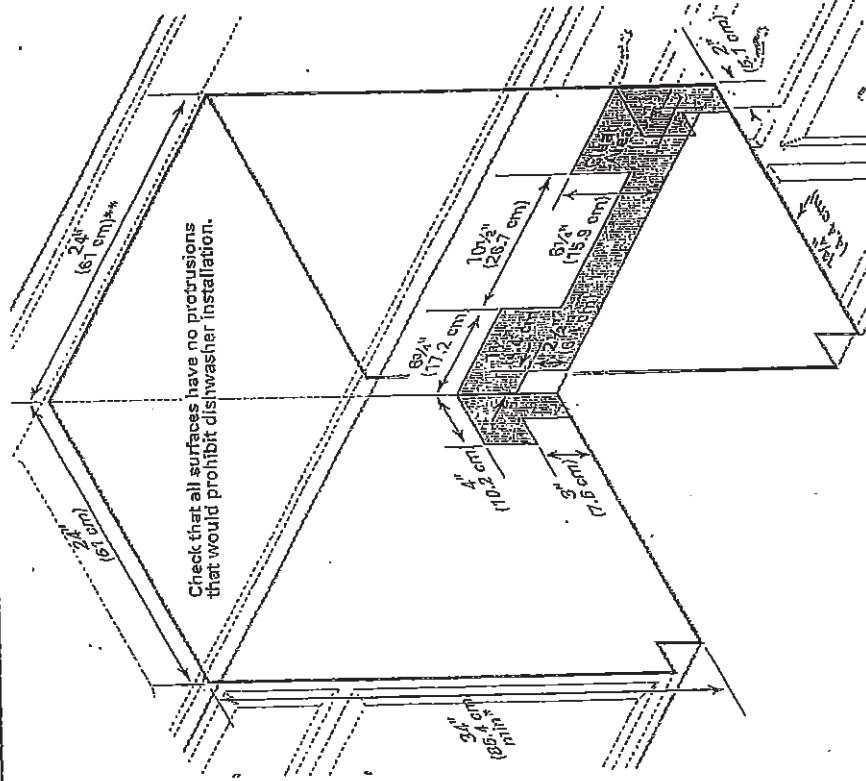


5
4

C2 COUNTRY LANE
LOT 542
20-1783 ALT ELEV B
THE ROSEWOOD

34 of 39

WHIRLPOOL WASHER Model #: WFW5620HW

Whirlpool Brand Canada: English | Washer and Dryer | Washers | Front Load Washers | WFW5620HW

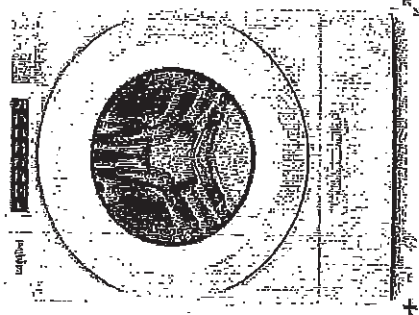

5.2 cu. ft. I.E.C. Closet-Depth
Front Load Washer with
Load & Go™ Dispenser



Whirlpool 5.2 cu. ft. I.E.C. Closet-Depth Front Load Washer with Load & Go™ Dispenser
Model #: WFW5620HW

Dimensions

Depth	80.17 cm, 31 9/16 in
Depth With Door Open 90 Degree	143.51 cm, 56-1/2 in
Minimum Height	98.11 cm, 38-5/8 in
Width	68.58 cm, 27.0 in

Appearance

LCD Touch Screen	No
Window	Yes

Details

Drum Material	Stainless Steel
---------------	-----------------

Cycles and Options

Number of Wash Cycles	37
-----------------------	----

Electrical

Hz	60
Power Cord Included	Yes

5-A

C2 COUNTRY LANE
LOT 542
20-1783 ALT ELEV B
THE ROSEWOOD

35 of 39

WHIRLPOOL WASHER Model #: WFW5620HW

LOCATION REQUIREMENTS


Proper installation is your responsibility.

You will need:

- A water heater set to 120°F (49°C).
- A grounded electrical outlet located within 6 ft (1.8 m) of power cord on back of washer.
- Hot and cold water faucets located within 4 ft (1.2 m) of hot and cold water fill valves on washer, and water pressure of 20–100 psi (137.9–689.6 kPa).
- A level floor with maximum slope of 1" (25 mm) under entire washer. Installing on carpet or surfaces with foam backing is not recommended.
- Floor must support washer's total weight (with water and load) of 315 lbs (143 kgs).


IMPORTANT: Do not install, store, or operate washer where it will be exposed to weather or in temperatures below 32°F (0°C). Water remaining in washer after use may cause damage in low temperatures. See "WasherCare" in your Use and Care Guide for winterizing information.

Whirlpool Models* ✓

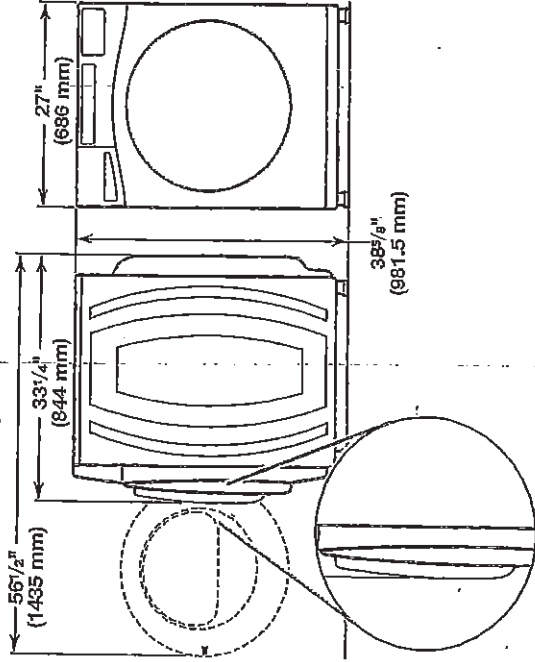



All dimensions show minimum spacing allowed. For each arrangement, consider allowing more space for ease of installation and servicing, and spacing for companion appliances and clearances for walls, doors, and floor moldings. Space must be large enough to allow door to fully open. Add spacing of 1" (25 mm) on all sides of washer to reduce noise transfer. If a closet door or louvered door is installed, top and bottom air openings in door are required.

Recessed area or closet installation (stacked washer and dryer): X

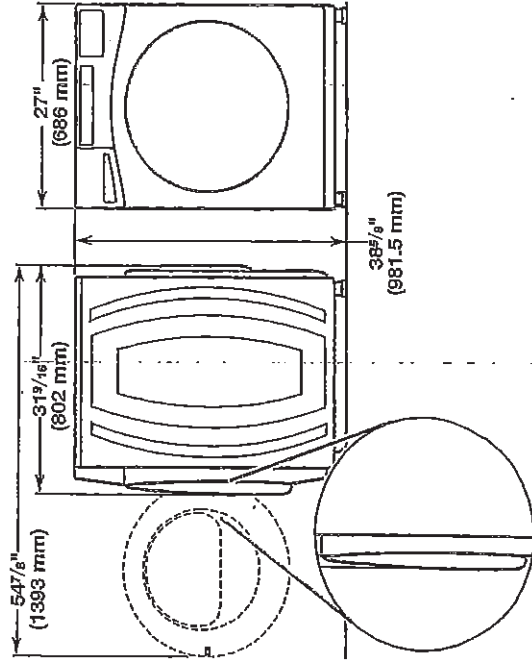

*For additional details (or information) specific to your model, refer to the 'Dimensions' listed for your model at www.whirlpool.com.

Maytag Models

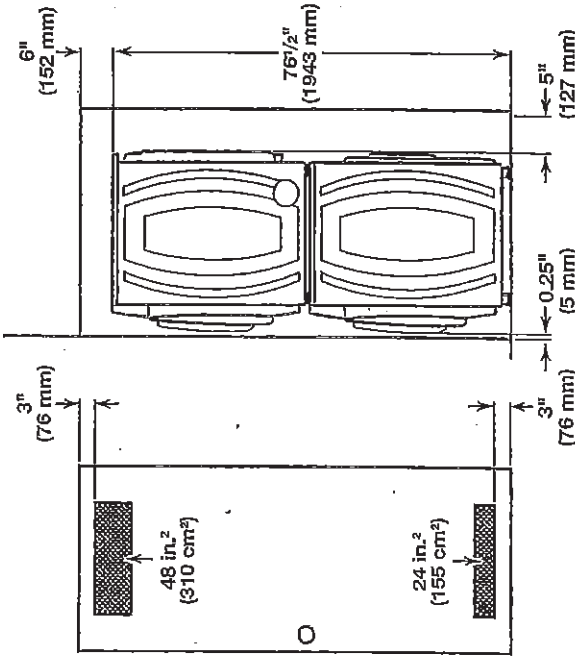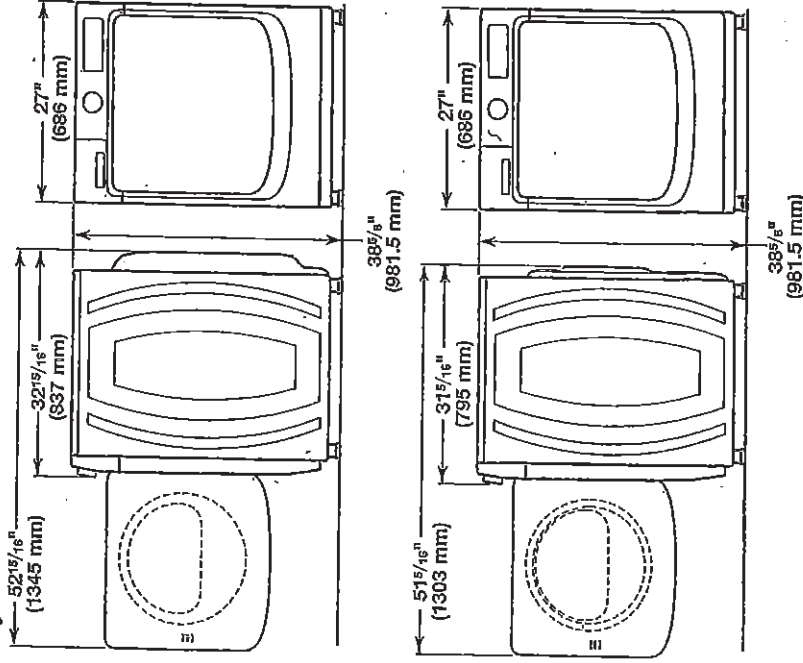


5.1

C2 COUNTRY LANE
LOT 542
20-1783 ALT ELEV B
THE ROSEWOOD


36 of 39

WHIRLPOOL WASHER Model #: WFW5620JHW


Custom under-counter installation: X

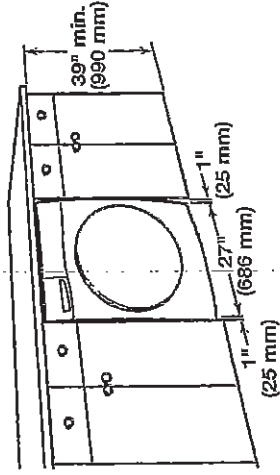

Recessed area or closet installation: X

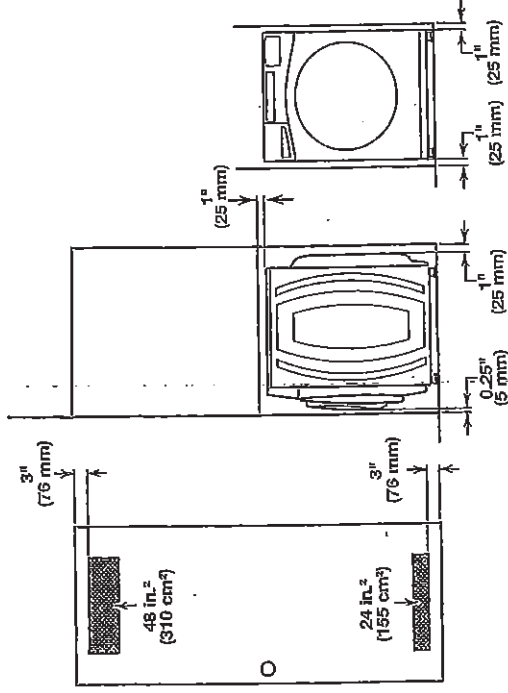

Custom cabinet installation: X

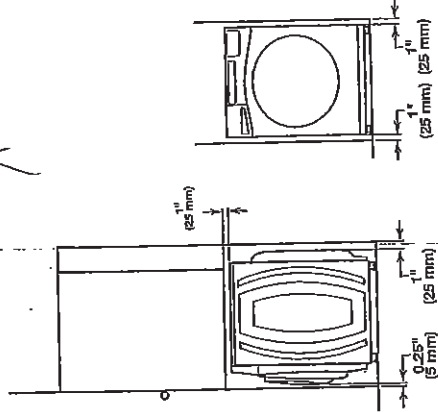


DRAIN SYSTEM

The drain system can be installed using a floor drain, wall standpipe, floor standpipe, or laundry tub. Select the method you need.


IMPORTANT: To avoid siphoning, only 4.5" (114 mm) of drain hose should be inside standpipe. Always secure drain hose with cable tie.

Floor standpipe drain system

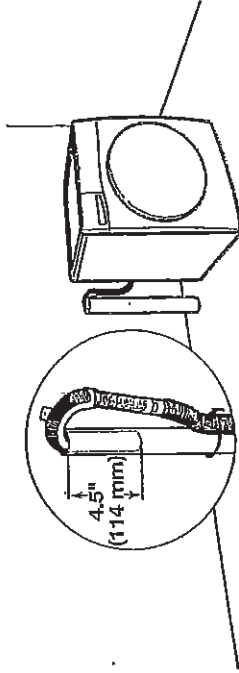


Minimum diameter for a standpipe drain: 2" (51 mm). Minimum carry-away capacity: 17 gal. (64 L) per minute. A 1/4" (6 mm) diameter to 1" (25 mm) diameter Standpipe Adapter Kit is available (Part Number 3363920). Top of standpipe must be at least 30" (762 mm) high; install no higher than 96" (2.44 m) from bottom of washer. If you have an overhead sewer and need to pump higher than 96" (2.44 m), a sump pump and associated hardware are needed. See "Alternate parts."

Wall standpipe drain system

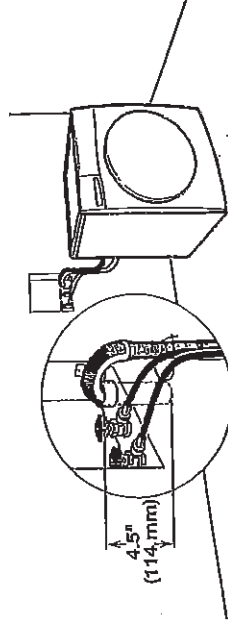

See requirements for floor standpipe drain system.

Laundry tub drain system

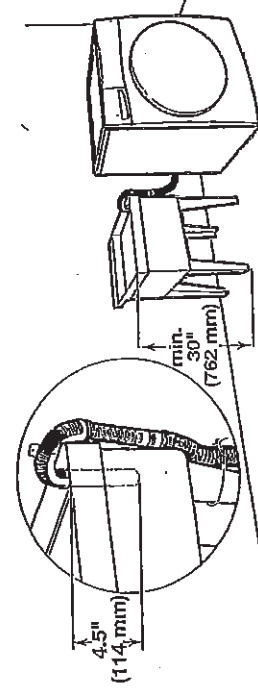

Minimum capacity: 20 gal. (76 L). Top of laundry tub must be at least 30" (762 mm) above floor; install no higher than 96" (2.44 m) from bottom of washer.


A.S

C2 COUNTRY LANE
LOT 542
20-1783 ALT ELEV B
THE ROSEWOOD

37 of 39

WHIRLPOOL DRYER Model #: YWED5620HW

Whirlpool Brand Canada English | Washer and Dryer | Dryer | Electric Dryer | YWED5620HW

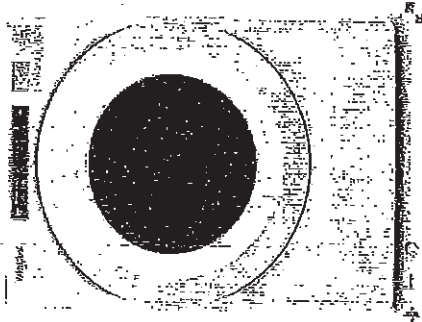

7.4 cu. ft. Front Load Electric
Dryer with Intuitive Touch
Controls



Whirlpool 7.4 cu. ft. Front Load Electric Dryer with Intuitive Touch Controls

Model #: YWED5620HW

Dimensions

Depth	78.74 cm, 31.0 in
Depth With Door Open 90 Degree	138.43 cm, 54-1/2 in
Height	98.42 cm, 38-3/4 in
Width	68.59 cm, 27.0 in

Configuration and Overview

Fuel Type	Electric
-----------	----------

Cycles and Options

Cycle Time Remaining	Yes
Lint Filter Indicator	No
Number of Dryer Cycles	36
Number of Dryness Levels	3

Ventilation System

Long Vent	No
Maximum Vent Length	64
Venting Direction	Left, Right, Bottom, Rear

Electrical

Hz	50
Power Cord Included	Yes


A.S

C2 COUNTRY LANE
LOT 542
20-1783 ALT ELEV B
THE ROSEWOOD

38 of 39

WHIRLPOOL DRYER Model #: YWED5620HW

Back view:

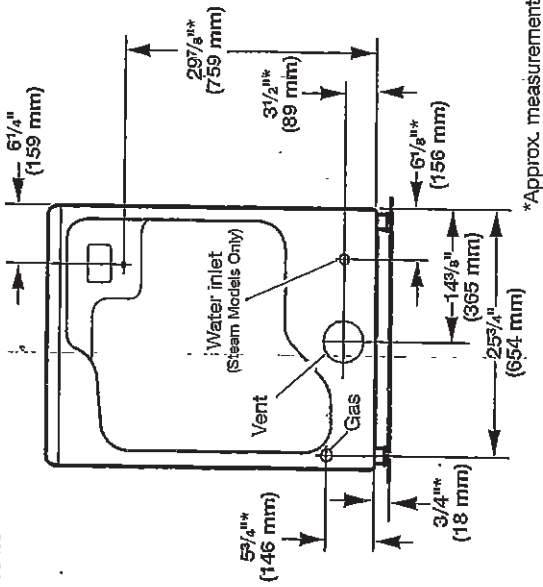

NOTE: Most installations require a minimum of 5" (127 mm) clearance behind dryer for exhaust vent with elbow. See "Venting Requirements."

Installation Clearances

For each arrangement, consider allowing more space for ease of installation and servicing, spacing for companion appliances, and clearances for walls, doors, and floor moldings. Space must be large enough to allow door to fully open. Add spacing on all sides of dryer to reduce noise transfer. If a closet door or louvered door is installed, top and bottom air openings in door are required.

Check code requirements. Some codes limit, or do not permit, installation of the dryer in garages, closets, mobile homes, or sleeping quarters. Contact your local building inspector.


NOTE: No other fuel-burning appliance can be installed in the same closet as a dryer.

Installation spacing for recessed area or closet installation

All dimensions show recommended and minimum spacing allowed.


- Additional spacing should be considered for ease of installation and servicing.
- Additional clearances might be required for wall, door, floor moldings, dryer venting, and gas line.
- Additional spacing should be considered on all sides of the dryer to reduce noise transfer.
- For closet installation with a door, minimum ventilation openings in the top and bottom of the door are required. Louvered doors with equivalent ventilation openings are acceptable.
- Companion appliance spacing should also be considered.

Recommended installation clearances (dryer only):

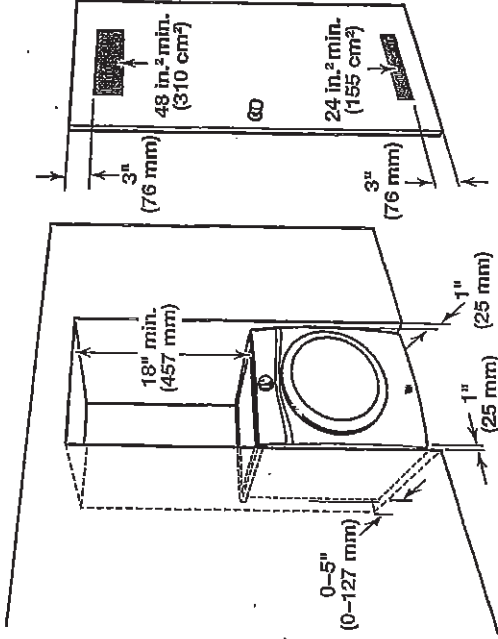

0" (0 mm) rear spacing is allowed for straight back venting only. For steam models only, inlet hose must not be kinked.

Custom under-counter installation: X

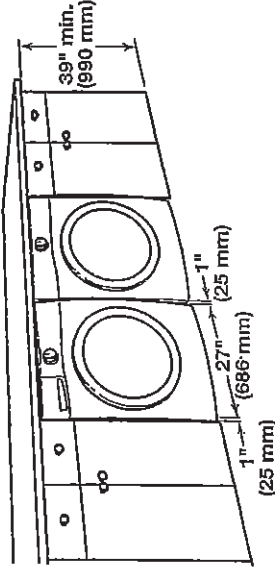

Mobile home - Additional installation requirements:

This dryer is suitable for mobile home installations. The installation must conform to the Manufactured Home Construction and Safety Standard, Title 24 CFR, Part 3280 (formerly the Federal Standard for Mobile home construction and Safety, Title 24, HUD Part 280) or Standard CAN/CSA-Z2240 MH.

Mobile home installations require:

- Metal exhaust system hardware, available for purchase from your dealer. For further information, see "Assistance or Service" in your Use and Care Guide.
- Special provisions must be made in mobile homes to introduce outside air into dryer. Openings (such as a nearby window) should be at least twice as large as dryer exhaust opening.

For mobile home installation of gas dryers:

- Mobile Home Installation Hold-down Kit Part Number 346764 is available to order. For further information, see "Assistance or Service" in your Use and Care Guide.

A.S

C-2 COUNTRY LANE
LOT 542
20-1783 ALT ELEV.B
THE ROSEWOOD

39 of 39

WHIRLPOOL DRYER Model #: YWED5620HW

Additional parts may be required, depending on your installation. Check local codes. Check existing electrical supply and venting. Read "Electrical Requirements" and "Venting Requirements" before purchasing parts.

If using a power supply cord:

Use a UL Listed power supply cord kit marked for use with clothes dryers. The kit should contain:

- A UL Listed 30 amp power supply cord, rated 120/240 volt minimum. The cord should be type SRD or SRDT and be at least 4 ft. (1.22 m) long. The wires that connect to the dryer must end in ring terminals or spade terminals with upturned ends.

- A UL Listed strain relief.

Optional Equipment (not supplied with dryer):

Refer to your Use and Care Guide for information about accessories available for your dryer.

LOCATION REQUIREMENTS

Check code requirements. Some codes limit, or do not permit, installing dryer in garages, closets, mobile homes, or sleeping quarters. Contact your local building inspector.

! WARNING


Explosion Hazard
Keep flammable materials and vapors, such as gasoline, away from dryer.
Place dryer at least 18 inches (460 mm) above the floor for a garage installation.
Failure to do so can result in death, explosion, or fire.

You will need:


- A location allowing for proper exhaust installation. See "Venting Requirements."
- A separate 15 or 20 amp circuit for a gas dryer or 30 amp circuit for an electric dryer.
- If using power supply cord, a grounded electrical outlet located within 2 ft. (610 mm) of either side of dryer. See "Electrical Requirements."
- Floor must support dryer weight of 200 lbs. (90.7 kg). Also consider weight of companion appliance.
- Cold water faucets located within 4 ft. (1.2 m) of the water fill valves, and water pressure of 20–120 psi (138–827 kPa). You may use your washer's water supply by purchasing the necessary parts noted in "Parts needed."
- Level floor with maximum slope of 1" (25 mm) under entire dryer. If slope is greater than 1" (25 mm), install Extended Dryer Feet Kit, Part Number 279810. If not level, clothes may not tumble properly and automatic sensor cycles may not operate correctly.
- For garage installation, place dryer at least 18" (460 mm) above floor. If using a pedestal, you will need 18" (460 mm) to bottom of dryer.
- The dryer must not be installed or stored in an area where it will be exposed to water and/or weather.

IMPORTANT: Do not operate, install, or store dryer where it will be exposed to water, weather, or at temperatures below 40°F (4°C). Lower temperatures may cause dryer not to shut off at end of automatic sensor cycles, resulting in longer drying times.

DRYER DIMENSIONS
Front view:

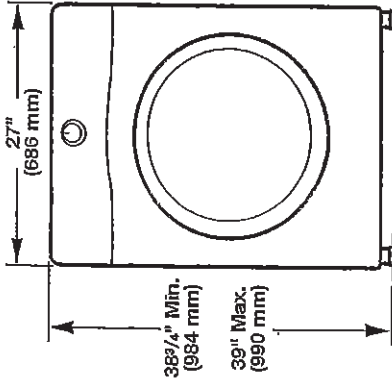


Side view:
Whirlpool Models

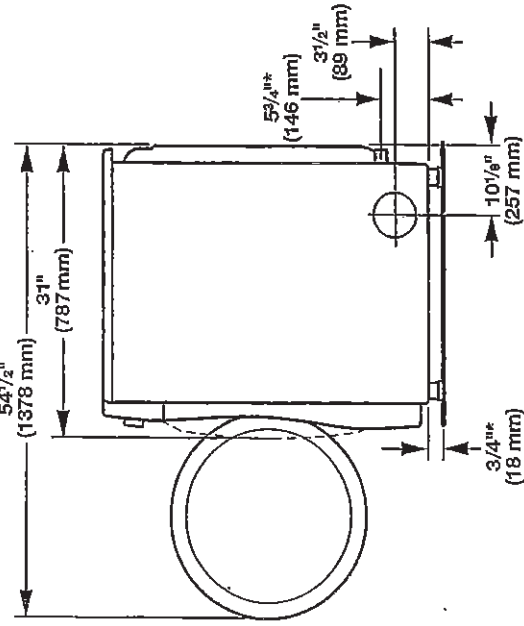

*Approx. measurement

Maytag Models

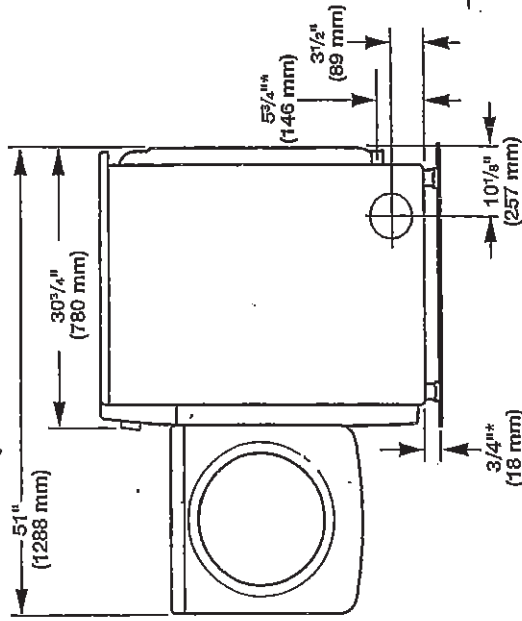

*Approx. measurement

A-S