



SC(B)300 | ALITO Collection



24" Width Model

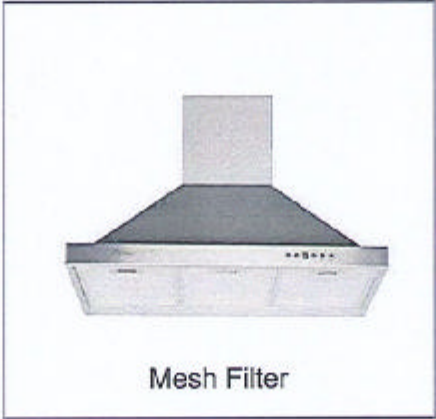

Mesh Filter

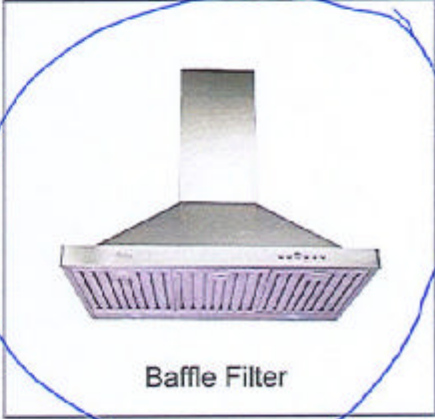

Baffle Filter

Wall Mount

Strong and sturdy with attractive lines and an imposing frame, the SC(B)300 is fitted with a time-delay OFF feature up to nine minutes, a 300 CFM fan, bright LED lights and a digital three-speed push button control panel.

Green Features



3 Speed Push Button Control Panel



Long-Lasting LED Lights



Time-Delay OFF Feature



Grease Cup



Model	Colour	Ducting	Filters	Size	CFM
SC30024	Stainless Steel	6"	Mesh	24"	300
SC30030	Stainless Steel	6"	Mesh	30"	300
SC30036	Stainless Steel	6"	Mesh	36"	300
SCB30024	Stainless Steel	6"	Baffle	24"	300
SCB30030	Stainless Steel	6"	Baffle	30"	300
SCB30036	Stainless Steel	6"	Baffle	36"	300

Cyclone Range Hoods Inc.

1361 Huntingwood Drive, Unit 16. Toronto, ON. M1S 3J1. Canada.



Toll Free: 1-868-293-5662 Tel: (416) 293-0933 Fax: (416) 293-4793 Website: www.CycloneRangeHoods.com

SC(B)300 | ALITO Collection



Features

- Wall mount range hood
- 6" round duct adapter
- Non-stick aluminum fan blades
- 3 speed push button control
- 2 LED lights (2 x 1.4W, 4000K)
- Quick release aluminum mesh filters
- Standard chimney fits up to 9 ft. ceiling
- Up to 9 minutes time-delay OFF feature
- Plug-in connection

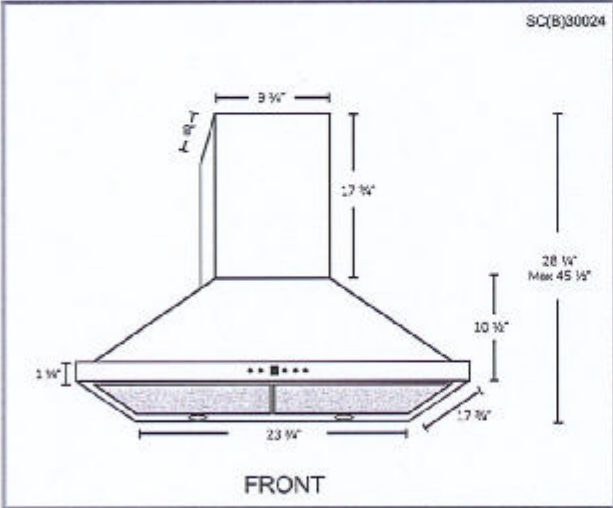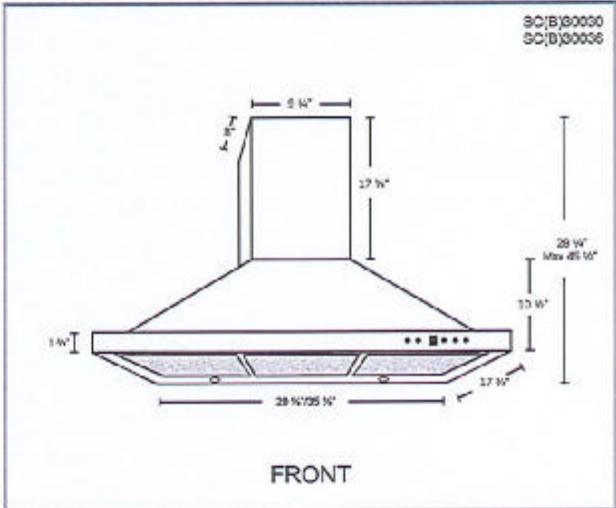

Options

- Filters:
 - SC300 - Quick Release Aluminum Mesh Filters
 - SCB300 - Quick Release Stainless Steel Baffle Filters
- Chimney Flues:
 - A1.CH10 - short (7'-8' ceilings)
 - A1.CH18 - standard (8'-9' ceilings)
 - A1.CH30 - extended (9'-11' ceilings)
- Widths: 24", 30", 36"

Specifications

- | | | |
|--------------------------------------|--------------------------------|---|
| • Air Flow Volume: 300 CFM | • Current: 2.5 Amps | • Finishes: Stainless Steel |
| • Electrical Connection: 120 V/60 Hz | • Fan Speed: 1350 RPM | • Ducting: 6" Round |
| • Power Consumption: 300 Watts | • Fan Type: Centrifugal Blower | • Noise Level: Min. 2 Sones
Max. 4 Sones |





LAHARA®

Monitor 14 Series Shower Trim

MODEL#: T14238-CZ

- Monitor Valve protects from rapid changes in hot or cold water
- 5-setting shower head
- Valve is not included, must purchase separately



WaterSense® Labeled

Finish: Champagne Bronze



Rough Valve



MultiChoice Universal Tub / Shower Rough - Universal Inlets / Outlets
MODEL#: R10000-UNBX

▼ SHOW MORE OPTION

Base Part



Monitor 14 Series Shower Trim
MODEL#: T14238-CZ



LAHARA®

Roman Tub Trim

MODEL#: T2738-CZ



- Valve is not included, must purchase separately
- 3-hole 8-16" installation
- Backed by Delta Faucet's Lifetime Limited Warranty

Finish: Champagne Bronze



Rough Valve



Two Handle Flexible Mount
MODEL#: R2707

▼ SHOW MORE OPTION


Base Part



Roman Tub Trim
MODEL#: T2738-CZ

Product Specification Sheet

B700 Undermount Stainless Steel Single Bar/Prep Kitchen Sink

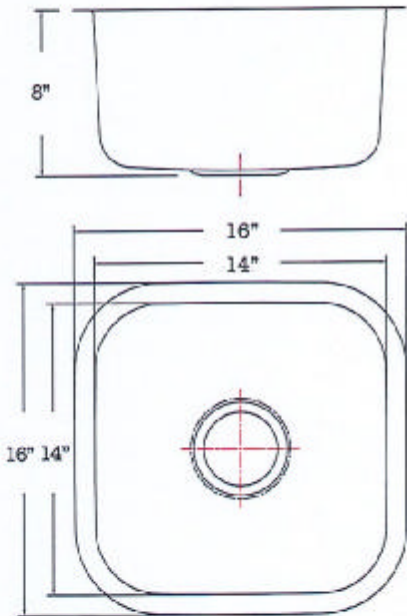

Colour Finish
Stainless Steel

Model No.
B700

- Description
- Outside dimensions: 16" x 16" x 8"
 - Inside Dimensions: 14" x 14" x 8"
 - Minimum cabinet size: 20"
 - Bar or Prep Sink
 - Undermount Stainless Steel Single Bowl Sink
 - 18 Gauge Type 304 Stainless Steel
 - Stone Guard undercoating over rubber pad
 - 3 1/2" drain opening
 - Supplied with installation clip, template and strainer
 - cUPC certified
 - Uses the BG700 grid

Available accessories

- BG700 Grid
- Colander Strainer - Stainless Steel
- Drying Rack



MAIN LOCATION

BRISTOL SINKS
56 Firestone Blvd
London, Ontario
N5W 6E6

WESTERN LOCATION

BRISTOL SINKS
964 72nd Avenue NE
Calgary, Alberta
T2E 8V9

CONTACT

Tel: 1 (800) 930-0214
Fax: 1 (866) 310-7580
Email: sales@bristolsinks.com

