

Interior Finishing Selecti

LIMITED - PHASE 4

LOT 053-2

LOT	053-2		<u>20-1841 E</u>	LEV B THE ARLINGTON
PURCHASERS	S: WINSOME J. COORE LEROY A. COORE	CONTACT NO: 416-2	278-0471	
VENDOR:	HEATHWOOD HOMES (WHITBY) LIN	/ITED - PHASE 4		
		UPC	3	
Appliance	es			
	cchen HoodFan		Air King Under Cabinet Range Ho STAINLESS STEEL AV1308 STD	ood (Standard for Towns Only) 30" PAGE 27
Cabinetry				İ
	chen Cabinet Colour/Style		SIMCOE MOONLIGHT Viking III	STD 3DL
	chen Cabinet Hardware	_	HARDWARE 9677 STD	
25-9111 Ma	ain Bathroom Cabinet Colour/Style	_	SIMCOE ORCHID VIKING III STE) 3DL :
29-7672 Ma	ain Bathroom Cabinet Hardware		HARDWARE 135 STD	
28-8799 Ma	ain Bathroom Countertop		Countertop INUKSHUK CARBON	P-346 LM Arborite
20-6247 Ma	aster Ensuite Cabinet Colour/Style		CAMDEN SHALE GREY CL Viking	iii MAPLE
22-7672 Ma	aster Ensuite Cabinet Hardware		HARDWARE 135 STD	
21-8796 Ma	aster Ensuite Countertop		Countertop PALOMA POLAR ETC Formica	HINGS FINISH 6698-46
Carpet				
37-9248 Be	droom 2 Flooring		Dynasty Tex 40 oz Poly BLACK ICE	E DY 89418 STD
38-9248 Be	droom 3 Flooring		Dynasty Tex 40 oz Poly BLACK ICE	E DY 89418 STD
36-9248 Ma	aster Bedroom Flooring		Dynasty Tex 40 oz Poly BLACK ICE	E DY 89418 STD
<i>52-1079</i> Th	roughout Underpad	Ġ	Underpad 500 Series STD	
Ceramics				
16-9106 Foy	yer Flooring	✓	Madison Series White Matte GE 18" X 18" Matte	.MD.WHT.1818.MT UPG 1
17-2225 Foy	yer Grout		Grout (27) Silver STD	
4-5721 Kit	chen Backsplash	✓	Colour and Dimension Bright Arc QT.CD.ARW.0306.BR UPG_1 3: PATTERN	
5-2226 Kit	chen Backsplash Grout		Grout (00) White STD	
338-9106 Kit	chen Flooring	✓	Madison Series White Matte GE 18" X 18" Matte	.MD.WHT.1818.MT UPG 1
 The Pur Purchase The Ver Purchase due to n grains. Y The Ver Selection The cold The Purchase 	chaser acknowledges these selections are subschaser acknowledges that the Vendor acceptor agrees to reselect from the currently availandor reserves the right to substitute above marer acknowledges that items may not be exact normal production processes. Vendor is not Variations from the Vendor's samples will occur a control of the vendor of the vendo	ots no responsibility in ble selections immediaterials and equipment vily as shown. Variation responsible for shade cur with natural materisholds that best suits that hat wood Homes Head inal and cannot be charactery of this Colour C	n the event the Vendor is unablately upon request. with that of equal or better qualitates from the Vendor's samples may difference which may occur froials such as wood, marble, granithe Tile selected. Office. Inged once submitted. Chart.	te to supply a selection. The cy. ay occur in finished materials om different dye lots or wood te, hardwood and brick.
Date	Purchaser		0 8 2031 / '	MES (MILLITEN)
Dare	ruicilasei	Date Apr	Oroved HEATHWOOD HO	



Interior Finishing Selection Speet

20-1841 ELEV B THE ARLINGTON 053-2 LOT CONTACT NO: 416-278-0471 PURCHASERS: WINSOME J. COORE LEROY A. COORE **HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4** VENDOR: **UPG** Ceramics Grout (27) Silver 339-2225 Kitchen Grout CARRARA White / Grey GE.CR.WHIT.1313.MT STD 13 x 13 348-9257 Laundry Mud Room Flooring Grout (27) Silver STD 349-2225 Laundry Mud Room Grout ☐ SEMPRE White Matte TR.SP.WHITE.1313 STD 13" x 13" 30-9255 Main Bathroom Flooring Grout (27) Silver STD 31-2225 Main Bathroom Grout Weave White QT.WV.WHT.0810 STD 8 x 10 INSTALL 112-9020 Main Bathroom Tub Wall Tile STACKED HORIZONTALLY Grout (00) White 113-2226 Main Bathroom Tub Wall Tile Grout ✓ Madison Series White Matte GE.MD.WHT.1818.MT UPG 1 23-9106 Master Ensuite Floor Tile 18" X 18" Matte Grout (27) Silver STD 24-2225 Master Ensuite Floor Tile Grout ✓ Ontario Series Mosaic Dark Grey OD.ON.DGR.0202.MT.N UPG 73-8666 Master Ensuite Shower Floor Tile 1 2 x 2 Grout (00) White 74-2226 Master Ensuite Shower Floor Tile Grout ☐ Shower Jamb / Sill Thassos White 147-8923 Master Ensuite Shower Jamb(s) and Sill(s) ☐ Weave White QT.WV.WHT.0810 STD 8 x 10 INSTALL 104-9020 Master Ensuite Shower Wall Tile STACKED HORIZONTALLY Grout (00) White 105-2226 Master Ensuite Shower Wall Tile Grout ✓ Madison Series White Matte GE.MD.WHT.1818.MT UPG 1 32-9106 Powder Room Flooring 18" X 18" Matte Grout (27) Silver 33-2225 Powder Room Grout 53-2232 Throughout Thresholds Electrical Decora White Switches and Plugs 90-5796 Throughout Switches and Plug Fireplace Paint Grade Mantle-Cabinet (Per Plan) WHITE NF-17 STD 136-8891 Great Room Fireplace Mantle PAGE 19 Dimplex FP3033HL Electric Fireplace 135-8865 Great Room Fireplace Type The Purchaser acknowledges these selections are subject to the terms and conditions of the applicable Agreement of Purchase and Sale. The Purchaser acknowledges that the Vendor accepts no responsibility in the event the Vendor is unable to supply a selection. The Purchaser agrees to reselect from the currently available selections immediately upon request. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.

Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.

The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected. Selections will not be processed unless signed by Heathwood Homes Head Office The colour selections made on the Colour Chart are final and cannot be changed once submitted The Purchaser has checked and acknowledges the accuracy of this Colour Chart. Purchaser Décor Copsyltant Date

-07- N 3 2009

Date Approved

HEATHWOOD HOMES (WHITBY)

LIMITED - PHASE 4

Page 2 of 4

Date

Purchaser



Interior Fini

LOT

20-1841 ELEV B THE ARLINGTON 053-2 CONTACT NO: 416-278-0471 PURCHASERS: WINSOME J. COORE **LEROY A. COORE HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4** VENDOR: **UPG** Granite MSI Quartz ICED WHITE Group 1 STD 3/4" 2-9069 Kitchen Countertop Hardwood ☐ Vintage Northern Solid Sawn Engineered Select V : Red Oak 99-7497 Dining Room Flooring Pearl COCOA Red Oak Pearl 3/4" x 3 1/4" ✓ Vintage Northern Solid Sawn Engineered Select V : Red Oak 14-7497 Family Room Flooring Pearl COCOA Red Oak Pearl 3/4" x 3 1/4" Vintage Northern Solid Sawn Engineered Select V: Red Oak 11-7497 Great Room Flooring Pearl COCOA Red Oak Pearl 3/4" x 3 1/4" ☐ Vintage Northern Solid Sawn Engineered Select V : Red Oak 78-7497 Stair Landing to Lower Level Flooring Pearl COCOA Red Oak Pearl 3/4" x 3 1/4" ☐ Vintage Northern Solid Sawn Engineered Select V : Red Oak 35-7497 Upper Hall Flooring Pearl COCOA Red Oak Pearl 3/4" x 3 1/4" Interior Railings ☐ Single Collar Alt. Plain w/ Shoes with 3 1/2" Square/Cap Post(s) 49-8148 Stairs to Lower Level Handrail/Pickets/Posts Type BLACK METAL STD ☐ Single Collar Alt. Plain w/ Shoes with 3 1/2" Square/Cap Post(s) 43-8148 Stairs to Upper Level Handrail/Pickets/Posts Type BLACK METAL STD Interior Stairs ☐ Paint Grade Stairs 116-1713 Basement Stairs Type Oak Stairs UPG_1 45-1712 Stairs to Lower Level Type Oak Stairs UPG_1 39-1712 Stairs to Upper Level Type Interior Trim 4 1/4" Baseboards and 2 3/4" Integrated Backbend Casings 91-9374 Throughout Trim Size Painting ☐ Stain handrail, stringers, treads, risers, nosing & posts. (Metal 46-7761 Stairs to Lower Level Colour STAIRS TO BE STAINED TO COMPLIMENT COCOA pickets) HARDWOOD FLOORS. STAIRS WILL VARY FROM FLOORS Stain handrail, stringers, treads, risers, nosing & posts. (Metal 40-7761 Stairs to Upper Level Colour STAIRS TO BE STAINED TO COMPLIMENT COCOA pickets) HARDWOOD. STAIRS WILL VARY FROM FLOORS ☐ Trim WHITE STD 240-1716 Throughout Trim - Paint Colour The Purchaser acknowledges these selections are subject to the terms and conditions of the applicable Agreement of Purchase and Sale. The Purchaser acknowledges that the Vendor accepts no responsibility in the event the Vendor is unable to supply a selection. The Purchaser agrees to reselect from the currently available selections immediately upon request. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.

Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may open in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.

The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected. Selections will not be processed unless signed by Heathwood Homes Head Office.

The colour selections made on the Colour Chart are final and cannot be changed once submitted. The Purchaser has checked and acknowledges the accuracy of this Colour Chart. Décor Consultant -07- n 8 280° **HEATHWOOD HOMES (WHITBY)** Purchaser Date Date Approved -LIMITED - PHASE 4



Interior Fini

20-1841 ELEV B THE ARLINGTON LOT 053-2CONTACT NO: 416-278-0471 PURCHASERS: WINSOME J. COORE LEROY A. COORE HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4 **VENDOR: UPG** Painting Wall WARM GREY 22 STD 51-1717 Throughout Walls - Paint Colour Plumbing Plumbing Fixtures WHITE 266-1737 Main Bathroom Plumbing Fixture (Colour) Plumbing Fixtures WHITE 149-1737 Master Ensuite Plumbing Fixture (colour) Plumbing Fixtures WHITE 34-1737 Powder Room Plumbing Fixture (Colour)

The Purchaser acknowledges these selections are subject to the terms and conditions of the applicable Agreement of Purchase and Sale. The Purchaser acknowledges that the Vendor accepts no responsibility in the event the Vendor is unable to supply a selection. The Purchaser agrees to reselect from the currently available selections immediately upon request. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.

Selections will not be processed unless siened by Heathwood Homes Head Office.

Selections will not be processed unless signed by Heathwood Homes Head Office. The colour selections made on the Colour Chart are final and cannot be changed once submitted.

The Purchaser has checked and acknowledges the accuracy of this Colour Chart.

Date

Purchaser

-07- 0 8 200

Décor Consultant

Date

Purchaser

Date Approved

HEATHWOOD HOMES (WHITBY)

LIMITED - PHASE 4



23-Jun-21



LOT	053-2			<u>2</u>	0-184	11 ELEV B THE	ARLINGTON
PURCHASERS:	WINSOME J. COORE LEROY A. COORE	CONTACT	NO: 416-278-0471				
VENDOR:	HEATHWOOD HOMES (WHITBY) LIN	1ITED - PH	ASE 4				HST #
Purchase and Sal and Sale shall rer	stood and agreed between the undersigned parti e in accordance with the agreement and except fi nain as stated herein: It is further understood tha lable selections. The Purchaser hereby agrees to	or such chang at and agreed	es noted below, all oth that all changes and ac	er terms and co	nditio	ns in the Agreemen	t of Purchase
Cabinetry							
1338	Optional Extras 30H- Wall cabinet with shelf for microwa 3/4"H x 17"D) * electrical priced separate	ely Before J	une 1, 2021 VIKING		Qty:	1	
	SEE SKETCH # T LOCATION	PAGE	17 F	OR			
Ceramics							
1692	Upgrade 1 Tile		Foyer Floor		Qty:	1	
1694	Upgrade 1 Tile		Kit/Brk Floor		Qty:	1	
1699			Kitchen Optional Backsplash		Qty:	1	
	Upgrade 1 Tile !NSTALL IN SUBWAY PATTERN		·				
1695	Upgrade 1 Tile		M. Ensuite Floor		Qty:	1	
1690			M. Ensuite Showe Floor	r	Qty:	1	
	Upgrade 1 Tile						
1693	Upgrade 1 Tile		Powder Floor		Qty:	1	
Hardwood							
2. All extra 3. In the ev Vendor v returned whatsoev 4. The Ven 5. Purchase due to n grains. V 6. The Ven 7. Selection 8. The selection	es Selection Sheet when properly executed for and upgrades listed above are subject to Coent the Vendor is unable to incorporate the will not be liable to the Purchaser in any witto the Purchaser, without interest. The cost wer the Agreement of Purchase and Sale is not dor reserves the right to substitute above may acknowledges that items may not be exact formal production processes. Vendor is not variations from the Vendor's samples will octor reserves the right to select Grout & Three is will not be processed unless signed by Hections made on this schedule are final and cachaser has checked and acknowledges the acceptance.	onstruction I work approvay. The more of options of the completed terials and etly as shown responsible cur with nat shoulds that I athwood Hounot be characterized.	Progress and Archited ed above in the consider paid for any charge restras is non-refur, the total cost of wo quipment with that or. Variations from the for shade difference ural materials such as best suits the Tile selences Head Office.	archase and Sactural and Mustruction of the nges or option added in all or k approved a fequal or bette Vendor's sare which may os wood, marblected.	ale. nicipa hous hal ex- ther c bove y er qua mples occur e, gra	l requirements. e for any reason verse for any reason verse for the following state of the	whatsoever, the d with shall be for any reason y the Vendor. ished materials e lots or wood d brick.
June o	3/21 Me_		June 23/.	21-6	1		
Date	Purchaser		APPROVED -	Dé	cor (Consultant	
Date	Purchaser			HEATUNIO	ים חר	OMES (WILLIAM	
			Date Approved	TEATHWU	עע H(OMES (WHITBY	,

LIMITED - PHASE 4



20-1841 ELEV B THE ARLINGTON

LOT 053-2

PURCHASERS: WINSOME J. COORE

LEROY A. COORE

VENDOR:

HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4

HST#

It is herein understood and agreed between the undersigned parties hereto that the following changes shall be made to the above mentioned Agreement of Purchase and Sale in accordance with the agreement and except for such changes noted below, all other terms and conditions in the Agreement of Purchase and Sale shall remain as stated herein: It is further understood that and agreed that all changes and additions shall be installed as per builder's specifications, location and available selections. The Purchaser hereby agrees to purchase the following extras:

CONTACT NO: 416-278-0471

981

Vintage

FAMILY

3-1/4" Red Oak Select-V

Heating / Air

331 **Optional Extras** KITCHEN

ROUGH-IN GAS LINE FOR GAS STOVE AT MAIN FLOOR (See specs) (Hook-up not

included)Leave standard 120 volt electrical outlet on a separate circuit. STOVE SPECS PAGES 29 - 31

Plumbing

276 STANDARD Kitchen Sink Option KITCHEN

Oty:

KINDRED Kitchen Sink Collection - Reginox ND1831 UA/9 Stainless Kitchen Double

(equal size) Bowl Undermount Sink (or equivalent)

PAGE 20

161

Moen -CHATEAU

POWDER ROOM

2 Handle Widespread Lavatory Chrome Faucet with Pop-Up Drain (Model#4945) in

lieu of standard single lever

PAGE 25

This Sales Selection Sheet when properly executed forms part of our Agreement of Purchase and Sale.

All extras and upgrades listed above are subject to Construction Progress and Architectural and Municipal requirements. In the event the Vendor is unable to incorporate the work approved above in the construction of the house for any reason whatsoever, the Vendor will not be liable to the Purchaser in any way. The monies paid for any changes or optional extras not proceeded with shall be returned to the Purchaser, without interest. The cost of options or extras is non-refundable in all other circumstances. If for any reason whatsoever the Agreement of Purchase and Sale is not completed, the total cost of work approved above will be retained by the Vendor. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.

Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur/in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.

Selections will not be processed unless signed by Heathwood Homes Head Office.

The selections made on this schedule are final and cannot be changed once submitted.

The Purchaser has checked and acknowledges the accuracy of this schedule.

Date

Purchaser

Date Approved

Décor Consultant

Date

Purchaser

0 7 202


HEATHWOOD HOMES (WHITBY)

LIMITED - PHASE 4

15°+40 The Arlington

20-1841 ELEV. B

Sketch \$5

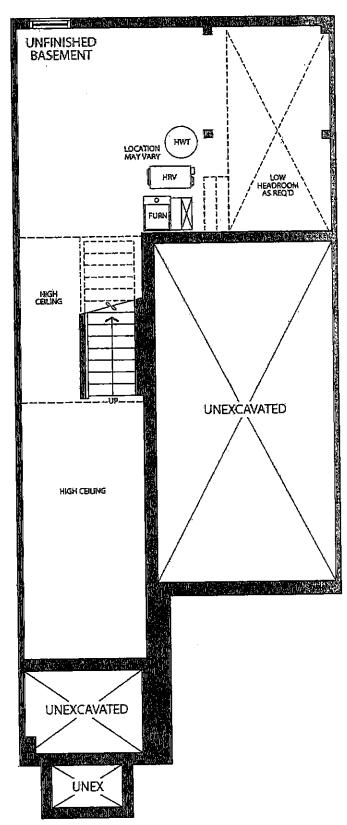


BASEMENT ELEVATION A & B

The Arlington

20-1841 ELEV. B

ELEVATION A & B: 1,841 SQ FT Sketch #6

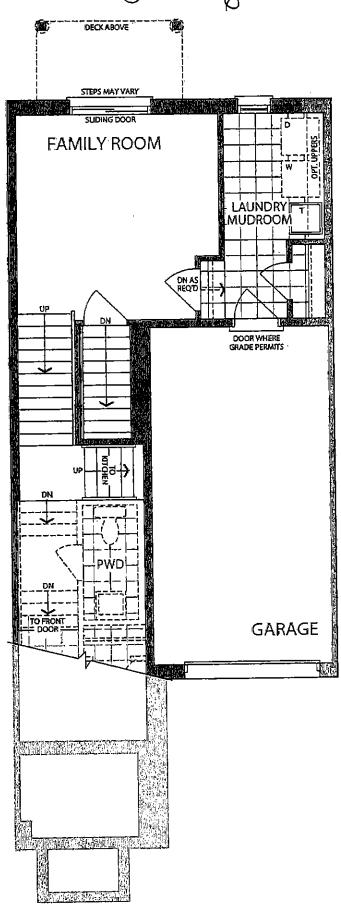


LOWER LEVEL ELEVATION A & B

Legal Plan July 22, 2020

The Arlington

20-1841 ELEV. B

ELEVATION A & B: 1,841 SQ FT Sketch# 7

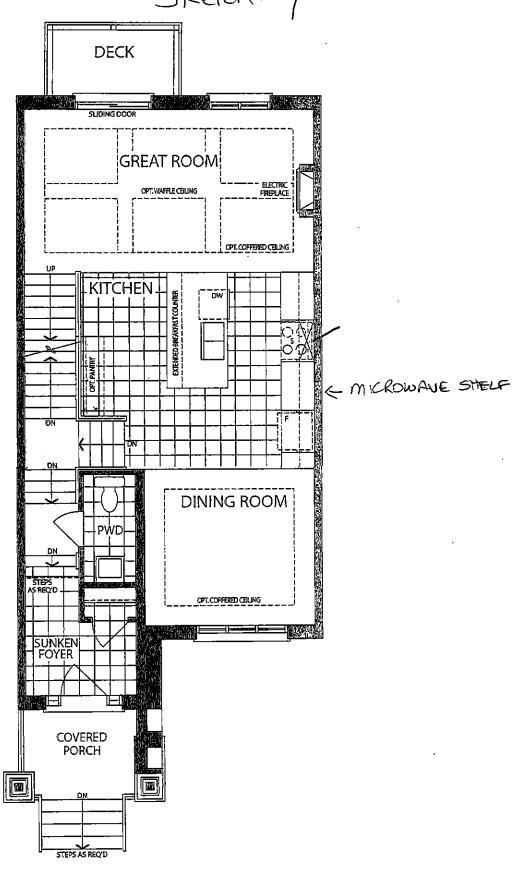


MAIN LEVEL ELEVATION B

Legal Plan July 22, 2020

8 of 40 The Arlington


20-1841 ELEV. B

ELEVATION A & B: 1,841 SQ FT Sketch #8

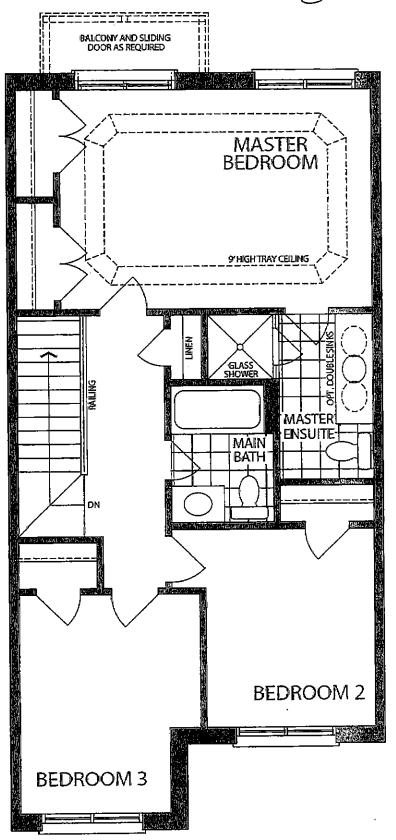


UPPER LEVEL ELEVATION B




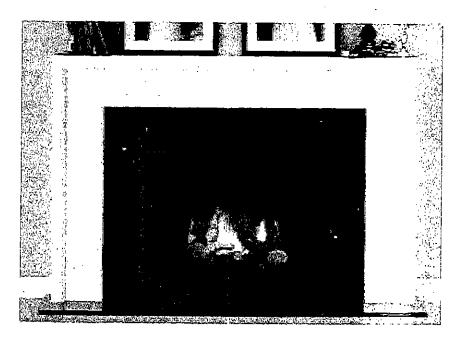

'CABINET!

NFAS NF17 Mantel





ND1831UA/9 SPECIFICATION

Model ND1831UA/9 is a double (two equal size) bowl undermount sink manufactured by Franke Kindred Canada Limited from 18 gauge stainless steel. Product has silk finished rims and linear brush finished bowls. Sink is fully undercoated. Basket strainer waste fittings (3 1/2", 89 mm) are included. Sink is backed with a limited lifetime warranty.

- O.D. 17 3/4" x 30 7/8" x 8 1/2" (45 x 78 x 22 cm)
- * Recommended for minimum 36" cabinet

Franke Kindred Canada Limited

P.O. Box 190, 1000 Franke Kindred Road, Midland, Ontario, Canada, L4R 4K9 Phone: 866-687-7465 Fax: 800-361-8408

hranke Kindred Canada Limited

STANDARD KITCHEN FAUCET

Align Modern



Single Handle Pull-Down Kitchen Faucet[±]

Model 7565†



BOULEVARD® PEDESTAL SINK VITREOUS CHINA

		_	
BOIL	EVARD	9 PEDESTA	I SINK

6,0641.800 Faucet holes on 8" (203mm) centers (Illustrated)

- ☐ 0641.400 Faucet holes on 4" (102mm) centers
- O641.100 Center hole only
 - Classic styled rectangular pedestal lavatory
 - · Vitreous china
 - Rear overflow
 - · Supplied with mounting kit
 - Right Height® for greater comfort during use
 - Faucet ledge with large deck area (faucet not included)
 - Design coordinates with Boulevard® Toilef
 - Basin has flat bottom to also allow use as an above counter sink or a drop-in sink (with u-shaped cut out)

Nominal Dimensions:

24" x 19" x 35-1/2" (610 x 483 x 902mm)

0641.008	Pedestal	top-8"	(203mm)	centers

- ☐ 0641.004 Pedestal top-4" (102mm) centers
- ☐ 0641.001 Pedestal top-center hole only
- O010.000 Pedestal only

Bowl sizes:

17" (432mm) wide, 12-1/2" (318mm) front to back, 5" (127mm) deep

Compliance Certifications -

Meets or Exceeds the Following Specifications:


• ASME A112.19.2 - 2008/CSA B45.1-08

To Be Specified:

- ☐ Color: ☐ White ☐ Linen
- Faucet Finish:
- ☐ Supplies:
- ☐ 1-1/4" Trap:

© 2014 AS America Inc.

☐ Nipple:



SEE REVERSE FOR ROUGHING-IN DIMENSIONS

J7

Revised 6/12

^{*} See faucet section for additional models available

COLONY COUNTERTOR SINK

- Vitreous china
- · Self-rimming
- · Front overflow
- · Supplied with template
- Faucet deck (Faucet shown not included)

I	0346	803
---	------	-----

Faucet holes on 203mm (8") centres

346 403 (Illustrated)

Faucet holes on 102mm (4") centres

346 001

Centre hole only

Nominal Dimensions: 521 x 448mm (20-1/2" x 17-5/8")

Bowl sizes:

422mm (16-5/8") wide, 279mm (11") front to back, 143mm (5-5/8") deep


COMPLIANCE CERTIFICATIONS -Meets or exceeds the following Specifications:


- ASME A112.19.2M for Vitreous China Fixtures.
- · CAN/CSA B45 Series.

To Be Specified

- ☐ Colour: White ☐ Bone ☐ Silver Gray
 - ☐ Linen
- ☐ Faucet*:
- □ Faucet Finish:
- ☐ Supplies & Stops:
- ☐ Trap 1-1/4" (32 mm):

BAS-198

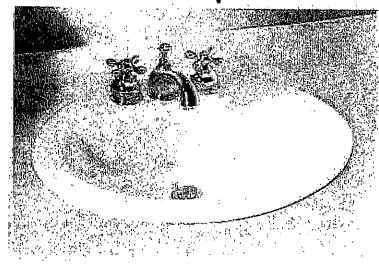

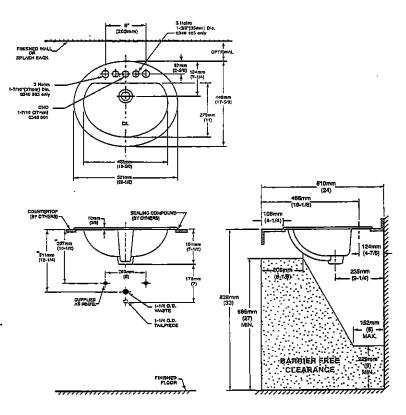

SUPPLIED WITH SINK.

FAUCETS NOT INCLUDED AND MUST BE ORDERED SEPARATELY.


IMPORTANT: Dimensions of lixtures are nominal and may vary within the range of tolerances established by ANSI Standard A112.19.2.

These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

@ 2000 American Standard Inc.

01/07

See faucet section for additional models available

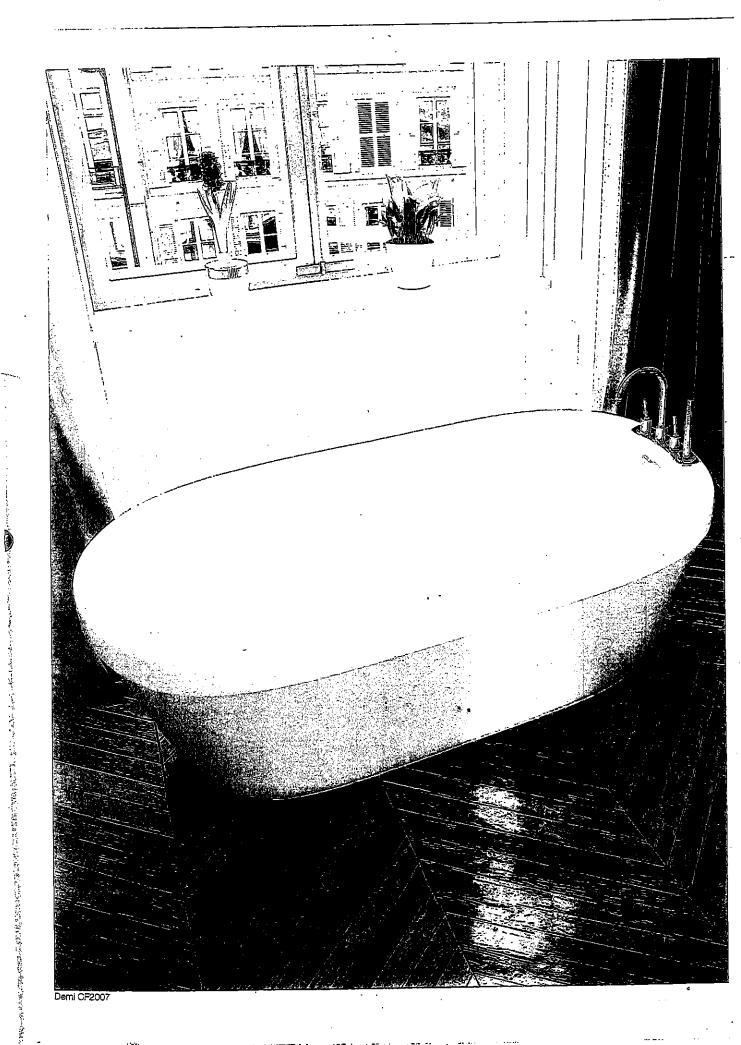

Specifications



DESCRIPTION

Quick connect system

Metal construction with various finishes identified by suffix

1/2" IPS shanks
Designed to be installed on 8" to 16" centers
Includes metal pop-up type waste assembly

OPERATION

- Lever style handles with hot and cold color indicators Hot side counterclockwise to open (clockwise to close) Cold side clockwise to open (counterclockwise to close)

FLOW

Flow is limited to 1.5 gpm max (5.7L/min) at 60 psi, for products made before October 2008 flow is limited to 2.2 gpm max (8.3 L/min)
 CARTRIDGE

1224 cartridge design
 Nonmetallic and stainless steel material
 STANDARDS

- Third party certified to WaterSense®, ASME A112.18.1/CSA B125.1 and all applicable requirements referenced therein Certified to NSF 61/9 & 372 Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- ADA 🚯 for lever handles

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser 5 year warranty if used in commercial installations



CHATEAU® Two-Handle Widespread **Lavatory Faucet**


Models: 4945 series

NOTE: SPOUT DESIGNED TO BE INSTALLED

THROUGH 1" MIN. DIA. HOLE. VALVES
INSTALL THROUGH 1-1/8" MIN. DIA. HOLE.
NOTE: FOR DECKTHICKNESS 1-1/2" to 3", USE SERVICE
KIT #115001. VALVES INSTALL THROUGH 1-1/4"

DIA. HOLE.



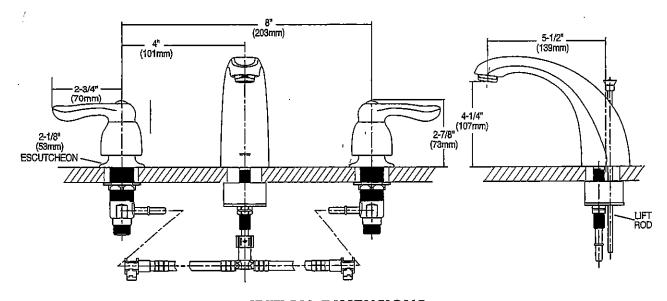

CRITICAL DIMENSIONS

(DO NOT SCALE)


FOR MORE INFORMATION CALL: 1-800-BUY-MOEN

www.moen.com

Rev. 8/15

Chateau

Transitional



Lavatory Faucet with Pop-Up Drain Model L4621†

VANITY SINKS AND PEDESTAL



Posi-Temp® Pressure Balancing Tub/Shower Model 62320 / TL183† OR

Posi-Temp Valve and Tub/Shower Trim with Eco-Performance Easy Clean® XL Model 62320 / TL183EP† (TL183EP not available in BC)

SHOWER AND 5' TUB FAUCETS





2 Handle Roman Tub with 9" Spout Model 4796 / T990†.

FREESTANDING TUB FAUCETS





SPECIFICATIONS RANGE HOODS

HVI CERTIFIED

180 CFM/7.0 Sones @ 0.10" SP. Horizontal 180 CFM/7.5 Sones @ 0.10" SP. Vertical

<u>Dimensions</u>

Overall bottom projection - 183/8" Overall top projection -12" Height - 6" Available widths: 21", 24", 30", 36" & 42"

Hood Body

Stainless Steel: 24 gauge, grade 430 stainless steel. Painted: 23 gauge cold rolled commercial grade (CRCQ) steel, auto welded, coated with a baked enamel finish.

2 speed, single coil, thermally protected, permanently lubricated. Rated 120 volts, 60 hz. Complete with 200°C lead wires.

Single 60 watt cook light capacity (bulb not included).

Ducting Options


Horizontal ducting: 31/4"x10" (duct adapter and damper included). Vertical ducting: 31/4"x10" (duct adapter and damper included). Vertical ducting: 7" round (duct adapter and damper not included). Ductiess: removable front vent (charcoal filter not included).

Fan Blade


One piece polymeric, electronically balanced blade. 65/8" diameter with 5 paddles.

Electrical connection

Hood top - 7/8" knockout hole for use with 1/2" cable clamp Hood back - 7/8" knockout hole for use with 1/2" cable clamp



AV SERIES



<u>Filters</u>

UL rated, class 2 filter. Grease Filter: RF35 - 87/8"x103/8" (included). Charcoal Filter: RF34 (not included).
Combo Grease/Charcoal: RF55 (not included).

<u>Available Finishes</u>

White, Biscuit, Almond, Black & Stainless Steel.

100	1	EXP	INDED	PERFO	RMANC	<u>}=</u>			نحبسي
	Static	c Pressure	(inches o	f w.g.)		Sones	Fan Speed	Power	g
0	0.05	0.1	0.15	0.2	0.25	@ .1 SP	KPM	wans	Apms
246	232	218	203	181	147	7.5	2973	87.0	2.1
225	210	180	175	155	120	7.0	3024	87.0	2.1
	0 246 225	0 0.05 246 232	Static Pressure 0 0.05 0.1 246 232 218	Static Pressure (inches of the pressure of	Static Pressure (inches of w.g.) 0 0.05 0.1 0.15 0.2 246 232 218 203 181	Static Pressure (inches of w.g.) 0 0.05 0.1 0.15 0.2 0.25 246 232 218 203 181 147	Static Pressure (inches of w.g.) Sones 0 0.05 0.1 0.15 0.2 0.25 @ .1 SP 246 232 218 203 181 147 7.5	Static Pressure (inches of w.g.) Sones Fan Speed 0 0.05 0.1 0.15 0.2 0.25 @ .1 SP RPM 246 232 218 203 181 147 7.5 2973	0 0.05 0.1 0.15 0.2 0.25 @ .1 SP RPM Watts 246 232 218 203 181 147 7.5 2973 87.0

PROJECT			. <u></u> .	ARCHITECT		
LOCATION	1			ENGINEER	4	
CONTRACTOR	<u> </u>			SUBMITTED	D BY	DATE
FAN MODEL NUMBER NUMBER	CFM IN W.C.	RPM WAT	TS AMPS	SONES	ОТУ	OPTIONAL EQUIPMENT & REMARKS
	j j		,			





Air King: 820 Lincoln Avenue West Chester, Pennsylvania 19380-4466 Tel: (610) 692-7400 • 877-304-3785 Fax: (610) 696-8048

Canada: Brampton, Ontario Tel: 905-456-2033 Fax: (905) 456-1015

Specifications subject to change without notice.



Bottom Mount Refrigerator

PRODUCT MODEL NUMBERS

WRF532SMB WRF535SMB WRF540CWB

Electrical: A 115-volt, 60-Hz, AC-only, 15- or 20-amp fused, grounded electrical supply is required. It is recommended that a separate circuit serving only your refrigerator be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.


NOTE: Before performing any type of installation, cleaning, or removing a light bulb, turn the control (Thermostat; Refrigerator or Freezer Control depending on the model) to OFF and then disconnect the refrigerator from the electrical source. When you are finished, reconnect the refrigerator to the electrical source and reset the control (Thermostat, Refrigerator or Freezer Control depending on the model) to the desired setting. See "Using the Controls."

Water: A cold water supply with water pressure between 30 and 120 psi (207 and 827 kPa) is required to operate the ice maker and water dispenser. If you have questions bout your water pressure, call a licensed, jualified plumber.

IMPORTANT: The pressure of the water coming out of a reverse osmosis system going to the water inlet valve of the refrigerator needs to be between 35 and 120 psi (241 and 827 kPa).


Reverse Osmosis Water Supply: If a reverse osmosis water filtration system is connected to your cold water supply, the water pressure to the reverse osmosis system needs to be a minimum of |40 to 60 psi (276 to 414 kPa).

PRODUCT DIMENSIONS

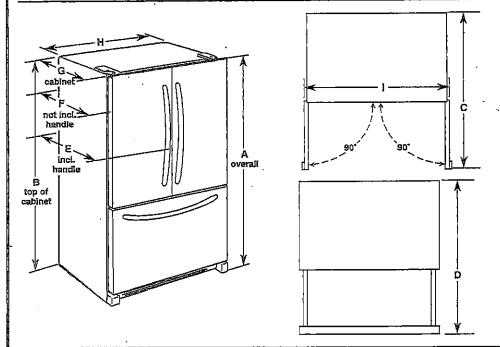

	Model Number/ Size	Height - Overall "A"	Height - Top of Cabinet "B"	Depth - Doors Open 90° "C"	Depth - Drawer Open "D"	Depth - With Handles "E"	Depth - Without Handles "F"	Depth - Cabinet Only "G"	Width - Cabinet "H"	Width - Door Open 90° "!"
	WRF535SWB 25.2 cu. ft.		68 %." (174.8 cm)	481/4" (122.1 cm)	53%" (135 cm)	351/4" (90 cm)	321%s" (83.7 cm)	29% (74 cm)	35%* (90.5 cm)	43% (110.2 cm)
	WRF535SMB	70%"	681%;*	48%"	53½"	35%"	321%"	29%	35%	43%"
	25.2 cu. ft.	(178.1 cm)	(174.8 cm)	(122.1 cm)	(135 cm)	(90 cm)	(83.7 cm)	(74 cm)	(90.5 cm)	(110.2 cm)
_	WRF532SMB	70%*	681%;"	47 /k	52%"	34%"	31'%#	28%"	32%*	42%'
	22 1 cu. ft.	(178.1 cm)	- (174.8-cm)	(119.5 cm)	(132.1 cm)	-(87.5 cm)	(81.1 cm)	(71:4 cm)	(82.9 cm)	- (107:6-ənə)
	WRF540CWB	70%"	681%;"	48"	44½"	29%"	28"	. 24%°	35%	99%"
	20 cu: ft.	(178.1 cm)	(174.8 cm)	(121.9 cm)	(113.0 cm)	(74.6 cm)	(71.1 cm)	(61.3 cm)	(90.5 cm)	(100.0 cm)

LOCATION REQUIREMENTS



To ensure proper ventilation for your refrigerator, allow for a ½" (1.25 cm) space on each side and at the top. Allow for 1" (2.54 cm) of space behind the refrigerator. If your refrigerator has an ice maker, make sure you leave some extra space at the back for the water line connections.


If you are installing your refrigerator next to a fixed wall, leave 2% (6.3 cm) minimum on the hinge side (some models require more) to allow for the door to swing open.


NOTE: This refrigerator is intended for use in a location where the temperature ranges from a minimum of 55°F (13°C) to a maximum of 110°F (43°C). The preferred room temperature range for optimum performance, which reduces electricity usage and provides superior cooling, is between 60°F (15°C) and 90°F (32°C). It is recommended that you do not install the refrigerator near a heat source, such as an oven or radiator.


Because Whiripool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

Ref. W10597594B 10/1/14





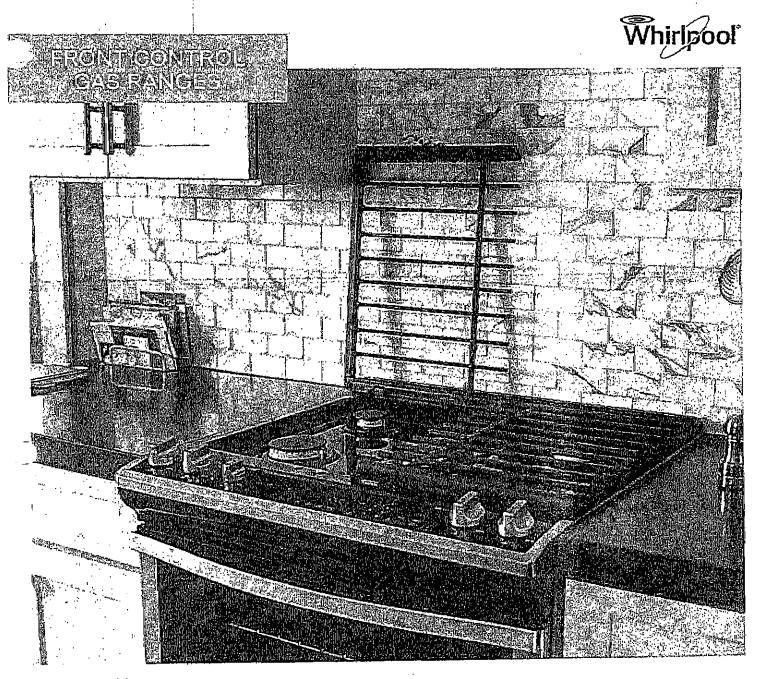

FEATURING



TimeSavor™ system
The TimeSavor™ system's Frozen
Bake Technology allows you to skip
préheating for favorites like pizza,
lasagna, chicken nuggets, fries or ples
so you can cook frozen foods faster.



HeatRight™ system The HealRight" system's True convection fielps you to cook food faster" with a rear fan and third healing element to circulate hot air over, under, and around food.




CompleteClean™ system


The CompleteClean system
The CompleteClean system's E2-2-Lift hinged grates give you quick access to spills on the cooktop. The industry first hinged design allows you to wipe up under them without removing them entirely. For a more thorough clean, the grates are also dishwasher-safe.

Every day, care.

From the #1 Selling Appliance brand in the USA[†]

Front Control Gas Ranges





WEG745H0F

30" Freestanding Range - 5.8 cu. ft.



TimeSavor[™]system

Frozen Bake Technology



HeatRight[™] system

- True Convection
- Convection Conversion
- AccuSimmer³ burner
- Center Oval burner
- Temperature Sensor



CompleteClean System


- EZ-2-Litt* Hinged Grates
- AquaLitt[®] Solf-cleaning Technology
- Dishwasher-safe knobs




ReadySet[™] system

- (2) Speed Heat " burners
- Rapid Preheat
- Keep Warm
- Delay Gook

Available colors



- or line attentioners, folias he hacessons in the



- private (page) spirited to 4 erchest (Lie 18) skip on 1 erchest erchest vot er tentigenspipe (ne strictif



- Part number 8273888A Anti-Tip Kit for Range
- Part number 4378577 Brick Baking Stone
- + Part number 4390923 Porcelain Broiler Pan & Grid
- * Part number W10123240 Premium Broil Pan & Roasting Rock
- ► Part number 8009 Appliance Light Bulb 40 Watt



30" (76.2 cm) Slide-in Gas Range





WEG789H0D

WEG760H0D

GAS SUPPLY REQUIREMENTS

Provide a gas supply line of ¾" (1.9 cm) rigid pipe to the range location. A smaller size pipe on longer runs may result in linsufficient gas supply. With LP gas, piping or tubing size can be ½" (1.3 cm) minimum. Usually, LP gas suppliers determine the size and materials used in the system.

NOTE: Pipe-joint compounds that resist the action of LP gas must be used. Do not use TEFLON® tape.

Flexible metal appliance connector:

If local codes permit, a new CSA design-certified, 4 to 5 ft (122 to 152.4 cm) long, ½" (1.3 cm) or ¾" (1.9 cm) I.D., flexible metal appliance connector may be used for connecting range to the gas supply line.




- $\,\blacksquare\,$ A ½" (1.3 cm) male pipe thread is needed for connection to the female pipelthreads of the inlet to the appliance pressure regulator.

of the inlet to the appliance pressure regulator.

Do not kink or damage the flexible metal tubing when moving the range.

Must include a shutoff valve:
The supply line must be equipped with a manual shutoff valve. This valve should be located in the same room but external to the range opening, such as an adjacent cabinet. It should be in a location that allows ease of opening and closing. Do not block access to shutoff valve. The valve is for turning on or shutting off gas to the range.



- A, Gas supply line B. Shutoff valve "open" position
- B. Shutoff v. C. To range

Gas Pressure Regulator

The gas pressure regulator supplied with this range must be used. The Inlet pressure to the regulator should be as follows for proper operation:


Natural das: Minimum pressure: 5" WCF Maximum pressure: 14" WCP

LP gas: Minimum pressure: 11" WCP Maximum pressure: 14" WCP

Contact local gas supplier If you are not sure about the inlet pressure.

PRODUCT DIMENSIONS

This manual covers several models. Your model may appear different from the models depicted. Dimensions given are maximum dimensions across all models.



- A. 1½6" (3.0 cm) height from cooktop to lop of vent
- 29%" (75.9 cm)
- C. Model/serial number plate flocated behind the oven door on the top right-hand side of the oven frame)
- D. 36" (91.4 cm) height to top of cooktop edge with leveling legs screwed all the way in*
- 28 5% (71.9 cm) max. depth from front of console to back of range. 28% (73.3 cm) max. depth from handle to back of range.

IMPORTANT: Range must be level after installation. Follow the instructions in the "Level Range" section. Using the cooktop as a reference for leveling the range is not recommended.

* Range can be raised approximately 1" (2.5 cm) by adjusting the leveling legs.

Type of Gas

Natural gas:

This range is factory set for use with Natural gas. See "Gas Conversions" section.

The model/serial rating plate located behind the control panel has information on the types of gas that can be used. If the types of gas listed do not include the type of gas available, check with the local gas supplier.

LP gas conversion:

Conversion must be done by a qualified service technician. No attempt shall be made to convert the appliance from the gas specified on the model/serial rating plate for use with a different gas without consulting the serving gas supplier. See "Gas Conversions" section.

ISTEFLON is a registered trademark of Chemours.


Page 1 of 2

Because Whitipool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without not


Dimensions are for planning purposes only. For complete details, see installation instructions packed with product. Specifications subject to change without notice.

Ref. W10665256E









WDF310PAAS Black-on-Stainless

OTHER AVAILABLE COLORS

Black Model: WDF310PAAB



Biscuit-on-Biscuit
Model: WDF310PAAT



White Model: WDF310PAAW



Universal Silver
Model: WDF310PAAD



DIMENSIONS		KEY FEATURES				
Maximum Height	34 1/2 Inches .	ENERGY STAR® Qualified No One Has Fewer Repairs 17 Years in A Row				
Mlnimum Height	33 1/2 Inches	Resource - Efficient Wash System				
Height	34 1/2 Inches	CEE Tier 1 qualified Tall Tub Design				
Depth	24 1/2 Inches	White Plastic Interior Quiet Partner(TM) I Sound Package				
Width	23 7/8 Inches	Auto Soil Sensor				
only. For complete infi instructions packaged	: for planning purposes prmalion, see installation with product,	3 Automatic Cycles 1-Hour Wash Cycle Heavy Wash Cycle Normal Cycle				
ELECTRICAL		4 Options High Temperature Wash System				
15 Amps Amps. 60	Hz. 120 V. 15,	Heated Dry Option 4 Hour Delay Wash Option				
Before purchasing this important information a annual energy consumerficiency rating that is dealer.	pilon or energy	4-Tier SheerClean Direct Feed Wash System Control Lock VInyl Racks In-Rack Sliverware Basket				



PRODUCT MODEL NUMBERS

WDF110PAB WDF111PAB WDF120PAF WDF121PAF WDF310PAA

WDE310PL' WDF320PAD WDF510PAY WDF520PAD WDF530PSY WDF540PAD WDF730PAY WDT710PAY

Electrical Requirements: 120-volt, 60-Hz, AC only, 15- or 20-amp. fused electrical supply. Copper wire only. A time delay fuse or circuit breaker and separate circuit is recommended.

If direct wiring dishwasher: Use flexible, armored,

or nonmetallic, sheathed copper wire with grounding wire that meets the wiring requirements for

your home and local codes and ordinances. Use a UL listed or CSA approved conduit connector.

If connecting dishwasher with a power supply cord:

Use Power Supply Cord Kit (Part No. 4317824) marked for use with dishwashers. Follow the kit

instructions for installing the power supply cord. Power supply cord must plug into a grounded 3 prong, outlet, located in the cabinet next to the dishwasher opening. Outlet must meet all

(a) (0g)

local codes and ordinances. Water Supply Requirements: A hot water line with 20 to water supply Requirements:A not water line with 20 to 120 psi (138 to 862 kPa) water pressure. Water temperature must be 120°F (49°C) water at dishwasher. Use %" O.D. copper tubing with compression: fitting or flexible braided water supply line (½" minimum plastic tubing is not recommended). Use a 90°elbow with ¾"N.P.T. external pipe threads on one end. Do not solderwithin 6" (15.2 cm) from water inlet valve.

Drain Requirements: A new drain hose is supplied with your dishwasher. If this is not long enough, use a new drain hose with a maximum length of 12' (3.7 m) (Part No. 3385556) that meets all current AHAM/IAPMO test standards, is resistant to heat and detergent, and fits the 1" (2.5 cm) drain connector of the dishwasher.

Make sure to connect the drain hose to waste tee or disposer inlet above drain trap in house plumbing and 20° (50.8 cm) minimum above the floor. It is recommended




that the drain hose either be looped up and securely fastened to the underside of the counter or be connected to an air gap.

Make sure to use an air gap if the drain hose is connected to house plumbing lower than 20" (50.8 cm) above subfloor or floor.

Use 1/2" (1.3 cm) minimum 1.D. drain line fittings. If required, the air gap should be installed in accordance with the air gap installation instructions. When connecting the air gap, a rubber hose (not provided) will be needed to connect to the waste tee or disposer inlet.

PRODUCT DIMENSIONS

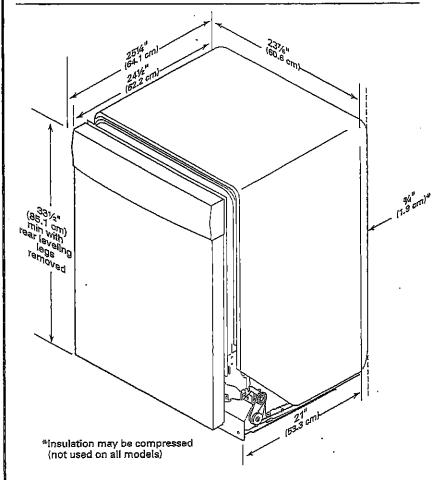

Page 1 of 2

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

Dimensions are for planning purposes only. For complete details, see installation instructions packed with product. Specifications subject to change without notice.


W10435040C-D-WH

CABINET CUTOUT DIMENSIONS

MDE320Pan

NOTE: Shaded areas of cabinet walls show where utility connections may be installed.


- *Measure from the lowest point on the underside of the countertop. May be reduced to 33½" (85.1 cm) by removing the rear leveling legs from dishwasher.
- **Minimum, measured from narrowest point of opening.

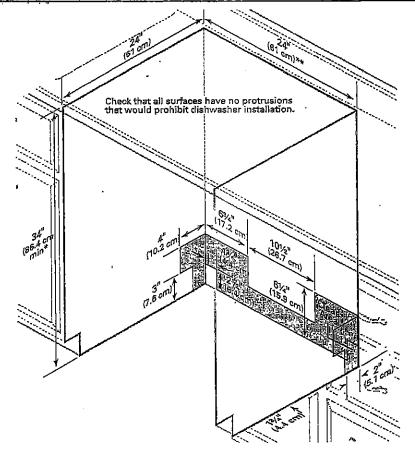

35 of 40

WHIRLPOOL WASHER Model #: WFW5620HW

Whiripton Bread Canada English (Wouter and Oryana (Washors (Front Load Washors) WFW5820H



5.2 cu. ft. I.E.C. Closet-Depth Front Load Washer with Load & Go™ Dispenser









Whirlfoo!"

5.2 cu. ft. I.E.C. Closet-Depth Front Load Washer with Load & $\text{Go}^{\text{\tiny{TM}}}$ Dispenser

Model #: WFW6520HW

Dimensions

Depth With Door C Minimum Height		cm, 58-1/2 in
Vincisis:		cm; 27.9 in
Appearance		, , , , , , , , , , , , , , , , , , , ,
LCD Touch Screen	N6	
Mindow	Yes	•
Details		
Details Drum Material	Staint	sss Sieel
Drum Material	, to the second second	ess Sieel
Drum Material	ns	ess Sieel
Cycles and Optio	ns	

LOCATION REQUIREMENTS


Proper installation is your responsibility.


You will need:

- A water heater set to 120°F (49°C).
- A grounded electrical outlet located within 6 ft (1.8 m) of power cord on back of washer.
- Hot and cold water faucets located within 4 ft (1.2 m) of hot and cold water fill valves on washer, and water pressure of 20–100 psi (137.9–689.6 kPa).
- A level floor with maximum slope of 1" (25 mm) under entire washer. Installing on carpet or surfaces with foam backing is not recommended.
- Floor must support washer's total weight (with water and load) of 315 lbs (143 kgs).

IMPORTANT: Do not install, store, or operate washer where it will be exposed to weather or in temperatures below 32°F (0°C). Water remaining in washer after use may cause damage in low temperatures. See "Washer Care" in your Use and Care Guide for winterizing information.


Whirlpool Models*






*For additional details (or information) specific to your model, refer to the 'Dimensions' listed for your model at www.whirlpool.com.

Maytag Models







All dimensions show minimum spacing allowed. For each arrangement, consider allowing more space for ease of installation and servicing, and spacing for companion appliances and clearances for walls, doors, and floor moldings.

Space must be large enough to allow door to fully open. Add spacing of 1* (25 mm) on all sides of washer to reduce noise transfer. If a closet door or louvered door is installed, top and bottom air openings in door are required.


Recessed area or closet installation (stacked washer and dryer):




Custom under-counter installation:



Recessed area or closet installation:

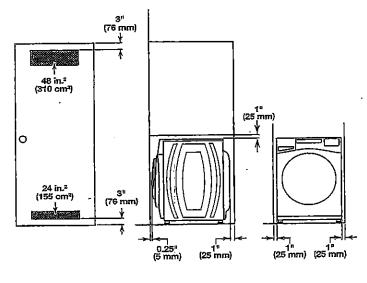

Custom cabinet installation:




DRAIN SYSTEM

The drain system can be installed using a floor drain, wall standpipe, floor standpipe, or laundry tub. Select the method you need.


IMPORTANT: To avoid siphoning, only 4.5" (114 mm) of drain hose should be inside standpipe. Always secure drain hose with cable tie.

Floor standpipe drain system




Minimum diameter for a standpipe drain: 2" (51 mm). Minimum carry-away capacity: 17 gal. (64 L) per minute. A 1/4" (6 mm) diameter to 1" (25 mm) diameter Standpipe Adapter Kit is available (Part Number 3363920). Top of standpipe must be at least 30" (762 mm) high; install no higher than 96" (2.44 m) from bottom of washer. If you have an overhead sewer and need to pump higher than 96" (2.44 m), a sump pump and associated hardware are needed. See "Alternate parts."

Wall standpipe drain system



See requirements for floor standpipe drain system.

Laundry tub drain system

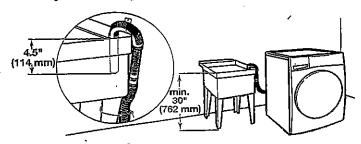


Minimum capacity: 20 gal. (76 L). Top of laundry tub must be at least 30" (762 mm) above floor; install no higher than 96" (2.44 m) from bottom of washer.

W

38 of 40

WHIRLPOOL DRYER Model #: YWED5620HW

Whirippod Board Canada English | Wester and Dryons | Dryens | Bacina Dryens | WED5629H





7.4 cu. ft. Front Load Electric Dryer with Intuitive Touch Controls

K.

Power Cord Included







Whirlpool


7.4 cu, ft. Front Load Electric Dryer with Intuitive Touch Controls

Model #: YWED5620Hb


Dimensions

Depth	78.74 cm, 31.0 in
Depth With Coor Open 90 Degree	138.43 cm, 54-1/2 in
Height	98.42 cm, 38-344 in 69.53 cm, 27.0 in
Configuration and Overview	
Fuell Type	Becuric
Cycles and Options	
Cycle Time Remaining	Yes
List Filter Indicator	No ·
Number of Dryer Cycles Number of Drymess Levels	36
Ventilation System	
Long Vent	No
Maainun: Veni Lengüi	64
Venting Direction	Left, Right, Bottom, Resi
Electrical	
展	60

M



WHIRLPOOL DRYER Model #: YWED5620HW



NOTE: Most installations require a minimum of 5" (127 mm) clearance behind dryer for exhaust vent with elbow. See "Venting Requirements."

Installation Clearances

For each arrangement, consider allowing more space for ease of installation and servicing, spacing for companion appliances, and clearances for walls, doors, and floor moldings. Space must be large enough to allow door to fully open. Add spacing on all sides of dryer to reduce noise transfer. If a closet door or louvered door is installed, top and bottom air openings in door are required.

Check code requirements. Some codes limit, or do not permit, installation of the dryer in garages, closets, mobile homes, or sleeping quarters. Contact your local building inspector.


NOTE: No other fuel-burning appliance can be installed in the same closet as a dryer.

Installation spacing for recessed area or closet installation

Alf dimensions show recommended and minimum spacing allowed.


- Additional spacing should be considered for ease of installation and servicing.
- Additional clearances might be required for wall, door, floor moldings, dryer venting, and gas line.
- Additional spacing should be considered on all sides of the dryer to reduce noise transfer.
- For closet installation with a door, minimum ventilation openings in the top and bottom of the door are required. Louvered doors with equivalent ventilation openings are acceptable.
- Companion appliance spacing should also be considered.

Recommended installation clearances (dryer only):

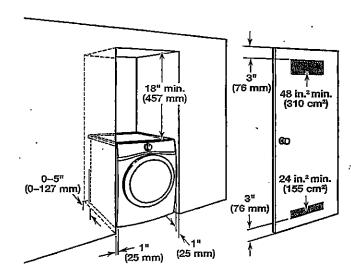

0" (0 mm) rear spacing is allowed for straight back venting only. For steam models only, inlet hose must not be kinked.

Custom under-counter installation:



Mobile home - Additional installation requirements:


This dryer is suitable for mobile home installations. The installation must conform to the Manufactured Home Construction and Safety Standard, Title 24 CFR, Part 3280 (formerly the Federal Standard for Mobile home construction and Safety, Title 24, HUD Part 280) or Standard CAN/CSA-Z240 MH.

Mobile home installations require:

- Metal exhaust system hardware, available for purchase from your dealer. For further information, see "Assistance or Service" in your Use and Care Guide.
- Special provisions must be made in mobile homes to introduce outside air into dryer. Openings (such as a nearby window) should be at least twice as large as dryer exhaust opening.

For mobile home installation of gas dryers:

■ Mobile Home Installation Hold-down Kit Part Number 346764 is available to order. For further information, see "Assistance or Service" in your Use and Care Guide.



WHIRLPOOL DRYER Model #: YWFD5620HW

Additional parts may be required, depending on your installation. Check local codes. Check existing electrical supply and venting. Read "Electrical Requirements" and "Venting Requirements" before purchasing parts.

If using a power supply cord:

Use a UL Listed power supply cord kit marked for use with clothes dryers. The kit should contain:

- A UL Listed 30 amp power supply cord, rated 120/240 volt minimum. The cord should be type SRD or SRDT and be at least 4 ft. (1.22 m) long. The wires that connect to the dryer must end in ring terminals or spade terminals with upturned ends.
- A UL Listed strain relief.

Optional Equipment (not supplied with dryer):

Refer to your Use and Care Guide for information about accessories available for your dryer.

LOCATION REQUIREMENTS

Check code requirements. Some codes limit, or do not permit, installing dryer in garages, closets, mobile homes, or sleeping quarters. Contact your local building inspector.



Explosion Hazard

Keep flammable materials and vapors, such as gasoline, away from dryer.

Place dryer at least 18 inches (460 mm) above the floor for a garage installation.

Failure to do so can result in death, explosion, or fire.


You will need:

- A location allowing for proper exhaust installation. See "Venting Requirements."
- A separate 15 or 20 amp circuit for a gas dryer or 30 amp circuit for an electric dryer.
- If using power supply cord, a grounded electrical outlet located within 2 ft. (610 mm) of either side of dryer. See "Electrical Requirements."
- Floor must support dryer weight of 200 lbs. (90.7 kg). Also consider weight of companion appliance.
- Cold water faucets located within 4 ft. (1.2 m) of the water fill valves, and water pressure of 20-120 psi (138-827 kPa). You may use your washer's water supply by purchasing the necessary parts noted in "Parts needed."
- Level floor with maximum slope of 1" (25 mm) under entire dryer. If slope is greater than 1" (25 mm), install Extended Dryer Feet Kit, Part Number 279810. If not level, clothes may not tumble properly and automatic sensor cycles may not operate correctly.
- For garage installation, place dryer at least 18" (460 mm) above floor. If using a pedestal, you will need 18" (460 mm) to bottom of dryer.
- The dryer must not be installed or stored in an area where it will be exposed to water and/or weather.


IMPORTANT: Do not operate, install, or store dryer where it will be exposed to water, weather, or at temperatures below 40°F (4°C). Lower temperatures may cause dryer not to shut off at end of automatic sensor cycles, resulting in longer drying times.

DRYER DIMENSIONS

Front view:



Side view: Whirlpool Models



Maytag Models

