

### PRE-Sales Selection Sheet CHECKLIST

7	oF	4	
	of		

20-1841 ELEV A THE ARLINGTON

**HEATHWOOD HOMES (WHITBY)** 

**LIMITED - PHASE 4** 

25-Jun-21

057-3

LOT

PURCHASE	· · -	ONTACT NO: 647-	280-9022	
VENDOR:	JIA HUI HUANG  HEATHWOOD HOMES (WHITBY) LIMIT	ED DUASE 4		
VENDOR.	HEATHWOOD HOWES (WHITE) LIMIT	EU - PRASE 4	<del></del> :	<u> </u>
			·	
	LOWER DECK			
	☐ FINISHED BASEMENT ☐ COLD CELLAR			
	UPGRADED / MODIFIED ELEVATION			
	CORNER UPGRADE  SIDE UPGRADE  REAR UPGRADE  CEILING UPGRADE - SMOOTH	<u> </u>	WALK OUT DECK WALK OUT BASEI	
	☐ MAIN FLOOR☐ SECOND FLOOR		BASEMENT	
	ADDITIONAL ROUGH-INS			
	<b>200 AMP SERVICE</b>		HUMIDIFIER	
	☐ WET BAR ROUGH IN		AIRCON	
	GAS ROUGH-IN  STOVE		DRYER	
	BBQ BBQ	· —	DRYER ADDITIONAL FIRE	PLACE
	HOODFAN VENTING			10_
(	☐ 6" ROUND DUCT ☑ 7" ROUND DUCT			
Ч				
	FULL BASEMENT STAIRS:	PAINT GRA	<u>ADE</u>	
	UPPER BASEMENT STAIRS:	<u>N/A</u>		
	LOWER BASEMENT STAIRS: STAIRS TO LOWER LEVEL:	N/A		
		ALL OAK	,	
	STAIRS TO UPPER LEVEL:	<u>N/A</u>		
	MAIN STAIRS:	ALL OAK		
	MEDIA STAIRS (if applicable):	<u>N/A</u>		
Jone a	·	المال المال	25/21	IRIT SALEM
Date	Purchaser	Date		Décor Consultant
Date	Purchaser		160es · 25 2021	Mosen

Date Approved



### Interior Finishing Selection Sheet

**HEATHWOOD HOMES (WHITBY)** 

**LIMITED - PHASE 4** 

LOT 057-3 20-1841 ELEV A THE ARLINGTON CONTACT NO: 647-280-9022 PURCHASERS: YAN HONG HE JIA HUI HUANG **VENDOR: HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4** UPG Appliances ☐ Air King Under Cabinet Range Hood (Standard for Towns Only) 6-34 Kitchen HoodFan STAINLESS STEEL AV1308 STD 30" PAGE 26 Cabinetry ☐ CHARLESTON ORCHID Viking III STD 3DL 1-9166 Kitchen Cabinet Colour/Style HARDWARE 9677 STD 3-2086 Kitchen Cabinet Hardware ☐ CHARLESTON ORCHID Viking III STD 3DL 25-9166 Main Bathroom Cabinet Colour/Style HARDWARE 9677 STD 29-2086 Main Bathroom Cabinet Hardware Countertop PALOMA POLAR ETCHINGS FINISH 6698-46 28-8796 Main Bathroom Countertop CHARLESTON ORCHID Viking III STD 3DL 20-9166 Master Ensuite Cabinet Colour/Style HARDWARE 9677 STD 22-2086 Master Ensuite Cabinet Hardware ☐ Countertop PALOMA POLAR ETCHINGS FINISH 6698-46 21-8796 Master Ensuite Countertop Ceramics ☐ CARRARA White / Grey GE.CR.WHIT.1313.MT STD 13 x 13 16-9257 Foyer Flooring ☐ Grout (27) Silver STD 17-2225 Foyer Grout ☐ CARRARA White / Grey GE.CR.WHIT.1313.MT STD 13 x 13 338-9257 Kitchen Flooring Grout (27) Silver STD 339-2225 Kitchen Grout ☐ CARRARA White / Grey GE.CR.WHIT.1313.MT STD 13 x 13 348-9257 Laundry Mud Room Flooring Grout (27) Silver STD 349-2225 Laundry Mud Room Grout CARRARA White / Grey GE.CR.WHIT.1313.MT STD 13 x 13 30-9257 Main Bathroom Flooring Grout (27) Silver STD 31-2225 Main Bathroom Grout ☐ Uniwall Tender Grey QT.UW.TGR.0810 STD 8 x 10 TO BE 112-9025 Main Bathroom Tub Wall Tile INSTALLED VERTICALLY 113-2226 Main Bathroom Tub Wall Tile Grout Grout (00) White STD CARRARA White / Grey GE.CR.WHIT.1313.MT STD 13 x 13 23-9257 Master Ensuite Floor Tile The Purchaser acknowledges these selections are subject to the terms and conditions of the applicable Agreement of Purchase and Sale.
 The Purchaser acknowledges that the Vendor accepts no responsibility in the event the Vendor is unable to supply a selection. The Purchaser agrees to reselect from the currently available selections immediately upon request.
 The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
 Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
 The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected. Selections will not be processed unless signed by Heathwood Homes Head Office. The colour selections made on the Colour Chart are final and cannot be changed once submitted. The Purchaser has checked and acknowledges the accuracy of this Colour Chart. Purchaser Décor Consultant

Date Approved

Purchaser

Date



## Interior Finishing Selection Sheet

LOT	057-3					20-1841 ELEV A THE ARLINGTON
PURCHASER	S: YAN HONG		CONTACT NO: 64	17-2	280-9022	
VENDOR:	HEATHWOO	OD HOMES (WHITBY)	LIMITED - PHASE 4			
<u> </u>				JPG		
Ceramic	S					
24-2225 N	laster Ensuite	Floor Tile Grout			Grout (27) Silv	ver STD
73-8661 N	laster Ensuite	Shower Floor Tile				s Mosaic Snow White Matte 0202.MT.N STD 2 x 2
74-2226 N	laster Ensuite	Shower Floor Tile Gro	ut		Grout (00) Wh	nite STD
147-8923 N	laster Ensuite	Shower Jamb(s) and S	ill(s)		Shower Jamb ,	/ Sill Thassos White STD
104-9025 N	laster Ensuite	Shower Wall Tile			Uniwall Tende INSTALLED VE	er Grey QT.UW.TGR.0810 STD 8 x 10 TO BE RTICALLY
105-2226 N	laster Ensuite	Shower Wall Tile Groເ	ıt		Grout (00) Wh	nite STD
365-9257 <b>™</b>	lud Room (Opti	onal Lower Level) Flo	oring		CARRARA Whi	ite / Grey GE.CR.WHIT.1313.MT STD 13 x 13
364-2225 N	lud Room (Opti	onal Lower Level) Gr	out		Grout (27) Silv	ver STD
<i>32-9257</i> P	owder Room F	·looring			CARRARA Whi	ite / Grey GE.CR.WHIT.1313.MT STD 13 x 13
33-2225 P	owder Room G	Grout			Grout (27) Silv	ver STD
<i>53-2232</i> T	hroughout Thr	esholds			Metal Thresho	olds STD
Electrica	<u> </u>					
90-5796 T	hroughout Swi	tches and Plug			Decora White	Switches and Plugs STD
Fireplace	e					
	reat Room Fire	place Mantle			Paint Grade M	Mantle- Cabinet (Per Plan) WHITE NF-17 STD
135-8865 G	reat Room Fire	place Type		✓	Dimplex FP303	PAGE 20 33HL Electric Fireplace
Granite						
2-9121 K	itchen Counter	rtop		✓	MSI Quartz ICI Edge	ED WHITE Group 1 UPG 3/4" with Mitered
Hardwoo	od					
<i>37-7502</i> B	edroom 2 Floo	oring		$\checkmark$		nern Solid Sawn Engineered Select V : Red Oak R Red Oak Pearl 3/4" x 3 1/4"
38-7502 B	edroom 3 Floo	oring		✓		nern Solid Sawn Engineered Select V : Red Oak R Red Oak Pearl 3/4" x 3 1/4"
<i>99-7502</i> D	ining Room Flo	ooring		✓		nern Solid Sawn Engineered Select V : Red Oak R Red Oak Pearl 3/4" x 3 1/4"
2. The P Purcha 3. The V 4. Purcha due to grains. 5. The V 6. Selecti 7. The co	urchaser acknowledges acknowledges acknowledges normal production. Variations from the endor reserves the ions will not be problem selections makes	edges that the Vendor a lect from the currently averight to substitute above is that items may not be earn processes. Vendor is	ccepts no responsibility allable selections immediately as shown. Variation not responsible for shell occur with natural marketsholds that best suit Heathwood Homes Heare final and cannot be	y in edia ent ation ade aten its the ead cha	n the event the ately upon requesting that of equals from the Verbiller of the Verbiller of the Tile selected Office.	pual or better quality.  endor's samples may occur in finished materials  hich may occur from different dye lots or wood  ood, marble, granite, hardwood and brick.  d.
June	21,2021			<u> </u>	21. 91	1
Date		Purchaser (	Date	FF	BOTER -	Décor Consultant
ازیه )	1,2021	长艺艺		- 7	? 5 <b>2</b> 021	WK -
Date		Purchaser				EATHWOOD HOMES (WHITBY)

Date Approved

TIMITED - PHASE 4



## Interior Finishing Selection Sheet

HEATHWOOD HOMES (WHITBY)

**LIMITED - PHASE 4** 

Date Approved

LOT 057-3 <u>20-1841 ELEV A THE ARLINGTON</u> CONTACT NO: 647-280-9022 PURCHASERS: YAN HONG HE JIA HUI HUANG VENDOR: **HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4** LIPG Hardwood ✓ Vintage Northern Solid Sawn Engineered Select V : Red Oak 14-7502 Family Room Flooring 3/4" x 3 1/4" Pearl PEWTER Red Oak Pearl ✓ Vintage Northern Solid Sawn Engineered Select V : Red Oak 11-7502 Great Room Flooring Pearl PEWTER Red Oak Pearl 3/4" x 3 1/4" ✓ Vintage Northern Solid Sawn Engineered Select V : Red Oak 36-7502 Master Bedroom Flooring 3/4" x 3 1/4" Pearl PEWTER Red Oak Pearl ☐ Vintage Northern Solid Sawn Engineered Select V : Red Oak 78-7502 Stair Landing to Lower Level Flooring 3/4" x 3 1/4" Pearl PEWTER Red Oak Pearl ✓ Vintage Northern Solid Sawn Engineered Select V: Red Oak 35-7502 Upper Hall Flooring Pearl PEWTER Red Oak Pearl 3/4" x 3 1/4" Interior Railings Single Collar Alt. Plain w/ Shoes with 3 1/2" Square/Cap Post(s) 49-8148 Stairs to Lower Level Handrail/Pickets/Posts Type BLACK METAL STD Single Collar Alt. Plain w/ Shoes with 3 1/2" Square/Cap Post(s) 43-8148 Stairs to Upper Level Handrail/Pickets/Posts Type BLACK METAL STD Interior Stairs Paint Grade Stairs 116-1713 Basement Stairs Type Oak Stairs UPG 1 45-1712 Stairs to Lower Level Type Oak Stairs UPG\_1 39-1712 Stairs to Upper Level Type Interior Trim 4 1/4" Baseboards and 2 3/4" Integrated Backbend Casings 91-9374 Throughout Trim Size STD Painting Stain handrail, stringers, treads, risers, nosing & posts. (Metal 46-7761 Stairs to Lower Level Colour Red Oak Pearl PEWTER - SHADE WILL VARY FROM pickets) HARDWOOD FLOOR Stain handrail, stringers, treads, risers, nosing & posts. (Metal 50-7761 Stairs to Lower Level Handrail/Pickets/Posts Colour Red Oak Pearl PEWTER - SHADE WILL VARY FROM pickets) HARDWOOD FLOOR Stain handrail, stringers, treads, risers, nosing & posts. (Metal 40-7761 Stairs to Upper Level Colour Red Oak Pearl PEWTER - SHADE WILL VARY FROM pickets) HARDWOOD FLOOR The Purchaser acknowledges these selections are subject to the terms and conditions of the applicable Agreement of Purchase and Sale. The Purchaser acknowledges that the Vendor accepts no responsibility in the event the Vendor is unable to supply a selection. The Purchaser agrees to reselect from the currently available selections immediately upon request. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.

Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is samples will occur with natural materials such as wood, marble, granite, hardwood and brick.

The Vendor reserves the right to select Grout & Thresholds that best quite the Tile selected. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected. Selections will not be processed unless signed by Heathwood Homes Head Office. The colour selections made on the Colour Chart are final and cannot be changed once submitted. The Purchaser has checked and acknowledges the accuracy of this Colour Chart. Décor Consultan



### Interior Finishing

LOT 057-3 20-1841 ELEV A THE ARLINGTON CONTACT NO: 647-280-9022 PURCHASERS: YAN HONG HE JIA HUI HUANG **VENDOR: HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4** UPG **Painting** Stain handrail, stringers, treads, risers, nosing & posts. (Metal 44-7761 Stairs to Upper Level Handrail/Pickets/Posts Colour pickets) Red Oak Pearl PEWTER - SHADE WILL VARY FROM HARDWOOD FLOOR ☐ Trim WHITE STD 240-1716 Throughout Trim - Paint Colour ■ Wall WARM GREY 22 STD 51-1717 Throughout Walls - Paint Colour Plumbing ☐ Plumbing Fixtures WHITE 266-1737 Main Bathroom Plumbing Fixture (Colour) ☐ Plumbing Fixtures WHITE 149-1737 Master Ensuite Plumbing Fixture (colour) ☐ Plumbing Fixtures WHITE 34-1737 Powder Room Plumbing Fixture (Colour)

The Purchaser acknowledges these selections are subject to the terms and conditions of the applicable Agreement of Purchase and Sale. The Purchaser acknowledges that the Vendor accepts no responsibility in the event the Vendor is unable to supply a selection. The Purchaser agrees to reselect from the currently available selections immediately upon request.

The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.

Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such on, marble, granite, hardwood and brick.

The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.

Selections will not be processed unless signed by Heathwood Homes Head Office.

The colour selections made on the Colour Chart are final and cannot be changed once submitted.

The Purchaser has checked and acknowledges the accuracy of this Colour Chart.

Date Approved

**HEATHWOOD HOMES (WHITBY)** 

**LIMITED - PHASE 4** 



LOT 057-3 20-1841 ELEV A THE ARLINGTON

PURCHASERS: YAN HONG HE

CONTACT NO: 647-280-9022

JIA HUI HUANG

VENDOR:

**HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4** 

HST#

It is herein understood and agreed between the undersigned parties hereto that the following changes shall be made to the above mentioned Agreement of Purchase and Sale in accordance with the agreement and except for such changes noted below, all other terms and conditions in the Agreement of Purchase and Sale shall remain as stated herein: It is further understood that and agreed that all changes and additions shall be installed as per builder's specifications, location and available selections. The Purchaser hereby agrees to purchase the following extras:

Granite				
795	Optional Upgrade  Countertop 3/4" GROUP 1 with double edge	Kitchen	Qty:	1
Hardwood				
974	Vintage 3-1/4" Red Oak Select-V	В/2	Qty:	1
975	<b>Vintage</b> 3-1/4" Red Oak Select-V	B/3	Qty:	1
970	Vintage 3-1/4" Red Oak Select-V	FAMILY	Qty:	1
973	Vintage 3-1/4" Red Oak Select-V	м/в	Qty:	1
Plumbing				
276	STANDARD Kitchen Sink Option KINDRED Kitchen Sink Collection - Reginox ND1831 (equal size) Bowl Undermount Sink (or equivalent)	<b>KITCHEN</b> JA/9 Stainless Kitchen Double PAGE み	Qty:	1

This Sales Selection Sheet when properly executed forms part of our Agreement of Purchase and Sale.

All extras and upgrades listed above are subject to Construction Progress and Architectural and Municipal requirements.

In the event the Vendor is unable to incorporate the work approved above in the construction of the house for any reason whatsoever, the Vendor will not be liable to the Purchaser in any way. The monies paid for any changes or optional extras not proceeded with shall be returned to the Purchaser, without interest. The cost of options or extras is non-refundable in all other circumstances. If for any reason whatsoever the Agreement of Purchase and Sale is not completed, the total cost of work approved above will be retained by the Vendor. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.

Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.

Selections will not be processed unless signed by Heathwood Homes Head Office.

The selections made on this schedule are final and cannot be changed once submitted.

The Purchaser has checked and acknowledges the accuracy of this schedule.

Date

Purchaser zig Purchaser

Décor Consultant

-03- 25 2021

**HEATHWOOD HOMES (WHITBY)** Date Approved **LIMITED - PHASE 4** 

Date



21-Jun-21

Sales Selection Sheet

LOT 057-3

20-1841 ELEV A THE ARLINGTON

PURCHASERS: YAN HONG HE

CONTACT NO: 647-280-9022

JIA HUI HUANG

VENDOR: HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4

HST#

It is herein understood and agreed between the undersigned parties hereto that the following changes shall be made to the above mentioned Agreement of Purchase and Sale in accordance with the agreement and except for such changes noted below, all other terms and conditions in the Agreement of Purchase and Sale shall remain as stated herein: It is further understood that and agreed that all changes and additions shall be installed as per builder's specifications, location and available selections. The Purchaser hereby agrees to purchase the following extras:

This Sales Selection Sheet when properly executed forms part of our Agreement of Purchase and Sale.
 All extras and upgrades listed above are subject to Construction Progress and Architectural and Municipal requirements.
 In the event the Vendor is unable to incorporate the work approved above in the construction of the house for any reason whatsoever, the Vendor will not be liable to the Purchaser in any way. The monies paid for any changes or optional extras not proceeded with shall be returned to the Purchaser, without interest. The cost of options or extras is non-refundable in all other circumstances. If for any reason whatsoever the Agreement of Purchase and Sale is not completed, the total cost of work approved above will be retained by the Vendor.
 The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
 Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
 The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
 Selections will not be processed unless signed by Heathwood Homes Head Office.
 The Purchaser has checked and acknowledges the accuracy of this schedule.

Juno 21, 2021

Purchaser

DatePROTER

Décor Consultant

Date Date

Purchaser

-93- 22 2021

Mora


- Date Approved - HEATHWOOD HOMES (WHITBY)
LIMITED - PHASE 4

# Cor HO The Arlington

20-1841 ELEV. A

ELEVATION A & B: 1,841 SQ FT

Sketch # 5

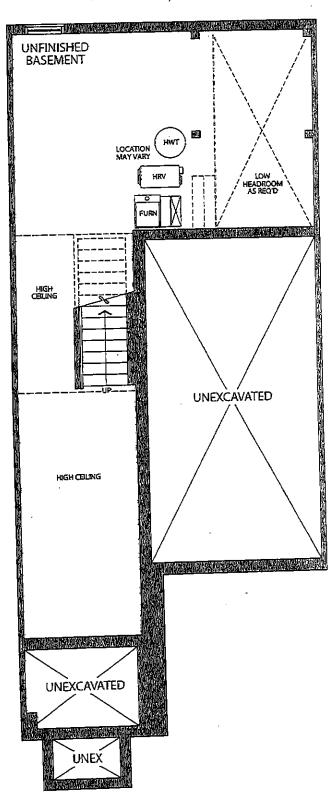

BASEMENT ELEVATION A & B

## 170FHO

### The Arlington

20-1841 ELEV. A

ELEVATION A & B: 1,841 SQ FT

Sketch # 6 **FAMILY ROOM NUDROOM GARAGE** 


LOWER LEVEL ELEVATION A & B

8 of 40

## Sketch#7 The Arlington

20-1841 ELEV. A

ELEVATION A & B: 1,841 SQ FT

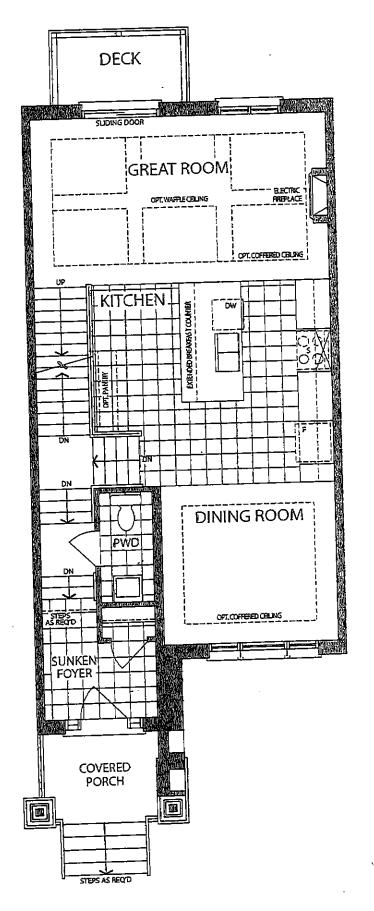

MAIN LEVEL

2


10 DE 40

Sketch#8


### The Arlington

20-1841 ELEV. A

ELEVATION A & B: 1,841 SQ FT

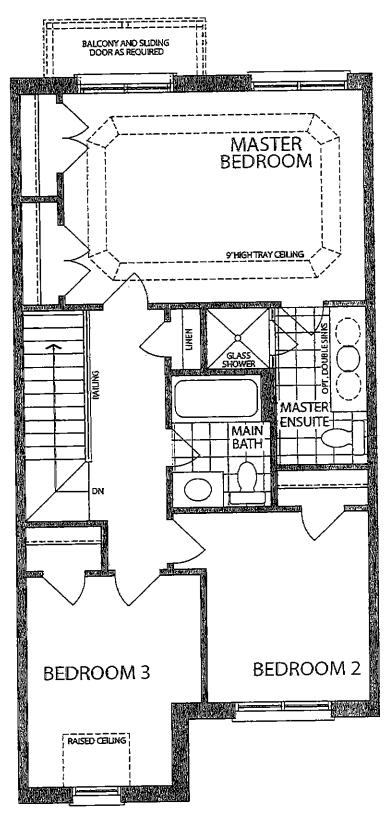


UPPER LEVEL ELEVATION A

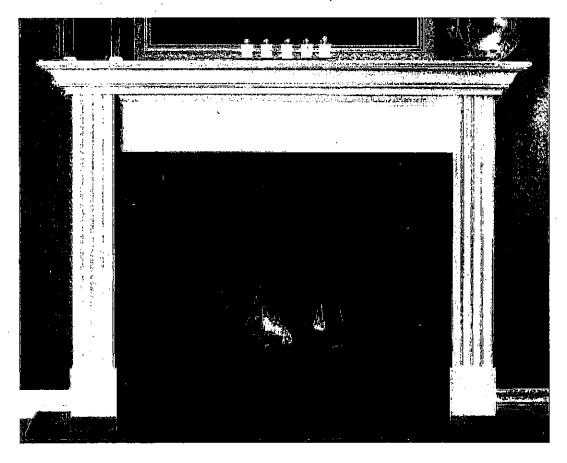

### **STANDARD NF 15 Mantel**


Clean apron finish with fluted legs
WHITE PAINT GRADE FINISH


(PICTURE SHOWN WITH UPGRADE SURROUND AND HEARTH -PRICED SEPARATELY)

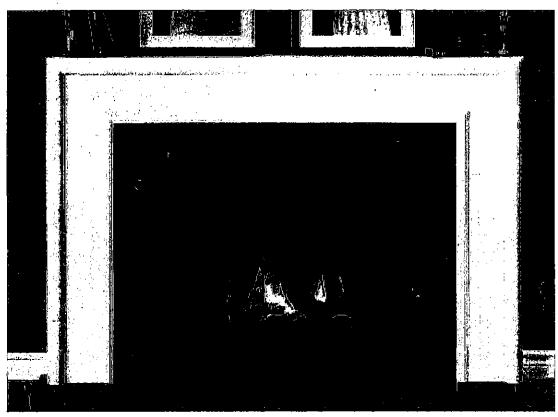

## CABINET STANDARD NF 17 Mantel WHITE PAINT GRADE FINISH

(PICTURE SHOWN WITH UPGRADE SURROUND AND HEARTH -PRICED SEPARATELY)





### ND1831UA/9 SPECIFICATION

Model ND1831UA/9 is a double (two equal size) bowl undermount sink manufactured by Franke Kindred Canada Limited from 18 gauge stainless steel. Product has silk finished rims and linear brush finished bowls. Sink is fully undercoated. Basket strainer waste fittings (3 1/2", 89 mm) are included. Sink is backed with a limited lifetime warranty.

- O.D. 17 3/4" x 30 7/8" x 8 1/2" (45 x 78 x 22 cm)
- Recommended for minimum 36" cabinet

Franke Kindred Canada Limited

Plumbing Fixture / Kitchen Sinks 15410

P.O. Box 190, 1000 Franke Kindred Road, Midland, Ontario, Canada, L4R 4K9 Phone: 866-687-7465 Fax: 800-361-8408

220+40

STANDARD KITCHEN FAUCET

Align

Modern



Single Handle Pull-Down Kitchen Faucet<sup>±</sup>

Model 7565†



### BOULEVARD® PEDESTAL SINK VITREOUS CHINA

### BOULEVARD® PEDESTAL SINK

- 0641.800 Faucet holes on 8" (203mm) centers (Illustrated)
- - ☐ 0641.100 Center hole only
    - Classic styled rectangular pedestal lavatory
    - Vitreous china
    - Rear overflow
    - Supplied with mounting kit
    - Right Height® for greater comfort during use
    - Faucet ledge with large deck area (faucet not included)
    - Design coordinates with Boulevard® Toilef
    - Basin has flat bottom to also allow use as an above counter sink or a drop-in sink (with u-shaped cut out)

### Nominal Dimensions:

24" x 19" x 35-1/2" (610 x 483 x 902mm)

- ☐ 0641.008 Pedestal top-8" (203mm) centers
- ☐ 0641.004 Pedestal top-4" (102mm) centers
- ☐ 0641.001 Pedestal top-center hole only
- O010.000 Pedestal only

### Bowl sizes:


17" (432mm) wide, 12-1/2" (318mm) front to back, 5" (127mm) deep

### Compliance Certifications -

Meets or Exceeds the Following Specifications:

ASME A112.19.2 - 2008/CSA B45.1-08

### To Be Specified: Color: White Linen Faucet Finish: Supplies: 1-1/4" Trap: Nipple:



SEE REVERSE FOR ROUGHING-IN DIMENSIONS

© 2014 AS America inc.

J7

Revised 6/12

<sup>\*</sup> See faucet section for additional models available

### American Standard

BARRIER FREE

C2-COUNTRY LANE **LOT 57-3** 20-1841 ELEV A THE ARLINGTON



### COLONY COUNTERTOP SINK

- · Vitreous china
- Self-rimming
- Front overflow
- Supplied with template
- Faucet deck (Faucet shown not included)

应	0346	ឧกឧ
7.71	U340	ซบจ

Faucet holes on 203mm (8") centres

☐ 0346 403 (Illustrated)

Faucet holes on 102mm (4") centres

**Q** 0346 001

Centre hole only

Nominal Dimensions: 521 x 448mm (20-1/2" x 17-5/8")

Bowl sizes:

422mm (16-5/8") wide, 279mm (11") front to back, 143mm (5-5/8") deep

### COMPLIANCE CERTIFICATIONS --Meets or exceeds the following Specifications: ASME A112.19.2M for Vitreous China Fixtures.

- CAN/CSA B45 Series.

To Be Specified

☐ Colour: White ☐ Bone ☐ Silver Gray

☐ Linen

☐ Faucet\*:


BA\$-198


☐ Faucet Finish:

Supplies & Stops:

Trap 1-1/4" (32 mm):

See faucet section for additional models available

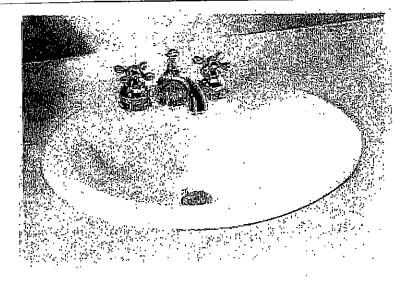

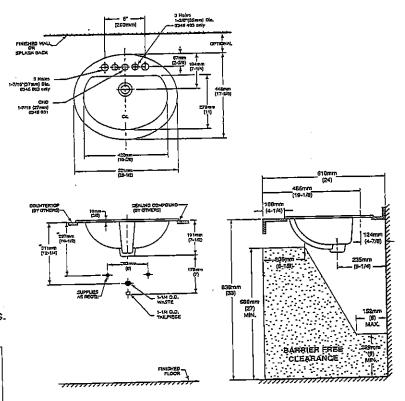


OTES:
DIMENSIONS SHOWN FOR LOCATION OF SUPPLIES AND "P" TRAP ARE SUGGESTED.
OR COUNTERTOP CUTOUT AND INSTALLATION INSTRUCTIONS USE TEMPLATE
UPPLIED WITH SINK.
AUCETS NOT INCLUDED AND MUST BE ORDERED SEPARATELY.
APORTANT: Dimensions of lixtures are nominal and may vary within the range of tolerances stabilished by ANSI Standard Att2.19.2.
hese measurements are subject to change or cancellation. No responsibility is assumed for use I superseded or voided pages.

© 2000 American Standard Inc.

01/07






### Chateau

Transitional



**Lavatory Faucet with Pop-Up Drain** Model L4621†

VANITY SINKS AND PEDESTAL





Posi-Temp® Pressure Balancing Tub/Shower Model 62320 / TL183† OR

Posi-Temp Valve and Tub/Shower Trim with Eco-Performance Easy Clean® XL Model 62320 / TL183EP† (TL183EP not available in BC)


**SHOWER AND 5' TUB FAUCETS** 





**2 Handle Roman Tub with 9" Spout** Model 4796 / T990†

FREESTANDING TUB FAUCETS





**SPECIFICATIONS** RANGE HOODS



180 CFM/7.0 Sones @ 0.10" SP. Horizontal 180 CFM/7.5 Sones @ 0.10" SP. Vertical

**Dimensions** 

Overall bottom projection - 183/8" Overall top projection -12" Height - 6" Available widths: 21", 24" 30", 36" & 42"

**Hood Body** 

Stainless Steel: 24 gauge, grade 430 stainless steel Painted: 23 gauge cold rolled commercial grade (CRCQ) steel, auto welded, coated with a baked enamel finish.

2 speed, single coil, thermally protected, permanently lubricated. Rated 120 volts, 60 hz. Complete with 200°C lead wires.

<u>Lighting</u>

Single 60 watt cook light capacity (bulb not included).

**Ducting Options** 

Horizontal ducting: 31/4"x10" (duct adapter and damper included).

Vertical ducting: 31/4"x10" (duct adapter and damper included).

Vertical ducting: 7" round (duct adapter and damper not included).


Ductiess: removable from vent (charcoal filter not included).

Fan Blade


One piece polymeric, electronically balanced blade. 65/8" diameter with 5 paddles.

**Electrical connection** 

Hood top - 7/8" knockout hole for use with 1/2" cable clamp Hood back - 7/8" knockout hole for use with 1/2" cable clamp



### **AV SERIES**



### <u>Filters</u>

UL rated, class 2 filter. Grease Filter: RF35 - 87/8"x103/8" (included). Charcoal Filter: RF34 (not included). Combo Grease/Charcoal: RF55 (not included).

<u>Available Finishes</u>

White, Biscuit, Almond, Black & Stainless Steel

	1 2	· 1 / 1	" EXP	NDED	PERFO	RWANC	<del>)</del> =			سببت ن
		Ştatī	c Pressure	(inches o	f w.g.)		Sones	Fan Speed	Power	
Air Flow - CFM	l o	0.05	0.1	0.15	0.2	0_25	@ .1 SP	RPM	Watts _	Anms
Vertical Ducting High	246	232	218	203	181	147	7.5	2973	87.0	2.1
Horizontal Ducting High	·	210	180	175	155	120	7.0	3024	87.0	2.1

PROJECT	· · · · · · · · · · · · · · · · · · ·	ARCHITECT
LOCATION		ENGINEER
CONTRACTOR	1	SUBMITTED BY DATE
FAN MODEL CFW NUMBER NUMBER		SONES QTY OPTIONAL EQUIPMENT





Air King: 820 Lincoln Avenue West Chester, Pennsylvania 19380-4466 Tel: (610) 692-7400 • 877-304-3785

Fax: (610) 696-8048

Canada:

Brampton, Ontario Tel: 905-456-2033 Fax: (905) 456-1015

Updated 2-18

ns subject to change without notice.





### **Top Mount Refrigerator**

PRODUCT MODEL NUMBERS

WRT311FZD WRT511\$ZD WRT541SZD

Electrical: A 115-volt, 60-Hz, AC-only, 15or 20-amp fused, grounded electrical supply is required. It is recommended that a separate circuit serving only your refrigerator be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.


NOTE: Before performing any type of installation, cleaning, or removing a light bulb, turn the control (Thermostat, Refrigerator or Freezer Control depending on the model) to OFF and then disconnect the refrigerator from the electrical source. When you are finished, reconnect the refrigerator to the electrical source and reset the control (Thermostat, Refrigerator or Freezer Control depending on the model) to the desired setting. See "Using the Controls."


Water: A cold water supply with water pressure between 30 and 120 psi (207 and 827 kPa) is required to operate ice: maker and water dispenser. If you have questions about your water pressure, call a licensed, qualified plumber.

IMPORTANT: The pressure of the water coming out of a reverse osmosis system going to the water inlet valve of the refrigerator needs to be between 30 and 120 psi (207 and 827 kPa).

Reverse Osmosis Water Supply: If a reverse osmosis water filtration system is connected to your cold water supply, the water pressure to the reverse osmosis system needs to be a minimum of 40 to 60 psi (276 to 414 kPa).


### PRODUCT DIMENSIONS





Model Number	Model Size	Reversible Door	Height - Overall "A"	Height - Top of Cabinet "B"	Depth - Door Open 90° "C"	Depth - With Handles "D"	Depth - Without Handles "E"	Depth - Cabinet Only "F"	Width - Cabinet "G"
WRT311FZD	20.5 cu. ft.	Yeş	661/4" (168.3 cm)	65½" (166.4 an)	621/4" (158.1 cm)	32%" (83.5 cm)	30%" (77,8 cm)	28½° (72.4 cm)	32¾° (83.2 cm)
WRT511SZD WRT541SZD	2/13 cu. ft.	Yes	661/4" (168.3 cm)	65½" (166.4 cm)	62¼" (158.1 cm)	34" (86.4 cm)	32½" (82.3 cm)	28½" (72.4 cm)	32¾* (83,2 cm)

### LOCATION REQUIREMENTS



To ensure proper ventilation for your refrigerator, allow for a  $\frac{1}{2}$ " (1.25 cm) space on each and between overhead cabinets and refrigerator top. Allow at least 1" (2.5 cm) between back of cabinet and the wall. If your refrigerator has an ice maker, make sure you leave some extra space at the back for the water line connections.

If you are installing your refrigerator next to a fixed wall, leave 2" (5 cm) minimum on the hinge side (depending on your model) to allow for the door to swing open.

NOTE: This refrigerator is intended for use in a location where the temperature ranges from a minimum of 55°F (13°C) to a maximum of 110°F (43°C). The preferred room temperature range for optimum performance, which reduces electricity usage and provides superior cooling, is between 60°F (15°C) and 90°F (32°C). It is recommended that you do not install the refrigerator near a heat source, such as an oven or radiator.

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.


Dimensions are for planning purposes only. For complete details, see installation instructions packed with product. Specifications subject to change without notice.


Ref. W10674106 10/29/14





28 05 40

### **Refrigerator Door Swing Verification**









### When facing the refrigerator

The state of the s

RIGHT HAND DOOR OPENING

- Hinges on right
- Handle on left

LEFT HAND DOOR OPENING

- Hinges on left
- Handle on right

INITIAL

Please check and INITIAL your door swing selection.

29 OF 40


WHIRLPOOL 30" (76.0 CM) FREESTANDING ELECTRIC RANGES Model YWFE515S0JS

5.3 cu. ft. Whirlpool® electric range with Frozen Bake™ technology

YWFE515S0JS

Whirlpool

Home > Kitchen Appliances > Cooking Appliances > Ranges > Single Oven Ranges > YWFE515S0JS

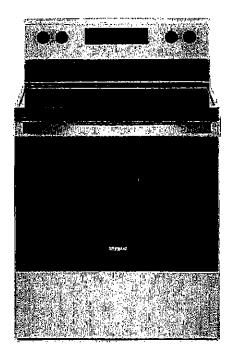

ুস



















### WHIRLPOOL 30" (76:0 CM) FREESTANDING ELECTRIC RANGES Model YWFE515S0JS

### **Product Dimensions**



- A. 273/4" (70.5 cm) max. depth with handle
- B. 467/s" (119.1 cm) overall height (max.) with leveling legs screwed all the way in\*
- 36" (91.4 cm) cooktop height (max.) with leveling legs screwed all the way in  $^{\star}$
- D. 297/s\* (75.9 cm) width
- E. 25<sup>5</sup>/16" (64.3 cm) depth back of range to front of cooktop\*\*
  F. Model/serial/rating plate (located on the frame behind a top corner of the door or either side of the drawer)

**IMPORTANT:** Range must be level after installation. Follow the instructions in the "Level Range" section. Using the cooktop as a reference for leveling the range is not recommended.

\*Range can be raised approximately 1" (2.5 cm) by adjusting the leveling legs.


\*Front of door and drawer may extend further forward depending on styling.

### **Cabinet Dimensions**

Cabinet opening dimensions shown are for 25" (64.0 cm) countertop depth, 24" (61.0 cm) base cabinet depth and 36" (91.4 cm) countertop height.

IMPORTANT: If installing a range hood or microwave hood combination above the cooking surface, follow the range hood or microwave hood combination installation instructions for dimensional clearances above the cooktop surface.

A freestanding range may be installed next to combustible walls with zero clearance.



- A. 13" (33.0 cm) max. upper cabinet depth
- B. 30" (76.2 cm) min. opening width
- C. For minimum clearance to top of cooktop, see NOTE\*
- D. 30" (76.2 cm) min. opening width
  E. Outlet 8" (20.3 cm) to 22" (55.9 cm) from either cabinet,
  7" (17.8 cm) max. from floor.
- F. Cabinet door or hinges should not extend into the cutout.

\*NOTE: 24" (61.0 cm) minimum when bottom of wood or metal cabinet is covered by not less than 1/4" (6.4 mm) flame retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015" (0.4 mm) stainless steel, 0.024" (0.6 mm) aluminum or 0.020" (0.5 mm) copper.

30" (76.2 cm) minimum clearance between the top of the cooking platform and the bottom of an uncovered wood or metal cabinet.

### WHIRLPOOL 30" (76.0 CM) FREESTANDING ELECTRIC RANGES Model YWFE515S0JS

### Install Anti-Tip Bracket

### AWARNING

Tip Over Hazard

A child or adult can tip the range and be killed.

Install anti-tip bracket to floor or wall per installation instructions.


Slide range back so rear range foot is engaged in the slot of the anti-tip bracket.

Re-engage anti-tip bracket if range is moved.

Do not operate range without anti-tip bracket installed and engaged.

Failure to follow these instructions can result in death or serious burns to children and adults.

- Remove the anti-tip bracket from where it is taped inside the storage drawer or warming drawer.
- Determine which mounting method to use: floor or wall.
  If you have a stone or masonry floor, you can use the wall
  mounting method. If you are installing the range in a mobile
  home, you must secure the range to the floor.
- Determine and mark centerline of the cutout space. The
  mounting can be installed on either the left-side or right-side
  of the cutout. Position mounting bracket against the wall in the
  cutout so that the V-notch of the bracket is 129/16" (31.9 cm)
  from centerline as shown.



A. 129/16" (31.9 cm) B. Bracket V-notch

 Drill two 1/8" (3 mm) holes that correspond to the bracket holes of the determined mounting method. See the following illustrations.


### Floor Mounting

Rear position

Front position

Diagonal (2 options)

Wall Mounting



- Using the Phillips screwdriver, mount anti-tip bracket to the wall or floor with the two #12 x 15/s" (4.1 cm) screws provided.
- 6. Move range close enough to opening to allow for final electrical connections. Remove shipping base, cardboard or hardboard from under range.
- Move range into its final location, making sure rear leveling leg slides into anti-tip bracket.




 Move range forward onto shipping base, cardboard or hardboard to continue installing the range using the following installation instructions.

(A)

HP







### WDF310PAAS Black-on-Stainless

OTHER AVAILABLE COLORS

Black Model: WDF310PAAB

Biscuit-on-Biscuit Model: WDF310PAAT

White Model: WDF310PAAW

Universal Silver
Model: WDF310PAAD



DIMENSIONS	-	KEY FEATURES
Maximum Height	34 1/2 inches	ENERGY STAR® Qualified  No One Has Fewer Repairs 17 Years in A Row
Minimum Height	33 1/2 Inches	Resource - Efficient Wash System
Height	34 1/2 Inches	CEE Tier 1 qualified Tall Tub Design
Depth	24 1/2 Inches	White Plastic Interior Quiet Partner(TM) I Sound Package
Width	23 7/8 Inches	Auto Soil Sensor
Dimensions shown an only. For complete in Instructions packaged	e for planning purposes formation, see installation I with product.	Electronic Controls 3 Automatic Cycles 1-Hour Wash Cycle Heavy Wash Cycle Normal Cycle
ELECTRICAL	•	4 Options High Temperature Wash System
15 Amps Amps. 60 Hz. 120 V. 15,		Heated Dry Option 4 Hour Delay Wash Option
Before purchasing this appliance, read important information about its estimated annual energy consumption or energy efficiency rating that is available from your dealer.		4-Tier SheerClean Direct Feed Wash System Control Lock Vinyl Racks In-Rack Silverware Basket



### PRODUCT MODEL NUMBERS

WDF110PAB WDF111PAB WDF120PAF WDF121PAF WDF310PAA WDF310PCA

WDF320PAD WDF320PAD WDF510PAY WDF520PAD WDF530PAY WDF530PLY WDF530PSY WDF540PAD WDF730PAY WDT710PAY WDT720PAD WDT770PAY

Electrical Requirements: 120-volt, 60-Hz, AC only, 15- or 20-amp. fused electrical supply. Copper wire only. A time delay fuse or circuit breaker and separate circuit is recommended.

If direct wiring dishwasher: Useiflexible, armored,

or nonmetallic, sheathed copper wire with grounding wire that meets the wiring requirements for

meets the wiring requirements for your home and local codes and ordinances.
Use a UL listed or CSA approved conduit connector.

If connecting dishwasher with a power supply cord:

Use Power Supply Cord Kit (Part No. 4317824) marked for use

with dishwashers. Follow the kit instructions for installing the power supply cord.

Power supply cord must plug into a grounded 3 prong, outlet, located in the cabinet next to the dishwasher opening. Outlet must meet all local codes and ordinances.



Water Supply Requirements: A hot water line with 20 to 120 psi (138 to 862 kPa) water pressure. Water temperature must be 120°F (49°C) water at dishwasher. Use % 0.D. copper tubing with compression fitting or flexible braided water supply line (½ minimum plastic tubing is not recommended). Use a 90°elbow with 44N.P.T. external pipe threads on one end. Do not solderwithin 6" (15.2 cm) from water inlet valve.

Drain Requirements: A new drain hose is supplied with your dishwasher. If this is not long enough, use a new drain hose with a maximum length of 12' (3.7 m) (Part No. 3385556) that meets all current AHAMVIAPMO test standards, is resistant to heat and detergent, and fits the 1\* (2.5 cm) drain connector of the dishwasher.

Make sure to connect the drain hose to waste tea or disposer inlet above drain trap in house plumbing and 20" (50.8 cm) minimum above the floor. It is recommended




that the drain hose either be looped up and securely fastened to the underside of the counter or be connected to an air gap.

Make sure to use an air gap if the drain hose is connected to house plumbing lower than 20° (50.8 cm) above subfloor or floor.

Use ½" (1.3 cm) minimum l.D. drain line fittings. If required, the air gap should be installed in accordance with the air gap installation instructions. When connecting the air gap, a rubber hose (not provided) will be needed to connect to the waste tee or disposer inlet.

### PRODUCT DIMENSIONS

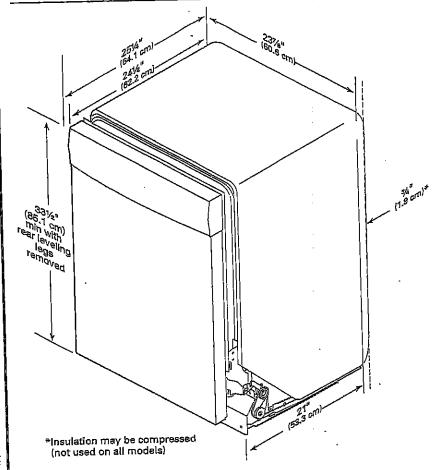

Page 1 of 2

Because Whirlpool Corporation policy includes a continuous commitment to interove our products, we reserve the right to change materials and specifications without notice

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice W10435040C-D-WH 5/1/16






### CABINET CUTOUT DIMENSIONS

NOTE: Shaded areas of cabinet walls show where utility connections may be installed.

- \*Measure from the lowest point on the underside of the countertop. May be reduced to 33½" (85.1 cm) by removing the rear leveling legs from dishwasher.
- \*\*Minimum, measured from narrowest point of opening.

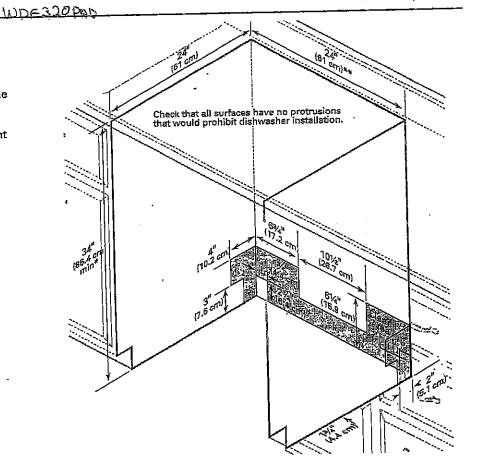


Page 2 of 2





### WHIRLPOOL WASHER Model #: WFW5620HW

Whiripool Brand Canoda English (Washer and Dryws | Washers | Frunk Load Woshers | WFW0820HD



5.2 cu. ft. I.E.C. Closet-Depth Front Load Washer with Load & Go™ Dispenser









Whiripool

5.2 cu. ft. I.E.C. Closet-Depth Front Load Washer with Load & Go™ Dispenser

Model #: WFVV5520HVV

### Dimensions

Depth	80.17 cm, 31-9/16 in
Depth With Door Open 90 D	Degree 143.51 cm, 56-1/2 in
Minimuna Height	98:11 cm, 38-5/8 in
Validati	68.58 cm, 27.0 in
Appearance	
LCD Touch Screen	No S
Window	Yes
Details	
Drum Material	Stainless Steel
Cycles and Options	
Number of Wash Cycles	<b>37</b>
Electrical	
Hz	60
Power Cord Included	Yes

1/2/

40

### **LOCATION REQUIREMENTS**


Proper installation is your responsibility.


### You will need:

- A water heater set to 120°F (49°C).
- A grounded electrical outlet located within 6 ft (1.8 m) of power cord on back of washer.
- Hot and cold water faucets located within 4 ft (1.2 m) of hot and cold water fill valves on washer, and water pressure of 20–100 psi (137.9–689.6 kPa).
- A level floor with maximum slope of 1" (25 mm) under entire washer. Installing on carpet or surfaces with foam backing is not recommended.
- Floor must support washer's total weight (with water and load) of 315 lbs (143 kgs).


IMPORTANT: Do not install, store, or operate washer where it will be exposed to weather or in temperatures below 32°F (0°C). Water remaining in washer after use may cause damage in low temperatures. See "Washer Care" in your Use and Care Guide for winterizing information.


### Whirlpool Models\*





\*For additional details (or information) specific to your model, refer to the 'Dimensions' listed for your model at www.whirlpool.com.






All dimensions show minimum spacing allowed. For each arrangement, consider allowing more space for ease of installation and servicing, and spacing for companion appliances and clearances for walls, doors, and floor moldings.


Space must be large enough to allow door to fully open. Add spacing of 1" (25 mm) on all sides of washer to reduce noise transfer. If a closet door or louvered door is installed, top and bottom air openings in door are required.

### Recessed area or closet installation (stacked washer and dryer):







### Custom under-counter installation:



### Recessed area or closet installation:

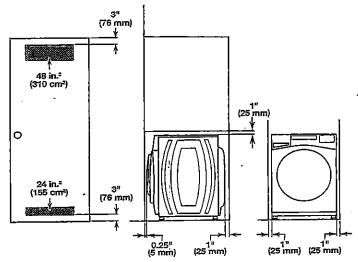

### Custom cabinet installation:




### **DRAIN SYSTEM**

The drain system can be installed using a floor drain, wall standpipe, floor standpipe, or laundry tub. Select the method you need.


**IMPORTANT:** To avoid siphoning, only 4.5" (114 mm) of drain hose should be inside standpipe. Always secure drain hose with cable tie.

### Floor standpipe drain system




Minimum diameter for a standpipe drain: 2" (51 mm). Minimum carry-away capacity: 17 gal. (64 L) per minute. A 1/4" (6 mm) diameter to 1" (25 mm) diameter Standpipe Adapter Kit is available (Part Number 3363920). Top of standpipe must be at least 30" (762 mm) high; install no higher than 96" (2.44 m) from bottom of washer. If you have an overhead sewer and need to pump higher than 96" (2.44 m), a sump pump and associated hardware are needed. See "Alternate parts."

### Wall standpipe drain system



See requirements for floor standpipe drain system.

### Laundry tub drain system

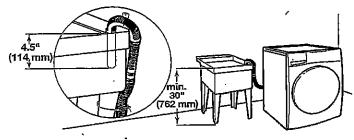


Minimum capacity: 20 gal. (76 L). Top of laundry tub must be at least 30" (762 mm) above floor; install no higher than 96" (2.44 m) from bottom of washer.

120

AT .

### WHIRLPOOL DRYER Model #: YWED5620HW

Whirippol Board Contide English | Waster and Dryon | Dryon | Electric Dryon | YWED5620HW





7.4 cu. ft. Front Load Electric Dryer with Intuitive Touch Controls

; ;









Whirlifool

Power Cord Included

7.4 cu. ft. Front Load Electric Dryer with Intuitive Touch Controls


Model & YWED5620HW

### Dimensions

Depth		78.74 cm, 31.0 in
Depih Wilh C	Ovor Open 90 Degree	138.43 cm, 54-1/2 in
Height Width		98.42 cm, 38-3(4 m 68.58 cm, 27.0 in
Configuratio	an and Overview	
Fuel Туре		Electric
Cycles and	Options	
Cycle Time	Remaining	Yes
Link Filter Sw		No
Number of (	Dryer Cycles	<b>36</b>
Mumber of I	Drymess Levels	3 
Ventilation :	System	
Long Vent		No No
Magimen V	Yent Length	64
Venting Dire	ection	Left, Flight Bottom, Rear
Electrical		
Hz		60

1/1

7



NOTE: Most installations require a minimum of 5" (127 mm) clearance behind dryer for exhaust vent with elbow. See "Venting Requirements."

### Installation Clearances

For each arrangement, consider allowing more space for ease of installation and servicing, spacing for companion appliances, and clearances for walls, doors, and floor moldings. Space must be large enough to allow door to fully open. Add spacing on all sides of dryer to reduce noise transfer. If a closet door or louvered door is installed, top and bottom air openings in door are required.

Check code requirements. Some codes limit, or do not permit, installation of the dryer in garages, closets, mobile homes, or sleeping quarters. Contact your local building inspector.


NOTE: No other fuel-burning appliance can be installed in the same closet as a dryer.

### Installation spacing for recessed area or closet installation

All dimensions show recommended and minimum spacing allowed.


- Additional spacing should be considered for ease of installation and servicing.
- Additional clearances might be required for wall, door, floor moldings, dryer venting, and gas line.
- Additional spacing should be considered on all sides of the dryer to reduce noise transfer.
- For closet installation with a door, minimum ventilation openings in the top and bottom of the door are required. Louvered doors with equivalent ventilation openings are acceptable.
- Companion appliance spacing should also be considered.

### Recommended installation clearances (dryer only):



0" (0 mm) rear spacing is allowed for straight back venting only. For steam models only, inlet hose must not be kinked.

### Custom under-counter installation:



### Mobile home - Additional installation requirements:

This dryer is suitable for mobile home installations. The installation must conform to the Manufactured Home Construction and Safety Standard, Title 24 CFF, Part 3280 (formerly the Federal Standard for Mobile home construction and Safety, Title 24, HUD Part 280) or Standard CAN/CSA-Z240 MH.

### Mobile home installations require:

- Metal exhaust system hardware, available for purchase from your dealer. For further information, see "Assistance or Service" in your Use and Care Guide.
- Special provisions must be made in mobile homes to introduce outside air into dryer, Openings (such as a nearby window) should be at least twice as large as dryer exhaust opening.

### For mobile home installation of gas dryers:

■ Mobile Home Installation Hold-down Kit Part Number 346764 is available to order. For further information, see "Assistance or Service" in your Use and Care Guide.

M

H H

### WHIRLPOOL DRYER Model #: YWED5620HW

Additional parts may be required, depending on your installation. Check local codes. Check existing electrical supply and venting. Read "Electrical Requirements" and "Venting Requirements" before purchasing parts.

### If using a power supply cord:

Use a UL Listed power supply cord kit marked for use with clothes dryers. The kit should contain:

- A UL Listed 30 amp power supply cord, rated 120/240 volt minimum. The cord should be type SRD or SRDT and be at least 4 ft. (1.22 m) long. The wires that connect to the dryer must end in ring terminals or spade terminals with upturned ends.
- A UL Listed strain relief.

### Optional Equipment (not supplied with dryer):

Refer to your Use and Care Guide for information about accessories available for your dryer.

### LOCATION REQUIREMENTS

Check code requirements. Some codes limit, or do not permit, installing dryer in garages, closets, mobile homes, or sleeping quarters. Contact your local building inspector.

### AWARNING



### **Explosion Hazard**

Keep flammable materials and vapors, such as gasoline, away from dryer.

Place dryer at least 18 inches (460 mm) above the floor for a garage installation.

Failure to do so can result in death, explosion, or fire.


### You will need:

- A location allowing for proper exhaust installation. See "Venting Requirements."
- A separate 15 or 20 amp circuit for a gas dryer or 30 amp circuit for an electric dryer.
- If using power supply cord, a grounded electrical outlet located within 2 ft. (610 mm) of either side of dryer. See "Electrical Requirements."
- Floor must support dryer weight of 200 lbs. (90.7 kg). Also consider weight of companion appliance.
- Cold water faucets located within 4 ft. (1.2 m) of the water fill valves, and water pressure of 20–120 psi (138–827 kPa). You may use your washer's water supply by purchasing the necessary parts noted in "Parts needed."
- Level floor with maximum slope of 1" (25 mm) under entire dryer. If slope is greater than 1" (25 mm), install Extended Dryer Feet Kit, Part Number, 279810. If not level, clothes may not tumble properly and automatic sensor cycles may not operate correctly.
- For garage installation, place dryer at least 18" (460 mm) above floor. If using a pedestal, you will need 18" (460 mm) to bottom of dryer.
- The dryer must not be installed or stored in an area where it will be exposed to water and/or weather.


IMPORTANT: Do not operate, install, or store dryer where it will be exposed to water, weather, or at temperatures below 40°F (4°C). Lower temperatures may cause dryer not to shut off at end of automatic sensor cycles, resulting in longer drying times.


### **DRYER DIMENSIONS**

Front view



Side view: Whirlpool Models





\*Approx. measurement ,

12