

# Halo Sliding Shower Door 56 1/2-59 x 78 3/4 in. 8 mm

Model number:

138997

Dimensions: 56 1/2-59" x 78 3/4"

Installation: Alcove

Door type: Slider



Standard Features:

- Glass panels 5/16 in. (8 mm) with a height of 78 3/4 in.
- Lotus easy clean protection for effortless maintenance
- Ball bearing roller technology for smooth and quiet opening
- 48 in. and 60 in. reversible showers door allowing left or right opening
- Also available in a corner configuration
- Available in 4 finishes: Chrome, Brushed

Product characteristics:

- Ball Bearing Roller System
- Bestseller
- Utile Compatible

Warranty:

10 Years

**Certifications**  
MAAX products adhere to one or more of the following certifications:



Frame Finish(es):

 Chrome (084)

 Dark Bronze (173)

 Brushed Nickel (305)

 Matte Black (340)



Glass Pattern(s):

 Clear (900)

Recommended products (Visit our website for a complete list of our recommended products)

No	Description
410011	ModulR 6032 Corner left (without armrests)
102003	Rectangular Base 6034 - 3 in.
105055	Rectangular Base 6030 - 5 in.


# Halo Sliding Shower Door 56 1/2-59 x 78 3/4 in. 8 mm

Model number: 138997

Dimensions: 56 1/2-59" x 78 3/4" Installation: Alcove

Door type: Slider

STANDARD

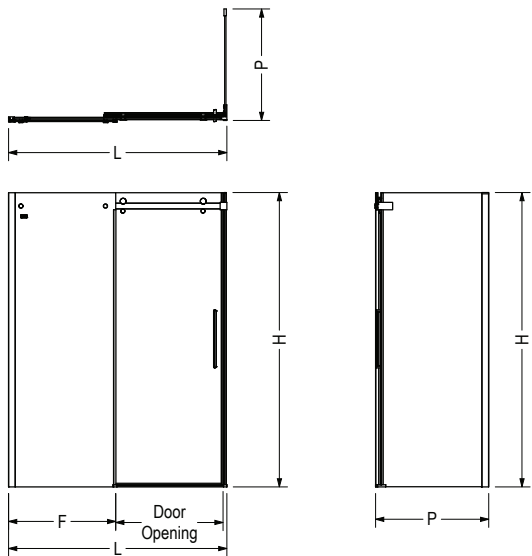

Code	Description	H	L Adjustable	F	P Adjustable	Door Opening	Wall Adjustment
138996	Halo 78 3/4" x 47"	78 3/4"	44 1/2" - 47"	22 1/2"	-	16 1/4" - 18 3/4"	1"
138997	Halo 78 3/4" x 59"	78 3/4"	56 1/2" - 59"	28 5/8"	-	22 1/8" - 24 5/8"	1"
139393	Return Panel 30"	78 3/4"	-	-	27 7/8"	-	1"
138998	Return Panel 32"	78 3/4"	-	-	29 7/8"	-	1"
139395	Return Panel 34"	78 3/4"	-	-	31 7/8"	-	1"
139396	Return Panel 36"	78 3/4"	-	-	33 7/8"	-	1"
139394	Return Panel 42"	78 3/4"	-	-	39 7/8"	-	1"

All dimensions are approximate. Structure measurements must be verified against the unit to ensure proper fit.

Dimensions:

56 1/2-59 x 78 3/4 in.  
(1435-1499 x 2000 mm)

Glass Thickness:

5/16 in. (8 mm)

Weight:

162 lbs (73.47 kg)

Frame type:

Frameless

Opening:

Reversible

Door adjustment:

For out of plumb walls

Minimum access:

22 1/2 (572 mm)

Maximum access:

24 1/2 (572 mm)



Project: \_\_\_\_\_

Contractor: \_\_\_\_\_

Representative: \_\_\_\_\_

Date: \_\_\_\_\_

Tel: \_\_\_\_\_

Notes: \_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

# Sax 60 x 32 AcrylX Freestanding Bathtub

Model number:	105797
---------------	--------

Dimensions: 60" x 32" x 24.875"      Installation: Freestanding      Material: AcrylX™ Applied Acrylic



Standard Colors:



White (002)

Standard Features:

- 2-piece bathtub – Transports and installs easily
- Above-the-Floor Rough (AFR) and F² Drain compatible
- MAAX innovative leveling legs for easy installation
- Faucet installation can be deck-mounted or floor-mounted
- Unique feature: maximized bathing well with comfortable backrest
- End drain

Product characteristics:

- Made in North America
- Transitional Design
- Comfortable Backrest

Warranty:

Lifetime limited



Certifications

MAAX products adhere to one or more of the following certifications:



# Sax 60 x 32 AcrylX Freestanding Bathtub


Model number:

105797

Dimensions: 60" x 32" x 24.875"

Installation: Freestanding

Material: AcrylX™ Applied Acrylic

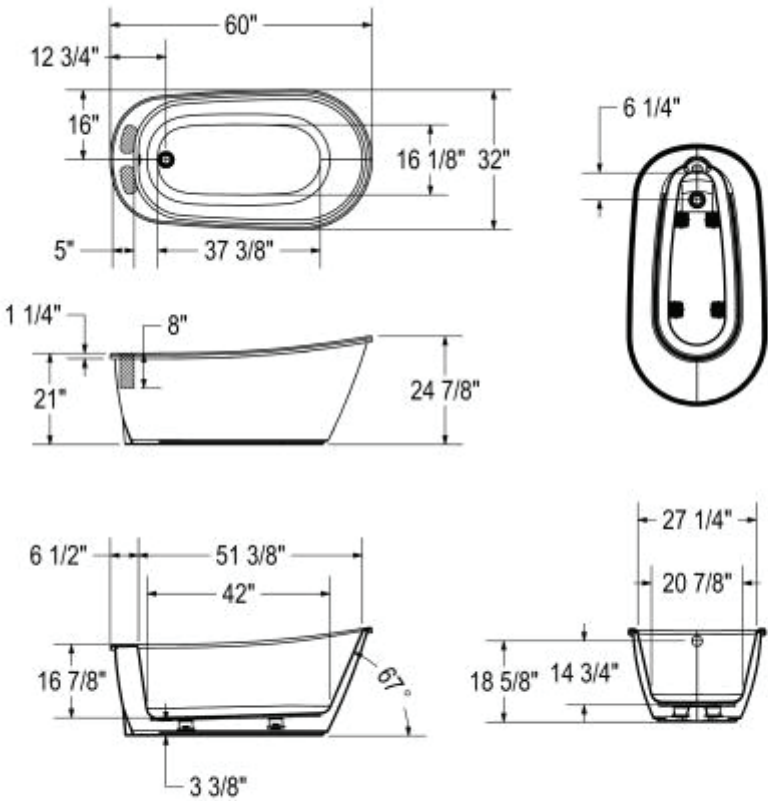

( ) : Recommended faucet area 2 sections of 7" (L) x 3" (W).  
Depth recommended for straight pipes 8".

All dimensions are approximate. Structure measurements must be verified against the unit to ensure proper fit.



## Dimensions

60 x 32 x 25 In.  
(1524 x 813 x 632 mm)

## Water Capacity

44 gallons - 168 liters

## Weight

130 lbs - 58.96 kg

## Bathing Well

51 1/2 In. x 27 1/4 In.  
(1305 mm x 692 mm)

## Deep Sump Height

16.875 In. - 429 mm

## Deck Width

5 In. - 127 mm

## Drain location:

End

Project: \_\_\_\_\_

Contractor: \_\_\_\_\_

Representative: \_\_\_\_\_

Date: \_\_\_\_\_

Tel: \_\_\_\_\_

Notes: \_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

# MANNING ONE PIECE TOILET

4.8LPF / 1.28GPF OR 3.5LPF / 0.92GPF

□ 4710BHXU

Unlined Tank

## PRODUCT SPECS

- High efficiency dual flush toilet
- 4.8Lpf/1.28Gpf or 3.5Lpf/0.92Gpf
- Elongated bowl with concealed skirted trapway
- Vitreous china
- 15¾" Bowl height
- Chrome tank top button
- 12" (305mm) Rough-in
- 2" Fully glazed ball pass trapway
- 3" Flapper
- Siphon jet flush action
- Water surface: 9½" x 6⅝" (240mm x 170mm)
- Decorative soft white side caps included
- Toilet seat not included

## DIMENSIONS

395mm W x 680mm D x 760mm H

15½" W x 26¾" D x 30" H

## COMPLIANCE CERTIFICATIONS

Meets or exceeds the following:

- IAPMO cUPC
- US EPA WaterSense
- ASME A 112.19.2/ CSA B45.1
- MaP Premium Tested 1000g
- LEED Compliant

## SHIPPING

Cube 8.29

GW 120 lbs



## TO BE SPECIFIED

Colour:

- Soft White

**NOTES:** This toilet is designed to rough-in at a minimum dimension of 305mm (12") from finished wall to C/L of outlet. Supply line not included with fixture and must be ordered separately.

Important: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ASME standard A112.19.2. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

