



Interior Finishing Selection Sheet

of

11-Jun-21

LOT 049-3

20-1841 ELEV B THE ARLINGTON

PURCHASERS: ROSHAN WIGNARAJAH
SUMI WIGNARAJAH

CONTACT NO: 416-716-5946
416-716-4214

VENDOR: HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4

UPG

Ceramics

348-9255	Laundry Mud Room	Flooring	☐	SEMPRE White Matte	TR.SP.WHITE.1313	STD	13" x 13"
349-2225	Laundry Mud Room	Grout	☐	Grout (27) Silver	STD		
30-8838	Main Bathroom	Flooring	☒	Eterna Carrara White Polished	OV.ET.WHT.1224.PL	UPG 5	12 x 24 TO BE INSTALL FRONT TO BACK SKETCH #8 PAGE 20
31-7705	Main Bathroom	Grout	☒	Upgrade Grout (01) Alabaster	U/G		
112-9020	Main Bathroom	Tub Wall Tile	☐	Weave White	QT.WV.WHT.0810	STD	8 x 10 TO BE INSTALL VERICALLY
113-2226	Main Bathroom	Tub Wall Tile Grout	☐	Grout (00) White	STD		
23-8838	Master Ensuite	Floor Tile	☒	Eterna Carrara White Polished	OV.ET.WHT.1224.PL	UPG 5	12 x 24 TO BE INSTALL SIDE TO SIDE SKETCH #8 PAGE 20
24-7705	Master Ensuite	Floor Tile Grout	☒	Upgrade Grout (01) Alabaster	U/G		
73-8666	Master Ensuite	Shower Floor Tile	☒	Ontario Series Mosaic Dark Grey	OD.ON.DGR.0202.MT.N	UPG	1 2 x 2
74-7704	Master Ensuite	Shower Floor Tile Grout	☐	Grout (19) Pearl Gray	STD		
147-8923	Master Ensuite	Shower Jamb(s) and Sill(s)	☐	Shower Jamb / Sill Thassos White	STD		
104-9020	Master Ensuite	Shower Wall Tile	☐	Weave White	QT.WV.WHT.0810	STD	8 x 10 TO BE INSTALLED VERTICALLY
105-2226	Master Ensuite	Shower Wall Tile Grout	☐	Grout (00) White	STD		
365-9255	Mud Room (Optional Lower Level)	Flooring	☐	SEMPRE White Matte	TR.SP.WHITE.1313	STD	13" x 13"
364-2225	Mud Room (Optional Lower Level)	Grout	☐	Grout (27) Silver	STD		
32-8913	Powder Room	Flooring	☒	Biel Blanco (White)	UN.BL.BIA.1224	UPG 2	12 x 24 TO BE INSTALL SIDE TO SIDE SKETCH #7 PAGE 19
33-7705	Powder Room	Grout	☒	Upgrade Grout (01) Alabaster	U/G		
53-2232	Throughout	Thresholds	☐	Metal Thresholds	STD		

Electrical

1. The Purchaser acknowledges these selections are subject to the terms and conditions of the applicable Agreement of Purchase and Sale.
2. The Purchaser acknowledges that the Vendor accepts no responsibility in the event the Vendor is unable to supply a selection. The Purchaser agrees to reselect from the currently available selections immediately upon request.
3. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
4. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
5. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
6. Selections will not be processed unless signed by Heathwood Homes Head Office.
7. The colour selections made on the Colour Chart are final and cannot be changed once submitted.
8. The Purchaser has checked and acknowledges the accuracy of this Colour Chart.

June 11/2021		
Date	Purchaser	Décor Consultant
June 11/21		
Date	Purchaser	Décor Consultant
Date Approved		HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4



HEATHWOOD

Interior Finishing Selection Sheet

OF

11-Jun-21

LOT 049-3

20-1841 ELEV B THE ARLINGTON

PURCHASERS: ROSHAN WIGNARAJAH
SUMI WIGNARAJAH

CONTACT NO: 416-716-5946
416-716-4214

VENDOR: HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4

UPG

Electrical

90-5796 Throughout Switches and Plug

☐ Decora White Switches and Plugs STD

Fireplace

136-8891 Great Room Fireplace Mantle

☐ Paint Grade Mantle- Cabinet (Per Plan) WHITE NF-17 STD
PAGE 21

138-8873 ~~Great Room Fireplace Surround~~

☐ ~~3 pc 4" Marble Surround-Nero-Macchine STD~~

135-8865 Great Room Fireplace Type

☐ Dimplex FP3033HL Electric Fireplace

Granite

2-9069 Kitchen Countertop

☐ MSI Quartz ICED WHITE Group 1 STD 3/4"

Hardwood

99-7498 Dining Room Flooring

☐ Vintage Northern Solid Sawn Engineered Select V : Red Oak Pearl GRYPHON Red Oak Pearl 3/4" x 3 1/4"

11-7498 Great Room Flooring

☐ Vintage Northern Solid Sawn Engineered Select V : Red Oak Pearl GRYPHON Red Oak Pearl 3/4" x 3 1/4"

338-7498 Kitchen Flooring

☒ Vintage Northern Solid Sawn Engineered Select V : Red Oak Pearl GRYPHON Red Oak Pearl 3/4" x 3 1/4"

35-7498 Upper Hall Flooring

☐ Vintage Northern Solid Sawn Engineered Select V : Red Oak Pearl GRYPHON Red Oak Pearl 3/4" x 3 1/4"

Interior Railings

49-8148 Stairs to Lower Level Handrail/Pickets/Posts Type

☐ Single Collar Alt. Plain w/ Shoes with 3 1/2" Square/Cap Post(s) BLACK METAL STD

43-8148 Stairs to Upper Level Handrail/Pickets/Posts Type

☐ Single Collar Alt. Plain w/ Shoes with 3 1/2" Square/Cap Post(s) BLACK METAL STD

Interior Stairs

116-1713 Basement Stairs Type

☐ Paint Grade Stairs STD

78-1712 Stair Landing to Lower Level Flooring

☐ Oak Stairs UPG_1

45-1712 Stairs to Lower Level Type

☐ Oak Stairs UPG_1

39-1712 Stairs to Upper Level Type

☐ Oak Stairs UPG_1

Interior Trim

91-9374 Throughout Trim Size

☐ 4 1/4" Baseboards and 2 3/4" Integrated Backband Casings STD

1. The Purchaser acknowledges these selections are subject to the terms and conditions of the applicable Agreement of Purchase and Sale.
2. The Purchaser acknowledges that the Vendor accepts no responsibility in the event the Vendor is unable to supply a selection. The Purchaser agrees to reselect from the currently available selections immediately upon request.
3. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
4. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
5. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
6. Selections will not be processed unless signed by Heathwood Homes Head Office.
7. The colour selections made on the Colour Chart are final and cannot be changed once submitted.
8. The Purchaser has checked and acknowledges the accuracy of this Colour Chart.

June 11/2021

Date

Purchaser

June 11/21

Date

Décor Consultant

June 11/21

Date

Purchaser

HEATHWOOD HOMES (WHITBY)

LIMITED - PHASE 4



HEATHWOOD

Interior Finishing Selection Sheet

11-Jun-21

LOT 049-3

20-1841 ELEV B THE ARLINGTON

PURCHASERS: ROSHAN WIGNARAJAH
SUMI WIGNARAJAH

CONTACT NO: 416-716-5946
416-716-4214

VENDOR: HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4

UPG

Painting

46-7761 Stairs to Lower Level Colour

☐ Stain handrail, stringers, treads, risers, nosing & posts. (Metal pickets) SATIN TO COMPLIMENT :Red Oak Pearl GRYPHON- SHADE WILL VARY

50-7761 Stairs to Lower Level Handrail/Pickets/Posts Colour

☐ Stain handrail, stringers, treads, risers, nosing & posts. (Metal pickets) SATIN TO COMPLIMENT :Red Oak Pearl GRYPHON- SHADE WILL VARY

40-7761 Stairs to Upper Level Colour

☐ Stain handrail, stringers, treads, risers, nosing & posts. (Metal pickets) SATIN TO COMPLIMENT :Red Oak Pearl GRYPHON- SHADE WILL VARY

44-7761 Stairs to Upper Level Handrail/Pickets/Posts Colour

☐ Stain handrail, stringers, treads, risers, nosing & posts. (Metal pickets) SATIN TO COMPLIMENT :Red Oak Pearl GRYPHON- SHADE WILL VARY

240-1716 Throughout Trim - Paint Colour

☐ Trim WHITE STD

51-1717 Throughout Walls - Paint Colour

☐ Wall WARM GREY 22 STD

Plumbing

266-1737 Main Bathroom Plumbing Fixture (Colour)

☐ Plumbing Fixtures WHITE STD

149-1737 Master Ensuite Plumbing Fixture (colour)

☐ Plumbing Fixtures WHITE STD

34-1737 Powder Room Plumbing Fixture (Colour)

☐ Plumbing Fixtures WHITE STD

1. The Purchaser acknowledges these selections are subject to the terms and conditions of the applicable Agreement of Purchase and Sale.
2. The Purchaser acknowledges that the Vendor accepts no responsibility in the event the Vendor is unable to supply a selection. The Purchaser agrees to reselect from the currently available selections immediately upon request.
3. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
4. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
5. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
6. Selections will not be processed unless signed by Heathwood Homes Head Office.
7. The colour selections made on the Colour Chart are final and cannot be changed once submitted.
8. The Purchaser has checked and acknowledges the accuracy of this Colour Chart.

June 11 | 2021

Date Purchaser

APPROVED - Date

Décor Consultant

June 11 | 2021

Date Purchaser

Date Approved HEATHWOOD HOMES (WHITBY)

LIMITED - PHASE 4



11-Jun-21

Sales Selection Sheet

LOT	049-3	20-1841 ELEV B THE ARLINGTON
PURCHASERS:	ROSHAN WIGNARAJAH SUMI WIGNARAJAH	CONTACT NO: 416-716-5946 416-716-4214
VENDOR:	HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4	
		HST #

It is herein understood and agreed between the undersigned parties hereto that the following changes shall be made to the above mentioned Agreement of Purchase and Sale in accordance with the agreement and except for such changes noted below, all other terms and conditions in the Agreement of Purchase and Sale shall remain as stated herein: It is further understood that and agreed that all changes and additions shall be installed as per builder's specifications, location and available selections. The Purchaser hereby agrees to purchase the following extras:

AMOUNT:

Appliances

2171	Cyclone 30" Wall Mount Chimney Hood SS SCB51930	KITCHEN	Qty: 1
------	--	---------	--------

PAGE 28

Cabinetry

1429	Optional Upgrade Optional Classic Kitchen (Crown Moulding, Deep Fridge Uppers, Soft Close Drawers, Soft Close Doors and 2 Tone Island) VIKING I/II/III	Classic Kitchen	Qty: 1
------	---	-----------------	--------

1377	Optional Extras Combo: 12B+10B- Pots and pans drawers (width min. 60cm/max. 90cm) (size subject to floor plan)with upgraded drawers from Metabox to Tandembox Viking (on a Classic Series Kitchen) DRAWERS TO BE 90CM WIDE SEE SKETCH # 7	KITCHEN	Qty: 1
------	--	---------	--------

PAGE 19

1293	Optional Extras 10B- Upgrade levels 1-4, 5-7 drawers from Metabox to Tandembox per drawer. BD x 4, BPP x 3, BT x 1 (Partial conversions on rooms not allowed, pull-outs must also be converted.) Viking TO BE USED FOR THE POT AND PAN DRAWERS	KITCHEN	Qty: 3
------	--	---------	--------

1428	Optional Upgrade Optional Valance (Trim Only) VIKING I/II/III	Valance	Qty: 1
------	--	---------	--------

Ceramics

1692	Upgrade 2 Tile	Foyer Floor	Qty: 1
------	----------------	-------------	--------

1. This Sales Selection Sheet when properly executed forms part of our Agreement of Purchase and Sale.
2. All extras and upgrades listed above are subject to Construction Progress and Architectural and Municipal requirements.
3. In the event the Vendor is unable to incorporate the work approved above in the construction of the house for any reason whatsoever, the Vendor will not be liable to the Purchaser in any way. The monies paid for any changes or optional extras not proceeded with shall be returned to the Purchaser, without interest. The cost of options or extras is non-refundable in all other circumstances. If for any reason whatsoever the Agreement of Purchase and Sale is not completed, the total cost of work approved above will be retained by the Vendor.
4. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
5. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
6. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
7. Selections will not be processed unless signed by Heathwood Homes Head Office.
8. The selections made on this schedule are final and cannot be changed once submitted.
9. The Purchaser has checked and acknowledges the accuracy of this schedule.

June 11 2021	Purchaser	June 11 21	Décor Consultant
Date		Date	
June 11 21	Purchaser	June 11 21	Décor Consultant
Date		Date	

Date-Approved: HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4



11-Jun-21

Sales Selection Sheet
of

LOT	049-3	20-1841 ELEV B THE ARLINGTON
PURCHASERS:	ROSHAN WIGNARAJAH SUMI WIGNARAJAH	CONTACT NO: 416-716-5946 416-716-4214
VENDOR:	HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4	HST #

It is herein understood and agreed between the undersigned parties hereto that the following changes shall be made to the above mentioned Agreement of Purchase and Sale in accordance with the agreement and except for such changes noted below, all other terms and conditions in the Agreement of Purchase and Sale shall remain as stated herein: It is further understood that and agreed that all changes and additions shall be installed as per builder's specifications, location and available selections. The Purchaser hereby agrees to purchase the following extras:

AMOUNT:

1692	Upgrade Grout	Foyer Floor	Qty: 1
1698	Optional Extras Upgrade additional backsplash behind chimney hoodfan Upgrade 2	KITCHEN	Qty: 1
1699	Upgrade 2 Tile	Kitchen Optional Backsplash	Qty: 1
1695	Upgrade 5 Tile	M. Ensuite Floor	Qty: 1
1695	Upgrade Grout	M. Ensuite Floor	Qty: 1
1690	Upgrade 1 Tile	M. Ensuite Shower Floor	Qty: 1
1696	Upgrade 5 Tile	Main Bth Floor	Qty: 1
1696	Upgrade Grout	Main Bth Floor	Qty: 1
1964	Optional Extras Listello (per lin ft) Upgrade 2 1' TO BE INSTALLED ON THE BACK WALL, FROM FLOOR TO CEILING SEE SKETCH # 8 PAGE# 20	MASTER BEDROOM	Qty: 14

1. This Sales Selection Sheet when properly executed forms part of our Agreement of Purchase and Sale.
2. All extras and upgrades listed above are subject to Construction Progress and Architectural and Municipal requirements.
3. In the event the Vendor is unable to incorporate the work approved above in the construction of the house for any reason whatsoever, the Vendor will not be liable to the Purchaser in any way. The monies paid for any changes or optional extras not proceeded with shall be returned to the Purchaser, without interest. The cost of options or extras is non-refundable in all other circumstances. If for any reason whatsoever the Agreement of Purchase and Sale is not completed, the total cost of work approved above will be retained by the Vendor.
4. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
5. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
6. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
7. Selections will not be processed unless signed by Heathwood Homes Head Office.
8. The selections made on this schedule are final and cannot be changed once submitted.
9. The Purchaser has checked and acknowledges the accuracy of this schedule.

Date	June 11 2021	Date	June 11 21
Purchaser		Décor Consultant	
Date	June 11 21		
Purchaser			

-Date-Approved- HEATHWOOD HOMES (WHITBY)
LIMITED - PHASE 4



11-Jun-21

Sales Selection Sheet

LOT	049-3	20-1841 ELEV B THE ARLINGTON
PURCHASERS: ROSHAN WIGNARAJAH CONTACT NO: 416-716-5946		
SUMI WIGNARAJAH 416-716-4214		
VENDOR: HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4		HST #

It is herein understood and agreed between the undersigned parties hereto that the following changes shall be made to the above mentioned Agreement of Purchase and Sale in accordance with the agreement and except for such changes noted below, all other terms and conditions in the Agreement of Purchase and Sale shall remain as stated herein. It is further understood that and agreed that all changes and additions shall be installed as per builder's specifications, location and available selections. The Purchaser hereby agrees to purchase the following extras:

AMOUNT:

1693	Upgrade 2 Tile	Powder Floor	Qty: 1
1693	Upgrade Grout	Powder Floor	Qty: 1
Hardwood			
987	Vintage 3-1/4" Red Oak Select-V	KITCHEN	Qty: 1
Mirrors/Glass Products			
538	Shower Upgrade Upgrade to Frameless clear glass with D-Ring Handle in chrome	Master Ensuite	Qty: 1
Plumbing			
277	STANDARD Kitchen Sink Option KINDRED Kitchen Sink Collection - Reginox NS1930U/9 Stainless Kitchen Single Bowl Undermount Sink (or equivalent)	KITCHEN	Qty: 1
Security			
436	Optional Extra Security Camera Rough-in TO BE INSTALLED BEFORE MAIN AND SECOND FLOOR SEE SKETCH# 7 PAGE 19		Qty: 1

1. This Sales Selection Sheet when properly executed forms part of our Agreement of Purchase and Sale.
2. All extras and upgrades listed above are subject to Construction Progress and Architectural and Municipal requirements.
3. In the event the Vendor is unable to incorporate the work approved above in the construction of the house for any reason whatsoever, the Vendor will not be liable to the Purchaser in any way. The monies paid for any changes or optional extras not proceeded with shall be returned to the Purchaser, without interest. The cost of options or extras is non-refundable in all other circumstances. If for any reason whatsoever the Agreement of Purchase and Sale is not completed, the total cost of work approved above will be retained by the Vendor.
4. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
5. The Vendor acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
6. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
7. Selections will not be processed unless signed by Heathwood Homes Head Office.
8. The selections made on this schedule are final and cannot be changed once submitted.
9. The Purchaser has checked and acknowledges the accuracy of this schedule.

June 4 11/2021	June 11, 21
Date	Date
Purchaser	Décor Consultant
June 11/21	APPROVED -
Date	Date
Purchaser	Purchaser

Date Approved HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4



11-Jun-21

Sales Selection Sheet

LOT	049-3	20-1841 ELEV B THE ARLINGTON
PURCHASERS:	ROSHAN WIGNARAJAH SUMI WIGNARAJAH	CONTACT NO: 416-716-5946 416-716-4214
VENDOR:	HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4	
		HST #

It is herein understood and agreed between the undersigned parties hereto that the following changes shall be made to the above mentioned Agreement of Purchase and Sale in accordance with the agreement and except for such changes noted below, all other terms and conditions in the Agreement of Purchase and Sale shall remain as stated herein: It is further understood that and agreed that all changes and additions shall be installed as per builder's specifications, location and available selections. The Purchaser hereby agrees to purchase the following extras:

AMOUNT:

1. This Sales Selection Sheet when properly executed forms part of our Agreement of Purchase and Sale.
2. All extras and upgrades listed above are subject to Construction Progress and Architectural and Municipal requirements.
3. In the event the Vendor is unable to incorporate the work approved above in the construction of the house for any reason whatsoever, the Vendor will not be liable to the Purchaser in any way. The monies paid for any changes or optional extras not proceeded with shall be returned to the Purchaser, without interest. The cost of options or extras is non-refundable in all other circumstances. If for any reason whatsoever the Agreement of Purchase and Sale is not completed, the total cost of work approved above will be retained by the Vendor.
4. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
5. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
6. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
7. Selections will not be processed unless signed by Heathwood Homes Head Office.
8. The selections made on this schedule are final and cannot be changed once submitted.
9. The Purchaser has checked and acknowledges the accuracy of this schedule.

June 11/2021		Purchaser	June 11 21		Décor Consultant
Date			Date	APPROVED	
June 11/21		Purchaser			
Date					


Date Approved: HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4

C-2 COUNTRY LANE
LOT 49-3
20-1841 ELEV. B
THE ARLINGTON

17 of 41
The Arlington

20-1841 ELEV. B

ELEVATION A & B: 1,841 SQ FT
Sketch # 5

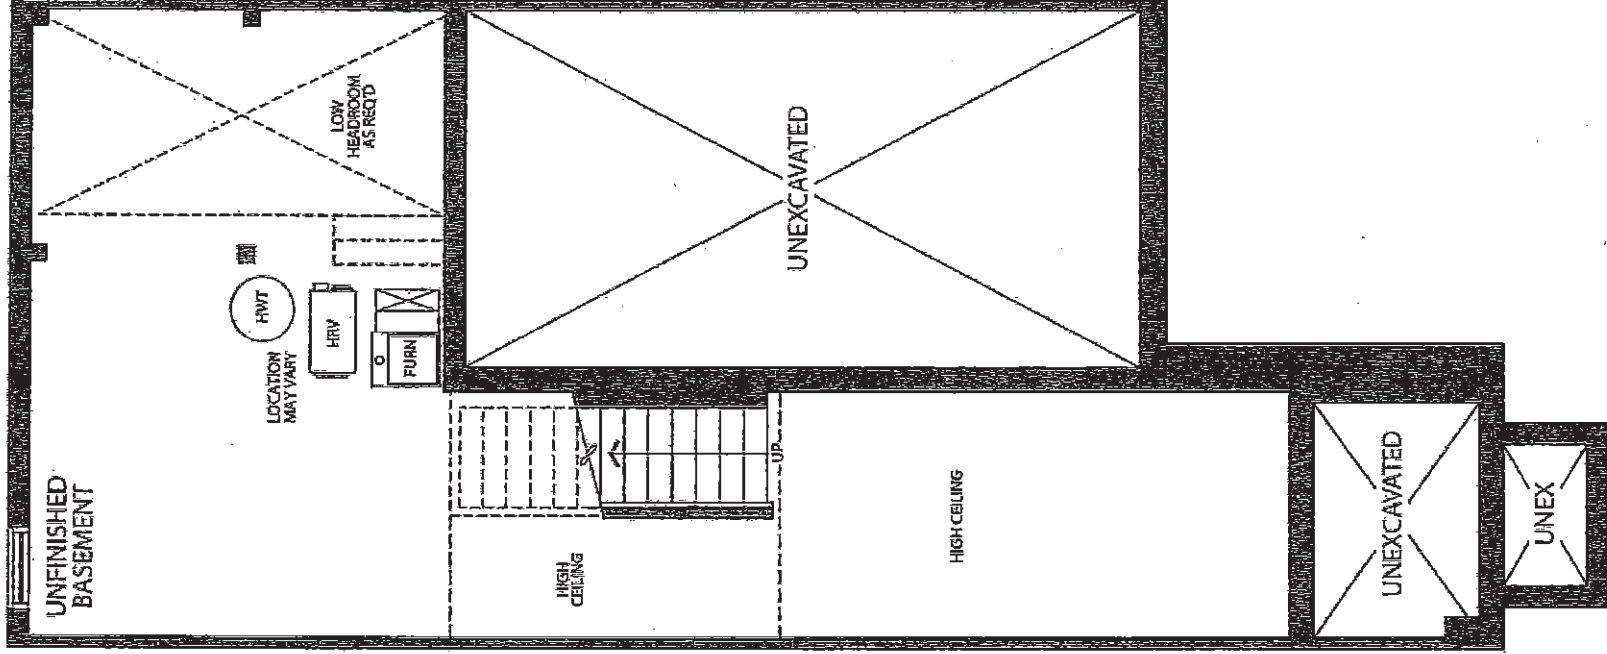

BASEMENT
ELEVATION A & B

S.W. RW

18 of 41

ELEVATION A & B: 1,841 SQ FT

DECK ABOVE



Legal Plan July 22, 2020


19 of 11

20-1841 ELEV. B

Sketch #7

ADDITIONAL
R1 SECURITY CAMERA

DECK

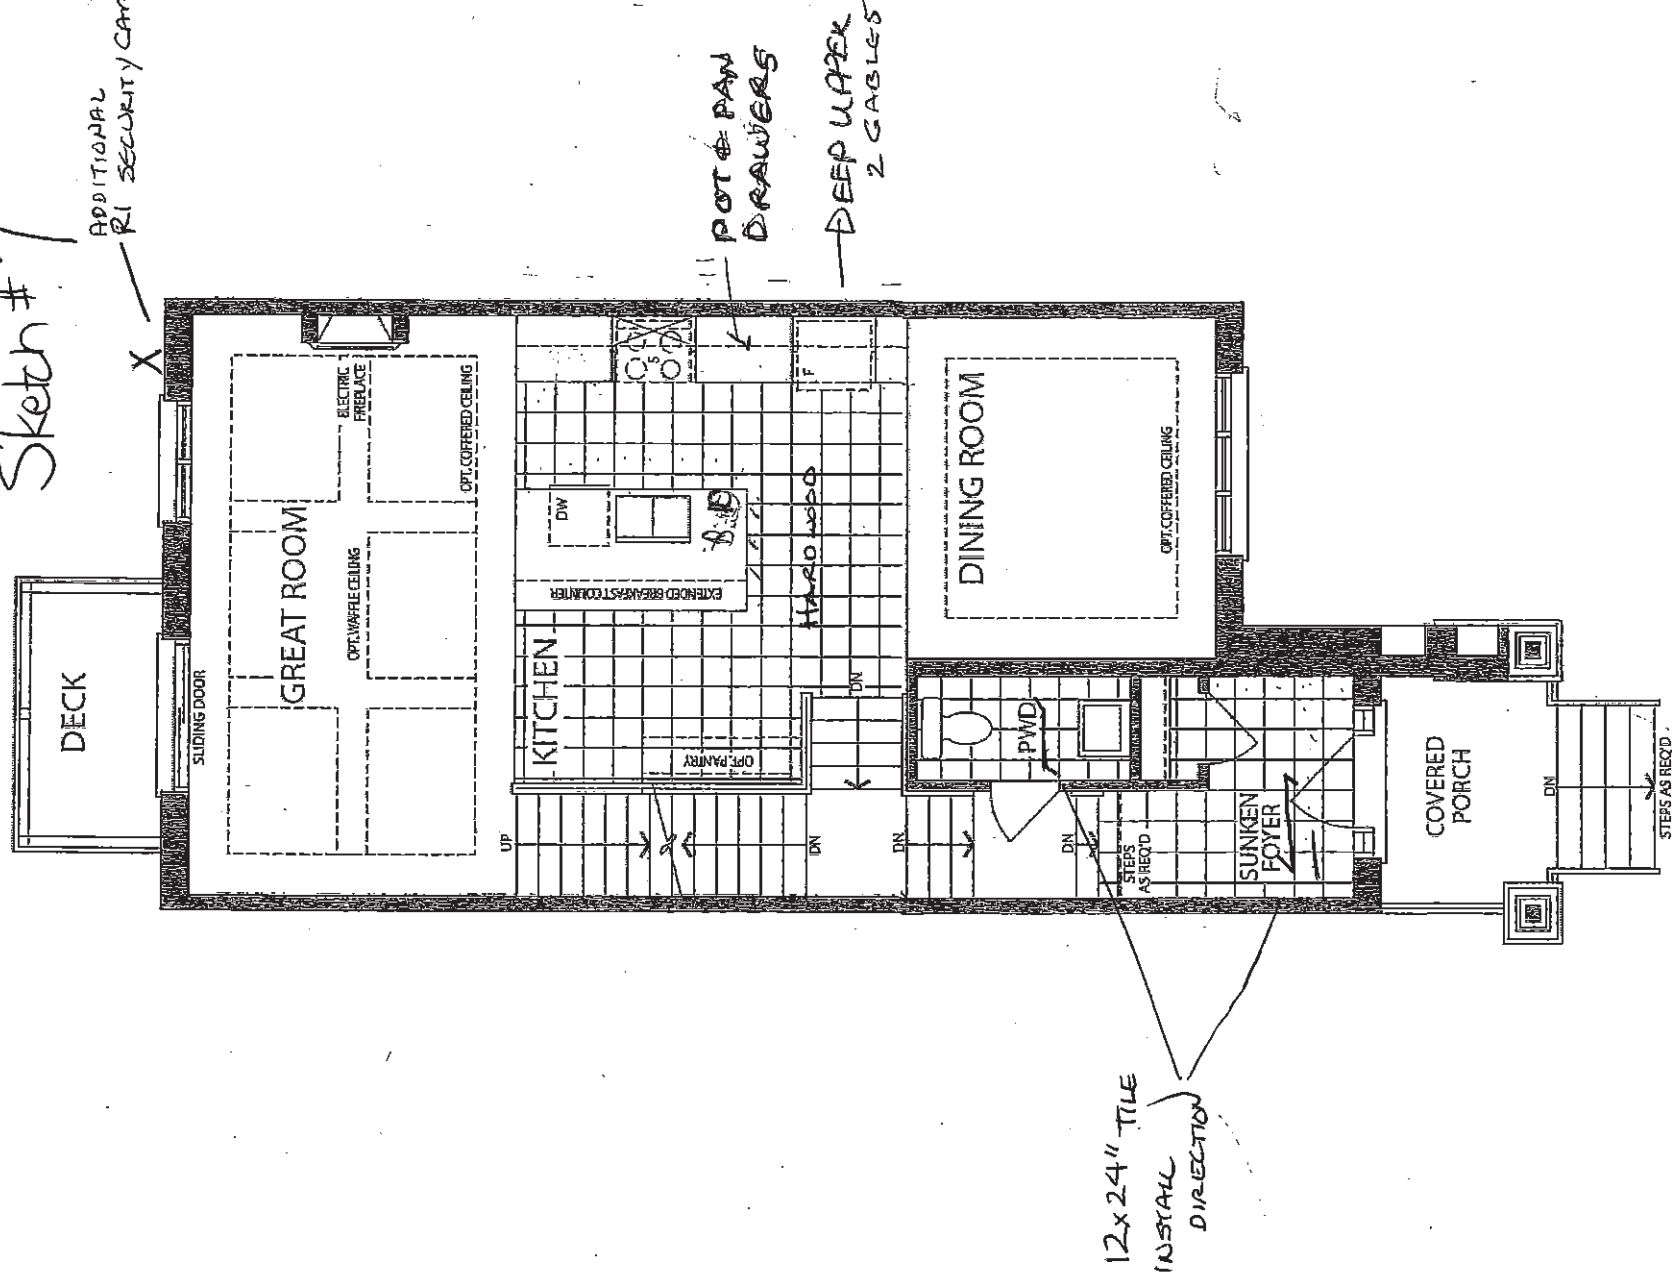

MAIN LEVEL
ELEVATION B

3

C-2 COUNTRY LANE
LOT 49-3
20-1841 ELEV. B
THE ARLINGTON


20 of 41

The Arlington

20-1841 ELEV. B

ELEVATION A & B: 1,841 SQ FT

Sketch #8

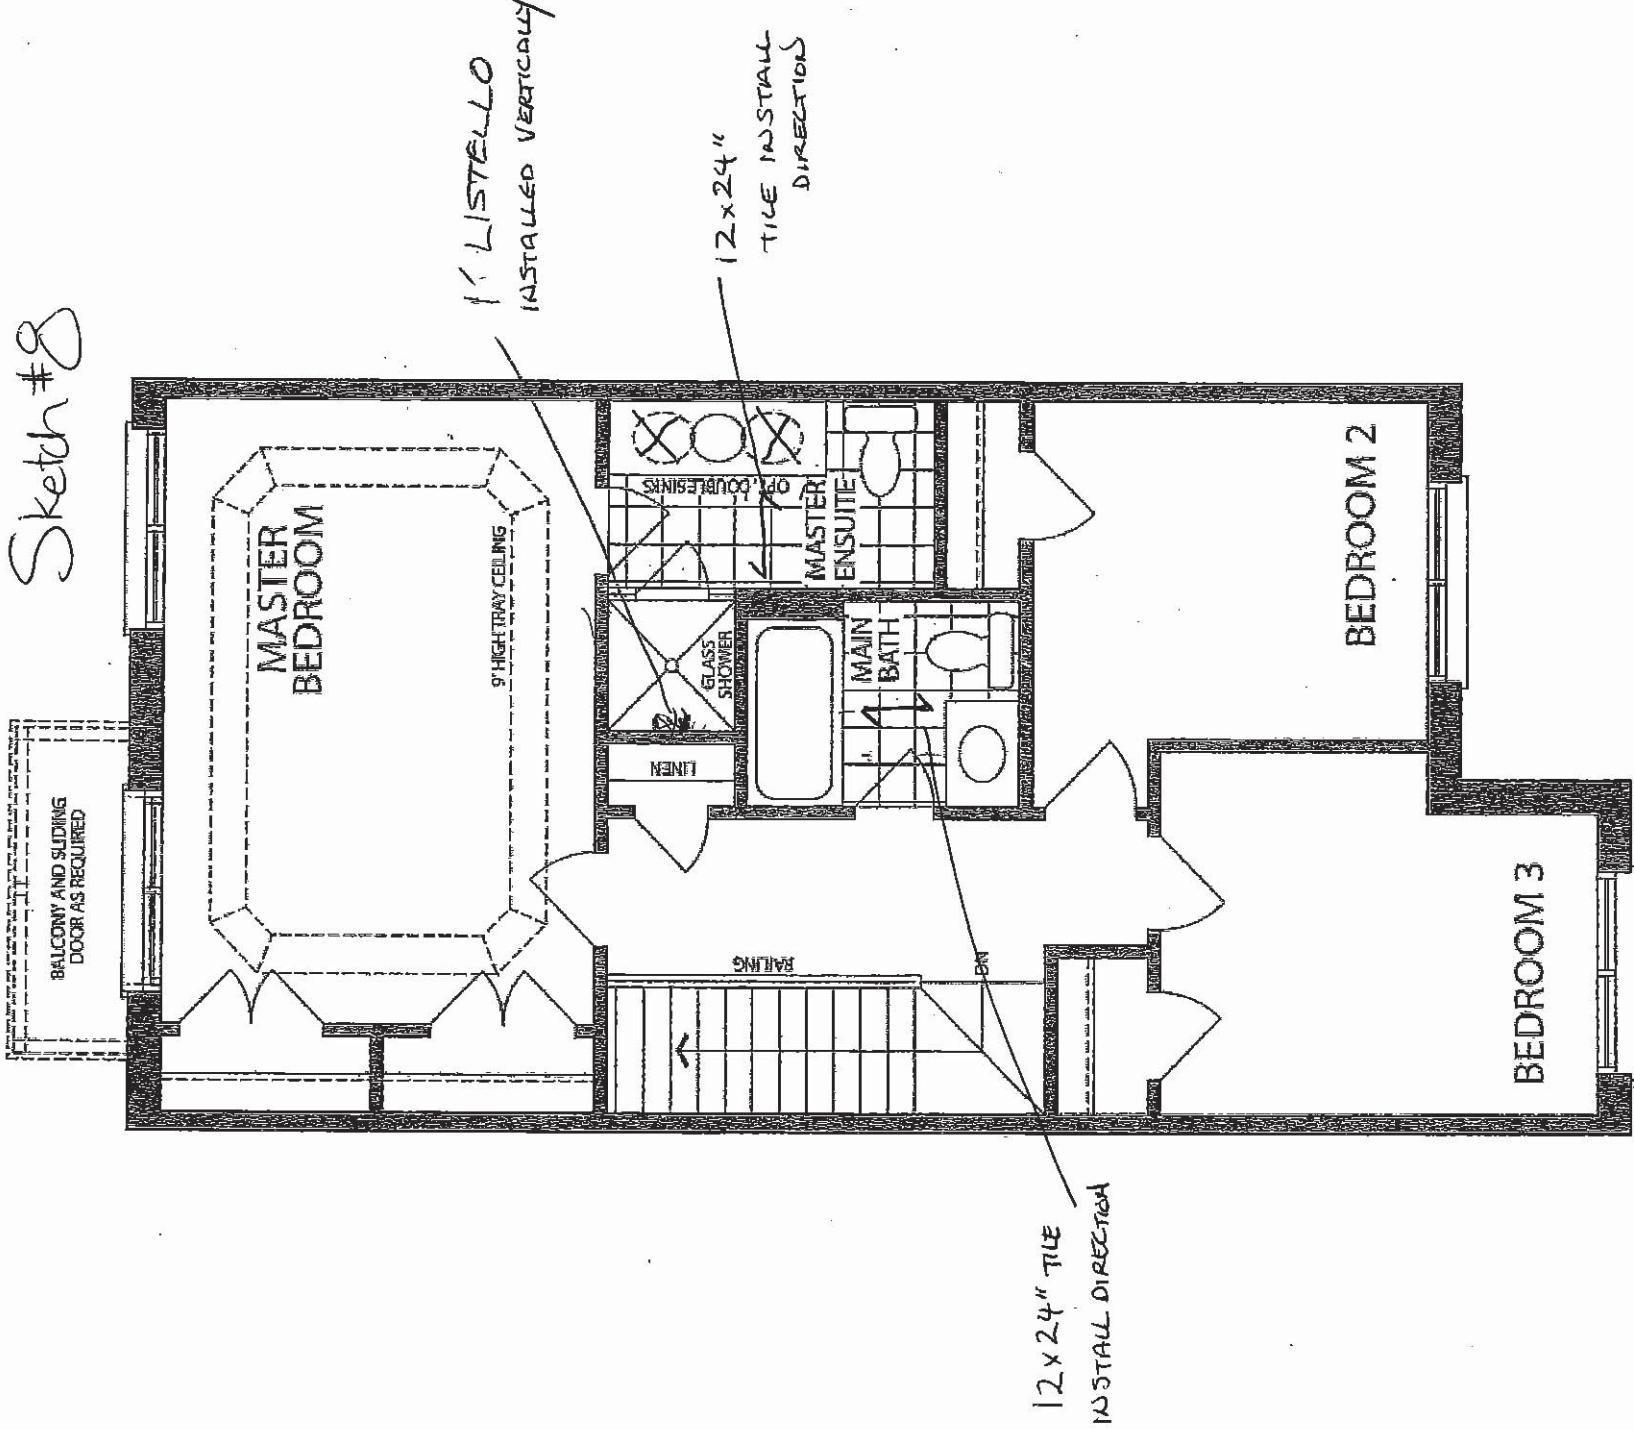


UPPER LEVEL
ELEVATION B

S.W. B.W.

C-2 COUNTRY LANE
LOT 49-3
20-1841 ELEV. B
THE ARLINGTON

21 of 41

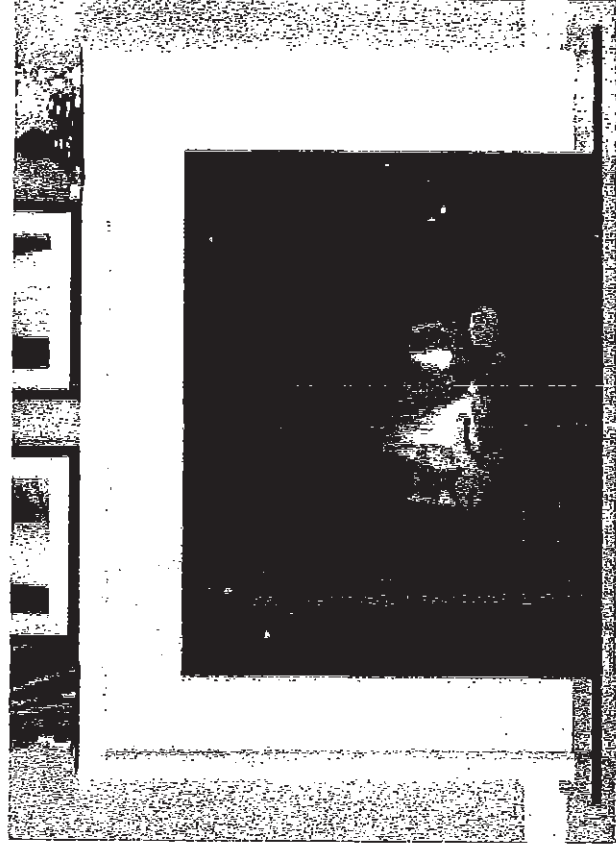

'CABINET'

NEAS NF17 Mantel



3
2
5

C-2 COUNTRY LANE
LOT 49-3
20-1841 ELEV. B
THE ARLINGTON

22 of 41

Stainless Steel | 122.0264.716

FAMILY : Sinks | SERIES : Reginox | MODEL : NS1930U/9 | FINISH : Stainless Steel | INSTALLATION TYPE : Undermount

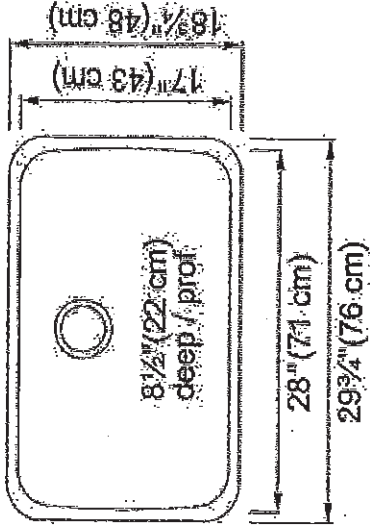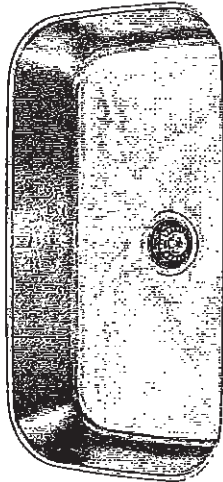

TECHNICAL DATA	
Width overall	18 3/4"
Length overall	29 3/4"
Width of large bowl	17"
Length of large bowl	28"
Depth of large bowl	8 1/2"
Cabinet Size	36"
Number of Bowls	1
Waste Outlet Diameter	3 1/2"
Cut-Out Template	Yes
Faucet Hole	None
Type of Material	18 Gauge Stainless Steel
Surface Finish	SILK
Special feature	Rear Drain Waste Hole Location
Waste Kit Included	YES

22 of 41


C-2 COUNTRY LANE
LOT 49-3
20-1841 ELEV. B
THE ARLINGTON

23 of 41

STANDARD KITCHEN FAUCET

Align

Modern

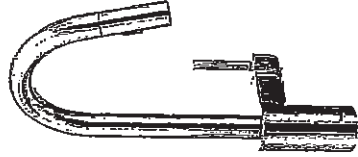

Single Handle Pull-Down Kitchen
Faucet*

Model 7565†

Low S-v

C-2 COUNTRY LANE
LOT 49-3
20-1841 ELEV. B
THE ARLINGTON

24 of 41

*American
Standard*

**BOULEVARD®
PEDESTAL SINK**
VITREOUS CHINA

BOULEVARD® PEDESTAL SINK

- ☐ 0641.800 Faucet holes on 8" (203mm) centers (Illustrated).
- * ☒ 0641.400 Faucet holes on 4" (102mm) centers
- ☐ 0641.100 Center hole only
- Classic styled rectangular pedestal lavatory
- Vitreous china
- Rear overflow
- Supplied with mounting kit
- Right Height® for greater comfort during use
- Faucet ledge with large deck area (faucet not included)
- Design coordinates with Boulevard® Toilet
- Basin has flat bottom to also allow use as an above counter sink or a drop-in sink (with u-shaped cut out)

Nominal Dimensions:
24" x 19" x 35-1/2"
(610 x 483 x 902mm)


- ☐ 0641.008 Pedestal top-8" (203mm) centers
- ☐ 0641.004 Pedestal top-4" (102mm) centers
- ☐ 0641.001 Pedestal top-center hole only
- ☐ 0010.000 Pedestal only

Bowl sizes:
17" (432mm) wide,
12-1/2" (318mm) front to back,
5" (127mm) deep

**Compliance Certifications -
Meets or Exceeds the Following Specifications:**
• ASME A112.19.2 - 2008/CSA B45.1-08

- To Be Specified:**
- ☐ Color: ☐ White ☐ Linen
 - ☐ Faucet Finish:
 - ☐ Supplies:
 - ☐ 1-1/4" Trap:
 - ☐ Nipple:

* See faucet section for additional models available

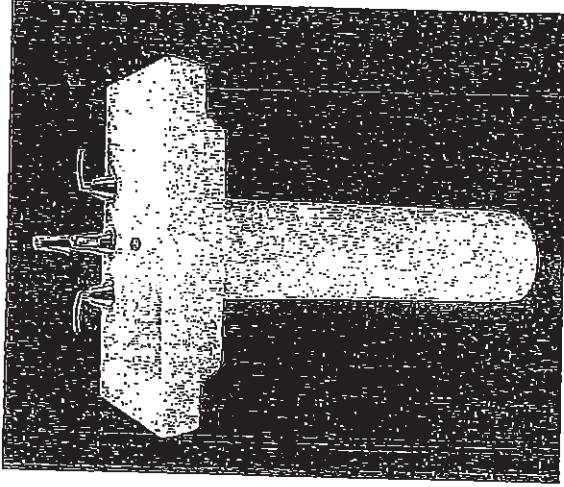

SEE REVERSE FOR ROUGHING-IN DIMENSIONS

R-w S-w

- Vitreous china
 - Self-rimming
 - Front overflow
 - Supplied with template
 - Faucet deck
- (Faucet shown not included)

- ☒ **0346 803**
Faucet holes on 203mm (8") centres
- ☐ **0346 403** (Illustrated)
Faucet holes on 102mm (4") centres
- ☐ **0346 001**
Centre hole only

Nominal Dimensions:
521 x 448mm (20-1/2" x 17-5/8")

Bowl sizes:
422mm (16-5/8") wide, 279mm (11") front to
back, 143mm (5-5/8") deep

COMPLIANCE CERTIFICATIONS –
Meets or exceeds the following Specifications:
• ASME A112.19.2M for Vitreous China Fixtures.
• CAN/CSA B45 Series.




- To Be Specified
- ☐ Colour: ☒ White ☐ Bone ☐ Silver Gray
- ☐ Linen
- ☐ Faucet*:
- ☐ Faucet Finish:
- ☐ Supplies & Stops:
- ☐ Trap 1-1/4" (32 mm):

* See faucet section for additional models available

BAS-198

© 2000 American Standard Inc.

01/07

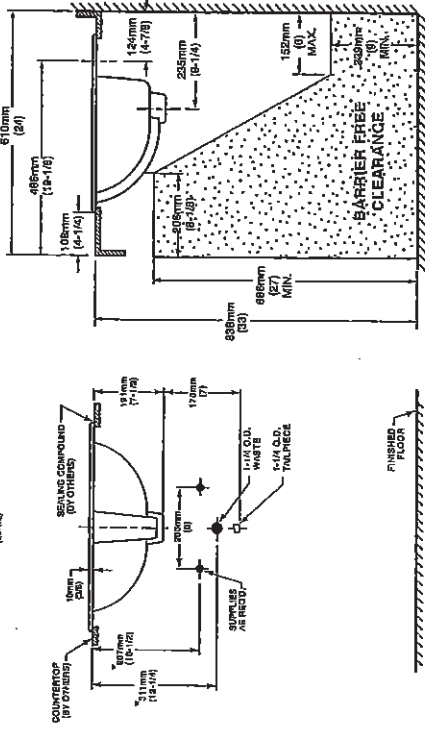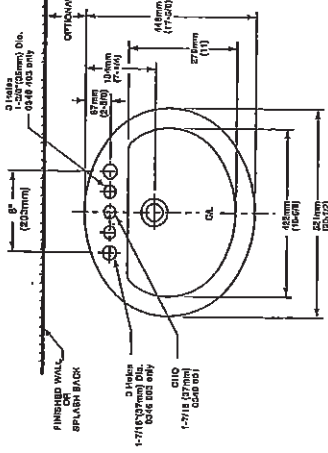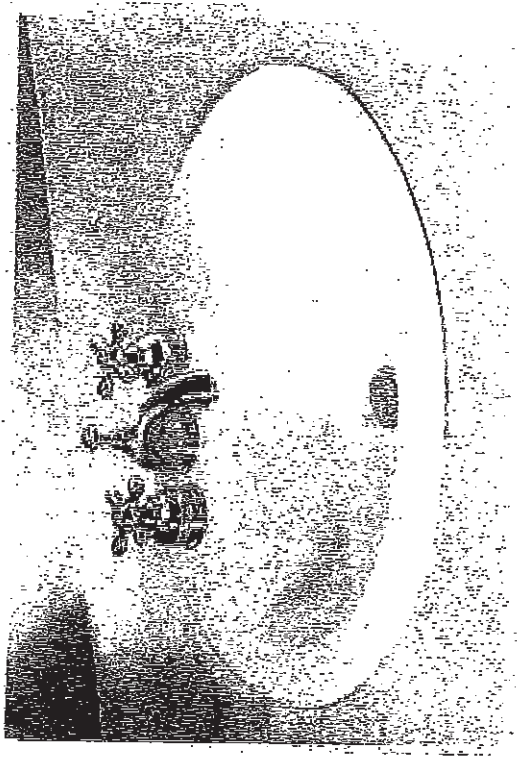


NOTES:
* DIMENSIONS SHOWN FOR LOCATION OF SUPPLIES AND *P* TRAP ARE SUGGESTED.
FOR COUNTERTOP CUTOUT AND INSTALLATION INSTRUCTIONS USE TEMPLATE
SUPPLIED WITH SINK.
FAUCETS NOT INCLUDED AND MUST BE ORDERED SEPARATELY.
IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances
established by ANSI Standard A112.19.2.
These measurements are subject to change or cancellation. No responsibility is assumed for use
of superseded or voided pages.

Rw Sw

C-2 COUNTRY LANE
LOT 49-3
20-1841 ELEV. B
THE ARLINGTON

26 of 41

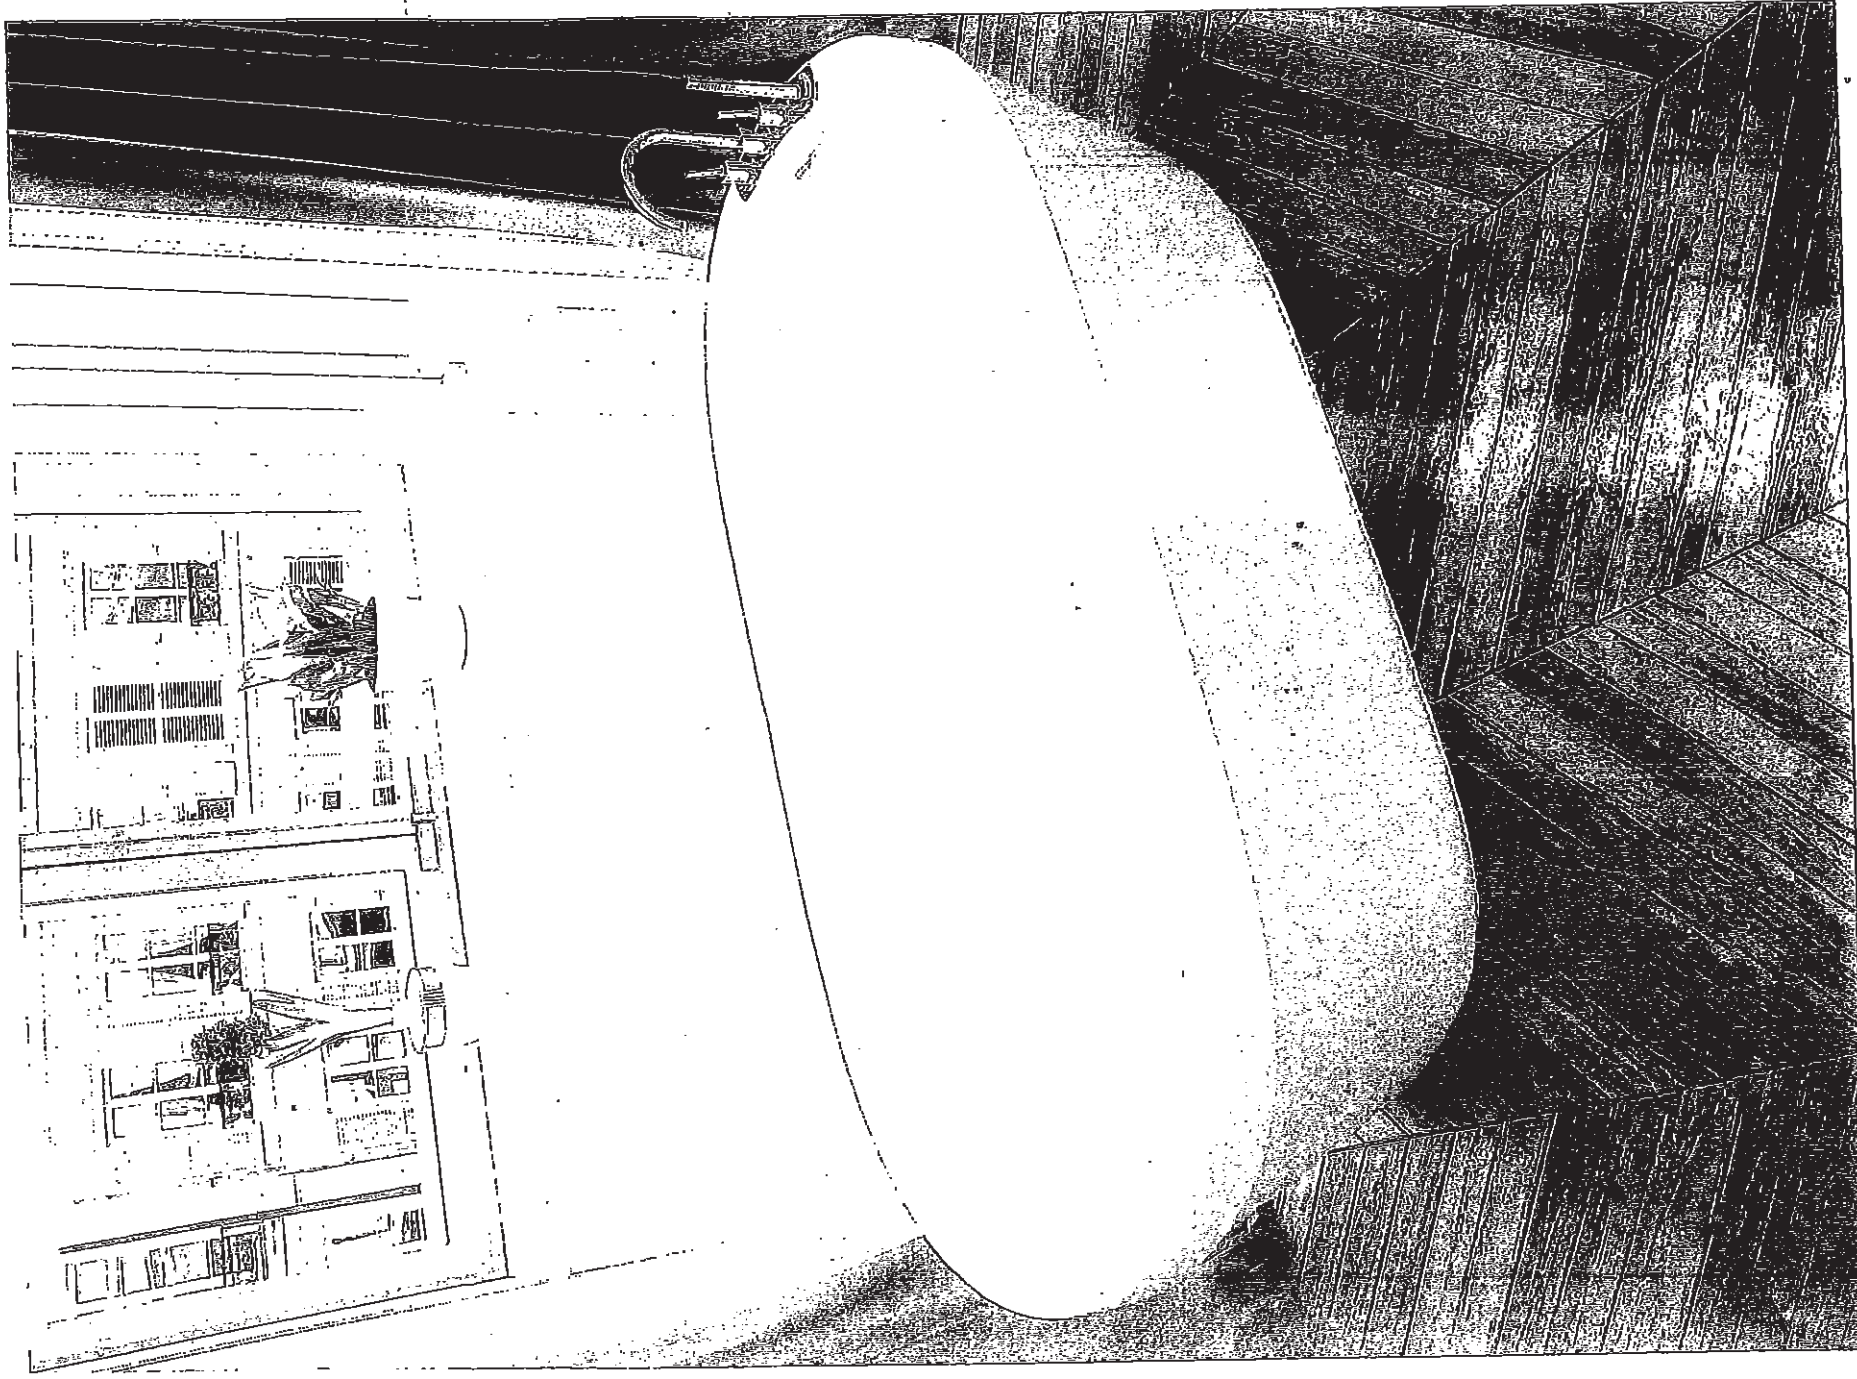

Demi CF2007


for sign

C-2 COUNTRY LANE
LOT 49-3
20-1841 ELEV. B
THE ARLINGTON

27 of 41


Chateau

Transitional



Lavatory Faucet with Pop-Up Drain
Model L4621†

VANITY SINKS AND PEDESTAL



Posi-Temp® Pressure Balancing Tub/Shower
Model 62320 / TL183†


OR

Posi-Temp Valve and Tub/Shower Trim
with Eco-Performance Easy Clean® XL

Model 62320 / TL183EP†

(TL183EP not available in BC)

SHOWER AND 5' TUB FAUCETS

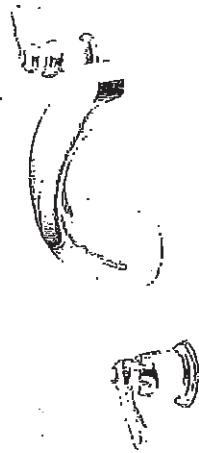

2 Handle Roman Tub with 9" Spout
Model 4796 / T990†

FREESTANDING TUB FAUCETS

Rw Sw

C2 COUNTRY LANE
LOT 49-3
20-1841 ELEV B
THE ARLINGTON

28 of 41



SC(B)519 | ALITO Collection

Cyclone[®]

Breathe Better

Features

- Wall mount range hood
- 6" round duct adapter
- Non-slick aluminum fan blades
- 3 speed push button control
- 2 LED lights (2 x 1.4W, 4000K)
- Quick release aluminum mesh filters
- Standard chimney fits up to 9 ft. ceiling
- Up to 9 minutes time-delay OFF feature
- Plug-In connection

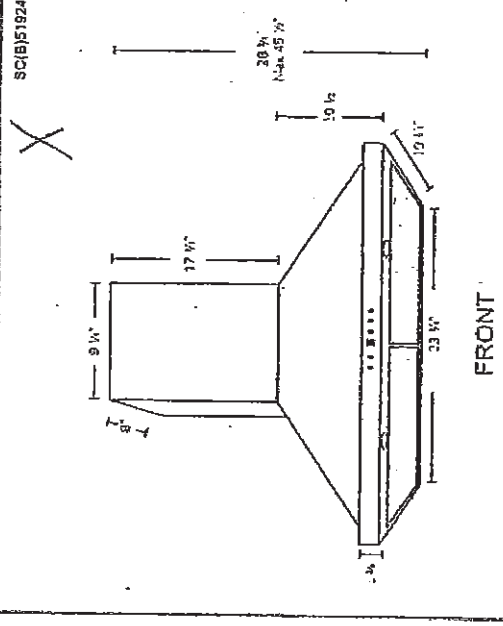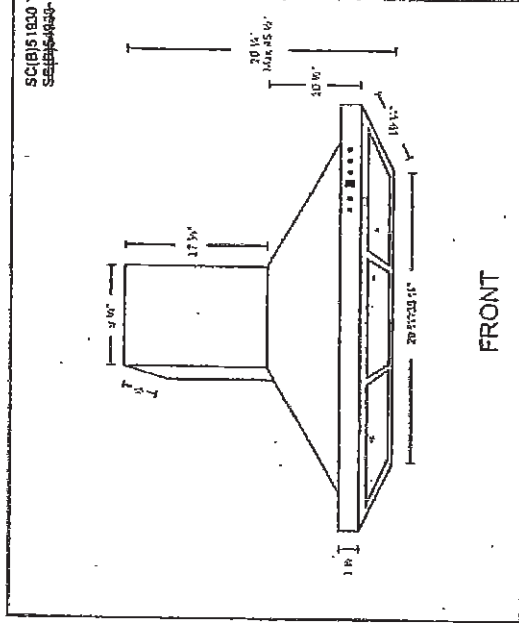

Options

- Filters:
 - SC519 - Quick Release Aluminum Mesh Filters
 - SCB519 - Quick Release Stainless Steel Baffle Filters**
- Chimney Flues:
 - A1.CH10 - short (7'-8' ceilings)
 - A1.CH18 - standard (8'-9' ceilings)
 - A1.CH30 - extended (9'-11' ceilings)
- Widths: 24\"/>

Specifications

- | | |
|--------------------------------------|---|
| • Air Flow Volume: 550 CFM | • Finishes: Stainless Steel |
| • Electrical Connection: 120 V/60 Hz | • Ducting: 6" Round |
| • Power Consumption: 300 Watts | • Noise Level: Min. 2 Sones
Max. 6 Sones |



Toronto • Vancouver • Boston
www.CycloneRangeHoods.com

C2 COUNTRY LANE
LOT 49-3
20-1841 ELEV B
THE ARLINGTON

29 of 41

Whirlpool® Bottom Mount Refrigerator

PRODUCT MODEL NUMBERS

WRF532SMB WRF535SMB
WRF535SMB WRF540CWB

Electrical: A 115-volt, 60-Hz, AC-only, 15- or 20-amp fused, grounded electrical supply is required. It is recommended that a separate circuit serving only your refrigerator be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.


NOTE: Before performing any type of installation, cleaning, or removing a light bulb, turn the control (Thermostat, Refrigerator or Freezer Control depending on the model) to OFF and then disconnect the refrigerator from the electrical source. When you are finished, reconnect the refrigerator to the electrical source and reset the control (Thermostat, Refrigerator or Freezer Control depending on the model) to the desired setting. See "Using the Controls."

Water: A cold water supply with water pressure between 30 and 120 psi (207 and 827 kPa) is required to operate the ice maker and water dispenser. If you have questions about your water pressure, call a licensed, qualified plumber.

IMPORTANT: The pressure of the water coming out of a reverse osmosis system going to the water inlet valve of the refrigerator needs to be between 35 and 120 psi (241 and 827 kPa).


Reverse Osmosis Water Supply: If a reverse osmosis water filtration system is connected to your cold water supply, the water pressure to the reverse osmosis system needs to be a minimum of 40 to 60 psi (276 to 414 kPa).

PRODUCT DIMENSIONS

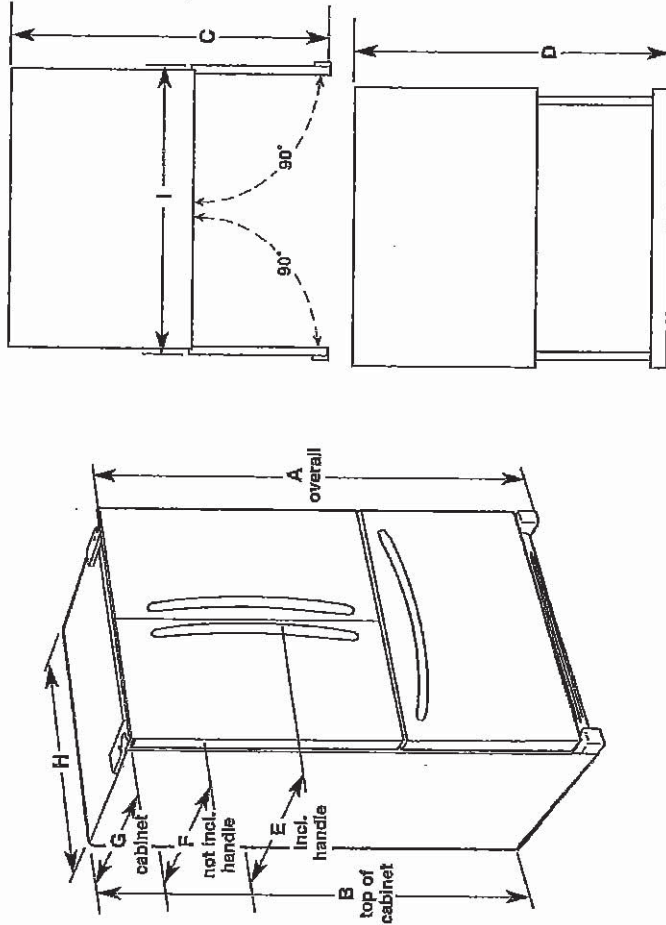

Model Number/Size	Height - Overall "A"	Height - Top of Cabinet "B"	Depth - Doors Open 90° "C"	Depth - Drawer Open "D"	Depth - With Handles "E"	Depth - Without Handles "F"	Depth - Cabinet Only "G"	Width - Cabinet "H"	Width - Door Open 90° "I"
WRF535SMB 25.2 cu. ft.	70 1/4" (178.1 cm)	68 3/4" (174.8 cm)	48 1/4" (122.1 cm)	53 1/4" (135 cm)	35 3/4" (90 cm)	32 3/4" (83.7 cm)	29 3/8" (74 cm)	35 3/4" (90.5 cm)	43 3/4" (110.2 cm)
WRF535SMB 25.2 cu. ft.	70 1/4" (178.1 cm)	68 3/4" (174.8 cm)	48 1/4" (122.1 cm)	53 1/4" (135 cm)	35 3/4" (90 cm)	32 3/4" (83.7 cm)	29 3/4" (74 cm)	35 3/4" (90.5 cm)	43 3/4" (110.2 cm)
WRF532SMB 22.1 cu. ft.	70 1/4" (178.1 cm)	68 3/4" (174.8 cm)	47 1/4" (119.5 cm)	52 1/4" (132.4 cm)	34 3/4" (87.5 cm)	31 1/4" (81.1 cm)	28 1/2" (71.9 cm)	32 3/4" (83.7 cm)	42 3/4" (107.6 cm)
WRF540CWB 20 cu. ft.	70 1/4" (178.1 cm)	68 3/4" (174.8 cm)	48" (121.9 cm)	44 1/4" (113.0 cm)	29 3/4" (74.6 cm)	28" (71.1 cm)	24 1/4" (61.3 cm)	35 3/4" (90.5 cm)	39 3/4" (100.0 cm)

LOCATION REQUIREMENTS

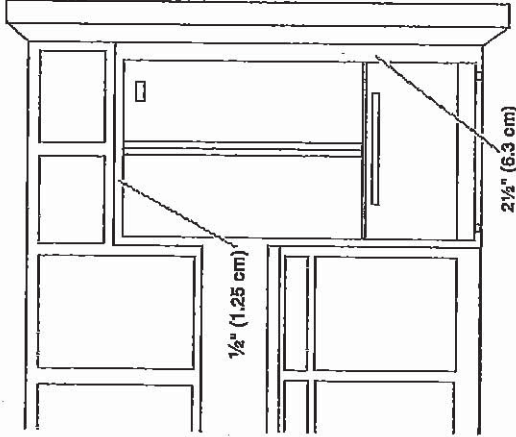

To ensure proper ventilation for your refrigerator, allow for a 1/2" (1.25 cm) space on each side and at the top. Allow for 1" (2.54 cm) of space behind the refrigerator. If your refrigerator has an ice maker, make sure you leave some extra space at the back for the water line connections.

If you are installing your refrigerator next to a fixed wall, leave 2 1/2" (6.3 cm) minimum on the hinge side (some models require more) to allow for the door to swing open.

NOTE: This refrigerator is intended for use in a location where the temperature ranges from a minimum of 55°F (13°C) to a maximum of 110°F (43°C). The preferred room temperature range for optimum performance, which reduces electricity usage and provides superior cooling, is between 60°F (15°C) and 90°F (32°C). It is recommended that you do not install the refrigerator near a heat source, such as an oven or radiator.

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

Ref. W10597594B
10/1/14

C-2 COUNTRY LANE
LOT 49-3
20-1841 ELEV. B
THE ARLINGTON

30 of 41

FRONT CONTROL
GAS RANGES

Whirlpool



FEATURING



TimeSavor™ system

The TimeSavor™ system's Frozen Bake Technology allows you to skip preheating for favorites like pizza, lasagna, chicken nuggets, fries or pies so you can cook frozen foods faster.



HeatRight™ system

The HeatRight™ system's True convection helps you to cook food faster* with a rear fan and third heating element to circulate hot air over, under, and around food.



CompleteClean™ system

The CompleteClean™ system's EZ-2-Lift™ hinged grates give you quick access to spills on the cooktop. The industry first hinged design allows you to wipe up under them without removing them entirely. For a more thorough clean, the grates are also dishwasher-safe.

Every day, care.™

From the #1 Selling Appliance brand in the USA*

37

The image consists of two separate photographs of a dark, rectangular object, likely a book or a folder. The top photograph shows the object from the outside, with its front cover and spine visible. The cover has a textured, possibly leather-like surface. The bottom photograph shows the object from the inside, revealing a large, empty rectangular compartment. The interior surface is dark and appears to be made of a different material, possibly cloth or paper. The overall image is in black and white, with high contrast and some visible noise or grain.

30" Freestanding Range - 5.8 cu. ft.



- Frozen Bake™ Technology



- True Convection
- Convection Conversion
- AccuSimmer[®] burner
- Center Oval burner
- Temperature Sensor




- EZ-2-Lit™ Hinged Grates
- Aqualit™ Self-cleaning Technology
- Dishwasher-safe knobs




- (2) SpeedHeat™ burners
- Rapid Preheat
- Keep Warm
- Delay Cook

מלכותו יתברך יתקן לנו שנה טובה ומוצלחת
בשנה טובה ומוצלחת.



- the Agency in December 1970. A year earlier, he had been a member of the National Student Reliance Fund, a group of students who had been organizing for a year to help the needy. "They had a big understanding of the way the world was and the way it should be," he said. "I was one of the few who didn't."

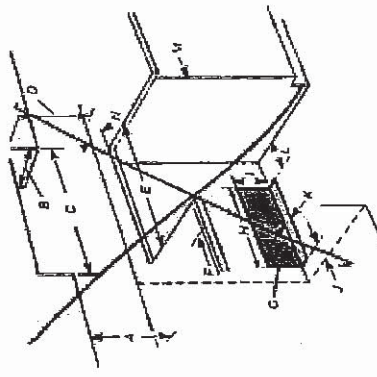[illegible]

- [illegible]

*Compared to a traditional pizza and bake cycle for pizza, suggests/inst. pizza and lasagna. **Compared to thermal-bake cycle on the same model. †Based on 12-month average of unit sales. Refrigeration, Cooking, Dishwashers, and Laundry appliances. Tracoline, 2014.



Form 02016 Whulboul. All rights reserved. 576. Form No. WC150099B

C-2 COUNTRY LANE
LOT 49-3
20-1841 ELEV. B
THE ARLINGTON

32 of 41

Whirlpool® 30" (76.2 cm) Slide-in Gas Range C

PRODUCT MODEL NUMBERS



GAS SUPPLY REQUIREMENTS

Gas supply line:


- Provide a gas supply line of $\frac{3}{4}$ " (1.9 cm) rigid pipe to the range location. A smaller size pipe on longer runs may result in insufficient gas supply. With LP gas, piping or tubing size can be $\frac{1}{2}$ " (1.3 cm) minimum. Usually, LP gas suppliers determine the size and materials used in the system.
NOTE: Pipe-joint compounds that resist the action of LP gas must be used. Do not use TEFLON® tape.

Flexible metal appliance connector:

- If local codes permit, a new CSA design-certified, 4 to 5 ft (122 to 152.4 cm) long, $\frac{1}{2}$ " (1.3 cm) or $\frac{3}{4}$ " (1.9 cm) I.D. flexible metal appliance connector may be used for connecting range to the gas supply line.



- A $\frac{1}{4}$ " (1.3 cm) male pipe thread is needed for connection to the female pipe threads of the inlet to the appliance pressure regulator.
- Do not kink or damage the flexible metal tubing when moving the range.
- Must include a shutoff valve:
The supply line must be equipped with a manual shutoff valve. This valve should be located in the same room but external to the range opening, such as an adjacent cabinet. It should be in a location that allows ease of opening and closing. Do not block access to shutoff valve. The valve is for turning on or shutting off gas to the range.

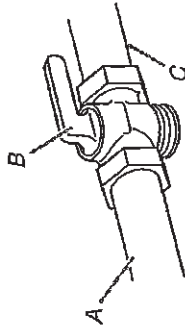

- A. Gas supply line
- B. Shutoff valve "open" position
- C. To range

Gas Pressure Regulator

The gas pressure regulator supplied with this range must be used. The inlet pressure to the regulator should be as follows for proper operation:

Natural gas:

Minimum pressure: 5" WCP
Maximum pressure: 14" WCP


LP gas:

Minimum pressure: 11" WCP
Maximum pressure: 14" WCP

Contact local gas supplier if you are not sure about the inlet pressure.

PRODUCT DIMENSIONS

This manual covers several models. Your model may appear different from the models depicted. Dimensions given are maximum dimensions across all models.

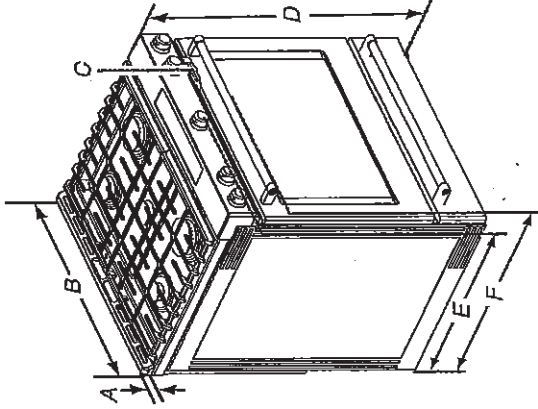

- A. $1\frac{1}{4}$ " (3.0 cm) height from cooktop to top of vent
- B. $23\frac{1}{4}$ " (59.5 cm)
- C. Model/serial number plate (located behind the oven door on the top right-hand side of the oven frame)
- D. $36\frac{1}{2}$ " (91.4 cm) height to top of cooktop edge with leveling legs screwed all the way in*
- E. $28\frac{3}{4}$ " (71.9 cm) max. depth from front of console to back of range.
- F. $28\frac{1}{4}$ " (73.3 cm) max. depth from handle to back of range.

IMPORTANT: Range must be level after installation. Follow the instructions in the "Level Range" section. Using the cooktop as a reference for leveling the range is not recommended.

* Range can be raised approximately 1" (2.5 cm) by adjusting the leveling legs.

Type of Gas

Natural gas:

- This range is factory set for use with Natural gas. See "Gas Conversions" section. The model/serial rating plate located behind the control panel has information on the types of gas that can be used. If the types of gas listed do not include the type of gas available, check with the local gas supplier.

LP gas conversion:

Conversion must be done by a qualified service technician. No attempt shall be made to convert the appliance from the gas specified on the model/serial rating plate for use with a different gas without consulting the serving gas supplier. See "Gas Conversions" section.

TEFLON is a registered trademark of Chemours.

33411



OTHER AVAILABLE COLORS

	Black Model: WDF310PAA8
	Biscuit-on-Biscuit Model: WDF310PAAT
	White Model: WDF310PAAW
	Universal silver Model: WDF310PAAD



DIMENSIONS		KEY FEATURES
Maximum Height	34 1/2 Inches	
Minimum Height	33 1/2 Inches	
Height	34 1/2 Inches	
Depth	24 1/2 Inches	
Width	23 7/8 Inches	
Dimensions shown are for planning purposes only. For complete information, see Installation Instructions packaged with product.		ENERGY STAR® Qualified No One Has Fewer Repairs 17 Years In A Row Resource - Efficient Wash System CEE Tier 1 qualified Tail Tub Design White Plastic Interior Quiet Partner(TM) Sound Package Auto Soil Sensor Electronic Controls 3 Automatic Cycles 1-Hour Wash Cycle Heavy Wash Cycle Normal Cycle 4 Options High Temperature Wash System Heated Dry Option 4 Hour Delay Wash Option 4-Tier SheerClean Direct Feed Wash System Control Lock Vynil Racks In-Rack Silverware Basket
ELECTRICAL		
15 Amps Amps, 60 Hz, 120 V, 15,		
Before purchasing this appliance, read important information about its estimated annual energy consumption or energy efficiency rating that is available from your dealer.		

C-2 COUNTRY LANE
LOT 49-3
20-1841 ELEV. B
THE ARLINGTON

34 of 41

Whirlpool® Undercounter Dishwasher

PRODUCT MODEL NUMBERS

WDF110PAB	WDE310ELA	WDF530PSY
WDF111PAB	WDF320PAD	WDF540PAD
WDF120PAF	WDF570PAY	WDF730PAY
WDF121PAF	WDF520PAD	WDT1710PAY
WDF310PAA	WDF530PAY	WDT720PAD
WDF310PCA	WDF530PLY	WDT770PAY


Electrical Requirements: 120-volt, 60-Hz, AC only, 15- or 20-amp. fused electrical supply. Copper wire only. A time delay fuse or circuit breaker and separate circuit is recommended.

If direct wiring dishwasher: Use flexible, armored, or nonmetallic, sheathed copper wire with grounding wire that meets the wiring requirements for your home and local codes and ordinances. Use a UL listed or CSA approved conduit connector.

If connecting dishwasher with a power supply cord:

Use Power Supply Cord Kit (Part No. 4317824) marked for use with dishwashers. Follow the kit instructions for installing the power supply cord.

Power supply cord must plug into a grounded 3 prong, outlet, located in the cabinet next to the dishwasher opening. Outlet must meet all local codes and ordinances.




Water Supply Requirements: A hot water line with 20 to 120 psi (138 to 862 kPa) water pressure. Water temperature must be 120°F (49°C) water at dishwasher. Use 3/4" O.D. copper tubing with compression fitting or flexible braided water supply line (1/2" minimum plastic tubing is not recommended). Use a 90° elbow with 3/4"N.P.T. external pipe threads on one end. Do not solder within 6" (15.2 cm) from water inlet valve.

Drain Requirements: A new drain hose is supplied with your dishwasher. If this is not long enough, use a new drain hose with a maximum length of 12' (3.7 m) (Part No. 3385556) that meets all current AHAW/JAPMO test standards, is resistant to heat and detergent, and fits the 1" (2.5 cm) drain connector of the dishwasher.

Make sure to connect the drain hose to waste tee or disposer inlet above drain trap in house plumbing and 20" (50.8 cm) minimum above the floor. It is recommended

that the drain hose either be looped up and securely fastened to the underside of the counter or be connected to an air gap.


Make sure to use an air gap if the drain hose is connected to house plumbing lower than 20" (50.8 cm) above subfloor or floor.

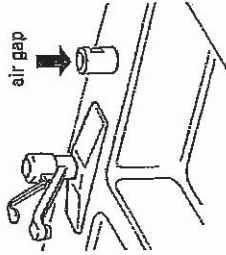

Use 1/2" (1.3 cm) minimum I.D. drain line fittings.

If required, the air gap should be installed in accordance with the air gap installation instructions. When connecting the air gap, a rubber hose (not provided) will be needed to connect to the waste tee or disposer inlet.

PRODUCT DIMENSIONS

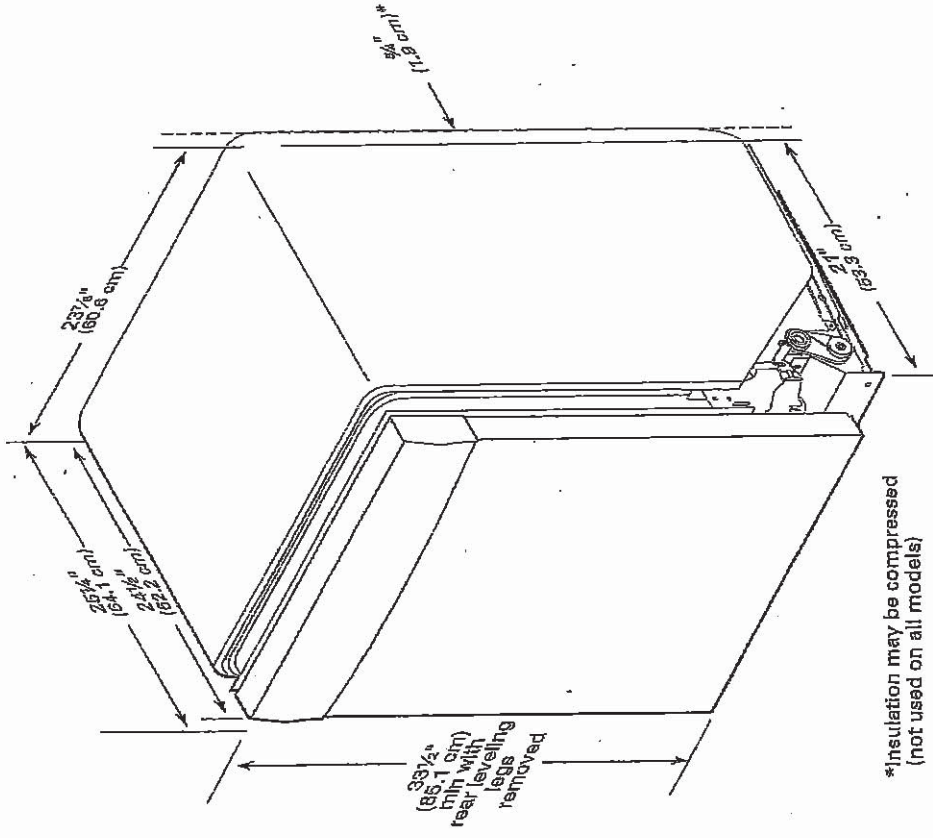

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

C-2 COUNTRY LANE
LOT 49-3
20-1841 ELEV. B
THE ARLINGTON

35 of 41


CABINET CUTOUT DIMENSIONS

WIDE 320 P&G

NOTE: Shaded areas of cabinet walls show where utility connections may be installed.

*Measure from the lowest point on the underside of the countertop. May be reduced to 33½" (85.1 cm) by removing the rear leveling legs from dishwasher.

**Minimum, measured from narrowest point of opening.

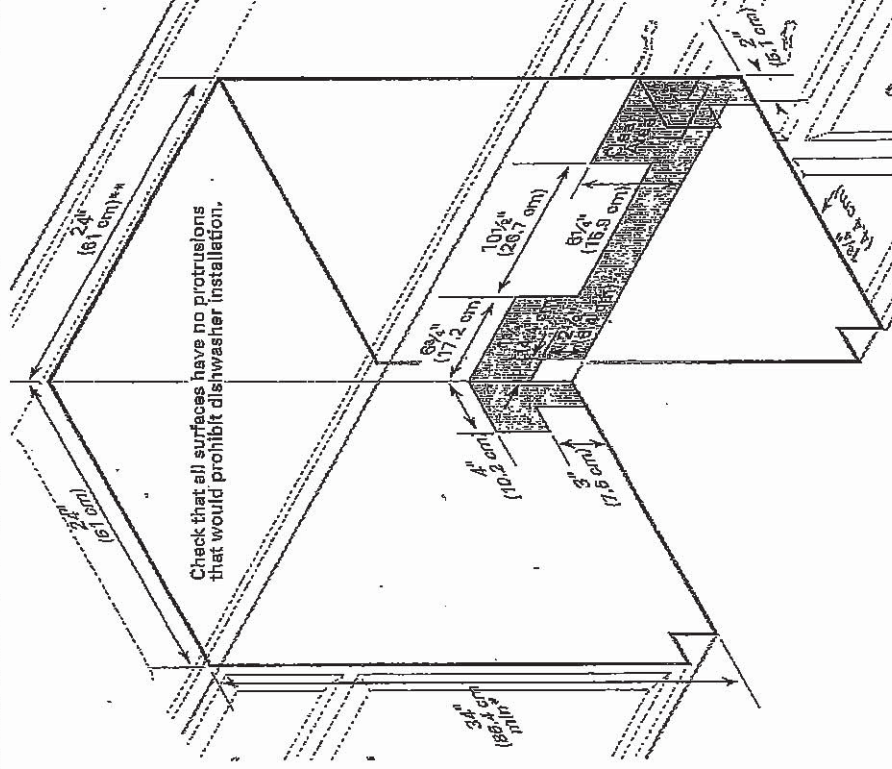


C-2 COUNTRY LANE
LOT 49-3
20-1841 ELEV. B
THE ARLINGTON

36041

WHIRLPOOL WASHER Model #: WFW5620HW

Whirlpool Brand Canada English | Washer and Dryers | Washers | Front Load Washers | WFW5620HW

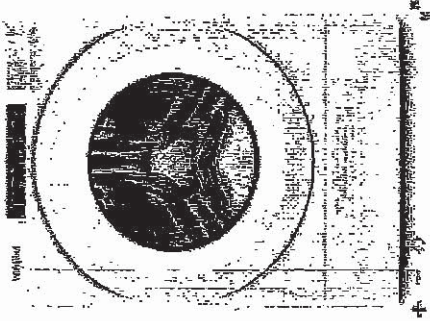

5.2 cu. ft. I.E.C. Closet-Depth
Front Load Washer with
Load & Go™ Dispenser



Whirlpool® 5.2 cu. ft. I.E.C. Closet-Depth Front Load Washer with Load & Go™ Dispenser
Model #: WFW5620HW

Dimensions

Depth	80.17 cm, 31-9/16 in
Depth With Door Open 90 Degree	143.51 cm, 56-1/2 in
Minimum Height	98.11 cm, 38-5/8 in
Width	68.58 cm, 27.0 in

Appearance

LCD Touch Screen	No
Window	Yes

Details

Drum Material	Stainless Steel
---------------	-----------------

Cycles and Options

Number of Wash Cycles	87
-----------------------	----

Electrical

Hz	60
Power Cord Included	Yes

C-2 COUNTRY LANE
LOT 49-3
20-1841 ELEV. B
THE ARLINGTON

37 of 41

WHIRLPOOL WASHER Model #: WFW5620HW

LOCATION REQUIREMENTS



Proper installation is your responsibility.

You will need:

- A water heater set to 120°F (49°C).
- A grounded electrical outlet located within 6 ft (1.8 m) of power cord on back of washer.
- Hot and cold water faucets located within 4 ft (1.2 m) of hot and cold water fill valves on washer, and water pressure of 20–100 psi (137.9–689.6 kPa).
- A level floor with maximum slope of 1" (25 mm) under entire washer. Installing on carpet or surfaces with foam backing is not recommended.
- Floor must support washer's total weight (with water and load) of 315 lbs (143 kg).


IMPORTANT: Do not install, store, or operate washer where it will be exposed to weather or in temperatures below 32°F (0°C). Water remaining in washer after use may cause damage in low temperatures. See "Washer Care" in your Use and Care Guide for winterizing information.

Whirlpool Models*

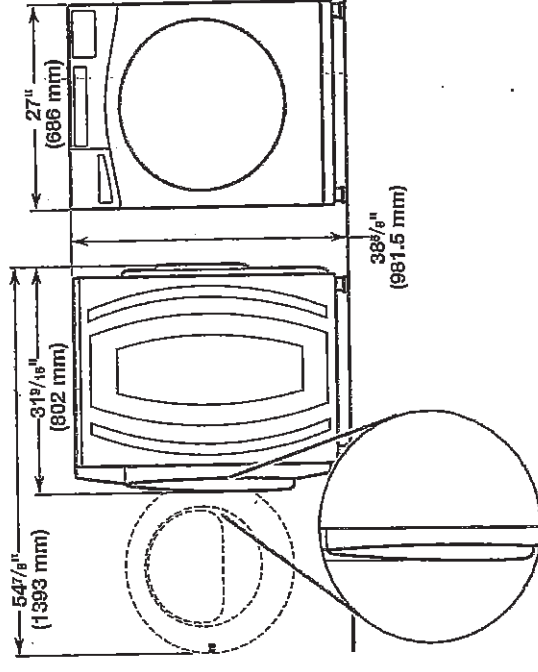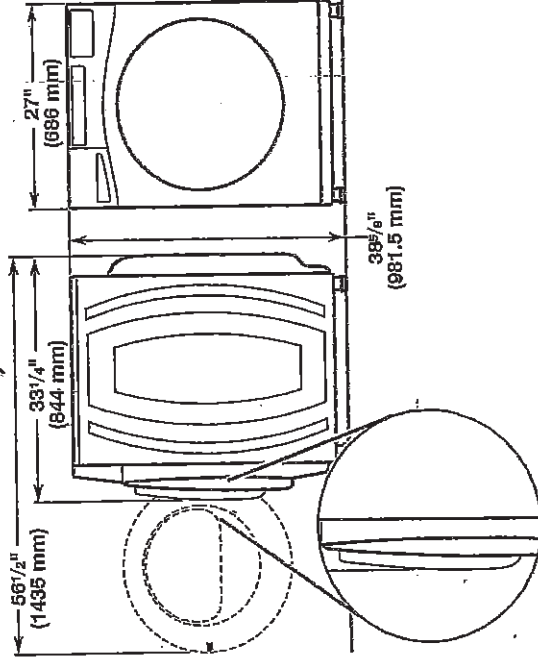

*For additional details (or information) specific to your model, refer to the 'Dimensions' listed for your model at www.whirlpool.com.

Maytag Models

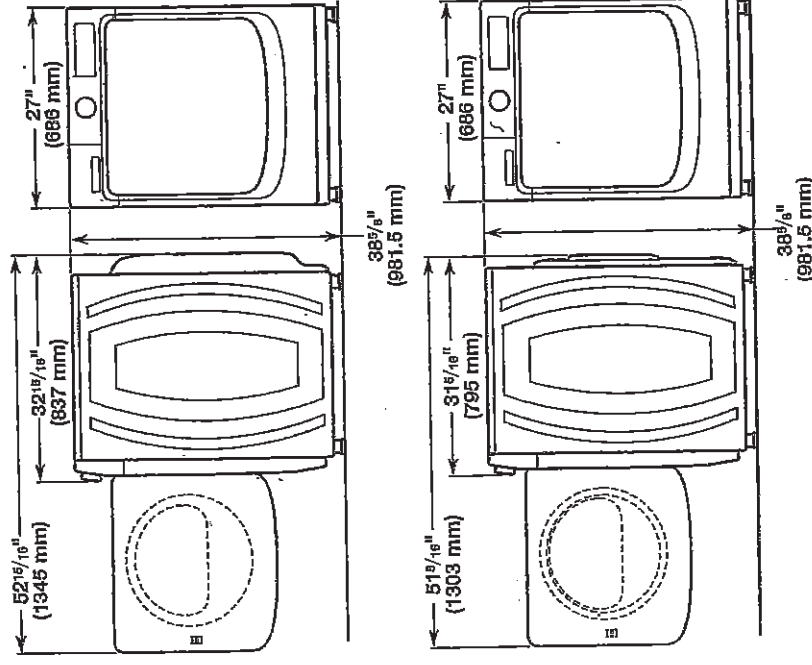


All dimensions show minimum spacing allowed. For each arrangement, consider allowing more space for ease of installation and servicing, and spacing for companion appliances and clearances for walls, doors, and floor moldings.

Space must be large enough to allow door to fully open.

Add spacing of 1" (25 mm) on all sides of washer to reduce noise transfer. If a closet door or louvered door is installed, top and bottom air openings in door are required.

**Recessed area or closet installation
(stacked washer and dryer):**

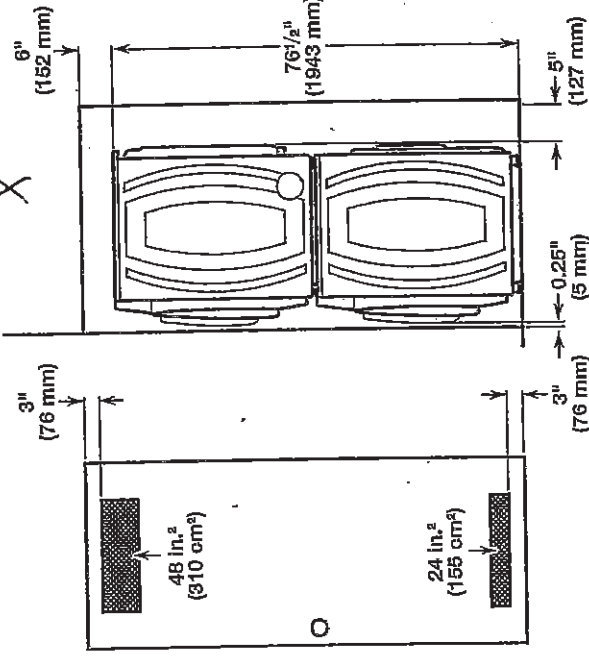


C-2 COUNTRY LANE
LOT 49-3
20-1841 ELEV. B
THE ARLINGTON


38 of 41

WHIRLPOOL WASHER Model #: WFW5620HW


Custom under-counter installation: X

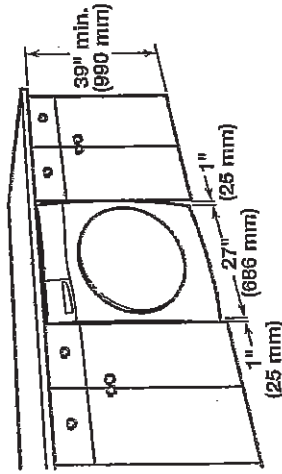

Recessed area or closet installation: X

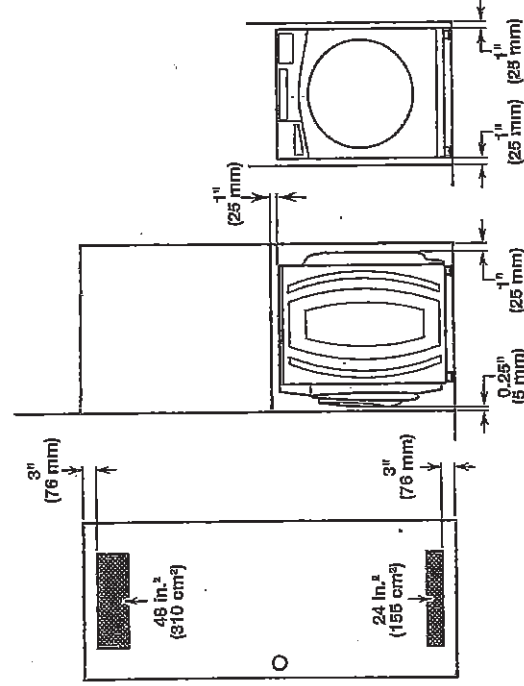

Custom cabinet installation: X

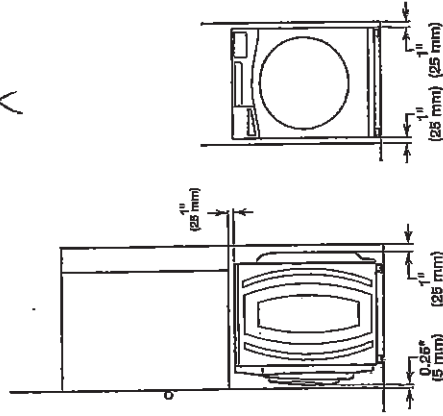


DRAIN SYSTEM

The drain system can be installed using a floor drain, wall standpipe, floor standpipe, or laundry tub. Select the method you need.


IMPORTANT: To avoid siphoning, only 4.5" (114 mm) of drain hose should be inside standpipe. Always secure drain hose with cable tie.

Floor standpipe drain system

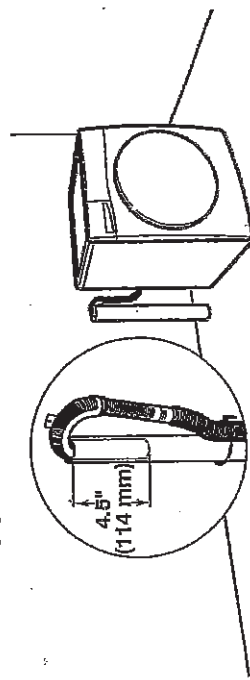


Minimum diameter for a standpipe drain: 2" (51 mm). Minimum carry-away capacity: 17 gal. (64 L) per minute. A 1/4" (6 mm) diameter to 1" (25 mm) diameter Standpipe Adapter Kit is available (Part Number 3363920). Top of standpipe must be at least 30" (762 mm) high; install no higher than 96" (2.44 m) from bottom of washer. If you have an overhead sewer and need to pump higher than 96" (2.44 m), a sump pump and associated hardware are needed. See "Alternate parts."

Wall standpipe drain system

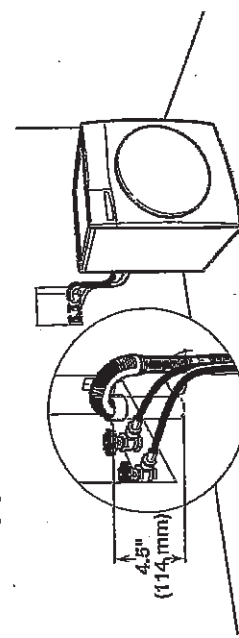

See requirements for floor standpipe drain system.

Laundry tub drain system

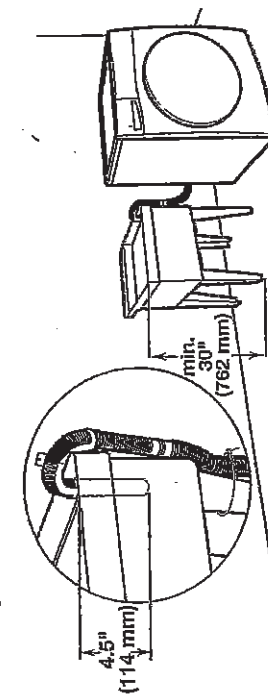


Minimum capacity: 20 gal. (76 L). Top of laundry tub must be at least 30" (762 mm) above floor; install no higher than 96" (2.44 m) from bottom of washer.

C-2 COUNTRY LANE
LOT 49-3
20-1841 ELEV. B
THE ARLINGTON

39 of 41

WHIRLPOOL DRYER Model #: YWED5620HW

Whirlpool (Brand Canada English) | Washers and Dryers | Dryers | Electric Dryers | YWED5620HW

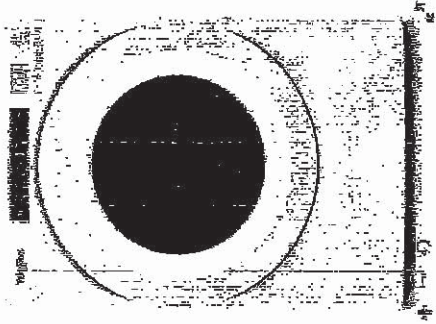

7.4 cu. ft. Front Load Electric
Dryer with Intuitive Touch
Controls



Whirlpool 7.4 cu. ft. Front Load Electric Dryer with Intuitive Touch Controls

Model #: YWED5620HW

Dimensions

Depth	78.74 cm, 31.0 in
Depth With Door Open 90 Degrees	138.43 cm, 54-1/2 in
Height	98.42 cm, 38-9/16 in
Width	68.58 cm, 27.0 in

Configuration and Overview

Fuel Type	Electric
-----------	----------

Cycles and Options

Cycle Time Remaining	Yes
Lint Filter Indicator	No
Number of Dryer Cycles	36
Number of Dryness Levels	3

Ventilation System

Long Vent	No
Maximum Vent Length	84
Venting Direction	Left, Right, Bottom, Rear

Electrical


He	60
Power Cord Included	Yes

C-2 COUNTRY LANE
LOT 49-3
20-1841 ELEV. B
THE ARLINGTON

40 of 41

WHIRLPOOL DRYER Model #: YWED5620HW

Back view:

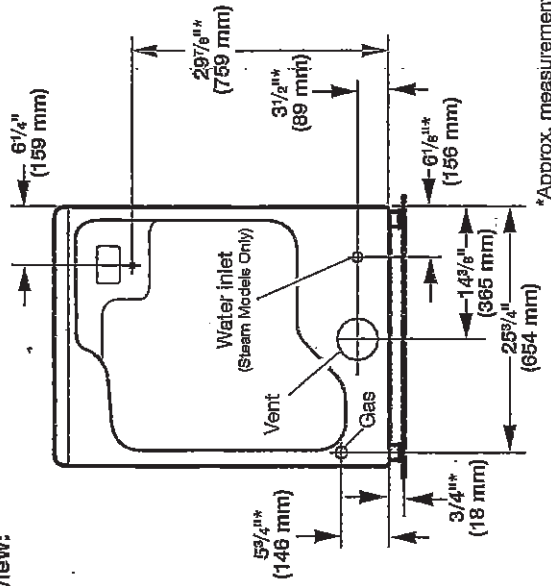

NOTE: Most installations require a minimum of 5" (127 mm) clearance behind dryer for exhaust vent with elbow. See "Venting Requirements."

Installation Clearances

For each arrangement, consider allowing more space for ease of installation and servicing, spacing for companion appliances, and clearances for walls, doors, and floor moldings. Space must be large enough to allow door to fully open. Add spacing on all sides of dryer to reduce noise transfer. If a closet door or louvered door is installed, top and bottom air openings in door are required.

Check code requirements. Some codes limit, or do not permit, installation of the dryer in garages, closets, mobile homes, or sleeping quarters. Contact your local building inspector.


NOTE: No other fuel-burning appliance can be installed in the same closet as a dryer.

Installation spacing for recessed area or closet installation

All dimensions show recommended and minimum spacing allowed.


- Additional spacing should be considered for ease of installation and servicing.
- Additional clearances might be required for wall, door, floor moldings, dryer venting, and gas line.
- Additional spacing should be considered on all sides of the dryer to reduce noise transfer.
- For closet installation with a door, minimum ventilation openings in the top and bottom of the door are required. Louvered doors with equivalent ventilation openings are acceptable.
- Companion appliance spacing should also be considered.

Recommended installation clearances (dryer only):

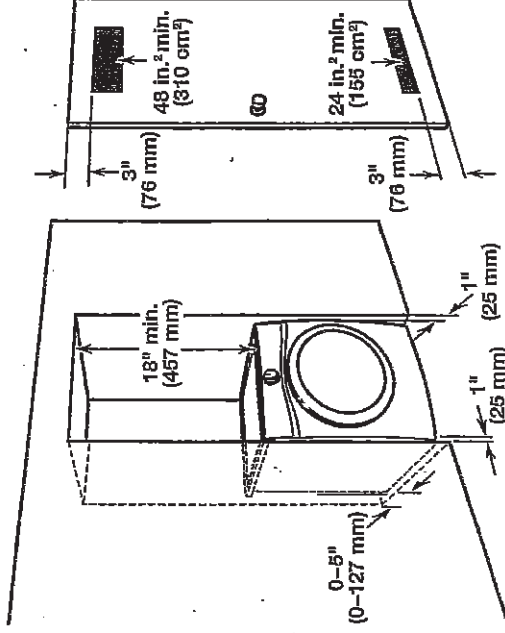

0" (0 mm) rear spacing is allowed for straight back venting only. For steam models only, inlet hose must not be kinked.

Custom under-counter installation:

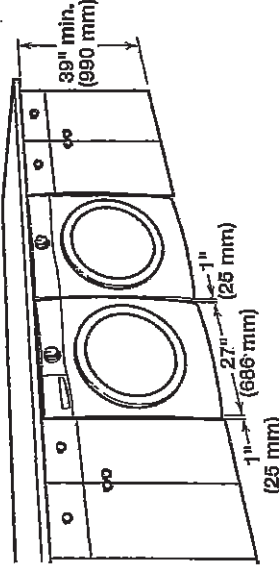

Mobile home - Additional installation requirements:

This dryer is suitable for mobile home installations. The installation must conform to the Manufactured Home Construction and Safety Standard, Title 24 CFR, Part 3280 (formerly the Federal Standard for Mobile home construction and Safety, Title 24, HUD Part 280) or Standard CAN/CSA-Z240 MH.

Mobile home installations require:

- Metal exhaust system hardware, available for purchase from your dealer. For further information, see "Assistance or Service" in your Use and Care Guide.
 - Special provisions must be made in mobile homes to introduce outside air into dryer. Openings (such as a nearby window) should be at least twice as large as dryer exhaust opening.
- For mobile home installation of gas dryers:**
- Mobile Home Installation Hold-down Kit Part Number 346764 is available to order. For further information, see "Assistance or Service" in your Use and Care Guide.

C-2 COUNTRY LANE
LOT 49-3
20-1841 ELEV. B
THE ARLINGTON

4 of 4

WHIRLPOOL DRYER Model #: YWED5620HW

Additional parts may be required, depending on your installation. Check local codes. Check existing electrical supply and venting. Read "Electrical Requirements" and "Venting Requirements" before purchasing parts.

If using a power supply cord:

Use a UL Listed power supply cord kit marked for use with clothes dryers. The kit should contain:

- A UL Listed 30 amp power supply cord, rated 120/240 volt minimum. The cord should be type SRD or SRDT and be at least 4 ft. (1.22 m) long. The wires that connect to the dryer must end in ring terminals or spade terminals with upturned ends.
- A UL Listed strain relief.

Optional Equipment (not supplied with dryer):

Refer to your Use and Care Guide for information about accessories available for your dryer.

LOCATION REQUIREMENTS

Check code requirements. Some codes limit, or do not permit, installing dryer in garages, closets, mobile homes, or sleeping quarters. Contact your local building inspector.

! WARNING



Explosion Hazard

Keep flammable materials and vapors, such as gasoline, away from dryer.

Place dryer at least 18 inches (460 mm) above the floor for a garage installation.


Failure to do so can result in death, explosion, or fire.

You will need:


- A location allowing for proper exhaust installation. See "Venting Requirements."
- A separate 15 or 20 amp circuit for a gas dryer or 30 amp circuit for an electric dryer.
- If using power supply cord, a grounded electrical outlet located within 2 ft. (610 mm) of either side of dryer. See "Electrical Requirements."
- Floor must support dryer weight of 200 lbs. (90.7 kg). Also consider weight of companion appliance.
- Cold water faucets located within 4 ft. (1.2 m) of the water fill valves, and water pressure of 20-120 psi (138-827 kPa). You may use your washer's water supply by purchasing the necessary parts noted in "Parts needed."
- Level floor with maximum slope of 1" (25 mm) under entire dryer. If slope is greater than 1" (25 mm), install Extended Dryer Feet Kit, Part Number 279810. If not level, clothes may not tumble properly and automatic sensor cycles may not operate correctly.
- For garage installation, place dryer at least 18" (460 mm) above floor. If using a pedestal, you will need 18" (460 mm) to bottom of dryer.
- The dryer must not be installed or stored in an area where it will be exposed to water and/or weather.

IMPORTANT: Do not operate, install, or store dryer where it will be exposed to water, weather, or at temperatures below 40°F (4°C). Lower temperatures may cause dryer not to shut off at end of automatic sensor cycles, resulting in longer drying times.


DRYER DIMENSIONS
Front view:

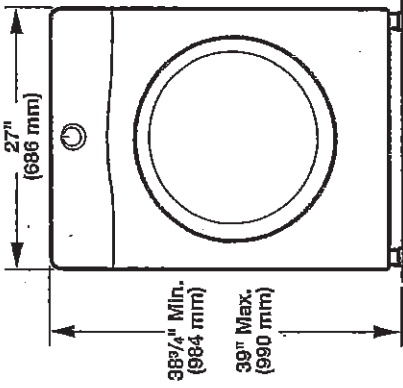

Side view:
Whirlpool Models

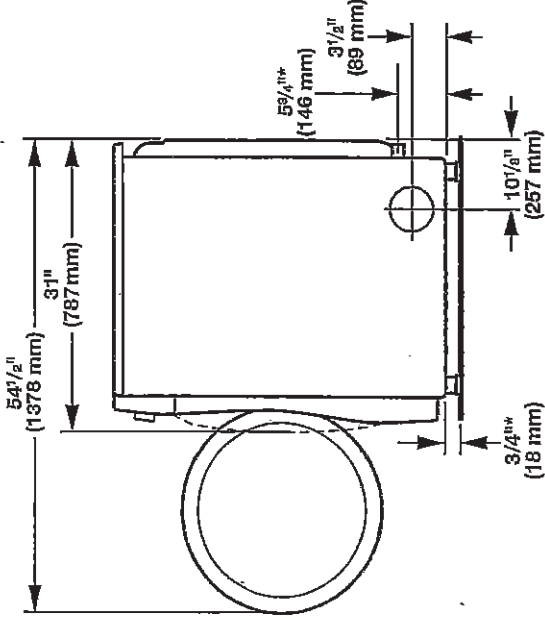

Maytag Models

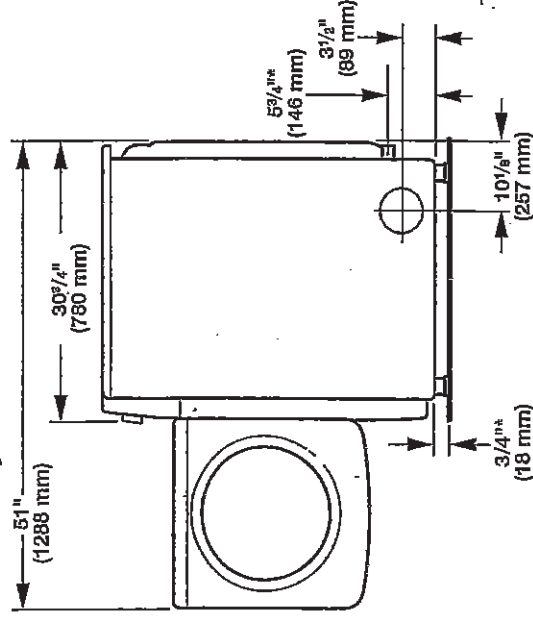

*Approx. measurement.