

HOME APPLIANCES

LG LAUNDRY

DLE7150W / DLG7151

7.3 cu.ft. Rear Control Top Load Dryer



APPLIANCE CHECKLIST

7.3 cu. ft. Ultra Large Capacity

Sensor Dry

FlowSense™ Duct Clogging & Leak Filter Indicators

ENERGY STAR® rated

| ITEM | BRAND | MODEL NUMBER |
|------------------------------|---------|----------------|
| LoDecibel™ Quieter Operation | Samsung | RF32CG5400SRAA |
| SmartDiagnosis™ | Samsung | DW80R9950US |
| Wrinkle Care™ | N/A | N/A |

Type: Gas ☐ Electric ☐ Induction ☐ Waterline Required ☐
Electrical: 15 Amp ☐ 40 Amp ☐ 50 Amp ☐

WALL OVEN LWC3063ST
Type: Gas ☐ Electric ☒ Waterline Required ☐
Electrical: 30 Amp ☐ 40 Amp ☒

WARMING DRAWER N/A N/A
Electrical: 15 Amp ☐ Other: Specify

| AVAILABLE COLORS | COOKTOP | FRIGIDAIRE | NFCCI3627AB/A |
|------------------|--|------------|---------------|
| WHITE | Type: Gas <input type="checkbox"/> Electric <input checked="" type="checkbox"/> Induction <input type="checkbox"/> Electrical: 15 Amp <input type="checkbox"/> 40 Amp <input checked="" type="checkbox"/> 50 Amp <input type="checkbox"/> | | |

MICROWAVE
Electrical: 15 Amp ☐ 20 Amp ☐ 240 Volt ☐ LP Conversion Kit 120 Volt ☐ 002D / LPK1

| | | | |
|---|--|---|--|
| SUMMARY | Capacity 7.3 cu.ft. WT7150CW | 3 Minute Installation Check Yes | Side Venting Kit 383EEL9001B |
| Matching Washer | OTR MICROWAVE | LoDecibel™ Quieter Operation Yes | DIMENSIONS |
| Sensor Dry | Color White (W) | End of Cycle Signal N/A Yes | Product (WxHxD) 27" x 44 1/4" x 29 1/2" (50 1/4" D with door open) |
| APPEARANCE | WASHING MACHINE | Reversible Door LG Yes | Carton (WxHxD) 29 1/2" x 48" x 31 1/4" |
| Intelligent Electronic with LED Display | DRYER | FlowSense™ Duct Clogging Indicator LG Yes | Weight (Product / Gas) 129.8 / 149.6 lbs. |
| Dial-A-Cycle™ | Type: Gas <input type="checkbox"/> Electric <input checked="" type="checkbox"/> Yes | Wrinkle Care™ Option LG Yes | Weight (Product / Gas) 127.7 lbs. (Electric) 131.2 lbs. (Gas) |
| DRYER PROGRAMS | OTHER: HOOD FAN - SCB31636SS | Venting Option 4 Way Venting (Electric) 3 Way Venting (Gas) | Weight (Carton) 140 lbs. (Electric) 143.5 lbs. (Gas) |
| No. of Programs 8 | OTHER: Cotton/Normal, Perm Press/Casual, Heavy Duty, Bulky/Bedding, Delicates, Speed Dry (Manual Dry), Air Dry (Manual Dry), Freshen Up (Manual Dry) | 4 Adjustable Legs Yes | WARRANTY |
| Programs (Sensor Dry) | | Remaining Time Display/Status Indicator(s) Yes | Parts & Labor 1 Year |

DRYER OPTIONS

| | |
|------------------|---|
| No. of Options 7 | Hood Fans must be purchased through Phoenix Homes, and will require an upgrade to a make up air system for any hood fans above 300CFM. Standard hood fan vent pipe is 6". |
| Options | Wrinkle Care, Control Lock, More Time, End of Cycle Display, Signal Energy Saver, Signal |

DRYER DETAILS

| | | | |
|--|--------------------------------|---|-------------------------------|
| Temperature Settings 3 | Materials and Finishes | Aluminized Alloy Steel Drum Yes | UPC CODES |
| Drying Levels 3 | Painted Steel | | WT7150CW (White) 048231028431 |
| Manual Dry Times 60, 40, 20 min, More-Less | POWER SOURCE | CSA Listed | DLE7150W (White) 048231028448 |
| FABRIC CARE FEATURES | Electrical Requirements / Type | Electric: 240V 30 Amps Gas: 120V, 15 Amps | DLG7151W (White) 048231028455 |
| Sensor Dry Yes | | | |

CONVENIENCE FEATURES


Community: White Tail Ridge Lot #: 155

Purchaser Signature:

Purchaser Signature:

Garime Uysal
B3B83A74BDC84D7...

1/24/2024 | 7:26 AM PST



Induction Cooktop

36" Induction Cooktop

FCCI3627AB

Available Colors : Black

Version : 12/21

Cooktop

| | |
|----------------------|--------|
| Auto Pan Detect | Yes |
| Bridge Element | Yes |
| Cooking Surface Type | Smooth |

Cooktop Performance

| | |
|---------------------------------|-----------------------------|
| Right Front Element Burner Size | 8" |
| Right Rear Element Burner Size | 6" |
| Left Front Element Burner Size | 7" |
| Left Rear Element Burner Size | 7" |
| Center Element Burner Size | 8" |
| Right Front Element Burner | 2,300 / 3,600 Watts (Boost) |
| Left Front Element Burner | 1,800 / 2,600 Watts (Boost) |
| Left Rear Element Burner | 1,800 / 2,600 Watts (Boost) |
| Center Element Burner | 2,300 / 3,600 Watts (Boost) |

Display

| | |
|-------------------------|-------|
| Control Location | Front |
| Display Interface Color | Red |

Dimensions and Volume

| | |
|----------------------|---------|
| Height | 2 7/8" |
| Width | 36 3/4" |
| Depth | 21 3/8" |
| Cutout Height | 3 5/8" |
| Minimum Cutout Width | 33 7/8" |
| Minimum Cutout Depth | 19 1/8" |
| Maximum Cutout Width | 36 1/8" |
| Maximum Cutout Depth | 20 1/2" |

General Specifications

| | |
|------------------|--------|
| Warranty - Labor | 1 Year |
| Warranty - Parts | 1 Year |

Safety Certifications and Approvals

| | |
|-----------|-----|
| UL Listed | Yes |
|-----------|-----|

| | |
|------------|-----|
| cUL Listed | Yes |
| RoHS | Yes |



Note: For planning purposes only. Always consult local and national electric, gas and plumbing codes.

Refer to Product Installation Guide for detailed installation instructions on the web at frigidaire.com / frigidaire.ca

Specifications subject to change. Accessories information available on the web at frigidaire.com / frigidaire.ca



USA • 10200 David Taylor Drive • Charlotte, NC 28262 • 1-800-FRIGIDAIRE • frigidaire.com

CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4 • 1-800-265-8352 • frigidaire.ca

36" Induction Cooktop

FCCI3627AB

Version : 12/21

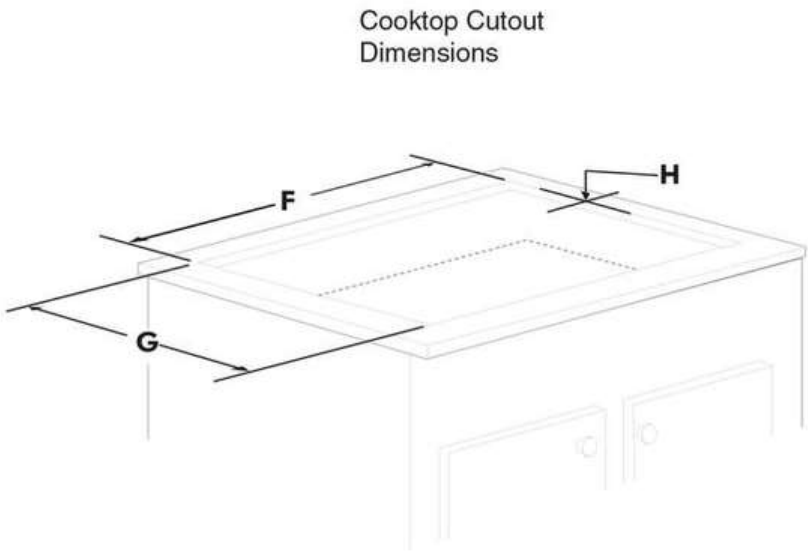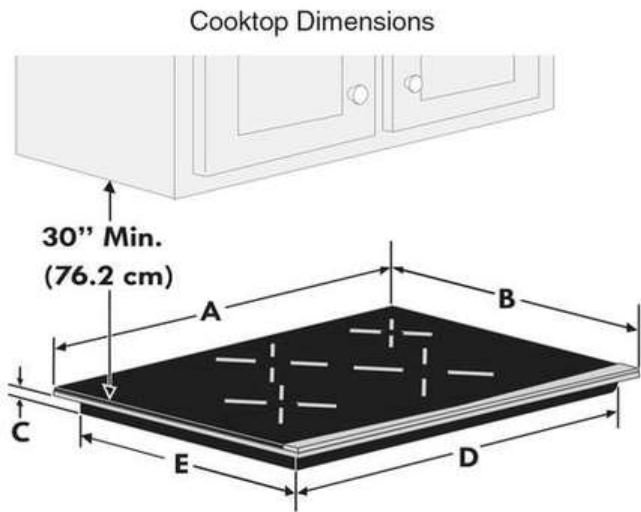


| COOKTOP DIMENSIONS | | | | | CUTOUT DIMENSIONS | | | | |
|---------------------------------------|---------------------------------------|-------------------------------------|---------------------------------------|---------------------------------------|---------------------------------------|---------------------------------------|---------------------------------------|---------------------------------------|-------------------------------------|
| A. WIDTH | B. DEPTH | C. HEIGHT | D. WIDTH | E. DEPTH | F. WIDTH | | G. DEPTH | | H. HEIGHT |
| | | | | | Min. | Max. | Min. | Max. | |
| 36 ³ / ₄ (93.4) | 21 ³ / ₈ (54.4) | 2 ⁷ / ₈ (7.3) | 33 ⁵ / ₈ (85.4) | 18 ⁷ / ₈ (47.9) | 33 ⁷ / ₈ (86.0) | 36 ¹ / ₈ (91.8) | 19 ¹ / ₈ (48.6) | 20 ¹ / ₂ (52.1) | 3 ⁵ / ₈ (9.2) |

Note: For planning purposes only. Always consult local and national electric, gas and plumbing codes.
Refer to Product Installation Guide for detailed installation instructions on the web at frigidaire.com / frigidaire.ca
Specifications subject to change. Accessories information available on the web at frigidaire.com / frigidaire.ca

DW80R9950

SAMSUNG

Samsung Linear Wash 39 dBA Dishwasher

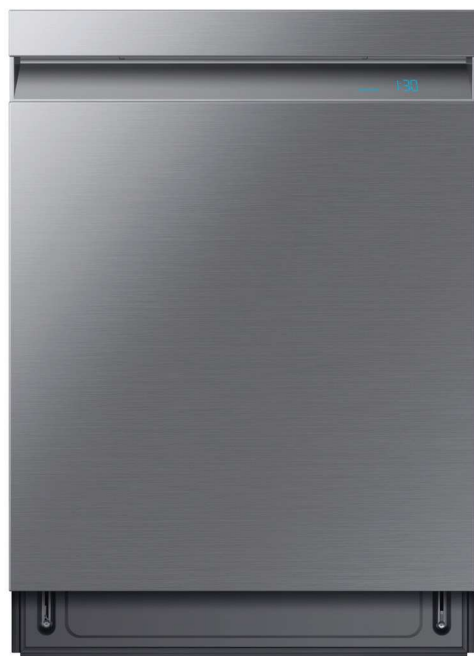

Signature Features

Linear Wash System

- AquaBlast™ jets provide corner to corner coverage for superior cleaning.

Whisper Quiet Cleaning

- Less noise and less disturbance with virtually silent wash cycles at 39 dBA.

AutoRelease™ Door

- At the end of a cycle, the door automatically opens to circulate air and improve drying performance.

Available Colors



Fingerprint Resistant
Stainless Steel (shown)



Fingerprint Resistant
Black Stainless Steel



Fingerprint Resistant
Tuscan Stainless Steel



Linear Wash System



AutoRelease™ Door

Features

- Flexible 3rd Rack
- Fingerprint Resistant Stainless Finish
- Zone Booster™
- Touch Control
- Quiet Operation: 39 dBA
- Wi-Fi Connectivity
- 7 Wash Cycles
- 8 Options
- Half-Load Cycle
- Express Cycle: 60 Minutes
- One-Touch Adjustable Racking System
- Full Stainless Steel Interior
- 15 Place Settings
- 3 Spray Wash Arms (Upper, Middle, Lower)

Convenience

- LED Time Display
- Control Lock
- Delay Start
- Digital Leak Sensor

Rating


ENERGY STAR®-rated:
239 kWh/yr

DW80R9950

SAMSUNG

Samsung Linear Wash 39 dBA Dishwasher

Installation Specifications

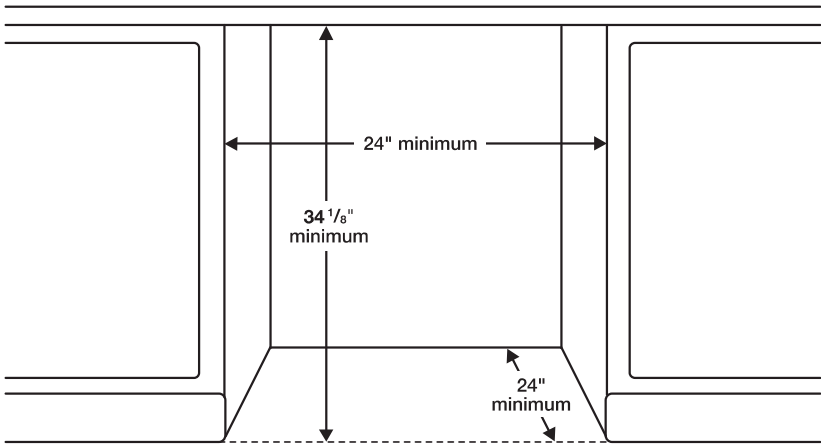

Features

- 7 Wash Cycles: Auto, Normal, Heavy, Delicate, Express 60, Rinse Only, Self Clean
- 8 Options: Half-Load Wash (Lower Rack), Zone Booster™ (Left), Speed Booster, Hi-Temp Wash, Sanitize (Anti-bacterial – NSF), Delay Start, Control Lock, Smart Control (Wi-Fi App)
- AutoRelease™ Door
- Hidden Heat Element
- Stainless Steel Interior Tub

Convenience

- Control Lock
- Digital Water Leakage Sensor
- Flexible Third Rack
- One-Touch Adjustable Racking System
- Silverware Basket
- Upper Rack: Foldable Cup Shelves, 2 Adjustable Tines
- Lower Rack: Fold-Down Tines


Warranty

One (1) Year All Parts and Labor
Five (5) Year Limited on Printed Circuit Board and Interior Nylon Racks

Dimensions

Side View

Rear View

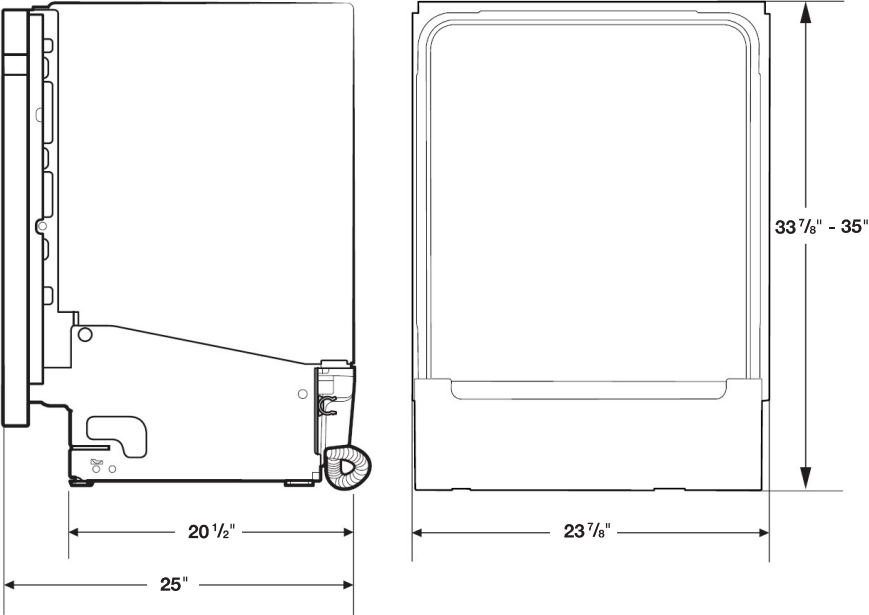

Product Dimensions & Weight (WxHxD)

Dimensions (height is adjustable):

23⁷/₈" x 33⁷/₈" – 35" x 25"

Weight: 95 lbs

Shipping Dimensions & Weight (WxHxD)

Dimensions:

26" x 34³/₄" x 29³/₄"

Weight: 101 lbs

| Color | Model # | UPC Code |
|--|-------------|--------------|
| Fingerprint Resistant Stainless Steel | DW80R9950US | 887276296647 |
| Fingerprint Resistant Black Stainless Steel | DW80R9950UG | 887276296623 |
| Fingerprint Resistant Tuscan Stainless Steel | DW80R9950UT | 887276320137 |

The **BRICK**.



SAMSUNG



SAMSUNG 30.5 CU. FT. FRENCH-DOOR REFRIGERATOR WITH FOUR TYPES OF ICE - RF32CG5400SRAA

\$ 2,295.00

SKU: RF32C54S

VSN: RF32CG5400SRAA

Dimensions

Width: 35.75" (90.8 cm) Height: 70" (177.8 cm) Depth: 34.63" (88.0 cm)

Experience convenience and innovation with this Samsung refrigerator. Organize your groceries and leftovers any way you'd like thanks to a large capacity, full-width snack drawer and slide-in shelf. Dual ice makers and an external dispenser provide you with four types of ice, so you're ready to impress at your next get together. Take advantage of Wi-Fi connectivity to monitor the fridge's temperature, water filter and more – plus, manage its power usage and get energy savings tips right from the SmartThings app.

Unique Features

Mega Capacity:

Store more groceries with more room to stay organized – the 31-cubic-foot Mega Capacity fits bulky items and provides easy access to everything you need.

More Ice Choices:

Choose from cubed ice and Ice Bites™ from the Dual Auto Ice Maker in the freezer drawer, or curved and crushed ice from the external dispenser.

Slide-In Shelf:

The slide-in shelf can be pushed back to create more room for storing tall bottles, large containers and more.

Monitor and Control Energy Use:

You can monitor and manage your refrigerator’s power usage with the SmartThings app. Get energy savings tips and alerts to help lower your electric bill, all from your phone.

Useful Notifications:

With Wi-Fi-enabled capabilities, SmartThings will alert you when the door is left open, if there’s an unexpected change in temperature or when it’s time to change the water filter.

Metal Cooling:

Stainless steel rear paneling helps retain cold air to maintain a consistent temperature throughout the refrigerator.

All-Around Cooling:

All-Around Cooling continually checks the temperature and circulates cool air through strategically placed vents to cool each compartment evenly from corner to corner.

ENERGY STAR® Certified:

Certified as meeting or exceeding government energy consumption standards, this fridge will save you both electricity and money off your energy bill.

General Details

| | |
|--------------------|---|
| VSN | RF32CG5400SRAA |
| UPC/GTIN | 887276769332 |
| Appliance Features | , Fingerprint Resistant, Ice Maker, Sabbath Mode, Smart Capable |
| Refrigerator Type | French-Door |

| | |
|---------------------------------|--|
| General Details | |
| Finish Colour | Fingerprint Resistant Stainless Steel |
| Lighting | Interior LED |
| Ice Maker | Dual Ice Maker, External Ice Dispenser |
| Water Dispenser | Exterior Ice/Water Dispenser |
| Energy Consumption | 786 kWh/year |
| Refrigerator Details | |
| Refrigerator Bins | 7 Door Bins |
| Refrigerator Drawers | <ul style="list-style-type: none">2 CrispersFull-Width Drawer |
| Refrigerator Shelves | 4, Tempered Glass |
| Freezer Details | |
| Freezer Drawers | 2-Tier Organization |
| Additional Details | |
| Technology Features | SmartThings, SmartThings Energy |
| Certification(s) | Energy Star Certified, ADA Compliant |
| Additional Dimensions | |
| Refrigerator Capacity (cu. ft.) | 21.3 |
| Freezer Capacity (cu. ft.) | 9.2 |
| Total Capacity (cu. ft.) | 30.5 |

The BRICK.

LG 6.4 CU. FT. SMART COMBINATION DOUBLE WALL OVEN - LWC3063ST

\$ 3,795.00

SKU: LWC3063S

VSN: LWC3063ST

Dimensions

Width: 29.75" (75.6 cm) Height: 43.82" (111.3 cm) Depth: 24.5" (62.2 cm)

Frozen to fresh, appetizers to entrees, bread to whole chickens, potatoes to pizzas – LG's combination double wall oven will have you cooking with possibility and ease. With the agility of a microwave and the power of convection, get ready for more precise food and more flexibility. Cooking is no longer a guessing game with this oven's 50 presets. This includes steam, bringing one of the healthiest ways to cook. It evenly distributes moisture and pairs perfectly with the true convection system for food that's golden outside and tender inside.

Unique Features

LG's TurboCook™ Speed Oven:

Get the speed of a microwave with the quality you expect from a convection oven. With speeds two to four times faster than a traditional oven, you'll have more cooking flexibility and more time to enjoy your meal.

Sleek and Practical Design:

Intuitive SmoothTouch™ glass controls not only look sleek, but make operating your oven a snap with just a touch of your finger. Best of all, they've been designed with practicality in mind – the smooth surface easily wipes clean.

10 Minutes. One Spotless Oven:

EasyClean® delivers the fastest oven cleaning feature yet. In 10 quick minutes, your oven can be sparkling clean – all without strong chemical fumes or high heat. Simply spray the oven interior with water, press EasyClean and then in 10 minutes, quickly wipe away any leftover grime.

Think of the Possibilities:

LG wall ovens featuring ThinQ® technology let you check on dishes from the comfort of your couch by monitoring cooking mode and remaining time. With the app, you can also activate features through simple voice commands as it's compatible with voice assistant devices.

Multiple Presets Make You a Pro:

Take the guesswork out of cooking. Let the preset cooking functions take over when you need to defrost, reheat, melt and more. With 50 options to choose from, it's got you covered.

General Details

| | |
|-----------------------|--|
| VSN | LWC3063ST |
| UPC/GTIN | 048231339810 |
| Appliance Features | Smart Capable |
| Fuel Type | Electric |
| Finish Colour | Stainless Steel |
| Control Panel | Glass Touch |
| This Product Includes | Glass Tray, Rack, 1 Gliding Rack, Meat Probe, Metal Tray, Broiler Pan and Grid, 2 Heavy Duty Racks, Scouring Pad |

Oven Details

General Details

| | |
|-----------------|---|
| Oven Modes | Convection Bake, Convection Roast, Steam Bake, Steam Roast, Probe, Favourite, Warm, Proof, Broil, Speed Cook, Microwave, Bake, Sabbath Mode |
| Baking Elements | Upper: 1,600 W, Lower: 2,500 W |
| Broiler Element | Upper: 1,200 W, Lower: 2,500 W (inner) / 1,500 W (outer) |
| Self-Clean | Regular |
| Lighting | 2 Halogen Lamp |
| Door | Drop Down |

Additional Details

| | |
|------------------------|--|
| Technology Features | Wi-Fi Connectivity, Voice Assistant Compatible, ThinQ® |
| Safety Details | Door Lock |
| Additional Information | Oven Capacity (cu. ft.): 1.7 (Upper), 4.7 (Lower) |

Additional Dimensions

| | |
|---------------------------------------|--------|
| Oven Capacity (cu. ft.) | 6.4 |
| Depth with Door Open 90 degrees (in.) | 26.875 |



LG LAUNDRY

WT7150CW
5.0 cu. ft. Rear Control Top Load Washer

- 5.0 cu. ft. Mega Capacity
- TurboDrum™ Technology
- 6Motion™ Technology
- SmartDiagnosis™
- Water Plus
- ColdWash™ Technology
- Direct Drive Motor 10-Year Limited Warranty
- ENERGY STAR® Certified
- SlamProof™ Glass Lid
- TrueBalance™ Anti-Vibration System & LoDecibel™
- Quiet Operation
- SpeedWash™ Cycle



AVAILABLE COLORS



WHITE



| SUMMARY | |
|---|---|
| Energy Star Qualified | Yes |
| Capacity (cu.ft.) | 5.0 cu. ft. |
| Matching Electric Dryer | DLE7150W |
| Matching Gas Dryer | DLG7151W |
| Color | White (W) |
| CAPACITY | |
| Capacity | 5.0 cu. ft. |
| APPEARANCE | |
| Intelligent Electronic Controls with Dual LED Display | Yes |
| Touch Buttons | Yes |
| Electronic Control Panel with LED Display | Yes |
| Dial-A-Cycle™ | Yes |
| ENERGY | |
| ENERGY STAR® Qualified | Yes |
| IMEF | 2.06 |
| IWF | 4.3 |
| WASH PROGRAMS | |
| No. of Programs | 8 |
| Wash Programs | Deep Wash, Normal, Bedding, Heavy Duty, Speed Wash, Delicates, Waterproof, Tub Clean |
| WASH OPTIONS | |
| No. of Options | 9 |
| Options | Soak, Extra Rinse, Delay Wash, Control Lock, Water Plus, Cold Wash, Signal, Rinse+Spin, Spin Only |

| WASH DETAILS | |
|------------------------------------|---|
| No. of Wash/Rinse Temps | 3 |
| Wash/Rinse Temps | Hot, Warm, Cold |
| No. of Spin Speeds | 3 |
| Spin Speeds | High, Medium, Low |
| No. of Water Levels | Automatically adjusts to the size of load |
| No. of Soil Levels | 3 |
| FABRIC CARE FEATURES | |
| SmartRinse™ Jet Spray System | Yes |
| ColdWash™ Option | Yes |
| SenseClean™ System | Yes |
| CONVENIENCE FEATURES | |
| SlamProof™ Lid | Yes |
| TrueBalance™ Anti-Vibration System | Yes |
| SmartDiagnosis™ | Yes |
| 3-Tray Dispenser | Yes |
| LoadSense | Yes |
| Status Indicator(s) | Yes |
| End of Cycle Signal | Yes |
| Child Lock | Yes |
| Auto Suds Removal | Yes |
| Forced Drain System | Yes |
| Add Garment Indicator | Yes |
| Leveling Legs | Yes |

| MOTOR AND AGITATOR | |
|-------------------------|---|
| Motor Type | Inverter Direct Drive Motor |
| Max RPM | 800 |
| Axis | Vertical |
| MATERIALS AND FINISHES | |
| Stainless Steel Drum | Yes |
| Cabinet | Painted Steel |
| All Available Colors | White (W) |
| Lid | White - Transparent Glass |
| POWER SOURCE | |
| Ratings | CSA Listed |
| Electrical Requirements | 120V @ 60Hz. |
| DIMENSIONS | |
| Product (WxHxD) | 27 5/8" x 44 1/2" x 28 3/8" (57 1/5" H with lid open) |
| Carton (WxHxD) | 29" x 46 3/8" x 31 3/8" |
| Weight (Product) | 127 lbs |
| Weight (Carton) | 147 lbs |
| LIMITED WARRANTY | |
| Parts and Labor | 1 Year |
| Direct Drive Motor | 10 Years |
| Drum | 3 Years |
| UPC CODES | |
| WT7150CW (White) | 048231028431 |
| DLE7150W (White) | 048231028448 |
| DLG7151W (White) | 048231028455 |

LG LAUNDRY

WT7150CW

5.0 cu. ft. Rear Control Top Load Washer

QUICK INSTALL & CLEARANCES

For full installation directions/clearances please refer to the corresponding User Manual and Installation Guide.


| DIMENSIONS/CLEARANCES/WEIGHTS | |
|-------------------------------|-------------------------|
| A Width | 27 5/8" |
| B Height | 44 1/2" |
| C Depth | 28 3/8" |
| D Height with lid open | 57 1/5" |
| Carton Dimensions (WxHxD) | 29" x 46 3/8" x 31 3/8" |
| ENERGY / RATINGS | |
| ENERGY STAR® Qualified | Yes |
| IMEF | 2.06 |
| IWF | 4.3 |
| Ratings | CSA Listed |
| Electrical Requirements | 120V @ 60Hz. |

ELECTRICAL REQUIREMENTS

- The washer should be plugged into a 120-VAC, 60-Hz grounded 3-prong outlet. Plug in the washer. Improper connection of the equipment-grounding conductor can result in risk of electric shock. Check with a qualified electrician or service technician if you are in doubt as to whether the appliance is properly grounded. Do not modify the plug provided with the appliance. If it does not fit the outlet, have a proper outlet installed by a qualified electrician. Failure to follow these warnings can cause serious injury, fire, electrical shock, or death.
- The power outlet must be within 60 inches (1.5 m) of either side of the washer.
- The appliance and outlet must be positioned so that the plug is easily accessible.
- Do not overload the outlet with more than one appliance.
- The outlet must be grounded in accordance with current wiring codes and regulations.
- Time-delay fuse or circuit breaker is recommended.
- It is the personal responsibility and obligation of the product owner to have a proper outlet installed by a qualified electrician.




DIMENSIONS AND CLEARANCES

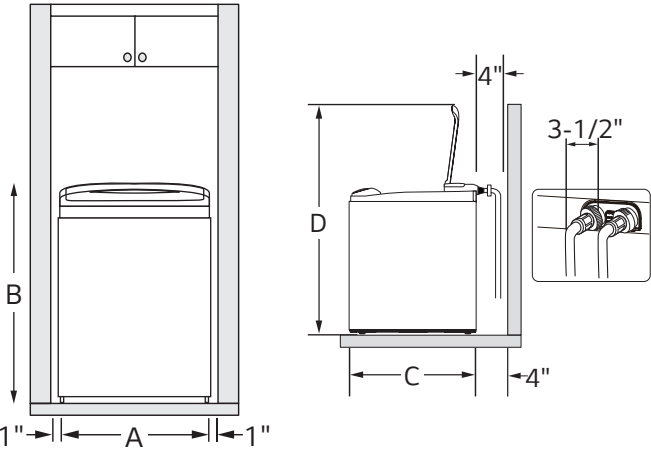

- To ensure sufficient clearance for water lines and airflow, allow minimum clearances of at least 1 in. (2.5 cm) at the sides and 4 in. (10 cm) behind the unit. Be sure to allow for wall, door, or floor moldings that may increase the required clearances.



CONNECTING THE WATER LINES

- LG recommends the use of LG hoses. Any leaking, property damage, or damage to the washing machine caused by an improper installation or by the use of non-LG hoses is not covered under the terms of the LG warranty and is the sole responsibility of the customer and/or an installer.
- Water supply pressure must be between 20 psi and 120 psi (138-827 kPa). If the water supply pressure is more than 120 psi, a pressure reducing valve must be installed.
- Inspect the threaded fitting on each hose and make sure there is a rubber seal in place in both ends of each hose.
- Connect the water supply hoses to the HOT and COLD water faucets tightly by hand and then tighten another 2/3 turn with pliers.
- Always run a gallon or two of water through each inlet hose to flush dirt, scale and other debris out of the water lines. Doing so will help prevent future problems with clogged filter screens, and will also allow you to verify which water line is hot and which is cold.
- Attach the hot water line to the hot water inlet on the back of the washer. Attach the cold water line to the cold water inlet on the back of the washer. Tighten the fittings securely. Turn ON both faucets all the way and check for leaks at both ends of the hoses.

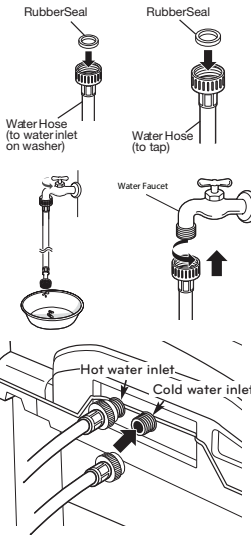


CONNECTING THE DRAIN HOSE

- The drain hose should always be properly secured. Failure to properly secure the drain hose can result in flooding and property damage.
- The drain must be installed in accordance with any applicable local codes and regulations.
- Make sure that the drain hose is not stretched, pinched, crushed, or kinked.
- Normal height of the end of the hose should be approximately 35"-47" (0.9-1.2 m) from the floor.
- Do not install the end of the drain hose lower than 29 in. (73.7 cm) or higher than 96 in. (243.8 cm) above the bottom of the washer or more than 60 in. (152.4 cm) away from the washer.
- Never create an airtight seal between the hose and the drain with tape or other means. If no air gap is present, water can be siphoned out of the tub resulting in poor wash/rinse performance or clothing damage.



STANDPIPE Option

- Do not insert the end of the drain hose into the standpipe more than 8 inches (20cm). **Doing so can cause siphoning, odors, or improper draining.**



LAUNDRY TUB Option

- Do not use this drain hose with a floor drain. The end of the drain hose must be at least 29 inches above the floor for proper draining to occur.