DocuSign Envelope ID: 8B5A8894-AFE2-43BE-B4EE-69BEA1BC0B6C

DV3 LOT 95 - PRIMARY ENSUITE VANITY FAUCETS 35776-CZMPU-DST

STRYKE®

Widespread Faucet

MODEL#: 35776-CZMPU-DST



Backed by Delta Faucet?s Lifetime Limited
Warranty

Finish: Champagne Bronze









List Price*:

\$1,095.70





3/25/2024 | 7:21 AM PDT

3/25/2024 | 10:45 AM EDT










DV3 LOT 95 - 8" INSTALL

Submitted Model No.:

Specific Features:

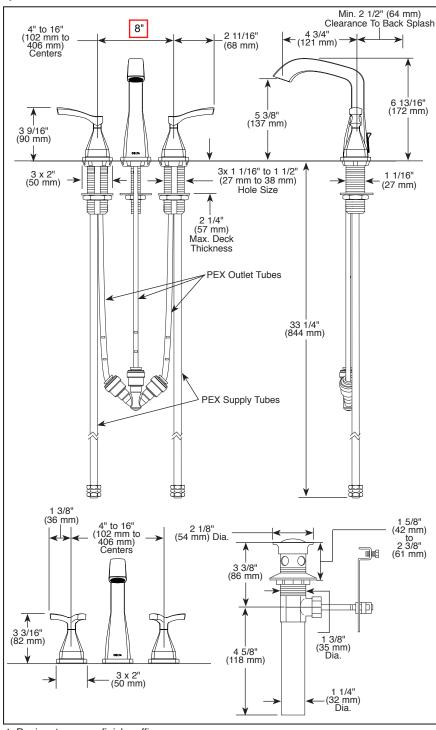

▲ Designate proper finish suffix

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.deltafaucet.com for finish options and product availability.



see what Delta can do

LAVATORY FAUCETS

- Stryke[™] Collection
- Two Handle Widespread Deck Mount

FEATURES:

■ DIAMOND Seal® Technology

STANDARD SPECIFICATIONS:

- Max. 1.20 qpm @ 60 psi, 4.54 L/min @ 414 kPa
- Three hole mount
- Solid brass fabricated end valve
- 1/4 turn stops
- Hot and cold stems are interchangeable
- Diamond coated ceramic cartridge
- 3/8" O.D. straight PEX supply tubes
- Models have metal drain with pop-up type fitting with plated flange and stopper

WARRANTY

- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes: or, for commercial users, for 5 years from date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or, for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.



COMPLETE VALVE COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
- ASME A112.18.2 / CSA B125.2
- Indicates compliance to ICC/ANSI A117.1
- EPA WaterSense

DocuSigned by:



3/25/2024 | 7:21 AM PDT



3/25/2024 | 10:45 AM EDT

Delta Faucet Company 55 E. 111th Street, Indianapolis, IN 46280 350 South Edgeware Road, St. Thomas, ON NSP 4L1 © 2018 Delta Faucet Company