



APPLIANCE CHECKLIST

It may seem early to be thinking about appliances, but they are an important part of your kitchen design and may require upgrades to your HVAC, plumbing and electrical plans. It’s important that we are provided with your appliance information during the structural and foundation part of the Design Process, so that these upgrades can be included on your invoice, if required.

ITEM	BRAND	MODEL NUMBER
FRIDGE	SAMSUNG	RF29BB8200QL
DISHWASHER	SAMSUNG	DW80CG5451
RANGE	SAMSUNG	NE63A6711SS
Type: Gas <input type="checkbox"/> Electric <input checked="" type="checkbox"/> Induction <input type="checkbox"/> Waterline Required <input type="checkbox"/> Electrical: 15 Amp <input type="checkbox"/> 40 Amp <input checked="" type="checkbox"/> 50 Amp <input type="checkbox"/>		
WALL OVEN	NA	
Type: Gas <input type="checkbox"/> Electric <input type="checkbox"/> Waterline Required <input type="checkbox"/> Electrical: 30 Amp <input type="checkbox"/> 40 Amp <input type="checkbox"/>		
WARMING DRAWER	NA	
Electrical: 15 Amp <input type="checkbox"/> Other: Specify		
COOKTOP	NA	
Type: Gas <input type="checkbox"/> Electric <input type="checkbox"/> Induction <input type="checkbox"/> Electrical: 15 Amp <input type="checkbox"/> 40 Amp <input type="checkbox"/> 50 Amp <input type="checkbox"/>		
MICROWAVE	SPEC NOT PROVIDED	19" DEEP SHELF + STD ELECTRICAL PROVIDED
Electrical: 15 Amp <input checked="" type="checkbox"/> 30Amp <input type="checkbox"/> 240 Volt <input type="checkbox"/> 120 Volt <input checked="" type="checkbox"/>		
MICROWAVE TRIM KIT	NA	
OTR MICROWAVE	NA	
WASHING MACHINE	SAMSUNG	WF45T6000AW
DRYER	SAMSUNG	DVE45T6005W
Type: Gas <input type="checkbox"/> Electric <input checked="" type="checkbox"/> Stacked <input type="checkbox"/>		
OTHER: HOODFAN	CYCLONE	SCB31930
OTHER:		
OTHER:		

Hood Fans must be purchased through Phoenix Homes, and will require an upgrade to a make up air system for any hood fans above 300CFM. Standard hood fan vent pipe is 6”.

A make up air system is a required upgraded for all gas stoves/cooktops.

Any changes from the standard kitchen plan and/or standard electrical, plumbing and electrical specifications/plans may be subject to additional fees.

Community: PATHWAYS (2)

Lot #: 352

Purchaser Signature:

DocuSigned by:

A8964482B086445...

Purchaser Signature:

DocuSigned by:

4704895289D845E...

PW2 LOT 352 - DISHWASHER

DW80CG5451

Smart 46 dBA Dishwasher with StormWash™

SAMSUNG



Available Colors

- Fingerprint Resistant
Stainless Steel
DW80CG5451SR
- Fingerprint Resistant
Matte Black
DW80CG5451MT

Features

- StormWash™
- 3rd Rack
- Full Stainless Steel Interior
- AutoRelease Door
- 46 dBA Noise Level
- Hidden Touch Controls
- One-Touch Adjustable Racking System
- Fingerprint Resistant Stainless Finish
- 3 Spray Wash Arms (Upper, Middle, Lower)


Convenience

- Wi-Fi Connectivity
- Control Lock
- Delay Start
- Digital Leak Sensor
- Silverware Basket
- 15 Place Settings
- Foldable Cup Shelves
- Adjustable Tines
- Hidden Heat Element

Additional Specifications

- 7 Wash Cycles:**
Auto, Normal, Heavy, Delicate, Pre-Blast, Express 60, Rinse Only, Download Cycle
- 7 Options:**
StormWash™, Delay Start, Half-Load Wash (Lower Rack), Sanitize (NSF Certified), Hi-Temp Wash, Control Lock, Smart Control

Rating

 ENERGY STAR®
Rated:
239 kWh/yr


DS DS
AB GK

DW80CG5451

Smart 46 dBA Dishwasher with StormWash™

SAMSUNG

Installation Specifications



NOTE

This dishwasher is designed to be enclosed on the top and on both sides by a standard residential kitchen cabinet unit.

The installation cabinet must be clean and free of any obstructions.

The cabinet must be at least 24 inches wide, 24 inches deep, and 34 1/8 inches high.

For the front door of the dishwasher to be flush with the leading edge of the counter top, the counter top must be at least 25 inches deep.

Dimensions

Product Dimensions & Weight (WxHxD)
Dimensions: 23 7/8" x 33 7/8" x 27 5/16"
Weight: 84 lbs

Shipping Dimensions & Weight (WxHxD)
Dimensions: 26" x 34 7/8" x 29 3/4"
Weight: 91 lbs


Warranty

One (1) Year Parts and Labor

Five (5) Years, Printed Circuit Board, Racking and Stainless Door Liner & Tub for Leakage (Parts Only)

Color	Model #	UPC Code
Fingerprint Resistant Stainless Steel	DW80CG5451SR	887276763866
Fingerprint Resistant Matte Black	DW80CG5451MT	887276761473

Dimensions

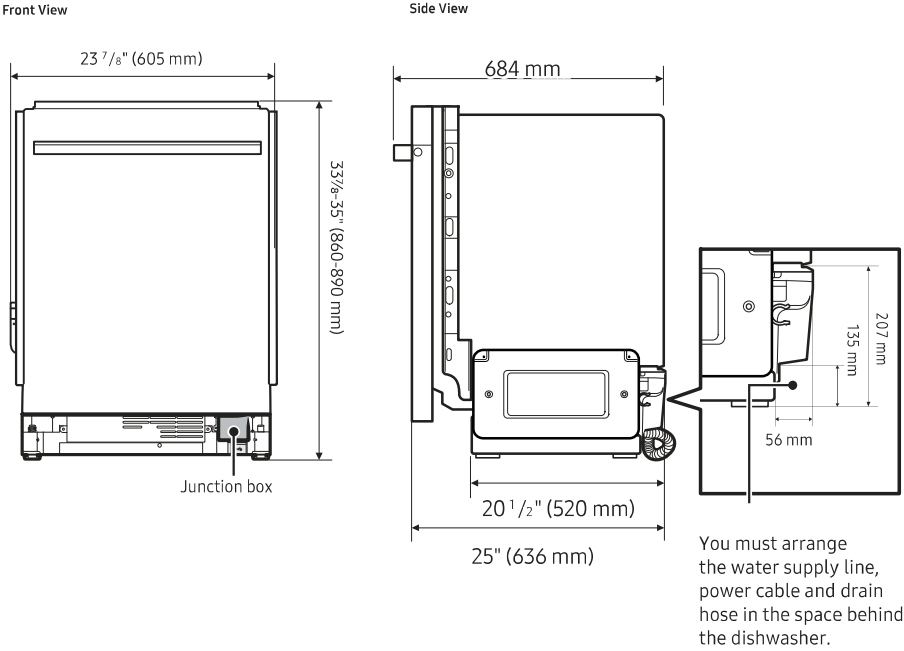

You must arrange the water supply line, power cable and drain hose in the space behind the dishwasher.

Actual color may vary. Design, specifications, and color availability are subject to change without notice. Non-metric weights and measurements are approximate.
©2023 Samsung Electronics America, Inc. 85 Challenger Road, Ridgefield Park, NJ 07660. Tel: 800-SAMSUNG. samsung.com. Samsung is a registered trademark of Samsung Electronics Co. Ltd.

PW2 LOT 352 - DRYER

DVE45T6005W

SAMSUNG

Samsung Front Load Electric Dryer with Sensor Dry
7.5 cu.ft. Capacity DOE



Signature Features

Sensor Dry

Automatically optimizes the time and temperature of your drying cycle to protect your clothes from heat damage, while avoiding excess energy use.

Smart Care

Easy troubleshooting from the convenience of your smartphone¹. SmartCare interacts with your washer and dryer to perform an immediate diagnosis and offer quick solutions.

Energy Star[®]

Save money by using less energy without sacrificing performance or functionality.

Available Colors



White



Sensor Dry



Smart Care

Features

- Sensor Dry
- Smart Care
- Interior Drum Light
- Reversible Door
- LED Display: Ice Blue

Convenience

- Child Lock
- Lint Filter Indicator²

Rating



ENERGY STAR[®] - Rated
608 kwh/yr

¹The Samsung Smart Washer/Dryer App is required and is available on Android and iOS devices. The Samsung Smart Washer/Dryer app supports Android OS 2.3.6 or later and iOS 3 or later for iPhone models. A Wi-Fi connection is required. Service callouts will occasionally be required and may incur extra repair costs.

²User will be solely responsible for any consequence(s) that may result, including but not limited to any damage or harm caused by incorrect information provided by the user.

DS DS
ABC K

DVE45T6005W

Samsung Front Load Electric Dryer with Sensor Dry

7.5 cu.ft. Capacity DOE


SAMSUNG

Installation Specifications


If the washer and dryer are installed together or the dryer alone, the closet front must have two unobstructed air openings for a combined minimum total area of 72-inch² (see stacked build below). Your washer alone does not require a specific air opening.

* Required spacing (External exhaust elbow may require additional space.)


DIMENSIONS

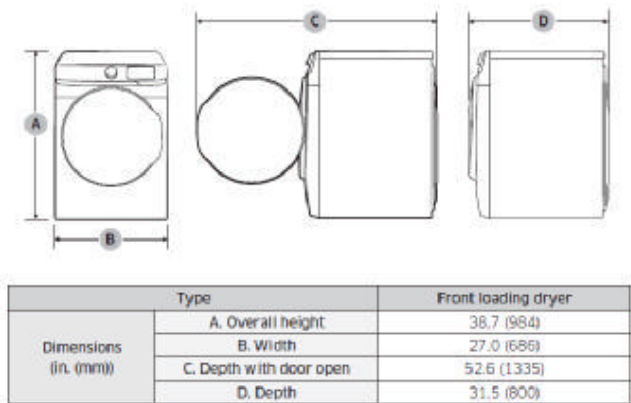


UNDER COUNTER INSTALLATION

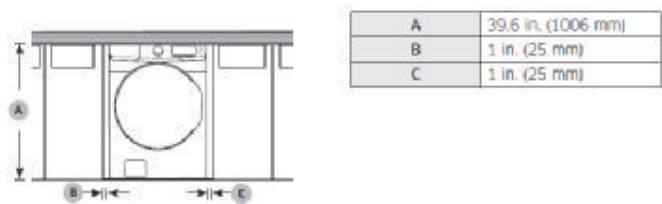


PEDESTAL INSTALLATION

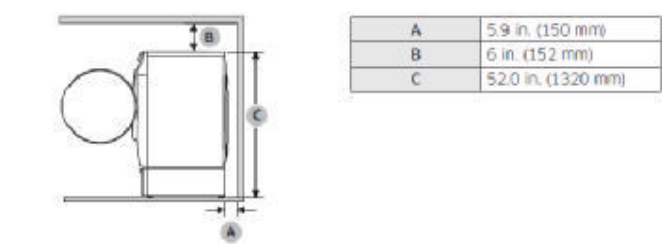

SIDE BY SIDE INSTALLATION

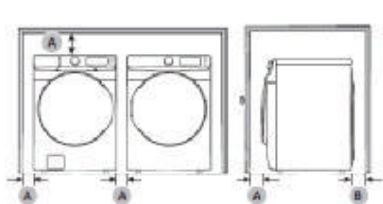

STACKED INSTALLATION

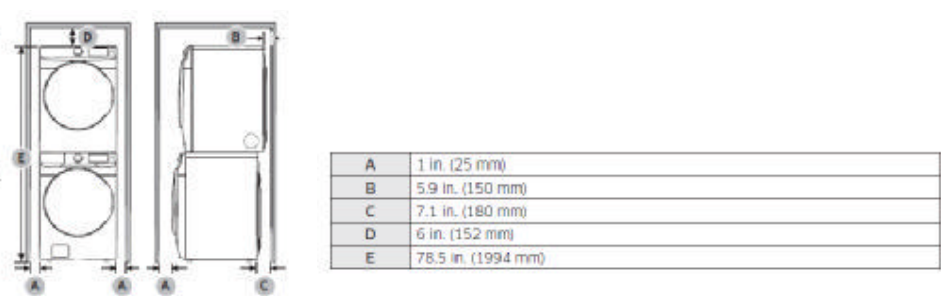

Actual color may vary. Design, specifications, and color availability are subject to change without notice. Non-metric weights and measurements are approximate.
© 2020 Samsung Electronics Canada Inc. All rights reserved. Samsung is a registered trademark of Samsung Electronics Co., Ltd., used with permission.

4-Way Venting

10 Preset Drying Cycles:
Normal, Heavy Duty, Permanent Press, Bedding, Delicates, Time Dry, Air Fluff, Quick Dry, Sanitize, Wrinkle Release.

9 Additional Drying Options:
Damp Alert, Wrinkle Prevent, Adjust Time (Up), Adjust Time (Down), Eco Dry, Child Lock, Smart Care, Alarm Off, Drum Light

5 Temperature Levels:
High, Medium High, Medium, Medium Low, Low

5 Dry Levels:
More Dry, Normal-More Dry, Normal Dry, Normal-Less Dry, Less Dry

Warranty
One (1) Year Parts and Labor

Product Dimensions & Weight (WxHxD)
Dimensions: 27 x 38³/₄ x 31¹/₂ inch
Weight: 123 lb

Shipping Dimensions & Weight (WxHxD)
Dimensions: 29³/₈" x 42⁹/₁₆" x 33¹/₂"
Weight: 130 lbs

Color	Model #	UPC Code
White	DVE45T6005W	887276387802

Matching Washer		
White	WF45T6000AW	887276394794

Pedestal		
White	WE402NW	887276310152

Accessories		
Stacking Kit	SKK-8K	887276344034

RF29BB8200

Bespoke 4-Door French Door Refrigerator (29 cu. ft.) with AutoFill Water Pitcher



Signature Features

Customizable Door Colors

Customize the design of your refrigerator with changeable door panels. Choose from a variety of colors and two finishes to create a space that fits your style.

Extra-large Capacity

With 29 cu. ft. of capacity, this spacious refrigerator is designed for convenience, offering flexibility and organization to store and access all your favorite foods with ease.

Dual Ice Maker with Ice Bites

Enjoy your favorite beverage with your choice of ice. Select from cubed ice or Ice Bites that chill your drink faster. Makes up to 5.4 lbs per day, stores up to 9.9 lbs total.

Bespoke 4-Door Refrigerator Standard Color Models



Stainless Steel - All Panels



White Glass - All Panels



Custom Panel-Ready



Design

- Customizable Door Colors
- Modern Design
- Recessed Handle


Technology

- AutoFill Water Pitcher
- Wi-Fi Enabled

Performance

- Dual Ice Maker with Ice Bites
- FlexZone™ Drawer
- Metal Cooling
- 29 cu. ft. Capacity
- Twin Cooling Plus

Rating

 ENERGY STAR® rated:
685 kWh/yr

 ADA Compliant

DS DS
AB GK

RF29BB8200

SAMSUNG


Bespoke 4-Door French Door Refrigerator (29 cu. ft.) with AutoFill Water Pitcher

Installation Specifications


1. Measure the height, width and depth of the opening, making sure to include baseboards, molding tile, countertop overhang, etc. Check to be sure there is enough room to open the door (consider walls, islands or other obstacles when measuring).
2. Refer to illustration below to determine dimensions.
3. Allow 2.5" of clearance on hinge side of refrigerator when installing next to a wall where handle may make contact.
4. Allow 1" minimum clearance at rear for proper air circulation and water/electrical connections. Allow a 3/8" minimum clearance at sides and top for ease of installation.
5. Ensure each door and entryway in the home is wide enough for the refrigerator to be moved through easily.

For optimal usage and ability to open refrigerator doors completely, do not install next to a wall.

Please note: The following dimension and cutout information is for planning purposes only. For complete installation details, consult manual packed with product, or download manual online at [samsung.com](https://www.samsung.com).

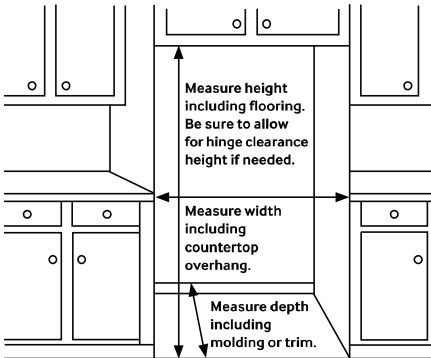

Dimensions

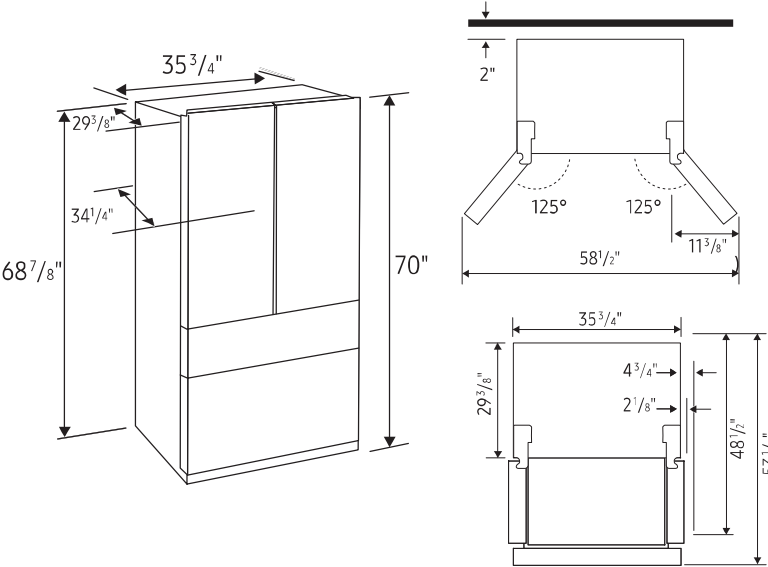

Total Capacity: 28.9 cu. ft.

Refrigerator: 16.8 cu. ft.

- 4 Tempered Glass Spill-Proof Shelves
- 2 Clear Drawers, Including Crisper+
- 6 Door Bins
 - Right: 1 Gallon Bin, 2 Regular Bins
 - Left: 1 Gallon Bin, 2 Regular Bins
- Surface Lighting

FlexZone™ Drawer: 3.1 cu. ft.

- 5 Temperature Zones
 - Soft Freeze (23°F)
 - Meat/Fish (30°F)
 - Cold Drinks (34°F)
 - Deli/Snacks (37°F)
 - Wine/Party Dishes (41°F)
- 2 Drawer Dividers
- High Efficiency LED Lighting

Freezer: 9.0 cu. ft.

- Dual Ice Maker in Freezer (Cubed Ice AND Ice Bites)
- Ice Bucket with Cover and 1 Scoop
- Produces up to 5.4 lbs ice/day, stores up to 9.9 lbs
- High Efficiency LED Lighting

Accessories

Water Filter: HAF-QIN

Warranty

One (1) Year Parts and Labor on Refrigerator

Five (5) Years Parts and Labor on

Sealed Refrigeration System Only*

Ten (10) Years Parts and Five (5) Years

Labor on Digital Inverter Compressor

*Compressor, evaporator, condenser, drier and connecting tubing.

Product Dimensions

Dimensions (WxHxD with hinges and doors):

35 3/4" x 70" x 34 1/4"

Dimensions (WxHxD without hinges and door):

35 3/4" x 68 7/8" x 29 3/8"

Shipping Dimensions (WxHxD)

Dimensions: 38 1/4" x 76 3/4" x 36 1/4"

Color	Model #	UPC Code	Product & Shipp Weight (lbs)	
Stainless Steel - All Panels	RF29BB8200QL	887276624310	332.9	357.
White Glass - All Panels	RF29BB820012	887276639833	366.0	368.
Custom Panel-Ready	RF29BB8200AP	887276624303	315.3	339.

PW2 LOT 352 - HOODFAN


SC(B)319 | ALITO Collection




Wall Mount

Our most popular and best-selling model, the SC300, has been redesigned to have the bright dual-setting LED lights on the front of the range hood to better illuminate your cooking surface where you need it most. This change may seem superficial but will make a huge difference for all involved and can help keep your project under budget.


Green Features




3 Speed Push Button
Control Panel



Long-Lasting
LED Lights



Time-Delay
OFF Feature



Grease Cup



Model	Colour	Ducting	Filters	Size	CFM
SC31924	Stainless Steel	6"	Mesh	24"	300
SC31930	Stainless Steel	6"	Mesh	30"	300
SC31936	Stainless Steel	6"	Mesh	36"	300
SCB31924	Stainless Steel	6"	Baffle	24"	300
SCB31930	Stainless Steel	6"	Baffle	30"	300
SCB31936	Stainless Steel	6"	Baffle	36"	300

Cyclone Range Hoods Inc.

1361 Huntingwood Drive, Unit 16. Toronto, ON. M1S 3J1. Canada.
Toll Free: 1-888-293-5662 Tel: (416) 293-0933 Fax: (416) 293-4793 Website: www.CycloneRangeHoods.com



DS
ABC K

SC(B)319 | ALITO Collection



Features

- Wall mount range hood
- 6” round duct adapter
- Non-stick aluminum fan blades
- 3 speed push button control
- 2 LED lights (2 x 1.4W, 4000K)
- Quick release filters
- Standard chimney fits up to 9 ft. ceiling
- Up to 9 minutes time-delay OFF feature
- Plug-in connection

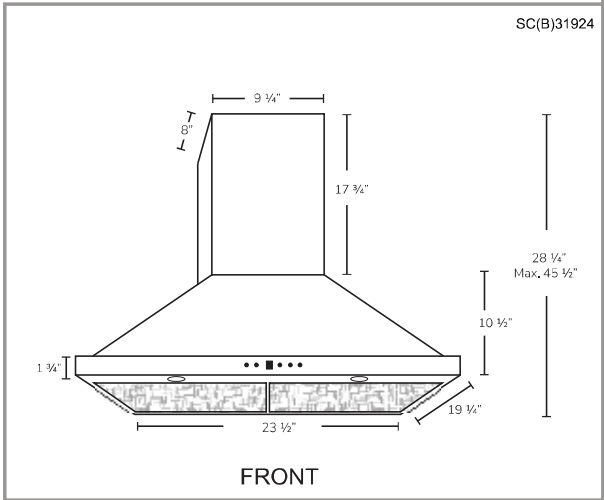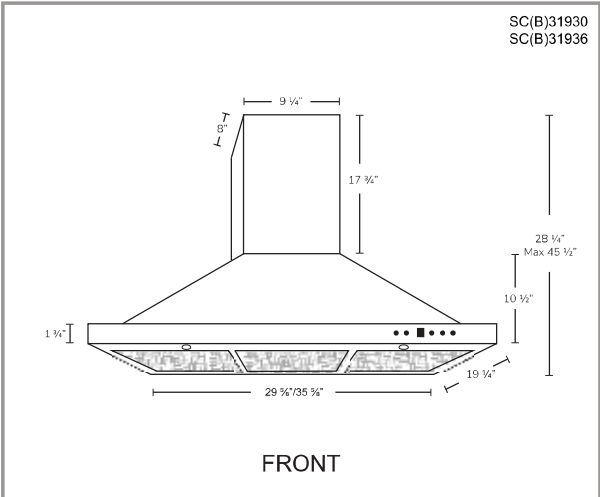

Options

- Filters:
 - SC319 - Quick Release Aluminum Mesh Filters
 - SCB319 - Quick Release Stainless Steel Baffle Filters
- Chimney Flues:
 - A1.CH10 - short (7'-8' ceilings)
 - A1.CH18 - standard (8'-9' ceilings)
 - A1.CH30 - extended (9'-11' ceilings)
- Widths: 24", 30", 36"

Specifications

- | | | |
|--------------------------------------|--------------------------------|---|
| ▪ Air Flow Volume: 300 CFM | ▪ Current: 2.5 Amps | ▪ Finishes: Stainless Steel |
| ▪ Electrical Connection: 120 V/60 Hz | ▪ Fan Speed: 1350 RPM | ▪ Ducting: 6" Round |
| ▪ Power Consumption: 300 Watts | ▪ Fan Type: Centrifugal Blower | ▪ Noise Level: Min. 2 Sones
Max. 4 Sones |



PW2 LOT 352 - ELECTRIC RANGE

NE63A6711SS

SAMSUNG

6.3 cu. ft. True Convection Electric Range with Wi-Fi and Air Fry



Signature Features

Air Fry

Enjoy better fried food with the Air Fry feature. With the provided Air Fry tray, the hot air circulation envelops the food placed on the tray.

Wi-Fi Connectivity and Voice Control

Monitor and control the oven using the SmartThings App¹. And control the oven with your voice using a voice assistant², such as Samsung Bixby³, Amazon Alexa or Google Assistant.

True Convection

A heated fan distributes heat all around the oven and keeps the temperature constant so dishes are cooked quickly and thoroughly.

Fingerprint Resistant Finish

Prevents surfaces from becoming covered in fingerprints and smudges.

Self Clean

A Self Cleaning system heats the cavity to a high temperature to burn off grease and food residue.

Available Colours




Stainless Steel (shown)



Black Stainless Steel



Bridge Element + Aluminum Griddle



Wi-Fi Connectivity and Voice Control

Features

- Flexible Cooktop
 - Five Electric Elements
 - 1 Triple Element (6"/9"/12")
 - 1 Bridge Element
 - 1 Single 6" Element
 - Warming Zone (7")

- Wide View Window
- Hidden Bake Element
- Storage Drawer
- Air Fry + Tray
- 2 Chrome Racks
- Flat Handle
- Aluminum Griddle

Convenience

- Wi-Fi Connectivity and Voice Control
- Delay Bake
- Hot Surface Indicator Light
- Auto Oven Light
- Kitchen Timer
- Fingerprint Resistant
- Self & Steam Clean
- Sabbath Mode
- Proofing
- Dehydrate

¹ Available on Android and iOS devices. A Wi-Fi connection and a Samsung account are required.
² A Wi-Fi connection is required.
³ Bixby is Samsung's brand of artificial intelligence (AI) / Internet of Things (IoT) voice assistant. A Samsung account is required.

DS DS
ABC K


NE63A6711SS

SAMSUNG

6.3 cu. ft. True Convection Electric Range with Wi-Fi and Air Fry

Installation Specifications

IMPORTANT: To eliminate the risk of burns or fire caused by reaching over heated surface units, avoid having cabinet storage space located above the surface units. If you have cabinet storage space over the heating elements, you can reduce the risk by installing a range hood that projects horizontally a minimum of 5 inches beyond the bottom of the cabinets.

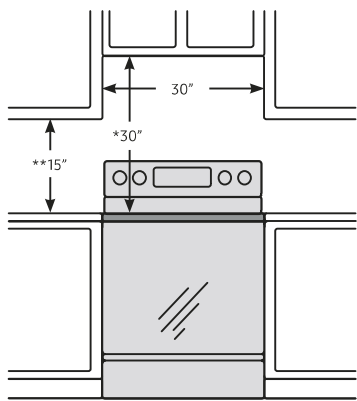


* A minimum of 30" is required between the top of the cooking surface and the bottom of an unprotected wood or metal cabinet; a minimum of 24" is required if the bottom of the wood or metal cabinet is protected by not less than 1/4" of flame retardant millboard covered with not less than no.28 MSG of sheet steel, 0.015" of stainless steel, 0.024" of aluminum, or 0.020" of copper.

** A minimum of 15" is required between the countertop and the adjacent cabinet bottom.

Dimensions

CAUTION: This range has been designed to comply with the maximum allowable wood cabinet temperature of 194 °F (90 °C). Make sure the wall covering, countertops, and cabinets around the range can withstand the heat (up to 194 °F [90 °C]) generated by the range. If not, discolouration, delamination, or melting may occur.

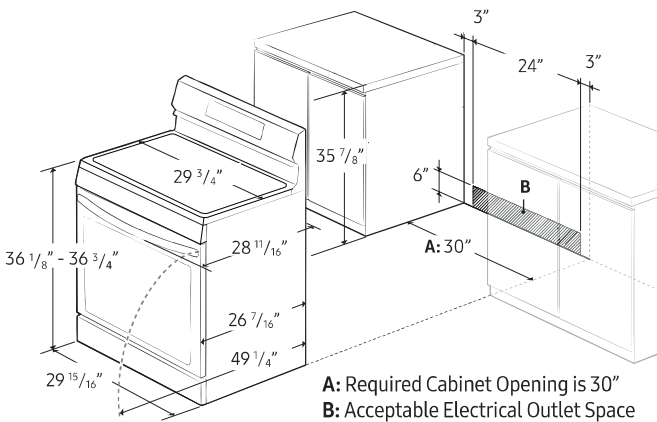

A: Required Cabinet Opening is 30"
B: Acceptable Electrical Outlet Space

Radiant Ceramic Cooktop

Right Front: 6"/9"/12" Triple Element, 3000W
Left Front: Bridge Element, 1800W
Right Rear: 6" Element, 1200W
Left Rear: Bridge Element, 1800W

Oven

Capacity: 6.3 cu. ft.
Hidden Bake Element: 3000W
Bake: 175°F–550°F
Broil: Low/High, 4200W
Sabbath Mode

Storage Drawer

Capacity: 0.8 cu. ft.

Warranty

One (1) Year Parts and Labour

Product Dimensions & Weight (WxHxD)

Cavity Dimensions: 24 13/16" x 22 7/16" x 19 3/4"
Net Dimensions: 29 15/16" x 46 5/16" - 47 1/16" x 26 7/16"
Weight: 163.8 lbs (74.3 Kg)

Shipping Dimensions & Weight (WxHxD)

Dimensions: 33 1/16" x 50 9/16" x 30 5/16"
Weight: 187.4 lbs (85 Kg)

Colour	Model #	UPC Code
Stainless Steel	NE63A6711SS	887276509495
Black Stainless Steel	NE63A6711SG	887276509471

Range Rating Watts		Specified Rating of Power-Supply-Cord Kit and Circuit Protection Amps	Diameter (inches) of Range Connection Opening		Plug Type	Power Cord Length
120/240 Volts 3-Wire	120/208 Volts 3-Wire		Power Cord	Conduit		
8750-16500	7801-12500		1 3/8"	1 1/8"		

A range cord rated at 40 amps with 125/250 minimum volt range is required. A 50 amp range cord is not recommended but if used, it should be marked for use with nominal 1 3/8" diameter connection openings. Care should be taken to center the cable and strain relief within the knockout hole to keep the edge from damaging the cable.

Actual colour may vary. Design, specifications and colour availability are subject to change without notice. Non-metric weights and measurements are approximate. © 2021 Samsung Electronics Canada Inc. All rights reserved. Samsung is a registered trademark of Samsung Electronics Co., Ltd., used with permission.

PW2 LOT 352 - WASHER

WF45T6000AW

SAMSUNG

Samsung Front Load Washer with Closet - Depth Design
5.2 cu.ft. capacity IEC.



Signature Features

Self Clean+

Keeps your washer drum fresh and clean by eliminating 99% of bacteria¹. Will also send a reminder to clean the drum every forty wash cycles.

Closet-Depth

This washer fits within your existing laundry space without sacrificing any capacity thanks to our new, wider drum. A new control panel design provides better visibility so it's easy to use even when stacked.²

VRT Plus™

Innovative VRT Plus™ technology reduces noise and vibration for quiet washing.

Available Colors



White



Self Clean+



Closet-Depth

Features

- Self Clean+
- Smart Care
- VRT Plus™ technology
- Swirl+ Drum Design
- Closet-Depth Fit²
- Stackability
- Direct Drive Motor
- LED Display: Ice Blue
- 24-Hour Delay End

Convenience

- Child Lock
- Delay End
- Dispenser Trays: Main Wash, Softener, Bleach

Rating



ENERGY STAR® - Rated
CEE Tier 2
IMEF = 2.92
IWF = 2.9

¹Based on testing by Intertek of the Self Clean+ cycle on the WF6000R.
²Designed to fit a 40" installation depth.

DS DS
ABC K

WF45T6000AW

SAMSUNG

Samsung Front Load Washer with Closet - Depth Design 5.2 cu.ft. capacity IEC.


Installation Specifications

If the washer and dryer are installed together or the dryer alone, the closet front must have two unobstructed air openings for a combined minimum total area of 72-inch² (see stacked build below). Your washer alone does not require a specific air opening.


* Required spacing (External exhaust elbow may require additional space.)

1. Alcove or closet installation

Minimum Clearance for Closet and Alcove Installations:

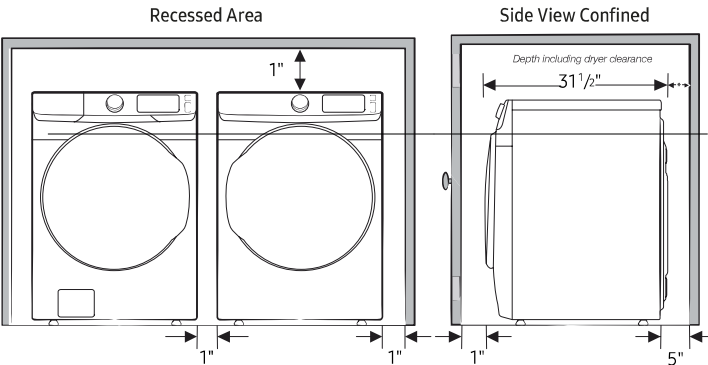


2. With stacked washer and dryer

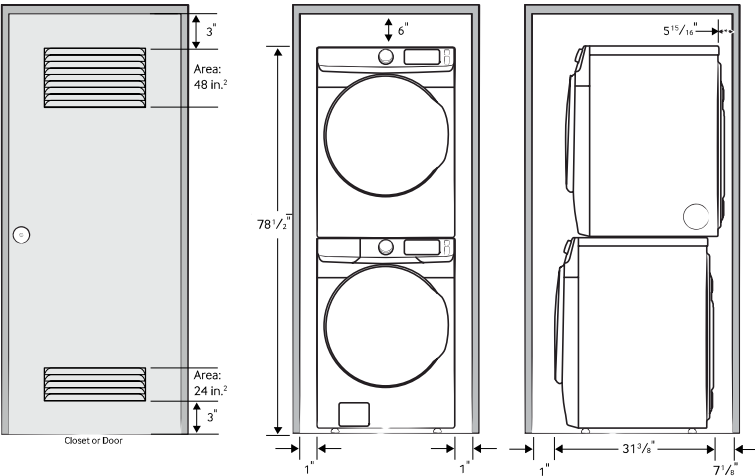

Dimensions

Required Dimensions for Installation with Pedestal:

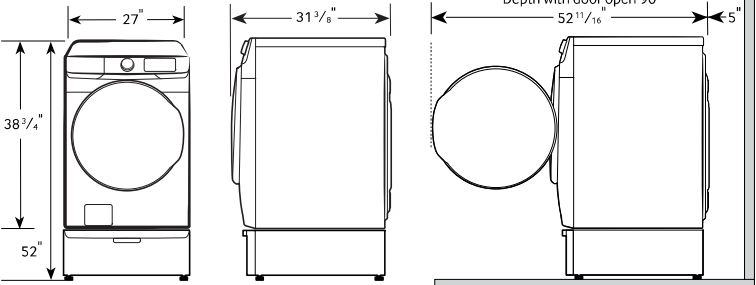

Actual color may vary. Design, specifications, and color availability are subject to change without notice. Non-metric weights and measurements are approximate.
© 2020 Samsung Electronics Canada Inc. All rights reserved. Samsung is a registered trademark of Samsung Electronics Co., Ltd., used with permission.

10 Preset Washing Cycles:

Normal, Heavy Duty, Bedding, Quick Wash, Permanent Press, Delicates, Whites, Rinse and Spin, Self Clean+, Active Wear.

7 Additional Washing Options:

Presoak, Delay End, Alarm Off, Child Lock, Smart Care, Spin Only

5 Temperature Levels:

Hot, Warmer, Warm, Cool, Cold

5 Spin Speeds:

High, Medium High, Medium, Low, No Spin

5 Soil Levels:

Heavy, Medium Heavy, Normal, Medium Low, Light

Dispenser Trays:

Main Wash, Softener, Bleach

Warranty

One (1) Year Parts and Labor
Ten (10) Years Direct Drive Motor (Part Only)

Product Dimensions & Weight (WxHxD)

Dimensions: 27 x 38³/₄ x 31³/₈ inch
Weight: 200 lb

Shipping Dimensions & Weight (WxHxD)

Dimensions: 29³/₈ " x 42³/₈ " x 34¹/₈ "
Weight: 205 lbs

Color	Model #	UPC Code
White	WF45T6000AW	887276394794

Matching Dryer		
White	DVE45T6005W	887276387802

Pedestal		
White	WE402NW	887276310152

Accessories		
Stacking Kit	SKK-8K	887276344034