

# DW80J3020US

Samsung Dishwasher

PW2 LOT 348 - DISHWASHER DW80J3020US

### Features

- Quiet Operation – 50 dBA
- ENERGY STAR® rated: 265 kWh/Year
- Water Consumption: 3.5 Gallons
- 15 Place Settings
- Hidden Heating Element
- Double Filtration System
- Electronic Touch Sensor
- Hard Food Disposer
- 3 Spray Wash Arms (Upper, Middle, Lower)
- 4 Wash Cycles and 1 Wash Option
- Fan Condensing Drying System
- 2-Piece Silverware Basket
- 2" Adjustable Racking System
- Stainless Steel Interior

### Convenience

- Child Lock
- Rinse Refill Indicator
- Cycle Progress Indicator
- Last Cycle Memory
- Self-Cleaning Filtration System
- Five Sensors (Digital Water Leakage, Overflow, Sanitize, Turbidity, Water Fill)



Hidden Heating Element



Hard Food Disposer

### Available Colors



Stainless Steel  
(shown)



White



Black

### Signature Features

#### STAINLESS STEEL INTERIOR

- Features a durable stainless steel tub that can help reduce energy consumption and aid in the drying process by retaining heat better than plastic tubs, allowing dishes to dry faster.

#### HARD FOOD DISPOSER

- Our advanced system allows for disposal of solid food particles with no need to clean a filter.
- Heavy foods are easily washed away without any pre rinsing or scrubbing involved.

#### HIDDEN HEATING ELEMENT

- Hidden Heat Element reduces the risk of melting plastic.




SAMSUNG


# DW80J3020US

## Samsung Dishwasher

### Installing Your Dishwasher



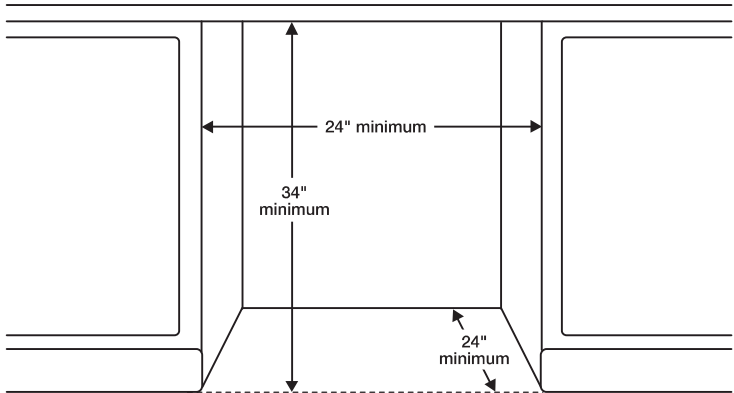


### Dimensions

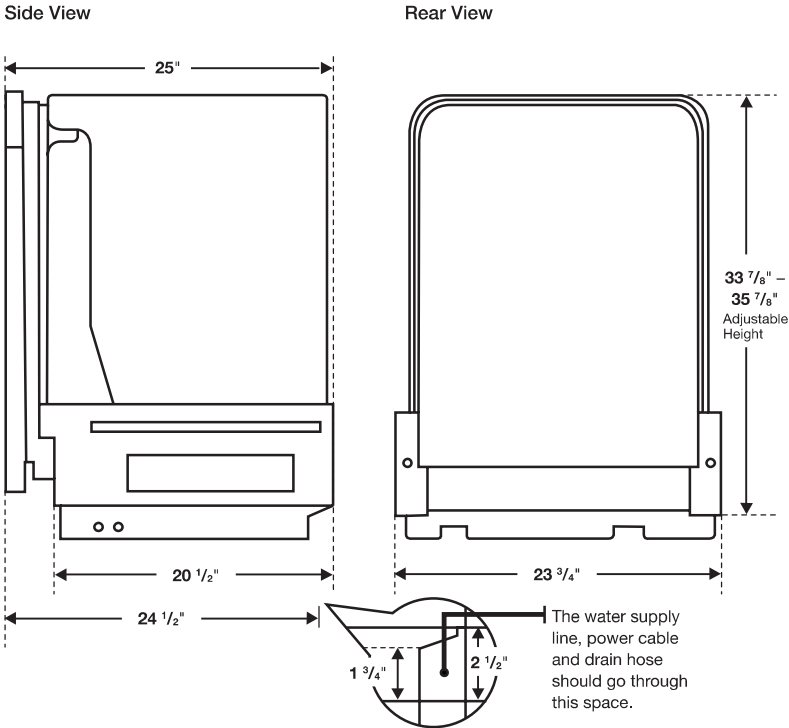

Side View

Rear View

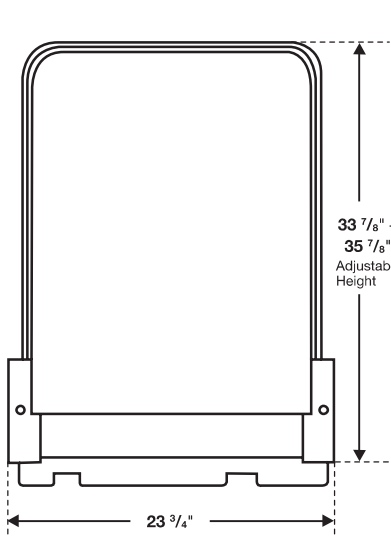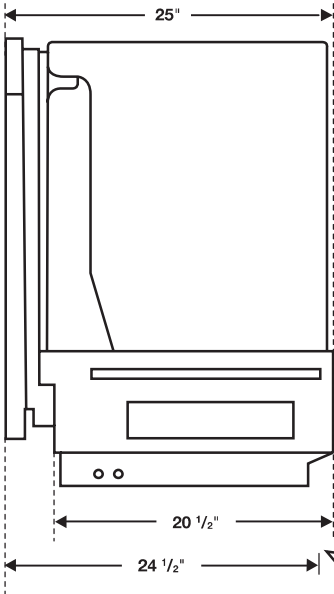

The water supply line, power cable and drain hose should go through this space.

### Features

- 4 Wash Cycles: Heavy, Normal, Quick Plus, Auto Wash
- 1 Option: Sanitize (Anti-Bacterial-NSF)
- 4 Control Buttons: Cancel and Drain (2 Buttons), Child Lock (1 Button), Start & Pause (1 Button)
- 2-Stage Filtration
- Hidden Heat Element
- Stainless Steel Interior Tub

### Convenience

- Child Lock
- Digital Water Leakage Sensor: Detects Water Leaks Before They Happen and Shuts Off the Dishwasher to Prevent Water Damage.
- Nylon Racking
- 2 Piece Silverware Basket
- Upper Rack: 2 Cup Shelves, 3 Adjustable Tines
- Upper Rack: 2 Fold Down Tine
- Lower Rack: 1 Removable Tine
- Cutlery Sleeves

### Warranty

One (1) Year All Parts and Labor  
Five (5) Year Limited on Printed Circuit Board and Interior Nylon Racks  
Lifetime Limited Warranty on Stainless Steel Door Liner and Tub for Leakage

### Product Dimensions & Weight (WxHxD)

Dimensions (height is adjustable):  
23 3/4" x 33 7/8" – 35 7/8" x 24 1/2"

Weight: 91.1 lbs.

### Shipping Dimensions & Weight (WxHxD)

Dimensions: 27 1/4" x 37 3/4" x 28 7/8"

Weight: 106.7 lbs.

Color	Model #	UPC Code
Stainless Steel	DW80J3020US	887276105529
White	DW80J3020UW	887276105543
Black	DW80J3020UB	887276105505



Actual color may vary. Design, specifications, and color availability are subject to change without notice.  
Non-metric weights and measurements are approximate.  
©2015 Samsung Electronics America, Inc. 85 Challenger Road, Ridgefield Park, NJ 07660. Tel: 800-SAMSUNG. samsung.com.  
Samsung is a registered trademark of Samsung Electronics Co. Ltd.



LG LAUNDRY

PW2 LOT 348 - DRYER DLEX6500B

DLEX6500\_ / DLGX6501\_

7.4 cu. ft. Capacity Energy Star Smart Front Load Dryer with AI Sensor Dry & TurboSteam®

KEY FEATURES

- 7.4 cu. ft. Ultra Large Capacity
- Digital Dial Control with LCD Display & Touch Button Control Panel
- AI Sensor Dry with Smart Pairing
- TurboSteam®, SteamFresh®, and SteamSanitary® Technology
- Wrinkle Care Option
- LG ThinQ® Technology with ThinQ Care
- FlowSense® Duct Clogging Indicator
- Tempered Glass Door (Reversible)
- NeveRust® Stainless Steel Drum
- ENERGY STAR® Certified

AVAILABLE COLORS

- BLACK STEEL
- WHITE



SMART APPLIANCE

ThinQ Care

**Proactive Smart Alerts to Keep Your Appliances Running Smoothly**

- Preventative Alerts help you stay a step ahead of potential issues to find proactive solutions before problems arise.
- Avoid preventable repairs and service calls with real-time diagnostics for a hassle-free experience.
- Integrated within LG's ThinQ app—a smart home hub for managing your smart devices and appliances.



PRODUCT FEATURES

SUMMARY		FABRIC CARE FEATURES		POWER SOURCE	
Type	Front Load Dryer	AI Sensor Dry	Yes	Ratings	CSA Listed
Vent Type	Vented	Sensor Dry	Yes	Electrical Requirements	Elec: 120/240V, 60Hz, 26A / Gas: 120V, 60Hz, 11.5A
Dryer Type	Elec: DLEX6500B / DLEX6500W Gas: DLGX6501B/ DLGX6501W	Precise Temperature Control with Variable Heater	Yes	Type	Electric, Gas
Capacity	7.4 cu. ft.	Steam	TurboSteam®	BTU Rating	Gas: 20,000
Matching Washer	WM6500HBA / WM6500HWA	CONVENIENCE FEATURES		OPTIONS	
Sensor Dry	Yes	3 Minute Installation Check	Yes	LP Conversion Kit	383EEL3002D
Steam	Yes	End of Cycle Signal	Yes	Side Venting Kit	3911EZ9131X
Color	Black Steel (B), White (W)	Drum Light (Door Open)	Yes	Drying Rack	3750EL1001A
APPEARANCE		Reversible Door	Yes	Pedestal	WDP6B, WDP6W
LCD Display	Yes	FlowSense® Duct Clogging Indicator	Yes	Pedestal (WxHxD)	27" x 13 5/8" x 28" (43 7/8" D with door open)
Touch Buttons	Yes	Wrinkle Care Option	Yes	DIMENSIONS	
Dial-A-Cycle®	Yes	Control Lock	Yes	Product (WxHxD)	27" x 39" x 29 3/4"
DRYER PROGRAMS		Venting Option	Electric: 4 Way Venting / Gas: 3 Way Venting	Depth with Door Open	51 3/8"
No. of Programs	23	4 Adjustable Legs	Yes	Carton (WxHxD)	28 31/32" x 46 29/64" x 31 27/64"
Programs (Sensor Dry)	Normal, AI Dry, Bedding, Delicates, Towels, Quick Dry, Timed Dry, Power Dry, Perm. Press, SteamFresh™, Heavy Duty, Air Dry, Steam Sanitary™, Super Dry, Active Wear, Denim -> Jeans, Blanket Refresh, Low Temp Dry, Overnight Dry, Easy Ironing, Small Load, Large Load Dry, X Large Load Dry	ThinQ® TECHNOLOGY		Product Weight (lbs.)	Electric: 124.3 lbs. / Gas: 136.0 lbs.
		Smart Diagnosis	Yes	Carton Weight (lbs.)	Electric: 136.5 lbs. / Gas: 146.6 lbs.
		Wi-Fi	Yes	LIMITED WARRANTY	
		ThinQ Care	Yes	Parts & Labor	1 Year
		Remote Start and Cycle Monitor	Yes	Drum	3 Years
No. of Options	11	Energy Monitoring	Yes	UPC CODES	
Options	Cycle Optimization, Damp Dry Signal, Wrinkle Care, Control Lock, Wi-Fi, Energy Saver, TurboSteam®, Reduce Static, Remote Start, Drum Light, Signal	ENERGY		DLEX6500B (Black)	195174052945
		ENERGY STAR® Certified	Yes	DLGX6501B (Black)	195174052969
		CEF	Electric: 3.94 / Gas: 3.49	DLEX6500W (White)	195174049075
Temperature Settings	High, Med. High, Medium, Low, Ultra Low	MATERIALS AND FINISHES		DLGX6501W (White)	195174048535
Drying Levels	Very Dry, More Dry, Normal Dry, Less Dry, Damp Dry	NeveRust® Stainless Steel Drum	Yes		
		Cabinet	Painted Steel		
Manual Dry Times	10 min ~ 100 min (10 min incremental)	Door	Tempered Glass Door		
		All Available Colors	Black Steel (B), White (W)		

# RF32CG5400

SAMSUNG

Large Capacity 3-Door French Door  
31 cu. ft. Refrigerator with 4 types of ice

PW2 LOT 348 - FRIDGE RF32CG5400



### Signature Features

**Large 31 cu. ft. Capacity**  
Store more groceries with more room to stay organized. Large 31 cu. ft. capacity fits big bulky items and provides easy access to everything you need.

**Four Ice Types**  
Enjoy your favorite beverage with your choice of ice. Choose cubed ice or Ice Bites™ from the Dual Ice Maker in the freezer drawer, or opt for curved or crushed ice from the external dispenser.

**Modern Design**  
A flat-front design with low-profile door handles and recessed drawer handle fit seamlessly into your kitchen.

### Available Colors

-  Fingerprint Resistant Stainless Steel (shown)
-  Fingerprint Resistant Matte Black Steel



Large 31 cu. ft. Capacity



Refrigerator: Curved and Crushed Ice  
Freezer: Cubed and Ice Bites™

### Design

- Premium External Filtered Water and Ice Dispenser
- Large Capacity of 31 cu. ft.
- High-Efficiency LED Lighting
- Gallon Door Bin
- Fingerprint Resistant Finish

### Technology

- Wi-Fi Enabled
- Power Cool & Power Freeze
- Door Alarm
- Water Filter Indicator

### Performance

- Four Ice Types: Crushed, Curved, Cubed and Ice Bites™
- SmartThings Energy\*
- Metal Cooling

\*Available on Android and iOS devices. A Wi-Fi connection and a Samsung account are required.



# RF32CG5400

SAMSUNG


## Large Capacity 3-Door French Door 31 cu. ft. Refrigerator with 4 types of ice

### Installation Specifications


1. Measure the height, width and depth of the opening, making sure to include baseboards, molding tile, countertop overhang, etc. Check to be sure there is enough room to open the door (consider walls, islands or other obstacles when measuring).
2. Refer to illustration below to determine dimensions.
3. Allow 2.5" of clearance on hinge side of refrigerator when installing next to a wall where handle may make contact.
4. Allow 1" minimum clearance at rear for proper air circulation and water/electrical connections. Allow a 3/8" minimum clearance at sides and top for ease of installation.
5. Ensure each door and entryway in the home is wide enough for the refrigerator to be moved through easily.

For optimal usage and ability to open refrigerator doors completely, do not install next to a wall.

Please note: The following dimensions and cutout information is for planning purposes only. For complete installation details, consult manual packed with product or download manual online at [samsung.com](https://www.samsung.com).

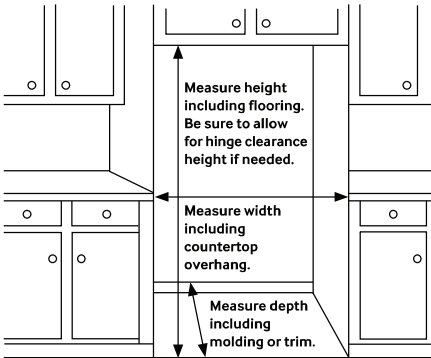

### Dimensions

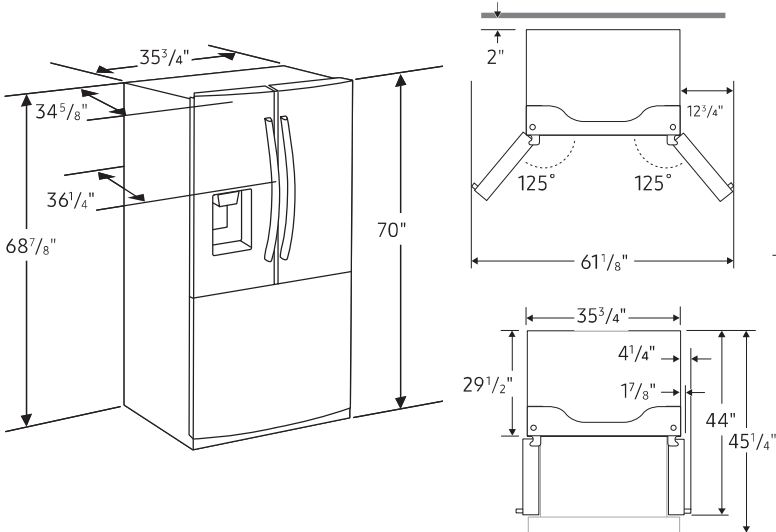

**Total Capacity: 30.5 cu. ft.**

**Refrigerator: 21.3 cu. ft.**

- External Filtered Water and Ice Dispenser
- 4 Tempered Glass Spill-Proof Shelves
- Full-Width Drawer
- 2 Clear Drawers
- 7 Door Bins
  - Right: 1 Gallon Bin, 3 Regular Bins
  - Left: 3 Regular Bins
- High-Efficiency LED Lighting

**Freezer: 9.2 cu. ft.**

- Dual Ice Maker in Freezer (Cubed Ice or Ice Bites™)
  - 2 Removable Ice Buckets and 1 Scoop
- 1 Large Opaque Bin with 1 Divider
- High-Efficiency LED Lighting

### Accessories

Water Filter: HAF-QIN

### Warranty

One (1) Year Parts and Labor on Refrigerator  
Five (5) Years Parts and Labor on  
Sealed Refrigeration System Only\*  
Ten (10) Years Parts and Five (5) Years  
Labor on Digital Inverter Compressor

\*Compressor, evaporator, condenser, drier and connecting tubing.

### Product Dimensions & Weight

Dimensions (WxHxD with hinges, handles and doors):

35 3/4" x 70" x 36 1/4"

Dimensions (WxHxD without hinges and door):

35 3/4" x 68 7/8" x 29 1/2"

Dimensions (WxHxD with hinge and door, no handle):

35 3/4" x 70" x 34 5/8"

Weight: 306 lbs

### Shipping Dimensions & Weight (WxHxD)

Dimensions: 37 3/4" x 75 7/16" x 36"

Weight: 316 lbs

### Color

Fingerprint Resistant  
Stainless Steel

### Model #

RF32CG5400SR

### UPC Code

887276769332

Fingerprint Resistant  
Matte Black Steel

RF32CG5400MT

887276769325



PW2 LOT 348 - MICROWAVE NNSD66LS




IMPORTANT SAFETY INSTRUCTIONS (continued)

- 3. **DO NOT** dry clothes, newspapers or other materials in the oven, or use newspaper or paper bags for cooking.
- 4. **DO NOT** hit or strike Control Panel. Damage to controls may occur.
- 5. **DO NOT** use recycled paper products unless the paper product is labeled as safe for microwave oven use. Recycled paper products may contain impurities, which may cause sparking.



TO AVOID THE RISK OF SCALDING:

POT HOLDERS should always be used when removing items from the oven. Heat is transferred from the HOT food to the cooking container and from the container to the Glass Tray. The Glass Tray can also be very HOT after removing the cooking container from the oven.



Glass Tray

- 1. **DO NOT** operate the oven without the Roller Ring and the Glass Tray in place.

For proper use of your oven, read remaining safety cautions and operating instructions.

- 2. **DO NOT** operate the oven without the Glass Tray fully engaged on the drive hub. Improper cooking or damage to the oven could result. Verify that the Glass Tray is properly engaged and rotating by observing its rotation when you press **Dial**.
- Note: The Glass Tray can turn in either direction.
- 3. Use only the Glass Tray specifically designed for this oven. **DO NOT** substitute any other glass tray.
- 4. If the Glass Tray is hot, allow to cool before cleaning or placing in water.
- 5. **DO NOT** cook directly on the Glass Tray. Always place food in a microwave safe dish, or on a rack set in a microwave safe dish.
- 6. If food or utensil on the Glass Tray touches oven walls, causing the tray to stop moving, the tray will automatically rotate in the opposite direction.

Roller Ring

- 1. The Roller Ring and oven floor should be cleaned frequently to prevent excessive noise.
- 2. Always replace the Roller Ring and the Glass Tray in their proper positions.
- 3. The Roller Ring must always be used for cooking along with the Glass Tray.




Installation

Examine Your Oven

Unpack oven, remove all packing material and examine the oven for any damage such as dents, broken door latches or cracks in the door. Notify dealer immediately if oven is damaged. **DO NOT** install if oven is damaged.

Placement of Oven

- 1. The oven must be placed on a flat, stable surface. Place the front surface of the door 3 inches (7.6 cm) or more from the counter top edge to avoid accidental tipping of the microwave oven during normal use. For proper operation, the oven must have sufficient airflow. Allow 4 inches (10.16 cm) of space between oven top, sides, rear and adjacent surfaces.
  - (a) **DO NOT** block air vents. If they are blocked during operation, the oven may overheat and be damaged.
  - (b) **DO NOT** place oven near a hot, damp surface such as a gas or electric range, sink, or dishwasher.
  - (c) **DO NOT** operate oven when room humidity is excessive.



- 2. This oven is manufactured for household use only. It is not approved or tested for mobile vehicle, marine, or commercial use.

Installation

- 1. **DO NOT** block air vents. If they are blocked during operation, the oven may overheat. If the oven overheats, a thermal safety device will turn the oven off. The oven will remain inoperable until it has cooled.

WARNING: IMPROPER USE OF THE GROUNDING PLUG CAN RESULT IN A RISK OF ELECTRIC SHOCK.

Consult a qualified electrician or service person if the grounding instructions are not completely understood, or if doubt exists as to whether the appliance is properly grounded. Do not use an extension cord. If the power supply cord is too short, have a qualified electrician or serviceman install an outlet near the appliance. If it is necessary to use an extension cord, use only a three-wire extension cord that has a three-prong polarized grounding plug, and a three-slot receptacle that will accept the plug of the appliance. The marked rating of the extension cord should be equal to or greater than the electrical rating of the appliance.





## Grounding Instructions

### Grounding Instructions


**THIS APPLIANCE MUST BE GROUNDED.**

In the event of an electrical short circuit, grounding reduces the risk of electric shock by providing an escape wire for the electric current.

This appliance is equipped with a cord having a grounding wire with a grounding plug.

The plug must be plugged into an outlet that is properly installed and grounded.

- **Plug into properly installed and grounded three-prong outlet.**
- **DO NOT** remove ground prong.
- **DO NOT** use an adapter.



### Power Supply

1. A short power-supply cord is provided to reduce the risks resulting from becoming entangled in or tripping over a longer cord.
2. Longer cord sets or extension cords are available and may be used if care is exercised in their use. **DO NOT** let cord hang over edge of a table or counter.
3. If a long cord or extension cord is used,
  - (1) the marked electrical rating of the cord set or extension cord should be at least as great as the electrical rating of the appliance,
  - (2) the extension cord must be a grounding-type three-wire cord, and
  - (3) the longer cord should be arranged so that it will not drape over the countertop or tabletop where it can be pulled on by children or tripped over accidentally.

### Wiring Requirements

1. The oven must be operated on a **DEDICATED CIRCUIT**. No other appliance should share the circuit with the microwave oven. If it does, the branch circuit fuse may blow or the circuit breaker may trip.
  2. The oven must be plugged into at least a 20 A, 120 V, 60 Hz **GROUNDED OUTLET**. Where a standard two-prong outlet is encountered, it is the personal responsibility and obligation of the consumer to have it replaced with a properly grounded three- prong outlet.
  3. The **VOLTAGE** used must be the same as specified on this microwave oven (120 V, 60 Hz).
- Using a higher voltage is dangerous and may result in a fire or oven damage. Using a lower voltage will cause slow cooking.
- Panasonic is NOT responsible for any damages resulting from the use of the oven with any voltage other than specified.

### TV / RADIO/WIRELESS EQUIPMENT INTERFERENCE

This product has been tested and found to comply with the limits or Microwave Oven, pursuant to Part 18 of the FCC Rules. This product can radiate radio frequency energy, which could cause interference to such products as radio, TV, baby monitor, cordless phone, Bluetooth, wireless router, etc., which can be confirmed by turning this product off and on. If present, the user is encouraged to try to correct by taking one or more of the following countermeasures:

- (1) Increase the spacing distance between the microwave oven and other product receiving the interference.
- (2) If possible, use a properly installed receiver antenna and/or reorient the receiving antenna of the other product receiving the interference.
- (3) Plug the microwave oven into a different outlet from the other product receiving the interference.
- (4) Clean door and sealing surfaces of the oven. (See Care and Cleaning of Your Microwave Oven)

## Food Preparation

Follow these Safety Precautions when cooking in your oven.  
**IMPORTANT**

**Proper cooking depends upon the power, the time setting and quantity of food. If you use a smaller portion than recommended but cook at the time for the recommended portion, fire could result.**

#### 1) HOME CANNING / STERILIZING / DRYING FOODS / SMALL QUANTITIES OF FOODS

- **DO NOT** use your oven for home canning. Your oven cannot maintain the food at the proper canning temperature. The food may be contaminated and then spoil.
- **DO NOT** use the microwave oven to sterilize objects (baby bottles, etc.). It is difficult to keep the oven at the high temperature needed for sterilization.
- **DO NOT** dry meats, herbs, fruits or vegetables in your oven. Small quantities of food or foods with low moisture

content can dry out, scorch or catch on fire if overheated.

#### 2) POPCORN

**Popcorn may be popped in a microwave oven corn popper. Microwave popcorn that pops in its own package is also available. Follow popcorn manufacturers' directions and use a brand suitable for the cooking power of your microwave oven.**  
**CAUTION: When using pre-packaged microwave popcorn, you can follow recommended package instructions or use the Popcorn button (refer to page 10). Otherwise, the popcorn may not pop adequately or may ignite and cause a fire. Never leave the oven unattended when popping popcorn. Allow the popcorn bag to cool before opening, and always open the bag facing away from your face and body to prevent steam burns.**

# NE63T8751SS

SAMSUNG

Samsung Flex Duo™ Front Control Slide-in Electric Range with Smart Dial & Air Fry

PW2 LOT 348 - ELECTRIC RANGE  
NE63T8751SS

6.3 cu. ft. Capacity



### Signature Features

#### Smart Dial

- The new Smart Dial simplifies oven settings in a single dial and intuitively learns based on your cooking preferences.

#### Air Fry

- Cooking just got healthier with new Air Fry mode.\* Using little to no oil, you can quickly prepare your favorite fried foods right in your oven. Air Fry tray included.

\*As compared to deep frying.

#### Flex Duo™

- The Flex Duo™ range is for the ultimate multi-tasker who wants to be efficient in the kitchen. Use the full oven, or split it into two separate smaller ovens to suit your needs.

### Available Colors



Fingerprint Resistant  
Stainless Steel (shown)



Fingerprint Resistant  
Black Stainless Steel



Smart Dial



Air Fry

### Features

- Smart Dial
- Air Fry, Tray Included
- Flex Duo™
- Convection
- Illuminated Knobs
- Fingerprint Resistant Finish
- 3600 W Express Boil™
- Large Oven Capacity – 6.3 cu. ft.
- Ready2Fit™ Guarantee
- Temperature Probe
- Gliding Rack
- Soft Close Door
- Storage Drawer

- Flexible Cooktop:  
Five Element Cooktop
  - One Triple Element (6"/9"/12")
  - One Double Element (6"/9")
  - Two Single Elements (6")
  - Warming Center



### Convenience

- Wi-Fi Connectivity
- Voice-Enabled
- Convection Auto Conversion
- Self & Steam Clean
- Hidden Bake Element
- Child Safety Lock
- Delay Start
- Auto Oven Light
- Kitchen Timer
- Sabbath Mode






# NE63T8751SS

SAMSUNG

## Samsung Flex Duo™ Front Control Slide-in Electric Range with Smart Dial & Air Fry


6.3 cu. ft. Capacity

### Installation Specifications

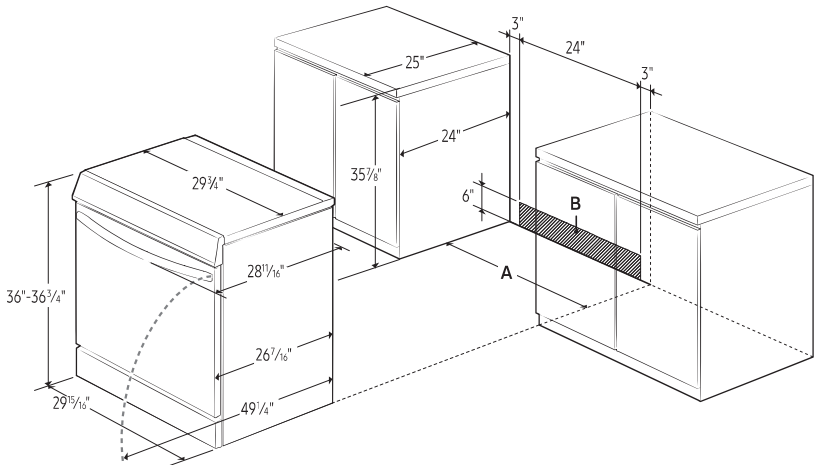

A: Cabinet opening min 30"  
B: Acceptable electrical outlet area

IMPORTANT: If your cabinets are over 36 3/4" high, you must install this range on a hard, heat-resistant support that raises the surface of the range so that it is about even with the countertop.

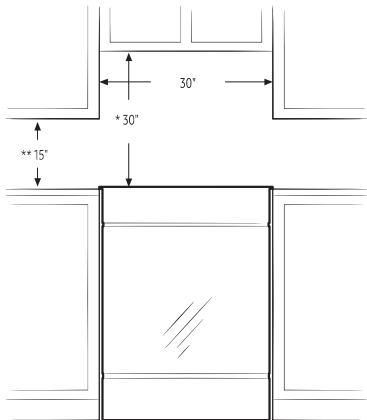

\* 30" minimum clearance between the top of the cooking surface and the bottom of an unprotected wood or metal cabinet; or 24" minimum when the bottom of the wood or metal cabinet is protected by not less than 1/4" of flame retardant millboard covered with not less than no.28 MSG sheet steel, 0.015" stainless steel, 0.024" aluminum, or 0.020" copper.

\*\*15" minimum between the countertop and the adjacent cabinet bottom.

IMPORTANT: Consult with Installation Manual for detailed instructions before installing. All ranges must be installed with the Anti-Tip device that is included.

**Power Source**  
240V/208V/60 Hz/40A

**Electric Ceramic Cooktop**

- Right Front: 6"/9"/12" Triple Element, 3000 W
- Left Front: 6"/9" Dual Element, Express Boil™ 3600 W
- Right Rear: 6", 1200 W
- Left Rear: 6", 1200 W
- Center: 7", Warming Center

**Dual Oven**

- Upper Capacity: 3.4 cu. ft.
- Lower Capacity: 2.7 cu. ft.
- Convection Element/Heater
- Convection Bake
- Convection Roast
- Bake
- Variable Broil: Low/High
- Air Fry
- Bread Proof
- Dehydrate

**Warranty**  
One (1) Year Parts and Labor

**Product Dimensions & Weight (WxHxD)**  
Oven Interior Dimensions:  
24 13/16" x 22 7/16" x 19 3/4"

Outside Net Dimensions:  
29 15/16" x 36 - 36 3/4" (Adjustable) x 28 11/16"  
Weight: 203 lbs

**Shipping Dimensions & Weight (WxHxD)**  
Dimensions:  
33 1/16" x 41 3/4" x 30 5/16"  
Weight: 226 lbs

Color	Model #	UPC Code
Fingerprint Resistant Stainless Steel	NE63T8751SS	887276409115
Fingerprint Resistant Black Stainless Steel	NE63T8751SG	887276409108





LG LAUNDRY

PW2 LOT 348 - WASHER WM6500HBA

WM6500H\_A

5.0 cu. ft. Mega Capacity Smart Front Load Energy Star Washer with TurboWash® 360° and AI DD® Built-In Intelligence

KEY FEATURES

- 5.0 cu. ft. Mega Capacity
- Digital Dial Control with LCD Display & Touch Button Control Panel
- TurboWash® 360° Technology
- AI DD®: AI Fabric and Weight Sensors with Smart Pairing
- LG ThinQ® Technology with ThinQ Care
- Allergiene® Cycle
- Cold Wash Technology
- NeveRust® Stainless Steel Drum
- ENERGY STAR® Certified & ENERGY STAR Most Efficient
- Direct Drive Motor 10-Year Limited Warranty

AVAILABLE COLORS

- BLACK STEEL
- WHITE



SMART APPLIANCE

ThinQ Care

**Proactive Smart Alerts to Keep Your Appliances Running Smoothly**

- Preventative Alerts help you stay a step ahead of potential issues to find proactive solutions before problems arise.
- Avoid preventable repairs and service calls with real-time diagnostics for a hassle-free experience.
- Integrated within LG's ThinQ app—a smart home hub for managing your smart devices and appliances.



PRODUCT FEATURES

SUMMARY		WASH DETAILS		MOTOR AND AGITATOR	
Type	Front Load Washer	No. of Wash/Rinse Temps	5	Motor Type	Inverter Direct Drive Motor
Capacity (cu. ft.)	5.0 cu. ft.	Wash/Rinse Temps	Ex. Hot, Hot, Warm, Cold, Tap Cold	Axis	Horizontal
Matching Electric Dryer	DLEX6500B / DLEX6500W	No. of Spin Speeds	5	MATERIALS AND FINISHES	
Matching Gas Dryer	DLGX6501B / DLGX6501W	Spin Speeds	Ex. High, High, Medium, Low, No Spin	NeveRust® Stainless Steel Drum	Yes
Color	Black Steel (B), White (W)	Max RPM	1300	Cabinet	Painted Steel
APPEARANCE		Water Levels	Load Sensing	Control Panel	
LCD Display	Yes	No. of Soil Levels	5	Top Plate	Painted Steel
Touch Buttons	Yes	FABRIC CARE FEATURES		Door / Rim	Glass / Shiny Rose Gold
Dial-A-Cycle®	Yes	AI DD®	Yes	Door Cover	Tempered Glass Door
ENERGY		TurboWash® 360 Technology	Yes	All Available Colors	Black Steel (B), White (W)
ENERGY STAR® Most Efficient	Yes	Steam Technology	Yes	CERTIFICATION	
ENERGY STAR® Certified	Yes	Allergiene® Cycle	Yes	AAFA	Yes
CEE Tier	Tier2	Sanitary Cycle	Yes	POWER SOURCE	
IMEF	2.92	Cold Wash Option	Yes	Ratings	UL Listed
IWF	3.0	CONVENIENCE FEATURES		Electrical Requirements	120V, 10 Amps
WASH PROGRAMS		Vibration Sensing (Cabinet Vibration Sensor)	Yes	Type	Electric
No. of Programs	25	TrueBalance® Anti-Vibration System	Yes	OPTIONS/ACCESSORIES	
Wash Programs	Normal, AI Wash, Bedding, Delicates, Towels, Quick Wash, Heavy Duty, Allergiene®, Perm. Press, Tub Clean, Bright Whites™, Sanitary, Rinse+Spin, Spin Only, Hand/Wool, Active Wear, Swimwear, Kids Wear, Jeans, Dresses, Color Care, Sweat Stains, Small Load, Large Load, X Large Load	4 Tray Dispenser	Prewash, Main Wash (with liquid detergent cup), Bleach, Fabric Softener	Pedestal	WDP6B, WDP6W
		End of Cycle Signal	Yes	Pedestal (WxHxD)	27" x 13 5/8" x 25 3/8" (43 7/8" D with door open)
		LoadSense	Yes	LG Sidekick™ Pedestal Washer	WD300CB, WD300CW
		Control Lock	Yes	LG Sidekick™ Pedestal Washer (WxHxD)	27" x 14 1/8" x 30 3/4" (50 1/2 with drawer open)
		Auto Suds Removal	Yes	Stacking Kit	KSTK4
WASH OPTIONS		Leveling Legs	4 Adjustable Legs	DIMENSIONS	
No. of Options	15	Drum Light	Yes	Product (WxHxD)	27" x 39" x 33 1/8"
Options	TurboWash®, Steam, Fresh Care, Pre-wash, Remote Start, Delay Wash, Wi-Fi, Add Item, Extra Rinse, Control Lock, Drum Light, ColdWash, Signal, Cycle List Edit, Cycle Optimization	ThinQ® TECHNOLOGY		Depth with Door Open	57 3/4"
		Smart Diagnosis	Yes	Carton (WxHxD)	29 1/2" x 42 1/8" x 34 1/4"
		Wi-Fi	Yes	Weight (Product/Carton)	202.6 / 216.5 lbs.
		ThinQ Care	Yes	LIMITED WARRANTY	
		Energy Monitoring	Yes	Parts and Labor	1 Year
		Tub Clean Coach	Yes	Direct Drive Motor	10 Years
				Drum	3 Years
		UPC CODES			
				WM6500HBA (Black)	195174052921
				WM6500HWA (White)	195174048689

DS AM 10