



## APPLIANCE CHECKLIST

It may seem early to be thinking about appliances, but they are an important part of your kitchen design and may require upgrades to your HVAC, plumbing and electrical plans. It's important that we are provided with your appliance information during the structural and foundation part of the Design Process, so that these upgrades can be included on your invoice, if required.

ITEM	BRAND	MODEL NUMBER
<b>FRIDGE</b>	LG	LRK2606S
<b>DISHWASHER</b>	LG	LDPS6762S
<b>RANGE</b>	NA	
Type: Gas <input type="checkbox"/> Electric <input type="checkbox"/> Induction <input type="checkbox"/> Electrical: 15 Amp <input type="checkbox"/> 40 Amp <input type="checkbox"/> 50 Amp <input type="checkbox"/>		Waterline Required <input type="checkbox"/>
<b>WALL OVEN</b>	LG	WCEP6427F
Type: Gas <input type="checkbox"/> Electric <input checked="" type="checkbox"/> Electrical: 30 Amp <input type="checkbox"/> 40 Amp <input type="checkbox"/> <b>50 AMP REQUIRED</b>		Waterline Required <input type="checkbox"/>
<b>WARMING DRAWER</b>	NA	
Electrical: 15 Amp <input type="checkbox"/> Other: Specify		
<b>COOKTOP</b>	LG	LSCE305ST
Type: Gas <input type="checkbox"/> Electric <input checked="" type="checkbox"/> Induction <input type="checkbox"/> Electrical: 15 Amp <input type="checkbox"/> 40 Amp <input checked="" type="checkbox"/> 50 Amp <input type="checkbox"/>		
<b>BUILT IN MICROWAVE</b>	NA	
Electrical: 15 Amp <input type="checkbox"/> 30Amp <input type="checkbox"/> 240 Volt <input type="checkbox"/> 120 Volt <input type="checkbox"/>		
<b>MICROWAVE TRIM KIT</b>	NA	
<b>OTR MICROWAVE</b>	NA	
<b>WASHING MACHINE</b>	LG	WKEX200HBA
<b>DRYER</b>	LG	WKEX200HBA
Type: Gas <input type="checkbox"/> Electric <input checked="" type="checkbox"/> Stacked <input checked="" type="checkbox"/>		
<b>OTHER: HOODFAN</b>	CYCLONE	BX21228
<b>OTHER: BEV FRIDGE</b>	SILHOUETTE	SBC051D1BSS
<b>OTHER:</b>		

Hood Fans must be purchased through Phoenix Homes, and will require an upgrade to a make up air system for any hood fans above 300CFM. Standard hood fan vent pipe is 6".


A make up air system is a required upgraded for all gas stoves/cooktops.

Any changes from the standard kitchen plan and/or standard electrical, plumbing and electrical specifications/plans may be subject to additional fees.


**Community:** PATHWAYS (2)

**Lot #:** 353 - MAIN HOUSE

**Purchaser Signature:**

DocuSigned by:  
  
 2413E8DD3FAF47C...

**Purchaser Signature:**

DocuSigned by:  
  
 4E5C487E00D245D...



## APPLIANCE CHECKLIST

It may seem early to be thinking about appliances, but they are an important part of your kitchen design and may require upgrades to your HVAC, plumbing and electrical plans. It's important that we are provided with your appliance information during the structural and foundation part of the Design Process, so that these upgrades can be included on your invoice, if required.

ITEM	BRAND	MODEL NUMBER
<b>FRIDGE</b>	LG	LTCS20020S
<b>DISHWASHER</b>	LG	LDFN3432T
<b>RANGE</b>	LG	LREL6321S
Type: Gas <input type="checkbox"/> Electric <input type="checkbox"/> Induction <input type="checkbox"/> Electrical: 15 Amp <input type="checkbox"/> 40 Amp <input type="checkbox"/> 50 Amp <input type="checkbox"/>		Waterline Required <input type="checkbox"/>
<b>WALL OVEN</b>	NA	WCEP6427F
Type: Gas <input type="checkbox"/> Electric <input checked="" type="checkbox"/> Electrical: 30 Amp <input type="checkbox"/> 40 Amp <input checked="" type="checkbox"/>		Waterline Required <input type="checkbox"/>
<b>WARMING DRAWER</b>	NA	
Electrical: 15 Amp <input type="checkbox"/> Other: Specify		
<b>COOKTOP</b>	NA	LSCE305ST
Type: Gas <input type="checkbox"/> Electric <input type="checkbox"/> Induction <input type="checkbox"/> Electrical: 15 Amp <input type="checkbox"/> 40 Amp <input type="checkbox"/> 50 Amp <input type="checkbox"/>		
<b>BUILT IN MICROWAVE</b>	NA	
Electrical: 15 Amp <input type="checkbox"/> 30Amp <input type="checkbox"/> 240 Volt <input type="checkbox"/> 120 Volt <input type="checkbox"/>		
<b>MICROWAVE TRIM KIT</b>	NA	
<b>OTR MICROWAVE</b>	NA	
<b>WASHING MACHINE</b>	LG	WM3600HWA
<b>DRYER</b>	LG	DLE3600W
Type: Gas <input type="checkbox"/> Electric <input checked="" type="checkbox"/> Stacked <input checked="" type="checkbox"/>		
<b>OTHER: HOODFAN</b>	STANDARD AIRKING UNDERCABINET HOODFAN	
<b>OTHER:</b>		
<b>OTHER:</b>		

Hood Fans must be purchased through Phoenix Homes, and will require an upgrade to a make up air system for any hood fans above 300CFM. Standard hood fan vent pipe is 6".

A make up air system is a required upgraded for all gas stoves/cooktops.

Any changes from the standard kitchen plan and/or standard electrical, plumbing and electrical specifications/plans may be subject to additional fees.

**Community:** PATHWAYS (2)

**Lot #:** 353 - INCOME SUITE

**Purchaser Signature:** DocuSigned by:

Marc Thierien  
2413E8DD3FAF47C...

**Purchaser Signature:** DocuSigned by:

Francine Thierien  
4E5C487E00D245D...

PW2 LOT 353 MAIN HOUSE - BEV FRIDGE SBC051D1BSS

Silhouette®



PRODUCT DESCRIPTION

What prizes are hidden behind doors 1 and 2? Your expertly preserved beverages of choice. This built-in features double the temperature zones to store your wine and beverages simultaneously and fan-forced cooling assists you in enjoying frost-free luxury.

SPECIFICATIONS

Dimensions

Width	60cm	23.8"
Depth	60cm	23.75"
Height	86cm	34"

Capacity

Bottle Capacity 750ml	60
Can capacity 330ml	27

Temperature Range

Temperature	Low: 2.8 °C	High: 17.8 °C
-------------	-------------	---------------

WARRANTY

The Silhouette SBC051D1BSS model comes with a 24-month warranty on parts and labour with convenient in-home service. The installation and yearly maintenance (cleaning) of the fridge are not covered under the warranty.

EMMENTAL

24" French Door Beverage Center - SBC051D1BSS

PRODUCT FEATURES

ELIMINATE STORAGE INCONSISTENCIES

Dual temperature zones bring an end to tough multi-beverage storage decisions. Wine and beverages require customized levels of cool, so two independently controlled sections, accessible through classic French doors, allow proper temps to be set for your distinct selection.

BANISH ICE BUILD UP

The frost-free, fan-forced cooling system in this unit makes unsightly and often damaging ice accumulation obsolete. The efficient defrosting system ensures you'll never deal with over-frozen frustrations.

NEVER BE LEFT IN THE DARK

The true, blue LED track lighting that illuminates the interior of this unit exquisitely displays your wine without any damaging heat. It is 50% brighter than the previous model and now offers 3 lighting options

Where some see room for an appliance;  
We see room for an experience

www.silhouetteappliances.com

Danby Products Ltd. PO Box 1778, Guelph, Ontario Canada N1H 2Z9 (519) 837-0920 FAX: (519) 837-0449  
We can make elegance look effortless, but it is always evolving. This is why our specifications may also change along the way, so these specifications are subject to change without notice. MSRP is Manufacturer's Suggested Retail Price and may not necessarily be the price at which the product is sold.

DS  
Mt F M

PW2 LOT 353 MAIN HOUSE - COOKTOP LSCE305ST

STUDIO SERIES



LSCE305ST  
LSCE365ST

30" & 36" Radiant Cooktops



Premium Style  
& Great Features

COOKING PERFORMANCE

- Electric Cooktops with 5 Elements
- Steady Heat Elements
- Double RF 9"/6", Double LR 8"/5" (LSCE305ST)
- Triple 12"/9"/6", Double 9"/6" (LSCE365ST)

STYLE AND DESIGN

- Premium Stainless Steel Trim

CONVENIENCE

- SmoothTouch™ Glass Controls
- Bridge Element – 7" (LSCE365ST)



● Stainless Steel (ST)



DS DS  
Mt F. M.

STUDIO SERIES

LSCE305ST  
LSCE365ST

30" & 36" Radiant Cooktops

Steady Heat Elements

Steady Heat cooking elements deliver constant heat at any temperature for more precise heat control, and respond quickly to every power setting adjustment.

Dual & Triple Elements

LG's premium cooktops offer versatile elements that fit different sized cookware for convenience and even heating.

SmoothTouch™ Glass Controls

Intuitive SmoothTouch™ Controls are extremely easy to use with just a touch. With just a quick glance of the centralized electronic controls you can see which heating elements are activated, and the smooth surface easily wipes clean.


Bridge Element (LSCE365ST)

In addition to being used separately, the left front and the left rear elements can be joined by the bridge element to evenly heat larger pans.



Installation Reference

(See chart at right for measurements)

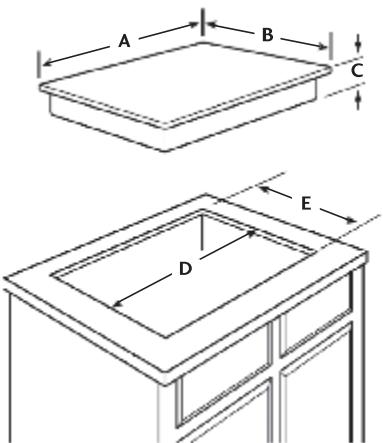

[www.LG.com](http://www.LG.com)

LG Electronics U.S.A., Inc.  
1000 Sylvan Avenue Englewood Cliffs, NJ 07632  
Customer Service and Technical Support: (800) 243-0000



TYPE	
Type	Electric
Size (LSCE305ST)	30"
Size (LSCE365ST)	36"
Cooking Surface	Radiant Glass Surface
Number of Elements	5 (plus bridge element - LSCE365ST)
FEATURES	
Controls Type / Location	SmoothTouch™ / Front Center
Hot Surface Indicator	•
Child Lock	•
Auto Shut Off	•
Under Bench Oven Capable	•
Warm Function	•
Power Control	Steady Heat
Elements	Ceramic Glass
Surface / Frame Trim	Black / Stainless Steel
CONFIGURATION (LSCE305ST)	
Element Configuration	
Left Front	6" / 1.2kW
Left Rear	8", 5" / 1.9, 0.95kW (Dual)
Center	7" / 1.5kW
Right Front	9", 6" / 3.0, 1.4kW (Dual)
Right Rear	6" / 0.1kW (Warm)
CONFIGURATION (LSCE365ST)	
Element Configuration	
Left Front	7" / 1.8kW
Left Rear	7" / 1.8kW
Center	12", 9", 6" / 3.0, 2.2, 1.1kW (Triple)
Right Front	9", 6" / 3.0, 1.4kW (Dual)
Right Rear	6" / 0.1kW (Warm)
Bridge	7" / 0.8kW (Bridge)
DIMENSIONS (LSCE305ST)	
A: Product Width	30 27/32"
B: Product Depth	21 47/64"
C: Product Height	4"
D: Cut-Out Width	29 3/8"
E: Cut-Out Depth	20 1/4"
Net Weight	34.2 lbs.
DIMENSIONS (LSCE365ST)	
A: Product Width	36 11/16"
B: Product Depth	22 33/64"
C: Product Height	4"
D: Cut-Out Width	34 9/16"
E: Cut-Out Depth	20 3/8"
Net Weight	43 lbs.
POWER SOURCE (LSCE305ST)	
Electrical Requirements	240V/208V, 60Hz AC
Max. Amp Load	40 Amp
Power Cable Location	Right Rear
Total Connected Load	7.7kW @ 240V, 5.8kW @ 208V
POWER SOURCE (LSCE365ST)	
Electrical Requirements	240V/208V, 60Hz AC
Max. Amp Load	50 Amp
Power Cable Location	Right Rear
Total Connected Load	10.5kW @ 240V, 7.9kW @ 208V
WARRANTY	
	2 Years Parts and Labor, 5 Years Parts on Cooktop and Coils
UPC CODES	
LSCE305ST 30" Radiant Cooktop	48231316620
LSCE365ST 36" Radiant Cooktop	48231316737

Dimensions and weights are approximate. Design, features and specifications subject to change without notice.

© 2010 LG Electronics USA, Inc. All rights reserved. "LG Life's Good" is a registered trademark of LG Corp. All other product and brand names are trademarks or registered trademarks of their respective companies. 07/10

PW2 LOT 353 MAIN HOUSE - DISHWASHER LDPS6762S

HOME APPLIANCES

LG DISHWASHERS

LDPS6762\_

Top Control Wi-Fi Enabled Dishwasher  
with QuadWash™ Pro

KEY FEATURES

- QuadWash® Pro
- Dynamic Dry® Enhanced with TrueSteam®
- Remote Start
- Height Adjustable 3rd Rack
- EasyRack® Plus
- ThinQ® Technology with ThinQ Care

AVAILABLE COLORS



PRINTPROOF™ STAINLESS STEEL



PRINTPROOF™ BLACK STAINLESS STEEL

SMART APPLIANCE



Proactive Smart Alerts to Keep  
Your Appliances Running Smoothly

- Preventative Alerts help you stay a step ahead of potential issues to find proactive solutions before problems arise.
- Avoid preventable repairs and service calls with real-time diagnostics for a hassle-free experience.
- Integrated within LG's ThinQ app—a smart home hub for managing your smart devices and appliances.

PRODUCT FEATURES

CAPACITY	
Total Place Settings	15
Upper Rack Dish Height Limit	7.1"
Lower Rack Dish Height Limit	12.5"
RACKS AND BASKETS	
Cutlery Baskets	Yes
Cup Rack	Yes
Stemware Holder	Yes
Fold Down Times	Yes (Half Fold on Upper & Half (Smart), Half (Normal) on Lower)
BPA-Free Nylon Coated Racks and Tines	Yes
Rack Handle	Yes (Upper & Lower)
EasyRack™ Plus System	Yes
Height Adjustable 3rd Rack	Yes (Easy One Touch (3 Level))
STYLE AND DESIGN	
Control Panel Location	Top Control
Electronic Controls	Fully Integrated Control Panel
Time Remaining Indicator	LED
Tub Material	NeveRust™ Stainless Steel
Handle	Pocket Handle
All Available Colors	PrintProof™ Stainless Steel, PrintProof™ Black Stainless Steel
Fingerprint Resistant	Yes
FEATURES	
TrueSteam®	Yes
QuadWash® Pro	Yes
SenseClean™ Wash System	Yes
Vario Wash	Yes
Number of Spray Arms	3 (Top, Upper, Lower)
Detergent and Rinse-Aid Dispenser	Yes
Number of Wash Cycles	10 (Auto, Heavy, Delicate, Refresh, Normal, Turbo, Download Cycle, Machine Clean, Rinse, Express)
Number of Options	8 (Flex Zone, Steam, High Temp, Extra Dry, Delay Start, Control Lock, Night Dry, Remote Start)
Drying System	Dynamic Dry
End of Cycle Indicator	Yes (Beeper + END indication on display)
Hidden Water Heater	Yes
Safety Float Switch (Leaks)	Yes
Soil (Turbidity) Sensor	Yes
DirectDrive Motor™	Yes
LoDecibel™ Quiet Operation	44 dBA
Tub Insulation	Yes (Damping Sheet, Sound Absorbing Material (felt), Base)



BPA-Free Nylon Coated Racks and Tines	Yes
Anti-Bacterial Treatment (Drain hose)	Yes
Balanced Door	Yes
ThinQ® SMART FEATURES	
Wi-Fi Enabled	Yes
ThinQ Care	Yes
SmartDiagnosis™	Yes
POWER RATINGS	
ENERGY STAR® Qualified	Yes
CEE Tier	1
Energy Use (kWh/Year)	238 kWh/Year
Water Factor (WF)	2.9
DIMENSIONS / CLEARANCES / WEIGHT	
Product Dimensions (in) (W x H x D)	23 3/4" x 24 5/8" x 33 5/8"
Min Height (Unit Dimensions)	33 5/8"
Min Height (Unit Dimensions)	36"
Product Weight (lbs)	87.3
Depth with Door Closed with Handle (in)	24 5/8"
Depth with Door Open (in)	49 1/4"
Water Connection (in)	90° 3/8" Compression Installed at Factory
Drain Hose End Sizes (in)	5/8" or 3/4" or 1"
Carton Dimensions (in) (W x H x D)	28 1/32" x 29 5/8" x 34 7/8"
Shipping Weight with Carton (lbs)	99.43
LIMITED WARRANTY	
Labor	1 Year
Parts	1 Year
Control Board and Rack Parts	5 Years
Direct Drive Motor	10 Years
Stainless Steel Door Liner or Tub	Lifetime
UPC CODES	
LDPS6762S (PrintProof™ Stainless Steel)	48231342667
LDPS6762D (PrintProof™ Black Stainless Steel)	48231344197

DS  
Mt

DS  
F M



PW2 LOT 353 MAIN HOUSE - FRIDGE LRYKC2606S

HOME APPLIANCES

LG REFRIGERATION



LRYKC2606\_
26 cu. ft. Counter Depth MAX Refrigerator

- Industry's Largest 26 cu. ft. Counter Depth Capacity
- Mirror InstaView® with Door in Door
- Pocket Handle Design with Welcome Light
- Industry's First 3 Built-in Ice maker
- Market First 4 Types of Ice
- Cool Guard with Premium Backlit Lighting

AVAILABLE COLORS



PRINTPROOF™ STAINLESS STEEL



PRINTPROOF™ BLACK STAINLESS STEEL



Proactive Smart Alerts to Keep Your Appliances Running Smoothly



- Preventative Alerts help you stay a step ahead of potential issues to find proactive solutions before problems arise.
- Avoid preventable repairs and service calls with real-time diagnostics for a hassle-free experience.
- Integrated within LG's ThinQ app—a smart home hub for managing your smart devices and appliances.



CAPACITY		REFRIGERATOR		DIMENSIONS/CLEARANCES/WEIGHTS	
Refrigerator (cu. ft.)	16.9 cu. ft.	No. of Shelves	4 split (3 Fixed + 1 Retractable)	Product (W x H x D)	35 3/4" x 70 1/4" x 31 5/8"
Freezer (cu. ft.)	8.6 cu. ft.	Shelf Construction	Spill Protector/Tempered Glass	Width	35 3/4"
Total Capacity (cu. ft.)	25.5 cu. ft.	Shelf Trim	Metallic Décor	Height (to Top of Hinge)	70 1/4"
ENERGY		No. of Crisper Bins	2	Depth (with Handles)	29 1/8"
ENERGY STAR® Qualified	Yes	Pantry (Glide N Serve)	Yes (Temp. Control)	Width (Door Open 90° without Handle)	40"
Energy Consumption (kWh/Year)	699	Cool Guard	Yes	Width (Door Open 90° with Handle)	44 7/8"
WATER & ICE SYSTEM		Fresh Air Filter	Yes	Width (Door Fully Open without Handle)	56 3/4"
Ice & Water Dispenser	Yes	Light	Yes	Height (to Top of Case)	68 7/8"
Water Dispenser UVnano	Yes	Light (Back lit lighting)	Yes	Depth without Door	24 3/4"
In-door Ice maker	Yes (1)	REFRIGERATOR DOOR		Depth without Handles	29 1/8"
In-door Ice maker Ice Type	Cubed / Crushed	InstaView®	Yes	Depth (to Hinge Cover)	18 1/4"
In-door Ice maker Daily Production	3.0 / 3.3 (IcePlus) lbs.	InstaView® Dimension (WxH)	11 3/4" x 30 3/4"	Depth (Total with Door Open)	43 5/8"
In-door Ice maker Storage Capacity	3.0 lbs.	Door-in-Door®	Yes	Depth (Draw Open Fully without Handle)	48 7/8"
No. Freezer Ice maker	Yes (2)	No. of Bins	4 (Left Door), 4 (Right Door)	Installation Clearance	Sides 1/8", Top 1", Back 2"
Freezer Ice maker Ice Type	Craft & Mini Cubed	Door Shape	Flat	Carton Dimensions (WxHxD)	38" x 72" x 31"
Freezer Ice maker Daily Production	3 or 6 ea & 1.5 / 1.7 (IcePlus) lbs.	Handle Type	Pocket	Weight (Unit/Carton)	291 lbs. / 313 lbs.
Freezer Ice maker Storage Capacity	27 ea / 4.0 lbs.	Handle Light	Yes	LIMITED WARRANTY	
Ice Plus	Yes	FREEZER		Parts & Labor	1 Year
Filteration System	1 stage	Door Type	Pull Drawer	Sealed System (Parts & Labor)	5 Years
Filter	LT1000P	Handle Type	Smart Pull™ Handle	Compressor (Parts & Labor)	5 Years
Dispenser Light Decoration	Yes	Drawers / Shelves	3-Tier Organization	Linear Compressor (Parts & Labor)	6 - 10 Years
COOLING		Freezer Light	LED Lighting	UPC CODES	
Compressor Type	Smart Inverter	Upper	Yes	LRYKC2606S (PrintProof™ Stainless Steel)	195174034828
Evaporator	Yes (1)	Lower	No	LRYKC2606D (PrintProof™ Black Stainless Steel)	195174037669
Multi Air Flow Cooling	Yes	SMART TECHNOLOGY			
Temperature Sensors	3	Smart Diagnosis	Yes		
Refrigerant		Wi-Fi	Yes		
		ThinQ®	Yes		
CONVENIENCE		ThinQ® Care	Yes		
Display Type	Smooth Touch Control / White LED	MATERIALS AND FINISHES			
Temperature Controls	Electronic/Digital	Hidden Hinges	Yes		
Door Alarm	Yes	All Available Colors			
Child Lock	Yes				
Auto Closing Door Hinge	Yes	Insulation			
Sabbath Mode	Yes				
ADA Compliant	Yes				

© 2023 LG Electronics USA, Inc., All rights reserved, "LG Life's Good" is a registered trademark of LG Corp. All other product and brand names are trademarks or registered trademarks of their respective owners. Design, features and specifications are subject to change without notice. Non-metric weights and measurements are approximate. Some features may require Internet access. Content and services may vary by product and are subject to change without notice. 4/10/23

DS
MT
DS
F M

PW2 LOT 353 - MAIN HOUSE HOODFAN

BX212 | CLASSIC Collection



22"



28"



34"

Insert

The BX212 features a convenient underside three-speed control. It remains hidden at eye level, enabling seamless cabinet arrangement. Effective mesh filters purify the air, accompanied by bright halogen bulbs for ample illumination.



Green Features



3 Speed Push Button Control Panel (22" Only)



3 Speed Slide Control Panel (28"/34" Only)



Halogen Light Bulbs



Grease Cup (28"/34" Only)

Model	Colour	Ducting	Filters	Size	CFM	Fits Cabinet
BX21222	Stainless Steel	6"	Mesh	22"	300	24"
BX21228	Stainless Steel	6"	Mesh	28"	300	30"
BX21234	Stainless Steel	6"	Mesh	34"	300	36"

Cyclone Range Hoods Inc.

1361 Huntingwood Drive, Unit 16. Toronto, ON. M1S 3J1. Canada.

Toll Free: 1-888-293-5662 Tel: (416) 293-0933 Fax: (416) 293-4793 Website: [www.CycloneRangeHoods.com](http://www.CycloneRangeHoods.com)

DS  
Mt F M



## BX212 | CLASSIC Collection

**Cyclone®**  
Breathe Better

## Breathe Better

## Features

- Insert range hood
- 6" round duct adapter
- Non-stick aluminum fan blades
- 3 speed push button control for 22"
- 3 speed slide control for 28" and 34"
- Quick release aluminum mesh filters
- 2 halogen light bulbs (2 x 25W E26)
- Plug-in connection

- 6" round duct adapter

- Non-stick aluminum fan blades


- 3 speed push button control for 22"

- 3 speed slide control for 28" and 34"

- Quick release aluminum mesh filters

- 2 halogen light bulbs (2 x 25W E26)


- Plug-in connection

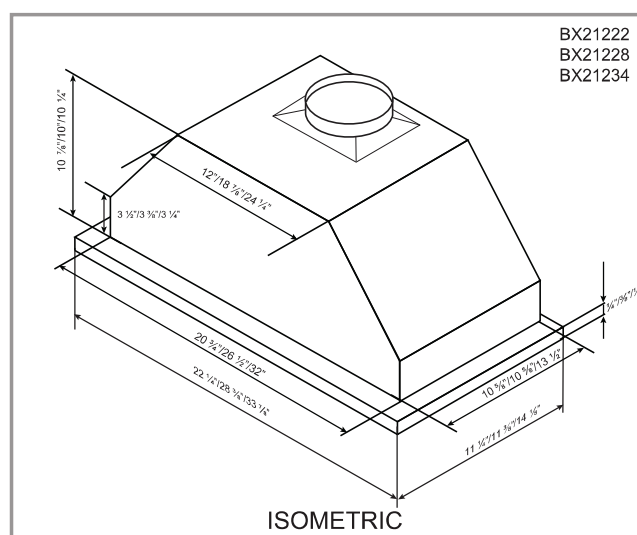

BX21222  
BX21228  
BX21234

BX21234

ISOMETRIC

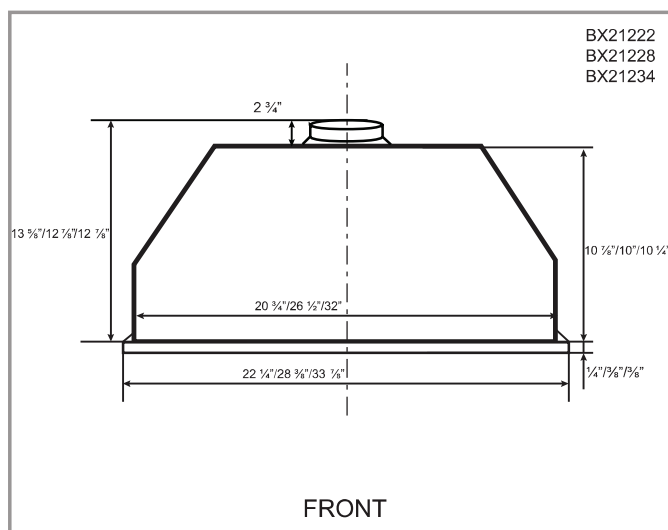

BX21222  
BX21228  
BX21234

BX21234

FRONT

## Options

- Widths: 22", 28", 34"

## Specifications

- Air Flow Volume: 300 CFM
- Electrical Connection: 120 V/60 Hz
- Power Consumption: 300 Watts

- Electrical Connection: 120 V/60 Hz

- Power Consumption: 300 Watts

- Current: 2.5 Amps
- Fan Speed: 1350 RPM
- Fan Type: Centrifugal Blower

- Fan Speed: 1350 RPM

- Fan Type: Centrifugal Blower

- Finishes: Stainless Steel
- Ducting: 6" Round
- Noise Level: Min. 2 Sones  
Max. 4 Sones

- Ducting: 6" Round

- Noise Level: Min. 2 Sones  
Max. 4 Sones

Max. 4 Sones



[www.CycloneRangeHoods.com](http://www.CycloneRangeHoods.com)

PW2 LOT 353 MAIN HOUSE - WALL OVEN WCEP6427F

WCEP6427F

LG BUILDER

6.4 cu. ft. Combination Wall Oven with True Convection and Steam



- 1.7 cu. ft. Microwave / Convection / Speed Cook Oven
  - 4.7 cu. ft. Oven with Steam Cooking
  - InstaView® + WideView™ Window
  - Air Fry with Tray Accessory
  - Steam Bake and Steam Sous Vide
  - EasyClean® + Self Clean
  - True Convection Technology
  - 2 Heavy Duty Racks
  - Temperature Probe
  - Backlit SmoothTouch™ Glass Controls
  - Optional Flush Installation
- Trim Kit Included
  - LG ThinQ® Technology (Wi-Fi)
  - ThinQ Care



COLOR AVAILABILITY	
<div><div></div> WCEP6427F – PrintProof™ Stainless Steel</div>	
CAPACITY	
Oven Capacity	6.4 cu. ft. Total
Upper Oven Capacity	1.7 cu.ft.
Lower Oven Capacity	4.7 cu. ft.
CONTROLS	
Oven Control Type	Backlit SmoothTouch™ Glass
Language	English, Spanish, French
Clock	12 hr or 24 hr (option)
Kitchen Timer	Yes
Temperature Unit of Measure	°F or °C
Cooking Complete Reminder Volume	High, Low, Off
UPPER OVEN FEATURES	
Microwave	Yes
Convection Bake	Yes
Broil	Yes
Built-in Air Fry	Yes
Dehydrate	Yes
Speed Cook	Yes, TurboCook™
Speed Broil	No
Warm	Yes
Proof	Yes
Defrost	Yes (4 Options)
Sensor Cook	Yes (9 Options)
Auto Cook	Yes (28 Options)
Soften	Yes (4 Options)
Melt	Yes (5 Options)
Microwave Power Output	950 W
Microwave Mode Power Consumption	1,650 W
Convection Bake Mode Power Consumption	1,600 W
Broil Mode Power Consumption	1,300 W

Convection Element	1,500 W (Hidden)
Broil Element (Upper)	1,200 W
Bake Element (Upper)	375 W
Glass Tray	Yes
Metal Tray	Yes
Metal Rack	Yes
LOWER OVEN FEATURES	
EasyClean®	Yes
Self Clean	Yes
Variable Cleaning Time	Yes (3, 4, 5 hrs)
Oven Racks	2 Heavy Duty
Number of Rack Positions	5
Temperature Probe	Yes
True Convection	Yes
Convection Conversion	Yes
Convection Element	Yes (2,000 Watts)
Built-in Air Fry	Yes
Variable Broil	Yes (Full, Center / High, Med, Low)
Broil Element	Inner: 2,500 W Outer: 1,500 W
Broil Element Type	8-Pass
Bake Element	Yes (2,500 W)
Bake Element Type	Hidden (8-Pass)
Water Reservoir	Yes
Steam Sous Vide	Yes
Steam Bake	Yes
Proof	Yes
Oven Cooking Modes	Convection Bake / Convection Roast / Bake / Broil / Steam Bake / Steam Roast / Steam Sous-Vide / Air Fry / Frozen Meal / Warm / Proof / Favorite

DS

mt

DS

F. M.

WCEP6427F


LG BUILDER

Automatic Safety Shut-Off	After 12 Hours
Oven Lights	Halogen
Variable Warm	Yes (High, Med, Low)
CONVENIENCE	
ADA Compliant	No
Sabbath Mode	Yes (Star-K-Certified)
SMART FEATURES	
Wi-Fi Enabled	Yes
ThinQ®	Yes
ThinQ Care	Yes
Voice Control	Google Assistant, Amazon Alexa
SmartDiagnosis™	Yes
Smart Recipe (3rd Party Recipe App)	Yes (SideChef)
Scan to Cook (LG ThinQ® Technology)	Yes (Lower Oven Only)
FINISHES AND APPEARANCE	
Fingerprint & Smudge Resistant Exterior	Yes
Handle Finish	Stainless Steel Appearance
Oven Door Feature	InstaView® WideView™ Window

TECHNICAL SPECS	
Required Power Supply	240/208V, 60Hz, 4-Wire
Minimum Circuit Breaker	50 Amp @ 240V, 40 Amp @ 208V
kW Rating at 240V	7.8 kW
Power Outlet Location	See Installation Diagram
INCLUDED ACCESSORIES	
Glass Tray, Metal Tray, Rack, Temperature Probe, 2 Heavy Duty Racks, Air Fry Tray	
DIMENSIONS	
Product Dimensions (W x H x D)	29 3/4" x 43 13/16" x 23 3/8"
Minimum Cutout Dimensions (W x H x D)	Standard: 28 1/2" x 43 7/16" x 24" Flush: 30" x 44" x 25"
Carton Dimensions (W x H x D)	33" x 50" x 30"
Approx. Weight (Product / Carton)	200 lbs. / 234 lbs.
LIMITED WARRANTY	
Parts and Labor	1 Year

DIMENSIONS / CLEARANCES

Measure the current cutout dimensions and compare them to the cutout dimensions shown below. Little or no cabinet work may be necessary.

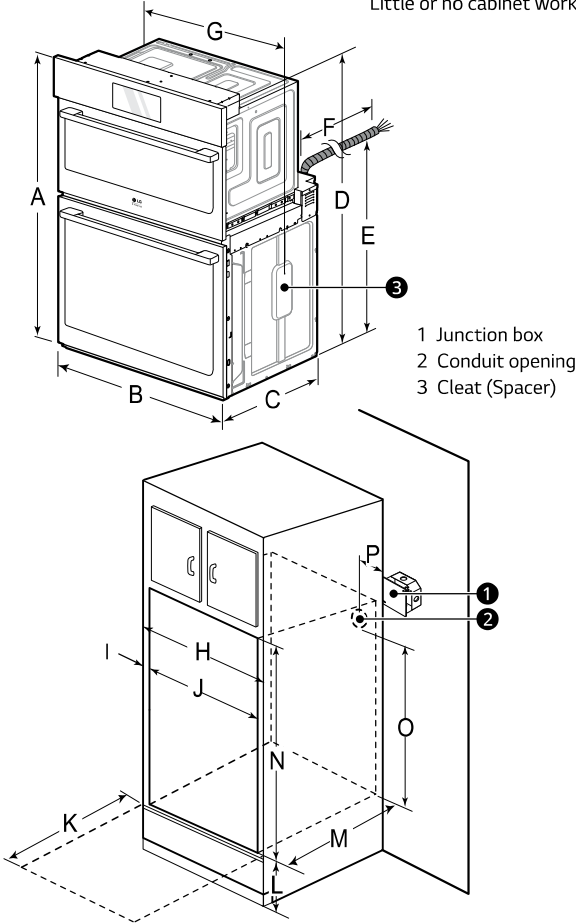

DIMENSIONS / CLEARANCES		
A	Height	43 13/16" (111.3 cm)
B	Width	29 3/4" (75.5 cm)
C	Depth	23 3/8" (59.3 cm)
D	Height (standard installation)	43 3/16" (109.7 cm)
E	Height (power cord)	25 7/8" (65.6 cm)
F	Length (power cord)	60" (152.4 cm)
G	Width (standard installation)	28 7/16" (72.2 cm)
H	Cabinet width	30" (76.2 cm)
I	Overlap of oven	1" (2.5 cm)
J	Cutout width	28 1/2" Min. (72.4 cm) 28 5/8" Max. (72.7 cm)
K	Depth of open door	23" (58.4 cm)
L	Cutout location from floor	12" (30.5 cm)
M	Cutout depth	24" Min. (61.0 cm)
N	Cutout height	43 7/16" Min. (110.3 cm) 43 1/2" Max. (110.5 cm)
O	Height of conduit opening from floor of cutout	39 27/32" (101.2 cm)
P	Distance of conduit opening from side of cabinet	5" (12.7 cm)

WCEP6427F

LG BUILDER

DIMENSIONS / CLEARANCES


INSTALLATION NOTES

- The cabinet base platform must be able to support 202 lbs (92 kg) for this appliance. If the cabinet does not have a solid bottom, two braces or runners must be installed level with the bottom of the cutout to support the weight of the appliance. Make sure the base is level and the front of the cabinet is square. If the cabinet base is not level, the oven racks will tend to slide out when opening the door.
- Make sure the cabinets and wall coverings around the oven can withstand the temperature (up to 194°F (90°C)) generated by the oven. Discoloration, delamination or melting may occur.
- Kitchen cabinets in contact with the oven must be heat resistant up to 194°F (90°C), and fronts of nearby units up to at least 158°F (70°C).
- DO NOT remove spacers (3) on the side walls of the built-in oven. These spacers center the oven in the space provided. The oven must be centered to prevent excess heat buildup that may result in heat damage or fire.
- DO NOT put any weight on the oven door. Never allow anyone to climb, sit, stand or hang on the oven door. The oven could be tipped and injury might result from contact with hot food or the oven itself.
- DO NOT block the oven air exhaust located at the bottom of the oven. Blocking the exhaust may cause cabinet damage and product malfunction.

NOTE


- If marks, blemishes or the cutout opening are visible above the installed appliance, it may be necessary to add wood shims under the runners and front trim until the marks or opening are covered.
- If the cabinet does not have a front frame and the sides are less than 3/4" (1.9 cm) thick, shim both sides equally to establish the cutout width.
- The junction box (1) must be flush with the conduit opening (2) of the cabinet as shown.
- Allow at least a 23" clearance for the door depth when it is open.

FLUSH INSTALLATION

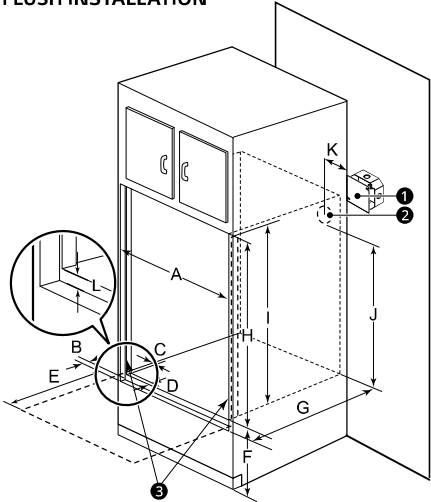


DIMENSIONS / CLEARANCES

A	Cutout width	30" (76.2 cm)
B	Cleat (spacer) inset from front of cabinet	1 3/8" (3.5 cm)
C	Cleat (spacer) width	3/16" (0.5 cm)
D	Cleat (spacer) depth	1" (2.5 cm)
E	Depth of open door	23" (58.4 cm)
F	Bottom of cutout from floor	12" (30.5 cm)
G	Cutout depth	25" (63.5 cm)
H	Cutout height	44" (111.8 cm)
I	Cleat (spacer) height	43 13/16" (111.3 cm)
J	Height of conduit opening from floor of cutout	39 7/8" (101.2 cm)
K	Distance of conduit opening from side of cabinet	5" (12.7 cm)
L	Bottom of bottom decorative trim to vent opening	3/4" (1.9 cm)

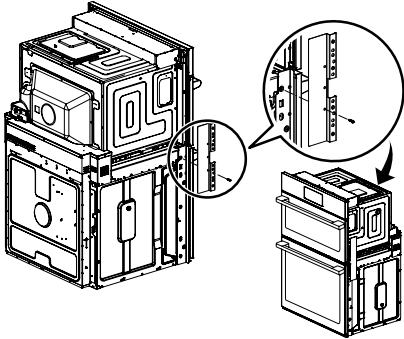

WHEN INSTALLING FLUSH CABINET

- The provided cover brackets are only used for flush cabinet installations.
- Remove one screw from the left and right sides as shown. These screw holes will be used to mount the cover brackets. Install the cover brackets on the sides of the oven with the provided self-tapping screws.



PW2 LOT 353 MAIN HOUSE - WASHER/DRYER WKEX200HBA

HOME APPLIANCES



LG LAUNDRY

WKEX200HBA

5.2 cu.ft. Washer, 7.4 cu.ft. Dryer Center Control Wash Tower

KEY FEATURES

- Unitary One Body Design
- AI DD & AI Dry
- Center Control for Easier Load / Unload to Dryer
- Steam technology & Allergiene Cycle / ASC
- LG ThinQ Technology
- TurboWash360 Technology
- NeveRust SS Drum

SMART APPLIANCE



Enjoy new ways to control your home with LG smart appliances

SmartThinQ®



PRODUCT FEATURES

CAPACITY	WASHER	DRYER
Washer / Dryer Capacity (cu.ft)	5.2	7.4
APPEARANCE		
Hard Buttons	Yes	
Touch Buttons	Yes	
Full Touch Electronic Control Panel with LED Display	Yes	
Unified Center Control	Yes	
ENERGY		
2019 Energy Star Most Efficient	Yes	
CEE Tier	2	
PROGRAMS		
No. of Programs	6 Normal, Bedding, Delicates, Heavy Duty, Speed Wash, Downloaded	6 Normal, Bedding, Delicates, Heavy Duty, Small Load, Downloaded
No. of Options	10 TurboWash®, Steam, Extra Rinse, Pre-wash, Sanitary*, Tub Clean*, Drum Light*, Child Lock*, Signal*, Wi-Fi* / Remote Start*	9 Wrinkle Care, TurboSteam™, Reduce Static, Energy Saver, Steam Fresh*, Drum Light*, Child Lock*, Signal*, Wi-Fi* / Remote Start*
No. of Wash/Rinse Temps	5 Hot, Warm/Hot, Warm, Cold/Warm, Cold	-
No. of Spin Speeds	5 High, Medium/High, Medium, Low, No Spin	-
Water Levels	Load Sensing	-
No. of Soil Levels	5	-
Temperature Settings	-	High, Medium/High, Medium, Low/Medium, Low
Drying Levels	-	Very, More, Normal, Less, Damp
Eco Hybrid	-	No
Manual Dry Times	-	60 min., 50 min., 40 min., 30 min., 20 min.
FABRIC CARE FEATURES		
AI DD	Yes	-
TurboWash™ 360 Technology	Yes	-
Steam Technology	Yes	-
Allergiene™ Cycle	Yes	-
Sanitary Cycle	Yes	-
SenseClean™ System	Yes	-
AI Dry	-	Yes
Sensor Dry	-	Yes
Precise Temperature Control with Variable Heater	-	Yes
Steam Technology	-	Yes (TurboSteam™)
CONVENIENCE FEATURES		
TrueBalance™ Anti-Vibration System	Yes	-
4 Tray Dispenser	Prewash, Main Wash (with liquid detergent cup), Bleach, Fabric Softener	-

LoDecibel™ Quiet Operation	Yes	
End of Cycle Signal	Yes	
LoadSense	Yes	-
Child Lock*	Yes	
Auto Suds Removal	Yes	-
Leveling Legs	4 Adjustable Legs	
Easy Loading TiITub™	Yes	-
Drum Light	Yes	
Remaining Time Display/Status Indicator(s)	Yes	
3 Minute Installation Check	-	Yes
Reversible Door	-	Yes
FlowSense™ Duct Clogging Indicator	-	Yes
Wrinkle Care Option	-	Yes
Venting Option	-	Electric: 4 Way Venting
THINQ TECHNOLOGY		
SmartDiagnosis™ (v3.0)	Yes	
Wi-Fi	Yes	
Remote Start and Cycle Monitor	Yes	
Energy Monitoring	Yes	
Tub Clean Coach	Yes	
MOTOR		
Motor Type	Inverter DD Motor	-
Axis	Horizontal	-
Max RPM	1300	-
MATERIALS AND FINISHES		
NeveRust™ Stainless Steel Drum	Yes	
Cabinet	PCM	
Control Panel	Plastic	
Top Plate	Painted	
Tub Rear	-	Stainless Steel
Door / Rim	Large Circle Chrome Rim	
Door Cover	Tinted Round Tempered Glass	
All Available Colours	Black Steel (B)	
POWER SOURCE		
Ratings	UL Listed	CSA Listed
Electrical Requirements	120V, 10 Amps	240V 30 Amps (Electric)
Type	Electric	
BTU Rating	-	10,000 Feet
MEASUREMENTS		
Product (WxHxD)	27" x 74 3/8" x 30 3/8" (700mm x 1890mm x 770mm)	
Depth with Door Open	(55" D with door open)	
Carton (WxHxD)	30 1/16" x 79 11/32" x 32" (763*2015*813(mm))	
Weight (Product/Carton)	326 / 361	
LIMITED WARRANTY		
Parts and Labour	1 Year	1 Year
Direct Drive Motor	10 Years	-
Drum	3 Years	10 Years
UPC		
WKEX200HBA	772454073670	

DS  
M+ F M

PW2 LOT 353 INCOME SUITE - DISHWASHER LDFN3432T

HOME APPLIANCES

LG DISHWASHERS

LDFN3432T  
Front Control Dishwasher



KEY FEATURES

- 15 Place Settings
- Dynamic Dry™
- NeveRust™ Stainless Steel Tub
- LoDecibel™ Operation (50 dB)
- NSF Certified

PRODUCT FEATURES

CAPACITY	
Total Place Settings	15
Upper Rack Dish Height Limit	9,0"
Lower Rack Dish Height Limit	12,5"
RACKS AND BASKETS	
Cutlery Baskets	Yes
Fold Down Tines	Yes (Half Fold on Upper & Half Fold on Lower)
BPA-Free Nylon Coated Racks and Tines	Yes
Height Adjustable Upper Rack	Yes (Manual)
STYLE AND DESIGN	
Control Panel Location	Front Control
Electronic Controls	Fully Integrated Control Panel
Tub Material	NeveRust™ Stainless Steel
Handle	Pocket Handle
All Available Colors	Stainless Steel
FEATURES	
Inverter Direct Drive Motor	Yes
LoDecibel™ Quiet Operation	50dBA
Number of Wash Cycles	5 (Auto, Heavy, Normal, Turbo, Machine Clean)
Number of Options	6 (Flex Zone, High Temp, Extra Dry, Delay Start, Control Lock, Night Dry)
Number of Spray Arms	3 (Top, Upper, Lower)
SenseClean™ Wash System	Yes
Vario Wash	Yes
Detergent and Rinse-Aid Dispenser	Yes
Drying System	Dynamic Dry
End of Cycle Indicator	Yes (Beeper + END indication on display)
Hidden Water Heater	Yes
Safety Float Switch (Leaks)	Yes
Soil (Turbidity) Sensor	Yes
Tub Insulation (Damping Sheet, Sound Absorbing Material (felt), Base)	Yes
BPA-Free Nylon Coated Racks and Tines	Yes
Anti-Bacterial Treatment (Sump, Inner / Outer filter, Drain pump case, Drain hose)	Yes
Balanced Door	Yes
3-Stage Filtration System	Yes



CERTIFICATIONS	
NSF® Certified	Yes
POWER RATINGS	
ENERGY STAR® Qualified	Yes
CEE Tier	1
Energy Use (kWh/Year)	258 kWh/Year
Water Factor (WF)	2.9
DIMENSIONS / CLEARANCES / WEIGHT	
Product Dimensions (in) (W x H x D)	23 3/4" x 33 5/8" x 24 5/8"
Product Weight (lbs)	75 lbs
Depth with Door Closed with Handle (in)	24 5/8"
Depth with Door Open (in)	49 1/4"
Carton Dimensions (in) (W x H x D)	28" x 34 7/8" x 29 5/8"
Shipping Weight with Carton (lbs)	88.2 lbs
LIMITED WARRANTY	
Labor	1 Year
Parts	1 Year
Control Board and Rack Parts	5 Years
Direct Drive Motor	10 Years
Stainless Steel Door Liner or Tub	Lifetime
UPC CODES	
LDFN3432T (Stainless Steel)	048231341950

DS  
Mt

DS  
F. M.



PW2 LOT 353 INCOME SUITE - DRYER DLE3600W

HOME APPLIANCES

LG LAUNDRY

DLE3600\_ / DLG3601\_  
7.4 cu.ft. Front Load Dryer with Built-In Intelligence

KEY FEATURES

- 7.4 cu. ft. Ultra Large Capacity
- AI Fabric Sensor/ Smart Pairing™
- LG ThinQ® Technology / Proactive Customer Care
- Tempered Glass Door
- FlowSense™ Duct Clogging and Lint Filter Indicators
- ENERGY STAR® Certified
- Closet Depth
- LoDecibel™ Quiet Operation
- Reversible Door
- Wrinkle Care Option

AVAILABLE COLORS



WHITE



GRAPHITE STEEL



SMART APPLIANCE

LG ThinQ®

works with the Google Assistant

WORKS WITH alexa

Enjoy new ways to control your home with LG smart appliances

- Use the ThinQ® app to start the laundry while you're out
- Get alerts when the cycle is finished
- With Smart Pairing™, the washer can tell the dryer to select a compatible drying cycle



PRODUCT FEATURES

SUMMARY		CONVENIENCE FEATURES		OPTIONS	
Type	Front Load Dryer	3 Minute Installation Check	Yes	LP Conversion Kit	383EEL3002D / LPK1
Capacity	7.4 cu. ft.	LoDecibel™ Quiet Operation	Yes	Side Venting Kit	3911EZ9131X
Matching Washer	WM3600HWA, WM3600HVA	End of Cycle Signal	Yes	Pedestal	WDP4W, WDP4V
Sensor Dry	Yes	Reversible Door	Yes	Pedestal (WxHxD)	27 x 14 1/8 x 30 3/4 (50 1/2 D with door open)
Color	White (W), Graphite Steel (V)	FlowSense™ Duct Clogging Indicator	Yes	DIMENSIONS (ELECTRIC)	
APPEARANCE		Wrinkle Care Option	Yes	Product (WxHxD)	27" x 39" x 30 1/8"
Intelligent Electronic Controls with LED Display	Yes	Child Lock	Yes	Depth with Door Open	51 3/8"
Dial-A-Cycle™	Yes	Venting Option	Electric: 4 Way Venting / Gas: 3 Way Venting	Carton (WxHxD)	29 1/2" x 42 1/4" x 31 1/4"
Touch Buttons	Yes	4 Adjustable Legs	Yes	Weight (Product)	121.9 lbs.
DRYER PROGRAMS		Remaining Time Display/Status Indicator(s)	Yes	Weight (Carton)	140.2 lbs
No. of Programs	10	ThinQ® TECHNOLOGY		DIMENSIONS (GAS)	
Programs (Sensor Dry)	Normal, Heavy Duty, Bedding, Small Load, Perm Press, Delicates, Towels, Speed Dry (Manual Dry), Air Dry (Manual Dry), Downloaded	SmartDiagnosis™ (v3.0)	Yes	Product (WxHxD)	27" x 39" x 30 1/8"
No. of Options	9	Wi-Fi	Yes	Depth with Door Open	51 3/8"
Options	More Time, Less Time, Damp Dry Signal, Wrinkle Care, Control Lock, Wi-Fi, Energy Saver, Remote Start, Signal	Remote Start and Cycle Monitor	Yes	Carton (WxHxD)	29 1/2" x 42 1/4" x 31 1/4"
Temperature Settings	High, Med-High, Medium, Low, Ultra Low	Energy Monitoring	Yes (Wi-Fi)	Weight (Product)	136.03 lbs
Drying Levels	Very Dry, More Dry, Normal Dry, Less Dry, Damp Dry	ENERGY		Weight (Carton)	151.7 lbs
Manual Dry Times	60 min., 40 min., 30 min., 20 min., More Time/Less Time	ENERGY STAR® Certified		LIMITED WARRANTY	
FABRIC CARE FEATURES		CEP		Parts & Labor	1 Year
A.I Dry	Yes	MATERIALS AND FINISHES		Drum	3 Years
Sensor Dry	Yes	Aluminized Alloy Steel Drum	Yes	UPC CODES	
Precise Temperature Control with Variable Heater	Yes	Tub Rear	Painted	DLE3600W (White)	048231028332
		Cabinet	Painted Steel	DLG3601W (White)	048231028349
		Door	Tempered Glass Door	WM3600HWA (White)	048231028264
		All Available Colors	White (W), Graphite Steel (V)	DLE3600V (Graphite Steel)	048231028318
		POWER SOURCE		DLG3601V (Graphite Steel)	048231028325
		Ratings	CSA Listed	WM3600HVA (Graphite Steel)	048231028257
		Electrical Requirements	120V, 15 Amps (Gas) / 240V 30 Amps (Electric)		
		Type	Electric, Gas		
		BTU Rating	Electric: 10,000 Gas: 20,000		

© 2020 LG Electronics USA, Inc. All rights reserved. "LG Life's Good" is a registered trademark of LG Corp. All other product and brand names are trademarks or registered trademarks of their respective owners. Design, features and specifications are subject to change without notice. Non-metric weights and measurements are approximate. Some features may require Internet access. Content and services may vary by product and are subject to change without notice. 3/29/21

DS  
M+ F M

PW2 LOT 353 INCOME SUITE - FRIDGE LTCS20020S

HOME APPLIANCES

LG REFRIGERATION

LTCS20020\_
Top Mount Refrigerator



KEY FEATURES

- Large Capacity- 20 cu. ft.
- Reversible Door
- Premium LED Refrigerator Lights
- Ice Maker Optional- LK65C
- Stainless Steel

AVAILABLE COLORS

- STAINLESS STEEL
- SMOOTH WHITE
- SMOOTH BLACK



PRODUCT FEATURES

CAPACITY	
Refrigerator (cu. ft.)	14.7
Freezer (cu. ft.)	5.5
Total Capacity (cu. ft.)	20.2
ENERGY	
Energy Consumption (kWh/Year)	430
ENERGY STAR® Qualified	Yes
WATER & ICE SYSTEM	
Ice System	Ice Maker Optional- LK65C
COOLING	
Inverter Compressor	Yes
Multi-Air Flow™ System	Yes
Temperature Sensors	3
Refrigerant	R600a - Low Global Warming Potential, Zero Ozone Depletion Potential and More Energy Efficient Refrigerant than R134a
CONVENIENCE	
Display Type	Internal Membrane / Green LED
Temperature Controls	Electronic/Digital
LoDecibel™ Quiet Operation	Yes
REFRIGERATOR	
No. of Shelves	2
Shelf Construction	Tempered Glass
Crisper Bins	2 Humidity Crispers
Refrigerator Light	Top LED
REFRIGERATOR DOOR	
Door Type	Reversible Door
No. of Bins	2 Total (2 Gallon Sized)
Door Bin Construction	1 Piece (Clear, Diamond Pattern)
FREEZER	
Door Type	Swing Door Type
Drawers	1 Glass Shelf
No. of Door Bins/Construction	2 Full (Clear, Diamond Pattern)
Freezer Handle	Pocket Handle

MATERIALS AND FINISHES	
Contour Door	Yes
Surface	Smooth
All Available Colors	Stainless Steel, Smooth White
Insulation	Cyclopentane - Low Global Warming Potential, and Zero Ozone Depletion Potential Blowing Agent
DIMENSIONS/CLEARANCES/WEIGHTS	
Depth with Handles	33 3/8"
Depth without Handles	33 3/8"
Depth without Door	29 1/2"
Depth (Total with Door Open)	60"
Height to Top of Case	65 1/2"
Height to Top of Door Hinge	66 1/8"
Width	29 3/4"
Width (Door Open 90° with Handle)	31 3/4"
Width (Door Open 90° without Handle)	31 3/4"
Door Edge Clearance with Handle	2"
Door Edge Clearance without Handle	2"
Installation Clearance	Sides 2", Top 2", Back 2"
Weight (Unit/Carton)	202 lbs./226 lbs.
Carton Dimensions (WxHxD)	31 4/5" x 69 3/8" x 38 1/7"
LIMITED WARRANTY	
Parts & Labor	1 Year
Sealed System (Parts & Labor)	5 Years
Compressor (Parts & Labor)	5 Years
Inverter Compressor (Parts Only)	6-10 Years
UPC CODES	
LTCS20020S (Stainless Steel)	048231805179
LTCS20020W (Smooth White)	195174001448
LTCS20020B (Smooth Black)	195174004548

Handwritten signatures and initials: MT, F, M.

PW2 LOT 353 INCOME SUITE - RANGE LREL6321S

HOME APPLIANCES

LG COOKING

LREL6321S

6.3 cu. ft. Smart Wi-Fi Enabled Electric Range with EasyClean®

6.3 cu. ft. Large Capacity

EasyClean®

LG ThinQ® App with ThinQ Care

AVAILABLE COLORS



STAINLESS STEEL

Proactive Smart Alerts to Keep Your Appliances Running Smoothly



- Preventative Alerts help you stay a step ahead of potential issues to find proactive solutions before problems arise.
- Avoid preventable repairs and service calls with real-time diagnostics for a hassle-free experience.
- Integrated within LG's ThinQ app—a smart home hub for managing your smart devices and appliances.



SUMMARY	
Cooktop Type	Radiant, Ceramic Glass
Number of Cooktop Burners	5
Oven Type	Single Oven
Oven Cooking System	Traditional
Oven Capacity (cu. ft.)	6.3
Oven Cleaning Type	EasyClean®
Drawer Type	Storage
Size in Width (in.)	30"
APPEARANCE	
Color	Stainless Steel
Control Type	Touchpad
Knobs	Stainless Steel Appearance
Oven Door Feature	WideView™ Window
Cooktop Finish	Ceramic Glass, Porcelain Enamel
COOKTOP	
Cooktop Type	Radiant, Ceramic Glass
Number of Cooktop Burners	5
Element/Burner - Left Front	9" / 6" Dual, 3200W UltraHeat™
Element/Burner - Left Rear	6" Single, 1200W
Element/Burner - Right Front	9" / 6" Dual, 3200W UltraHeat™
Element/Burner - Right Rear	6" Single, 1200W
Element/Burner - Center	7" Single, 100W Warming Zone
Hot Surface Indicator Light	Yes

OVEN	
Oven Type	Single Oven
Oven Cooking System	Traditional
Oven Cleaning Type	EasyClean®
Oven Capacity (cu. ft.)	6.3
Broiler Element Power	4200W
Bake Element Power	3400W
Hidden Bake Element	Yes
Number of Rack Positions	7
Number of Oven Racks	2
Oven Rack Type	2 Standard
Drawer Type	Storage
Oven Modes	Bake, Broil, Easy Clean, Warm
Oven Light Type	Halogen
CONTROL FEATURES	
Kitchen Timer	Yes
Timed Cook	Yes
Oven Control Lock	Yes
Sabbath Mode	Yes
SMART FEATURES	
Wi-Fi	Yes
ThinQ Care	Yes
Smart Diagnosis™	Yes
Works with	LG ThinQ® Amazon Alexa Google Assistant SIDECHEF

POWER/RATINGS	
Amp Rating at 208V	47.3
Amp Rating at 240V	54.6
KW Rating at 208V	9.8
KW Rating at 240V	13.1
Required Power Supply Amp	40
DIMENSIONS & WEIGHT	
Cabinet Width (in.)	30"
Overall Depth (in.) - Including Handle	28 7/8"
Overall Height (in.)	46 1/2"
Overall Width (in.)	29 7/8"
Product Weight (lb)	157
Shipping Weight (lb)	181
Shipping Dimensions (W x H x D) (in.)	32 1/2" x 51" x 30 1/2"
POWER/RATINGS	
Amp Rating at 208V	47.3A
Amp Rating at 240V	54.6A
KW Rating at 208V	9.8kW
KW Rating at 240V	13.1kW
Required Power Supply (amp)	40A
UPC CODES	
LREL6321S (Stainless Steel)	048231341417

DS  
Mt F. M.

PW2 LOT 353 INCOME SUITE - WASHER WM3600HWA

HOME APPLIANCES

LG LAUNDRY

WM3600H\_A

4.5 cu.ft. Front Load Washer with Built-In Intelligence & Steam Technology

KEY FEATURES

- 4.5 cu. ft. Ultra Large Capacity
- AI Fabric Sensor/ Smart Pairing™
- AAFA certified LG washer
- LG ThinQ® Technology / Proactive Customer Care
- Tempered Glass Door
- ColdWash™ Technology
- Direct Drive Motor 10-Year Limited Warranty
- ENERGY STAR® Certified
- Closet Depth
- NeveRust™ Stainless Steel Tub

AVAILABLE COLORS

- WHITE
- GRAPHITE STEEL



SMART APPLIANCE



Enjoy new ways to control your home with LG smart appliances

- Use the ThinQ® app to start the laundry while you're out
- Get alerts when the cycle is finished
- With Smart Pairing™, the washer can tell the dryer to select a compatible drying cycle



PRODUCT FEATURES

SUMMARY		Max RPM	1300	Control Panel	Plastic
Type	Front Load Washer	Water Levels	Load Sensing	Top Plate	Painted
Capacity (cu.ft.)	4.5 cu. ft.	No. of Soil Levels	5	Door / Rim	Glass/White Rim (White), Glass/Silver Rim (Graphite Steel)
Matching Electric Dryer	DLE3600W, DLE3600V	FABRIC CARE FEATURES		Door Cover	Tinted Cover
Matching Gas Dryer	DLG3601W, DLG3601V	AI DD™	Yes	All Available Colors	White (W), Graphite Steel (V)
Color	White (W), Graphite Steel (V)	Steam Technology	Yes	CERTIFICATION	
APPEARANCE		Allergiene™ Cycle	Yes	AAFA	Yes
Hard Buttons	Yes	Sanitary Cycle	Yes	POWER SOURCE	
Touch Buttons	Yes	ColdWash™ Option	Yes	Ratings	UL Listed
Dial-A-Cycle™	Yes	SenseClean™ System	Yes	Electrical Requirements	120V, 10 Amps
ENERGY		CONVENIENCE FEATURES		Type	Electric
ENERGY STAR® Most Efficient 2019	Yes	TrueBalance™ Anti-Vibration System	Yes	OPTIONS/ACCESSORIES	
ENERGY STAR® Qualified	Yes	4 Tray Dispenser	Prewash, Main Wash (with liquid detergent cup), Bleach, Fabric Softener	Pedestal	WDP4W, WDP4V
CEE Tier	2	LoDecibel™ Quiet Operation	Yes	Pedestal (WxHxD)	27 x 14 1/8 x 30 3/4 (50 9/16 D with door open)
IMEF	2.92	End of Cycle Signal	Yes	LG Sidekick™ Pedestal Washer	WD100CW, WD100CV
IWF	2.9	LoadSense	Yes	LG Sidekick™ Pedestal Washer (WxHxD)	27 x 14 1/8 x 30 3/4 (50 9/16 D with door open)
WASH PROGRAMS		Child Lock	Yes	Stacking Kit	KSTK1
No. of Programs	10	Auto Suds Removal	Yes	DIMENSIONS	
Wash Programs	Normal, Heavy Duty, Bedding, Allergiene™, Tub Clean, Perm. Press, Delicates, Speed Wash, Rinse + Spin, Downloaded	Leveling Legs	4 Adjustable Legs	Product (WxHxD)	27" x 39" x 30 1/4"
WASH OPTIONS		Easy Loading TilTub™	Yes	Depth with Door Open	(55" D with door open)
No. of Options	9	ThinQ® TECHNOLOGY		Carton (WxHxD)	29 23/32" x 41 27/32" x 31 17/32"
Options	Steam, Delay Wash, Pre-Wash, Extra Rinse, Cold Wash, Wi-Fi, Remote Start, Spin Only, Control Lock	SmartDiagnosis™ (v3.0)	Yes	Weight (Product/Carton)	187.4 / 209.8 lbs
WASH DETAILS		Wi-Fi	Yes	LIMITED WARRANTY	
No. of Wash/Rinse Temps	5	Remote Start and Cycle Monitor	Yes	Parts and Labor	1 Year
Wash/Rinse Temps	Extra Hot, Hot, Warm, Cold, Tap Cold	Energy Monitoring	Yes	Direct Drive Motor	10 Years
No. of Spin Speeds	5	MOTOR AND AGITATOR		Drum	3 Years
Spin Speeds	Extra High, High, Medium, Low, No Spin	Motor Type	Inverter Direct Drive Motor	UPC CODES	
		Axis	Horizontal	WM3600HWA (White)	048231028264
		MATERIALS AND FINISHES		WM3600HVA (Graphite Steel)	048231028257
		NeveRust™ Stainless Steel Drum	Yes		
		Cabinet	PCM		

© 2020 LG Electronics USA, Inc. All rights reserved. "LG Life's Good" is a registered trademark of LG Corp. All other product and brand names are trademarks or registered trademarks of their respective owners. Design, features and specifications are subject to change without notice. Non-metric weights and measurements are approximate. Some features may require Internet access. Content and services may vary by product and are subject to change without notice. 7/22/20

DS  
M+ F M