



29-Jul-21

PRE-Sales Selection Sheet

CHECKLIST

7A 39^{CU}

LOT	001-2	* REVISED *	20-2447 ELEV A THE JAMESPORT
PURCHASERS: ANKITKUMAR PATEL		CONTACT NO: 705-808-5225	
KSHITI SANJIV PATEL		647-335-5225	
VENDOR: HEATHWOOD HOMES (UPCOUNTRY) LIMITED			

☒ FINISHED BASEMENT	
☐ COLD CELLAR	
UPGRADED / MODIFIED ELEVATION	
☐ CORNER UPGRADE	☐ WALK OUT DECK
☐ SIDE UPGRADE	☐ WALK OUT BASEMENT
☐ REAR UPGRADE	
CEILING UPGRADE - SMOOTH	
☒ MAIN FLOOR *	☐ BASEMENT
☐ SECOND FLOOR	
ADDITIONAL ROUGH-INS	
☒ 200 AMP SERVICE	☐ HUMIDIFIER
☐ WET BAR ROUGH IN	☒ AIRCON
GAS ROUGH-IN	
☒ STOVE *	☐ DRYER
☐ BBQ	☐ ADDITIONAL FIREPLACE
HOODFAN VENTING	
☒ 6" ROUND DUCT *	
☐ 7" ROUND DUCT	
FULL BASEMENT STAIRS: PAINT GRADE	
UPPER BASEMENT STAIRS:	N/A
LOWER BASEMENT STAIRS:	N/A
STAIRS TO LOWER LEVEL:	ALL OAK
STAIRS TO UPPER LEVEL:	N/A
MAIN STAIRS:	ALL OAK
MEDIA STAIRS (if applicable):	N/A

Date	July 27/21	Signature on file	July 27/21	1KIT SALGM
Date		Purchaser		
Date		Purchaser		

Date	APPROVED	Décor Consultant
Date	29 2021	
Date	Approved	HEATHWOOD HOMES (UPCOUNTRY) LIMITED



Interior Finishing Selection Sheet

27-Jul-21

LOT 001-2

20-2447 ELEV A THE JAMESPORT

PURCHASERS: ANKITKUMAR PATEL CONTACT NO: 705-808-5225
KSHITI SANJIV PATEL 647-335-5225

VENDOR: HEATHWOOD HOMES (UPCOUNTRY) LIMITED

Appliances

6-9117 Kitchen HoodFan

☒ CYCLONE 30" STAINLESS CHIMNEY/CANOPY HOODFAN
STAINLESS STEEL SCB51930 UPG 30" Page 25

Cabinetry

1-9111 Kitchen Cabinet Colour/Style

☐ SIMCOE ORCHID VIKING III STD 3DL

3-7676 Kitchen Cabinet Hardware

☐ HARDWARE 12843 STD

25-8375 Main Bathroom Cabinet Colour/Style

☐ MANCHESTER POPPY SEED Viking III MAPLE

29-7676 Main Bathroom Cabinet Hardware

☐ HARDWARE 12843 STD

28-8797 Main Bathroom Countertop

☐ Countertop ARGENTO ROMANO ETCHINGS FINISH 6697-46 Formica

20-8375 Master Ensuite Cabinet Colour/Style

☐ MANCHESTER POPPY SEED Viking III MAPLE

22-7676 Master Ensuite Cabinet Hardware

☐ HARDWARE 12843 STD

21-8797 Master Ensuite Countertop

☐ Countertop ARGENTO ROMANO ETCHINGS FINISH 6697-46 Formica

414-8375 Powder Room Lower Level Cabinet Colour/Style

☐ MANCHESTER POPPY SEED Viking III MAPLE

416-7676 Powder Room Lower Level Cabinet Hardware

☐ HARDWARE 12843 STD

415-8797 Powder Room Lower Level Countertop

☐ Countertop ARGENTO ROMANO ETCHINGS FINISH 6697-46 Formica

Carpet

37-9248 Bedroom 2 Flooring

☐ Dynasty Tex 40 oz Poly BLACK ICE DY 89418 STD

38-9248 Bedroom 3 Flooring

☐ Dynasty Tex 40 oz Poly BLACK ICE DY 89418 STD

14-9248 Family Room Flooring

☐ Dynasty Tex 40 oz Poly BLACK ICE DY 89418 STD

367-9248 Lower Level Hall Flooring

☐ Dynasty Tex 40 oz Poly BLACK ICE DY 89418 STD

36-9248 Master Bedroom Flooring

☐ Dynasty Tex 40 oz Poly BLACK ICE DY 89418 STD

52-1079 Throughout Underpad

☐ Underpad 500 Series STD

Ceramics

16-9255 Foyer Flooring

☐ SEMPRE White Matte TR.SP.WHITE.1313 STD 13" x 13"

1. The Purchaser acknowledges these selections are subject to the terms and conditions of the applicable Agreement of Purchase and Sale.
2. The Purchaser acknowledges that the Vendor accepts no responsibility in the event the Vendor is unable to supply a selection. The Purchaser agrees to reselect from the currently available selections immediately upon request.
3. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
4. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
5. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
6. Selections will not be processed unless signed by Heathwood Homes Head Office.
7. The colour selections made on the Colour Chart are final and cannot be changed once submitted.
8. The Purchaser has checked and acknowledges the accuracy of this Colour Chart.

27-July-2021 *Appliances*

July 27, 21 *LF*

Date Purchaser

Décor Consultant

27 Jul 21 *[Signature]*

Mr. Rosen

Date Purchaser

Date Approved HEATHWOOD HOMES (UPCOUNTRY) LIMITED



27-Jul-21

Interior Finishing Selection Sheet

LOT 001-2

20-2447 ELEV A THE JAMESPORT

PURCHASERS: ANKITKUMAR PATEL
KSHITI SANJIV PATEL

CONTACT NO: 705-808-5225
647-335-5225

VENDOR: HEATHWOOD HOMES (UPCOUNTRY) LIMITED

Ceramics

UPG

- | | |
|--|--|
| 17-2225 Foyer Grout | ☐ Grout (27) Silver STD |
| 4-8103 Kitchen Backsplash | ☒ ONTARIO HEXAGON MATTE SNOW WHITE
OD.ON.SWT.02.HEX.MT UPG_2 |
| 5-2226 Kitchen Backsplash Grout | ☐ Grout (00) White STD |
| 7-8913 Kitchen/Breakfast Flooring | ☐ Biel Bianco (White) UN.BL.BIA.1224 UPG_2 12 x 24
INSTALLED SIDE TO SIDE SKETCH # 7 PAGE 16 |
| 8-2225 Kitchen/Breakfast Grout | ☐ Grout (27) Silver STD |
| 348-9257 Laundry Mud Room Flooring | ☐ CARRARA White / Grey GE.CR.WHIT.1313.MT STD 13 x 13 |
| 349-2225 Laundry Mud Room Grout | ☐ Grout (27) Silver STD |
| 30-9257 Main Bathroom Flooring | ☐ CARRARA White / Grey GE.CR.WHIT.1313.MT STD 13 x 13 |
| 31-2225 Main Bathroom Grout | ☐ Grout (27) Silver STD |
| 112-9020 Main Bathroom Wall Tile | ☐ Weave White QT.WV.WHT.0810 STD 8 x 10 TO BE INSTALLED
HORIZONTALLY |
| 113-2226 Main Bathroom Wall Tile Grout | ☐ Grout (00) White STD |
| 23-9257 Master Ensuite Floor Tile | ☐ CARRARA White / Grey GE.CR.WHIT.1313.MT STD 13 x 13 |
| 24-2225 Master Ensuite Floor Tile Grout | ☐ Grout (27) Silver STD |
| 73-8661 Master Ensuite Shower Floor Tile | ☐ Ontario Series Mosaic Snow White Matte
OD.ON.SWT.0202.MT.N STD 2 x 2 |
| 74-2226 Master Ensuite Shower Floor Tile Grout | ☐ Grout (00) White STD |
| 147-8923 Master Ensuite Shower Jamb(s) and Sill(s) | ☐ Shower Jamb / Sill Thassos White STD |
| 104-9020 Master Ensuite Shower Wall Tile | ☐ Weave White QT.WV.WHT.0810 STD 8 x 10 TO BE INSTALLED
HORIZONTALLY |
| 105-2226 Master Ensuite Shower Wall Tile Grout | ☐ Grout (00) White STD |
| 32-9257 Powder Room Flooring | ☐ CARRARA White / Grey GE.CR.WHIT.1313.MT STD 13 x 13 |
| 33-2225 Powder Room Grout | ☐ Grout (27) Silver STD |
| 369-9257 Powder Room Lower Level Flooring | ☐ CARRARA White / Grey GE.CR.WHIT.1313.MT STD 13 x 13 |
| 370-2225 Powder Room Lower Level Grout | ☐ Grout (27) Silver STD |

1. The Purchaser acknowledges these selections are subject to the terms and conditions of the applicable Agreement of Purchase and Sale.
2. The Purchaser acknowledges that the Vendor accepts no responsibility in the event the Vendor is unable to supply a selection. The Purchaser agrees to reselect from the currently available selections immediately upon request.
3. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
4. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
5. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
6. Selections will not be processed unless signed by Heathwood Homes Head Office.
7. The colour selections made on the Colour Chart are final and cannot be changed once submitted.
8. The Purchaser has checked and acknowledges the accuracy of this Colour Chart.

27 July 2021

Aggerty

Date

Purchaser

27 Jul 21

July 27, 21

Date

Décor Consultant

Date

Purchaser

Date Approved 27-20-2021

HEATHWOOD HOMES (UPCOUNTRY)
LIMITED



27-Jul-21

Interior Finishing Selection Sheet

LOT 001-2

20-2447 ELEV A THE JAMESPORT

PURCHASERS: ANKITKUMAR PATEL
KSHITI SANJIV PATEL

CONTACT NO: 705-808-5225
647-335-5225

VENDOR: HEATHWOOD HOMES (UPCOUNTRY) LIMITED

UPG

Ceramics

53-2232 Throughout Thresholds

☐ Metal Thresholds STD

Electrical

90-5796 Throughout Switches and Plug

☐ Décora White Switches and Plugs STD

Fireplace

136-9114 Great Room Fireplace Mantle

☐ Paint Grade Mantel- Cabinet (Per Plan) WHITE NF 15 STD

135-8865 Great Room Fireplace Type

☐ Dimplex FP3033HL Electric Fireplace

Granite

2-7823 Kitchen Countertop

☐ Granite UBA TUBA Group 1 STD 3/4"

Hardwood

11-9358 Great Room Flooring

☐ Vintage Pioneerred Solid Collection Select V : Red Oak Pearl
TITANIUM Red Oak Pearl 3/4" X 3 1/4"

12-9358 Living Room Flooring

☐ Vintage Pioneerred Solid Collection Select V : Red Oak Pearl
TITANIUM Red Oak Pearl 3/4" X 3 1/4"

98-9358 Main Hall Flooring

☐ Vintage Pioneerred Solid Collection Select V : Red Oak Pearl
TITANIUM Red Oak Pearl 3/4" X 3 1/4"

~~79-9059 Stair Landing at Garage Entry Flooring~~
~~77-9059 Stair Landings to Upper Level Flooring~~

☐ Red Oak-Vintage 3 1/4 inch Pre-Sanded Smooth Unfinished Red Oak-Unfinished-3/4 inch x 3 1/4inch 3/4" x 3 1/4" STAIN SAMBUCCA COLOUR IS DIFFERENT THEN HARDWOOD FLOOR

78-9059 Stair Landing to Lower Level Flooring

☐ Red Oak-Vintage 3 1/4 inch Pre-Sanded Smooth Unfinished Red Oak-Unfinished-3/4 inch x 3 1/4inch 3/4" x 3 1/4" STAIN SAMBUCCA COLOUR IS DIFFERENT THEN HARDWOOD FLOOR

35-9358 Upper Hall Flooring

☐ Vintage Pioneerred Solid Collection Select V : Red Oak Pearl
TITANIUM Red Oak Pearl 3/4" X 3 1/4"

Interior Railings

49-7654 Stairs to Lower Level Handrail/Pickets/Posts Type

☐ 1 3/4" Square pickets with 3 1/2" Square/Cap Post(s) ALL
OAK STD

43-7654 Stairs to Upper Level Handrail/Pickets/Posts Type

☐ 1 3/4" Square pickets with 3 1/2" Square/Cap Post(s) ALL
OAK STD

Interior Stairs

119-1713 Basement Stairs Handrail/Pickets/Post Type

☐ Paint Grade Stairs STD

1. The Purchaser acknowledges these selections are subject to the terms and conditions of the applicable Agreement of Purchase and Sale.
2. The Purchaser acknowledges that the Vendor accepts no responsibility in the event the Vendor is unable to supply a selection. The Purchaser agrees to reselect from the currently available selections immediately upon request.
3. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
4. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
5. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
6. Selections will not be processed unless signed by Heathwood Homes Head Office.
7. The colour selections made on the Colour Chart are final and cannot be changed once submitted.
8. The Purchaser has checked and acknowledges the accuracy of this Colour Chart.

27 July 2021

Purchaser

Date

Purchaser

27 July 2021

Décor Consultant

Date

M. Rosen

27th July 21

Purchaser

Date

Purchaser

~~Date Approved~~ HEATHWOOD HOMES (UPCOUNTRY)
LIMITED

27-Jul-21

LOT 001-2

20-2447 ELEV A THE JAMESPORT

PURCHASERS: ANKITKUMAR PATEL
KSHITI SANJIV PATELCONTACT NO: 705-808-5225
647-335-5225

VENDOR: HEATHWOOD HOMES (UPCOUNTRY) LIMITED

UPG

Interior Stairs

46-1712 Stairs to Lower Level Type

☐ Oak Stairs UPG_1

39-1712 Stairs to Upper Level Type

☐ Oak Stairs UPG_1

Interior Trim

91-9374 Throughout Trim Size

☐ 4 1/4" Baseboards and 2 3/4" Integrated Backbend Casings
STD-Towns

Painting

46-1728 Stairs to Lower Level Colour

☐ Stain handrail, pickets, stringers, treads, risers, nosing &
posts. STAIN SAMBUCCA COLOUR IS DIFFERENT THEN
HARDWOOD FLOOR

50-1728 Stairs to Lower Level Handrail/Pickets/Posts Colour

☐ Stain handrail, pickets, stringers, treads, risers, nosing &
posts. STAIN SAMBUCCA COLOUR IS DIFFERENT THEN
HARDWOOD FLOOR

40-1728 Stairs to Upper Level Colour

☐ Stain handrail, pickets, stringers, treads, risers, nosing &
posts. STAIN SAMBUCCA COLOUR IS DIFFERENT THEN
HARDWOOD FLOOR

44-1728 Stairs to Upper Level Handrail/Pickets/Posts Colour

☐ Stain handrail, pickets, stringers, treads, risers, nosing &
posts. STAIN SAMBUCCA COLOUR IS DIFFERENT THEN
HARDWOOD FLOOR

240-1716 Throughout Trim - Paint Colour

☐ Trim WHITE STD

51-1717 Throughout Walls - Paint Colour

☐ Wall WARM GREY 22 STD

Plumbing

266-1737 Main Bathroom Plumbing Fixture (Colour)

☐ Plumbing Fixtures WHITE STD

149-1737 Master Ensuite Plumbing Fixture (colour)

☐ Plumbing Fixtures WHITE STD

34-1737 Powder Room Plumbing Fixture (Colour)

☐ Plumbing Fixtures WHITE STD

371-1737 Powder Room Lower Level Plumbing Fixture (Colour)

☐ Plumbing Fixtures WHITE STD

1. The Purchaser acknowledges these selections are subject to the terms and conditions of the applicable Agreement of Purchase and Sale.
2. The Purchaser acknowledges that the Vendor accepts no responsibility in the event the Vendor is unable to supply a selection. The Purchaser agrees to reselect from the currently available selections immediately upon request.
3. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
4. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
5. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
6. Selections will not be processed unless signed by Heathwood Homes Head Office.
7. The colour selections made on the Colour Chart are final and cannot be changed once submitted.
8. The Purchaser has checked and acknowledges the accuracy of this Colour Chart.

27 July 2021 Appals

July 27 21

Date Purchaser

Date APPROVED - Décor Consultant

27 Jul 21

27-07-2021

Date Purchaser

Date Approved HEATHWOOD HOMES (UPCOUNTRY)

LIMITED



27-Jul-21

Sales Selection Sheet
OF 3

LOT	001-2	20-2447 ELEV A THE JAMESPORT	
PURCHASERS: ANKITKUMAR PATEL		CONTACT NO: 705-808-5225	
KSHITI SANJIV PATEL		647-335-5225	
VENDOR:	HEATHWOOD HOMES (UPCOUNTRY) LIMITED		HST #

It is herein understood and agreed between the undersigned parties hereto that the following changes shall be made to the above mentioned Agreement of Purchase and Sale in accordance with the agreement and except for such changes noted below, all other terms and conditions in the Agreement of Purchase and Sale shall remain as stated herein: It is further understood that and agreed that all changes and additions shall be installed as per builder's specifications, location and available selections. The Purchaser hereby agrees to purchase the following extras:

AMOUNT:

Appliances

792	Cyclone 30" Wall Mount Chimney Hood SS	KITCHEN	Qty: 1
	SCB51930		

PAGE 25

Cabinetry

440	Optional Extras	KITCHEN	Qty: 1
	03H- 66cm deep fridge cabinet (counter depth)(66cm fridge gable(s) sold separately) Viking		

SKETCH # 7 PAGE 16

Ceramics

703	Upgrade 2 Tile	Kit/Brk Floor	Qty: 1
-----	----------------	---------------	--------

493	Optional Extras	KITCHEN	Qty: 1
	Supply and install additional backsplash due to chimney hoodfan installation Upgrade 2		

707	Upgrade 2 Tile	Kitchen Optional Backsplash	Qty: 1
-----	----------------	-----------------------------	--------

Drywall

633	Ceiling Upgrades	Smooth Ceilings Main Floor	Qty: 1
-----	------------------	----------------------------	--------

Smooth Ceilings Main Floor
INCLUDES FOYER CEILING

Electrical

1. This Sales Selection Sheet when properly executed forms part of our Agreement of Purchase and Sale.
2. All extras and upgrades listed above are subject to Construction Progress and Architectural and Municipal requirements.
3. In the event the Vendor is unable to incorporate the work approved above in the construction of the house for any reason whatsoever, the Vendor will not be liable to the Purchaser in any way. The monies paid for any changes or optional extras not proceeded with shall be returned to the Purchaser, without interest. The cost of options or extras is non-refundable in all other circumstances. If for any reason whatsoever the Agreement of Purchase and Sale is not completed, the total cost of work approved above will be retained by the Vendor.
4. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
5. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
6. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
7. Selections will not be processed unless signed by Heathwood Homes Head Office.
8. The selections made on this schedule are final and cannot be changed once submitted.
9. The Purchaser has checked and acknowledges the accuracy of this schedule.

Date	Signature on file	July 27, 21	Date	Decor Consultant
Date	Purchaser		Date	APPROVED -
Date	Purchaser		Date	APPROVED -

Date Approved: HEATHWOOD HOMES (UPCOUNTRY) LIMITED



27-Jul-21

Sales Selection Sheet

20-2447 ELEV A THE JAMESPORT

LOT	001-2	20-2447 ELEV A THE JAMESPORT
PURCHASERS:	ANKITKUMAR PATEL KSHITI SANJIV PATEL	CONTACT NO: 705-808-5225 647-335-5225
VENDOR:	HEATHWOOD HOMES (UPCOUNTRY) LIMITED	HST #

It is herein understood and agreed between the undersigned parties hereto that the following changes shall be made to the above mentioned Agreement of Purchase and Sale in accordance with the agreement and except for such changes noted below, all other terms and conditions in the Agreement of Purchase and Sale shall remain as stated herein: It is further understood that and agreed that all changes and additions shall be installed as per builder's specifications, location and available selections. The Purchaser hereby agrees to purchase the following extras:

AMOUNT:

284 **Optional Extras** **BASEMENT** Qty: 1

Extra wall interior outlet on Existing Circuit (does not include kitchen outlets)

SEE SKETCH # 5 PAGE# 14

286 **Optional Extras** **GREAT ROOM** Qty: 1

Ceiling rough-in (Capped)

CAP LIGHT TO BE INSTALLED IN THE CENTRE OF THE ROOM- USE EXISTING SWITCH PLUG

SEE SKETCH # 7 PAGE 16

284 **Optional Extras** **GREAT ROOM** Qty: 1

Extra wall interior outlet on Existing Circuit (does not include kitchen outlets)

TO BE INSTALLED 70" FROM FLOOR ABOVE THE FIRE PLACE SKETCH # 7 PAGE 16

286 **Optional Extras** **KITCHEN** Qty: 1

Ceiling rough-in (Capped)

CAP LIGHT TO BE INSTALLED ABOVE BREAKFAST BAR - SWITCH TO BE TOGETHER WITH STD. KITCHEN LIGHT

SEE SKETCH # 7 PAGE 16

Fireplace

44 **Optional Extras** **GREAT ROOM** Qty: 1

Purchasers have been advised: heat from the FP can damage TV above a FP and items placed on mantle. Purchasers acknowledge: Heathwood Homes and its contractors will not be liable for any damage on items placed/installed above a FP after closing

Heating / Air

277 **Optional Extras** **KITCHEN** Qty: 1

ROUGH-IN GAS LINE FOR GAS STOVE AT MAIN FLOOR (See specs) (Hook-up not included) Leave standard 120 volt electrical outlet on a separate circuit. SKETCH # 7 PAGE 16

STOVE SPECS PAGES 28-30

1. This Sales Selection Sheet when properly executed forms part of our Agreement of Purchase and Sale.
2. All extras and upgrades listed above are subject to Construction Progress and Architectural and Municipal requirements.
3. In the event the Vendor is unable to incorporate the work approved above in the construction of the house for any reason whatsoever, the Vendor will not be liable to the Purchaser in any way. The monies paid for any changes or optional extras not proceeded with shall be returned to the Purchaser, without interest. The cost of options or extras is non-refundable in all other circumstances. If for any reason whatsoever the Agreement of Purchase and Sale is not completed, the total cost of work approved above will be retained by the Vendor.
4. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
5. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
6. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
7. Selections will not be processed unless signed by Heathwood Homes Head Office.
8. The selections made on this schedule are final and cannot be changed once submitted.
9. The Purchaser has checked and acknowledges the accuracy of this schedule.

Signature on Date

Date Purchaser

Date APPROVED - Décor Consultant

Date Purchaser

Date Approved HEATHWOOD HOMES (UPCOUNTRY) LIMITED



27-Jul-21

Sales Selection Sheet
OF

LOT	001-2	20-2447 ELEV A THE JAMESPORT	
PURCHASERS: ANKITKUMAR PATEL		CONTACT NO: 705-808-5225	
KSHITI SANJIV PATEL		647-335-5225	
VENDOR:	HEATHWOOD HOMES (UPCOUNTRY) LIMITED		HST #

It is herein understood and agreed between the undersigned parties hereto that the following changes shall be made to the above mentioned Agreement of Purchase and Sale in accordance with the agreement and except for such changes noted below, all other terms and conditions in the Agreement of Purchase and Sale shall remain as stated herein: It is further understood that and agreed that all changes and additions shall be installed as per builder's specifications, location and available selections. The Purchaser hereby agrees to purchase the following extras:

AMOUNT:

Painting

350	Optional Extras - PAINT / STAIN - Custom	Qty: 3
	Stain stair landing less than 25sq/ft in sambucca. For stair with metal or oak pickets only. 5" (Unfinished Pre-sanded) smooth hardwood will be installed and to be stained in sambucca to match the stairs	

Plumbing

226	STANDARD Kitchen Sink Option	KITCHEN	Qty: 1
	KINDRED Kitchen Sink Collection - Reginox NS1930U/9 Stainless Kitchen Single Bowl Undermount Sink (or equivalent)		

PAGE 19

1. This Sales Selection Sheet when properly executed forms part of our Agreement of Purchase and Sale.
2. All extras and upgrades listed above are subject to Construction Progress and Architectural and Municipal requirements.
3. In the event the Vendor is unable to incorporate the work approved above in the construction of the house for any reason whatsoever, the Vendor will not be liable to the Purchaser in any way. The monies paid for any changes or optional extras not proceeded with shall be returned to the Purchaser, without interest. The cost of options or extras is non-refundable in all other circumstances. If for any reason whatsoever the Agreement of Purchase and Sale is not completed, the total cost of work approved above will be retained by the Vendor.
4. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
5. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
6. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
7. Selections will not be processed unless signed by Heathwood Homes Head Office.
8. The selections made on this schedule are final and cannot be changed once submitted.
9. The Purchaser has checked and acknowledges the accuracy of this schedule.

Signature on file Purchaser

July 27, 21 Date APPROVED -

Date

Décor Consultant

Date

Purchaser

Date Approved - HEATHWOOD HOMES (UPCOUNTRY) LIMITED

CU-COUNTRY LANE
LOT 1-2
20-2447 ELEV A
THE JAMESPORT


14^{6F} 39

The Jamesport

20-2447 ELEV. A

ELEVATION A:
2,447 SQ FT

Sketch #5

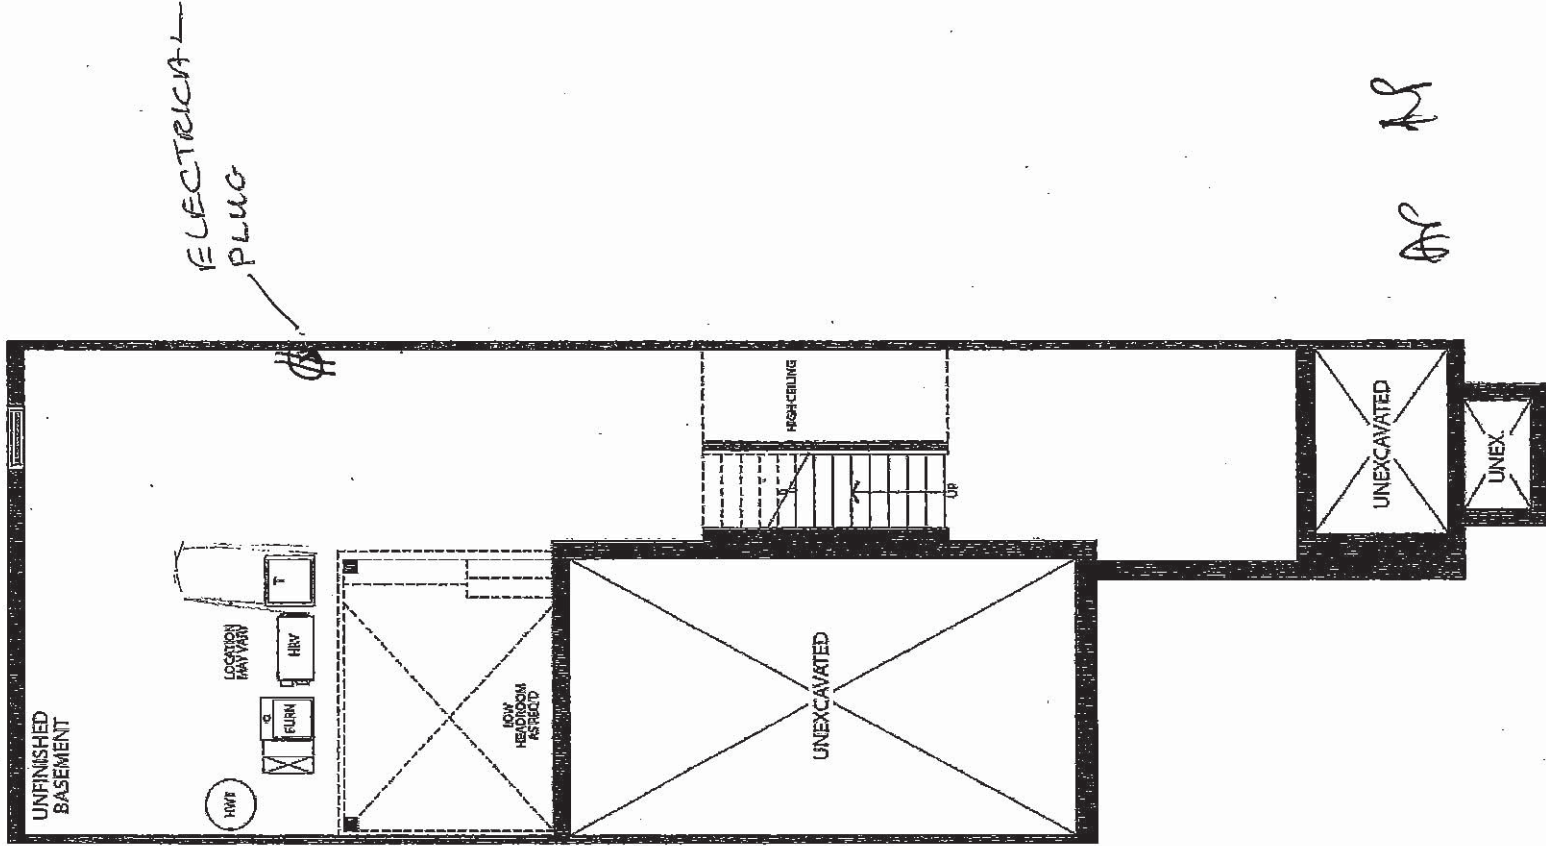


BASEMENT
ELEVATION A & B

5 of 39

20-2447 ELEV. A

Sketch #6

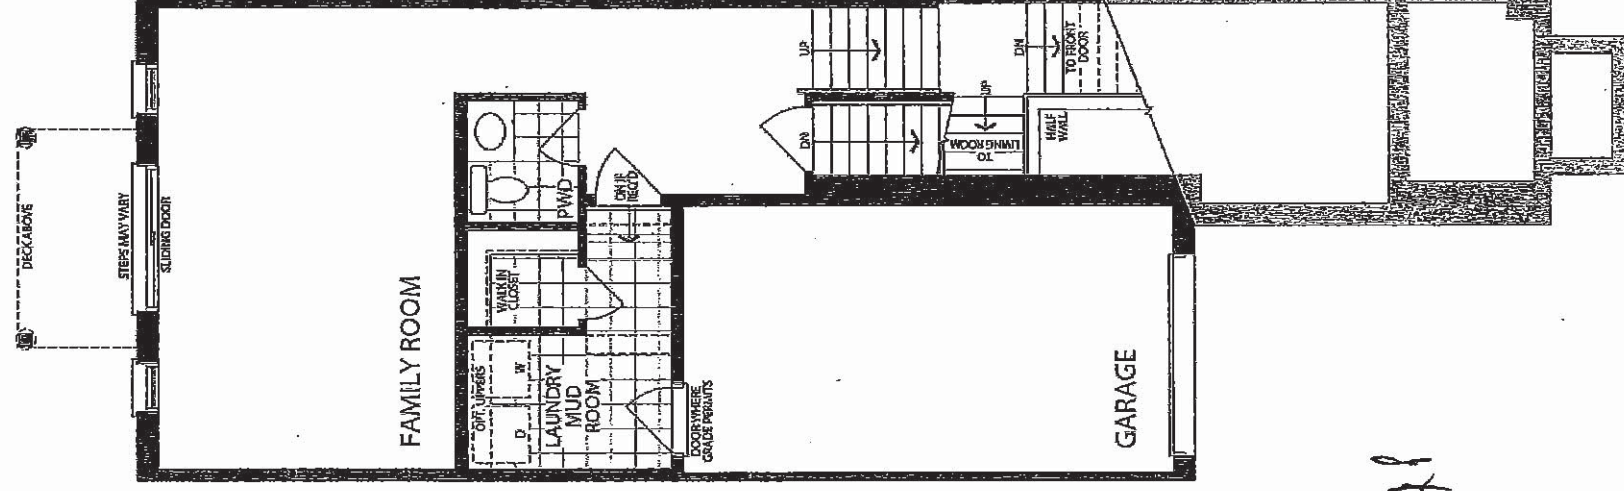

2

Legal Plan: July 22, 2020

CU-COUNTRY LANE
LOT 1-2
20-2447 ELEV A
THE JAMESPORT


16 of 39

The Jamesport

20-2447 ELEV. A

ELEVATION A:
2,447 SQ FT

Sketch # 7

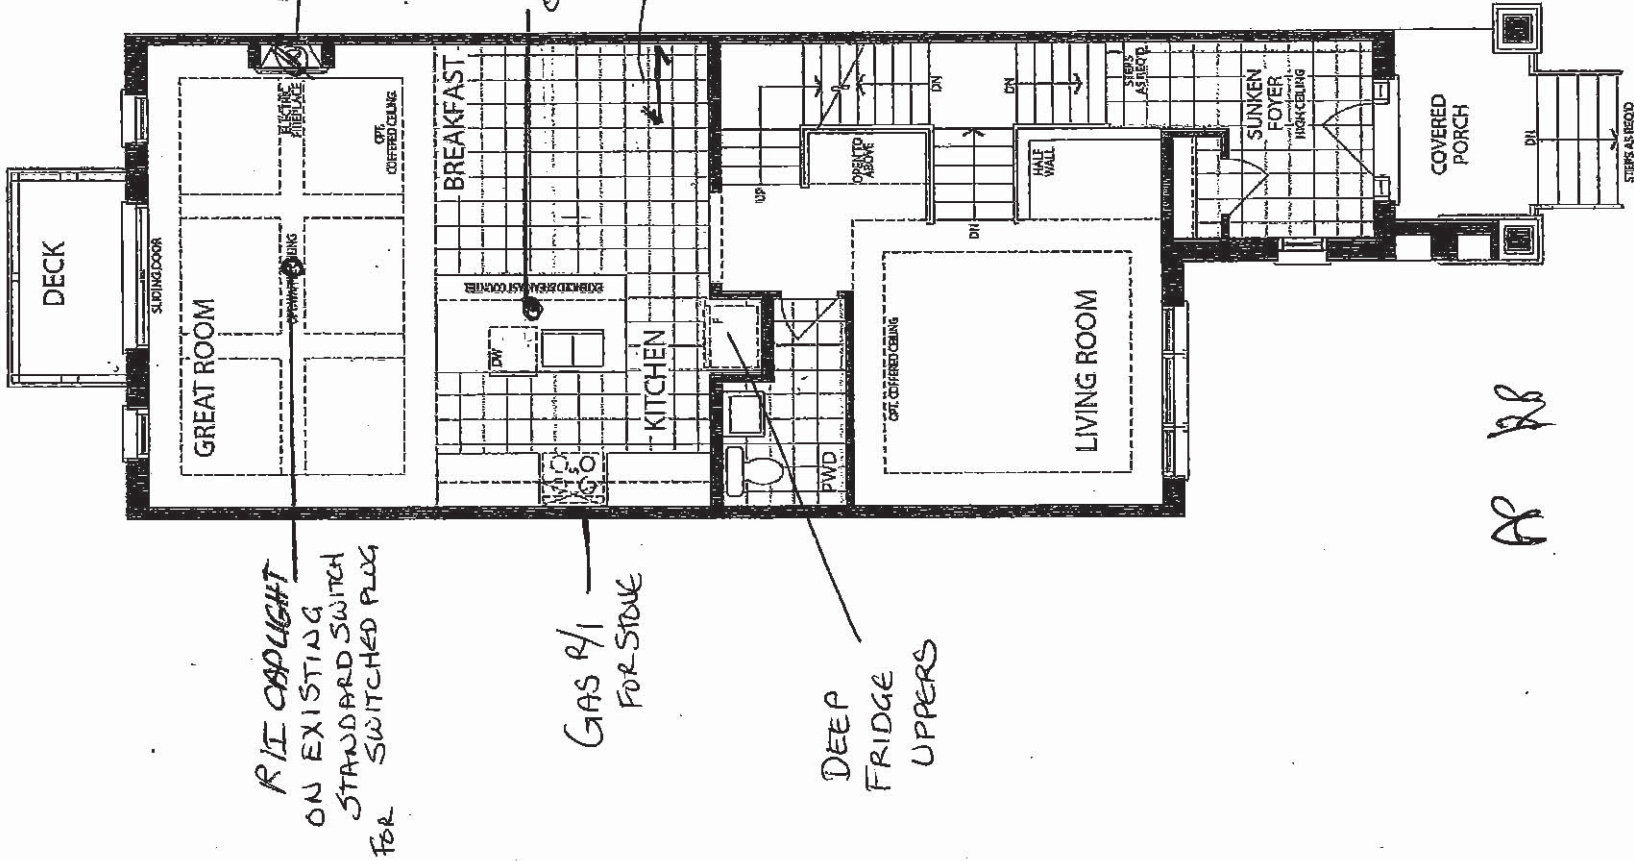

AP AB

MAIN LEVEL
ELEVATION A

CU-COUNTRY LANE
LOT 1-2
20-2447 ELEV A
THE JAMESPORT


17 of 39

The Jamesport

20-2447 ELEV. A

ELEVATION A:
2,447 SQ FT


Sketch #8

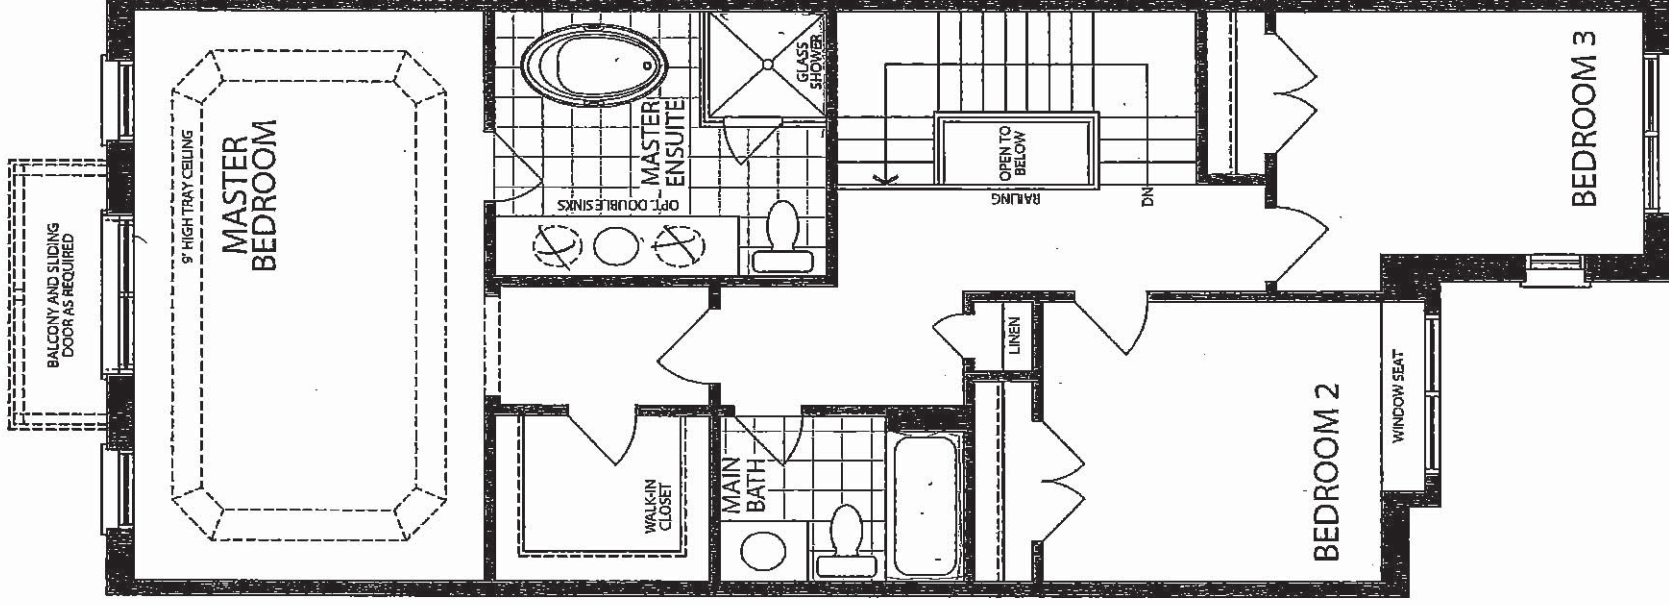

UPPER LEVEL
ELEVATION A

CU-COUNTRY LANE
LOT 1-2
20-2447 ELEV A
THE JAMESPORT

18 of 39

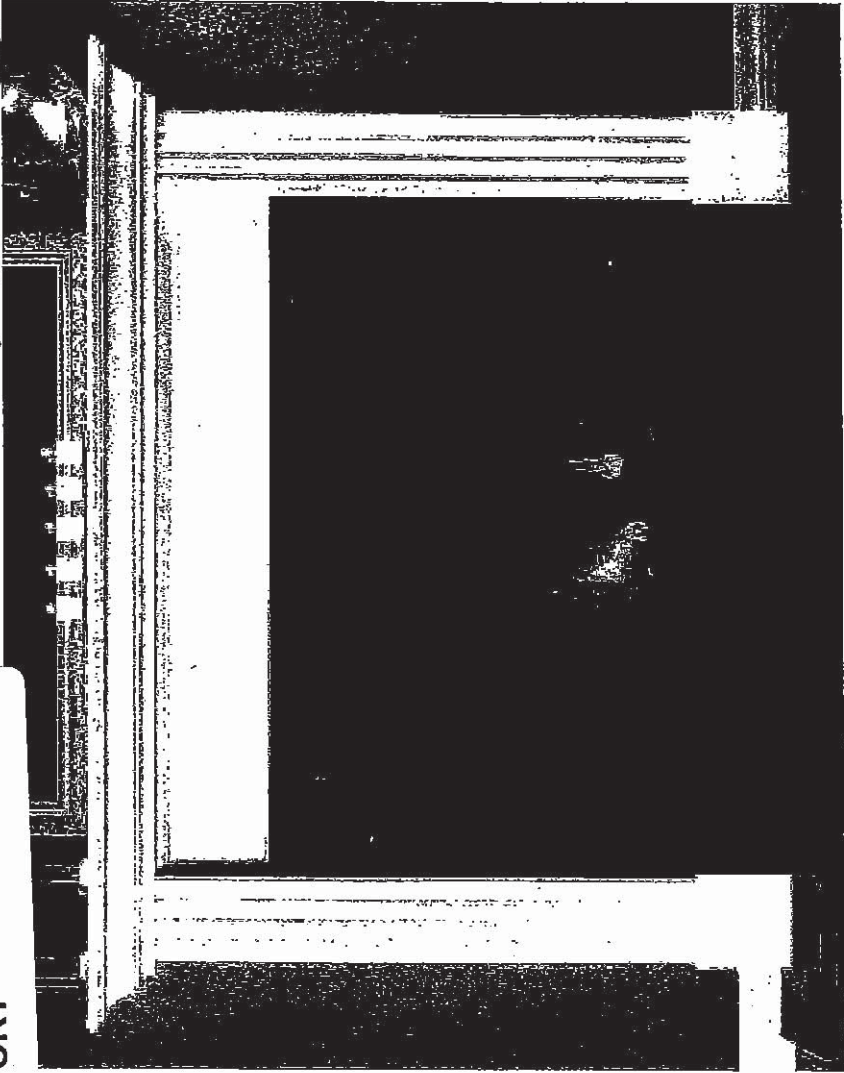


'CABINET'

STANDARD NF 15 Mantel

Clean apron finish with fluted legs

WHITE PAINT GRADE FINISH

(PICTURE SHOWN WITH UPGRADE SURROUND AND HEARTH -PRICED SEPARATELY)

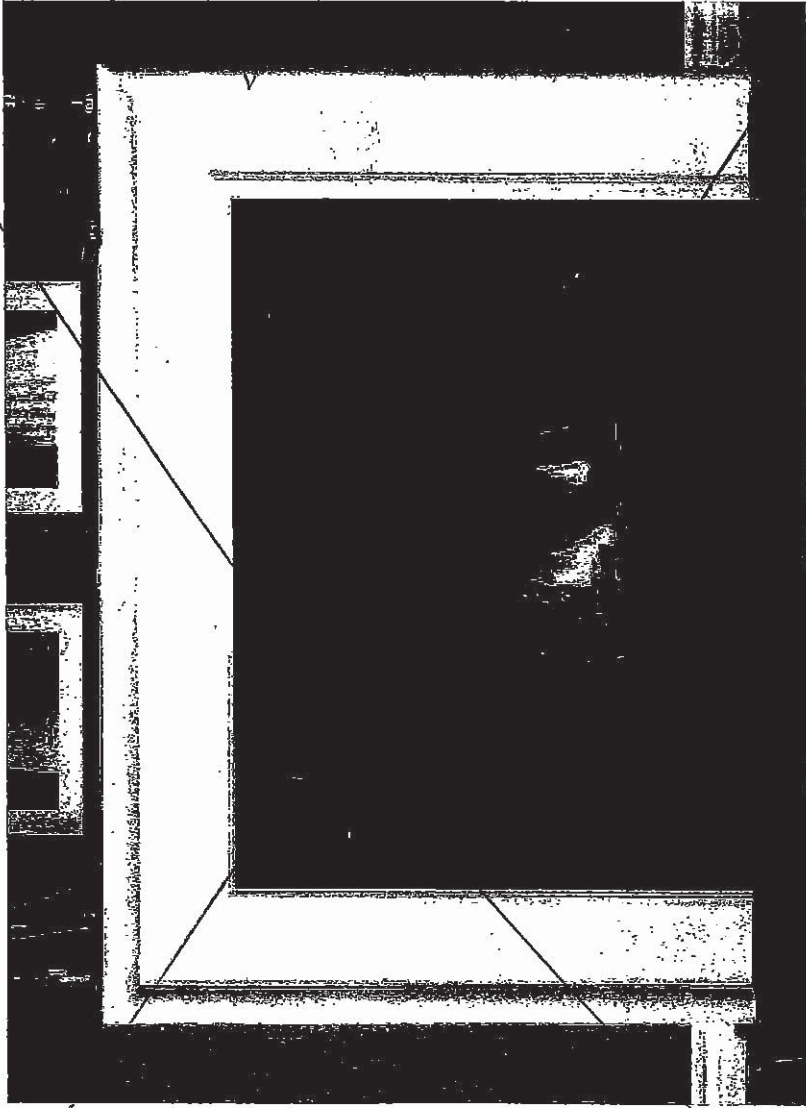

AP
BA

STANDARD NF 17 Mantel

WHITE PAINT GRADE FINISH


(PICTURE SHOWN WITH UPGRADE SURROUND AND HEARTH -PRICED SEPARATELY)

CU-COUNTRY LANE
LOT 1-2
20-2447 ELEV A
THE JAMESPORT

19 of 39

Stainless Steel | 122.0264.716

FAMILY : Sinks | SERIES : Reginox | MODEL : NS1930U/9 | FINISH : Stainless Steel | INSTALLATION TYPE : Undermount

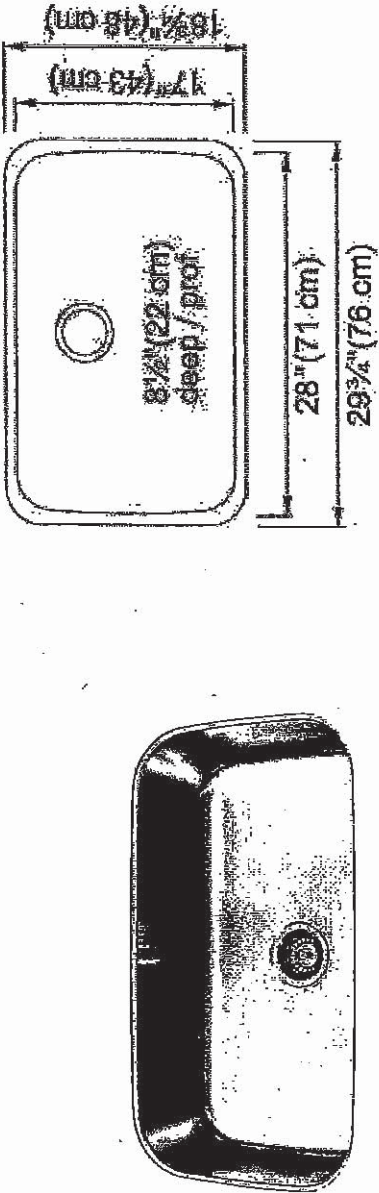

TECHNICAL DATA	
Width overall	18 3/4"
Length overall	29 3/4"
Width of large bowl	17"
Length of large bowl	28"
Depth of large bowl	8 1/2"
Cabinet Size	36"
Number of Bowls	1
Waste Outlet Diameter	3 1/2"
Cut-Out Template	Yes
Faucet Hole	None
Type of Material	18 Gauge Stainless Steel
Surface Finish	SILK
Special feature	Rear Drain Waste Hole Location
Waste Kit Included	YES


CU-COUNTRY LANE
LOT 1-2
20-2447 ELEV A
THE JAMESPORT

20 of 39

STANDARD KITCHEN FAUCET

Align

Modern

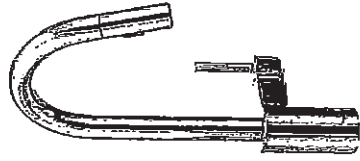

Single Handle Pull-Down Kitchen
Faucet*

Model 7565+

AS WP

CU-COUNTRY LANE
LOT 1-2
20-2447 ELEV A
THE JAMESPORT

21 of 39



BOULEVARD®
PEDESTAL SINK
VITREOUS CHINA

BOULEVARD® PEDESTAL SINK

- ☐ 0641.800 Faucet holes on 8" (203mm) centers (Illustrated)
- * ☐ 0641.400 Faucet holes on 4" (102mm) centers
- ☐ 0641.100 Center hole only
 - Classic styled rectangular pedestal lavatory
 - Vitreous china
 - Rear overflow
 - Supplied with mounting kit
 - Right Height® for greater comfort during use
 - Faucet ledge with large deck area (faucet not included)
 - Design coordinates with Boulevard® Toilet
 - Basin has flat bottom to also allow use as an above counter sink or a drop-in sink (with u-shaped cut out)

Nominal Dimensions:
24" x 19" x 35-1/2"
(610 x 483 x 902mm)

- ☐ 0641.008 Pedestal top-8" (203mm) centers
- ☐ 0641.004 Pedestal top-4" (102mm) centers
- ☐ 0641.001 Pedestal top-center hole only
- ☐ 0010.000 Pedestal only

Bowl sizes:
17" (432mm) wide,
12-1/2" (318mm) front to back,
5" (127mm) deep


Compliance Certifications *

Meets or Exceeds the Following Specifications:
• ASME A112.19.2 - 2008/CSA B45.1-08

To Be Specified:

- ☐ Color: ☐ White ☐ Linen
- ☐ Faucet Finish:
- ☐ Supplies:
- ☐ 1-1/4" Trap:
- ☐ Nipple:

* See faucet section for additional models available

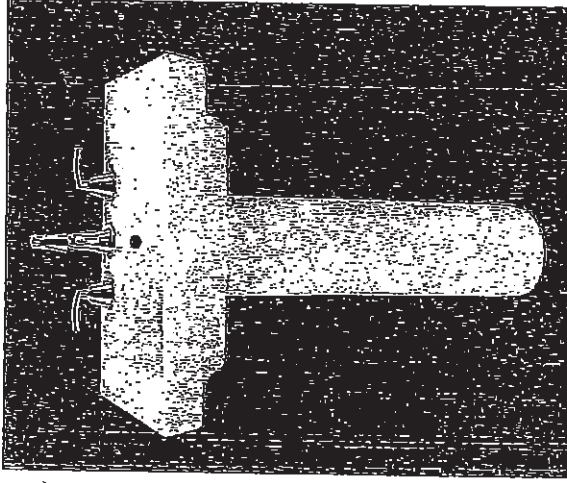

SEE REVERSE FOR ROUGHING-IN DIMENSIONS

CU-COUNTRY LANE
LOT 1-2
20-2447 ELEV A
THE JAMESPORT

22 of 39

American Standard

 BARRIER FREE

COLONY™
COUNTERTOP SINK
VITREOUS CHINA

COLONY COUNTERTOP SINK

- Vitreous china
 - Self-rimming
 - Front overflow
 - Supplied with template
 - Faucet deck
- (Faucet shown not included)

- ☒ 0346 803
Faucet holes on 203mm (8") centres
- ☐ 0346 403 (Illustrated)
Faucet holes on 102mm (4") centres
- ☐ 0346 001
Centre hole only

Nominal Dimensions:
521 x 448mm (20-1/2" x 17-5/8")

Bowl sizes:
422mm (16-5/8") wide, 279mm (11") front to
back, 143mm (5-5/8") deep

COMPLIANCE CERTIFICATIONS –
Meets or exceeds the following Specifications:

- ASME A112.19.2M for Vitreous China Fixtures.
- CAN/CSA B45 Series.

To Be Specified




- ☐ Colour: ☒ White ☐ Bone ☐ Silver Gray
- ☐ Linen
- ☐ Faucet*:
- ☐ Faucet Finish:
- ☐ Supplies & Stops:
- ☐ Trap 1-1/4" (32 mm):

* See faucet section for additional models available

BAS-198

© 2000 American Standard Inc.

01/07

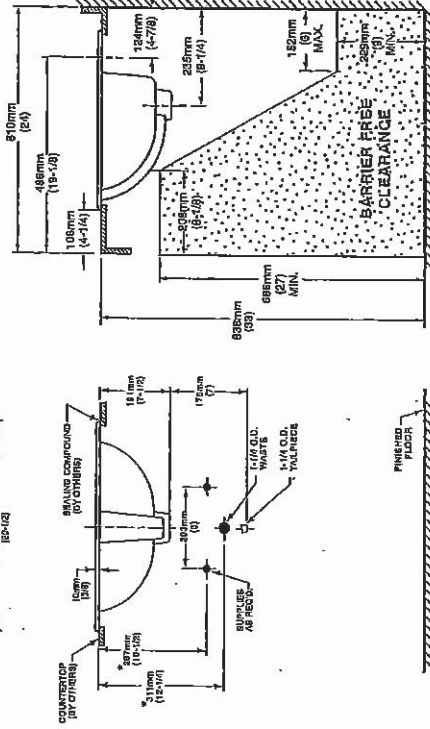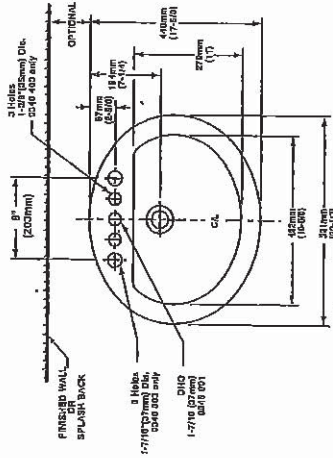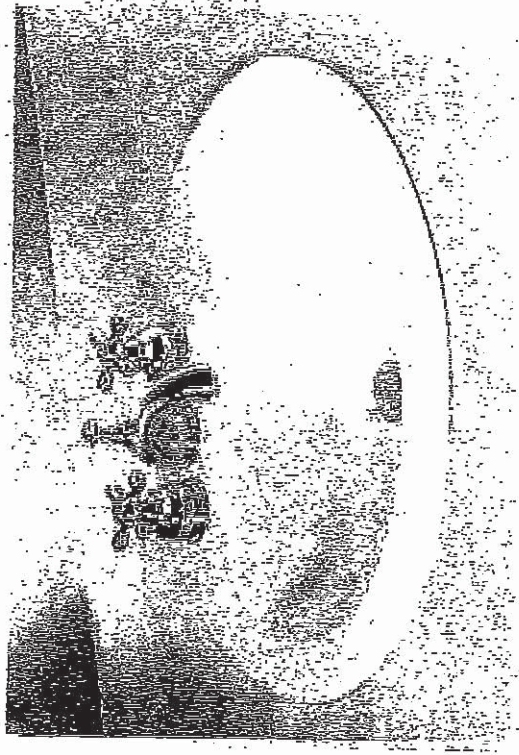


NOTES:
* DIMENSIONS SHOWN FOR LOCATION OF SUPPLIES AND "PI" TRAP ARE SUGGESTED.
FOR COUNTERTOP CUTOOT AND INSTALLATION INSTRUCTIONS USE TEMPLATE
SUPPLIED WITH SINK.
FAUCETS NOT INCLUDED AND MUST BE ORDERED SEPARATELY.
IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances
established by ANSI Standard A112.19.2.
These measurements are subject to change or cancellation. No responsibility is assumed for use
of superseded or voided pages.

Al

CU-COUNTRY LANE
LOT 1-2
20-2447 ELEV A
THE JAMESPORT

23 of 39

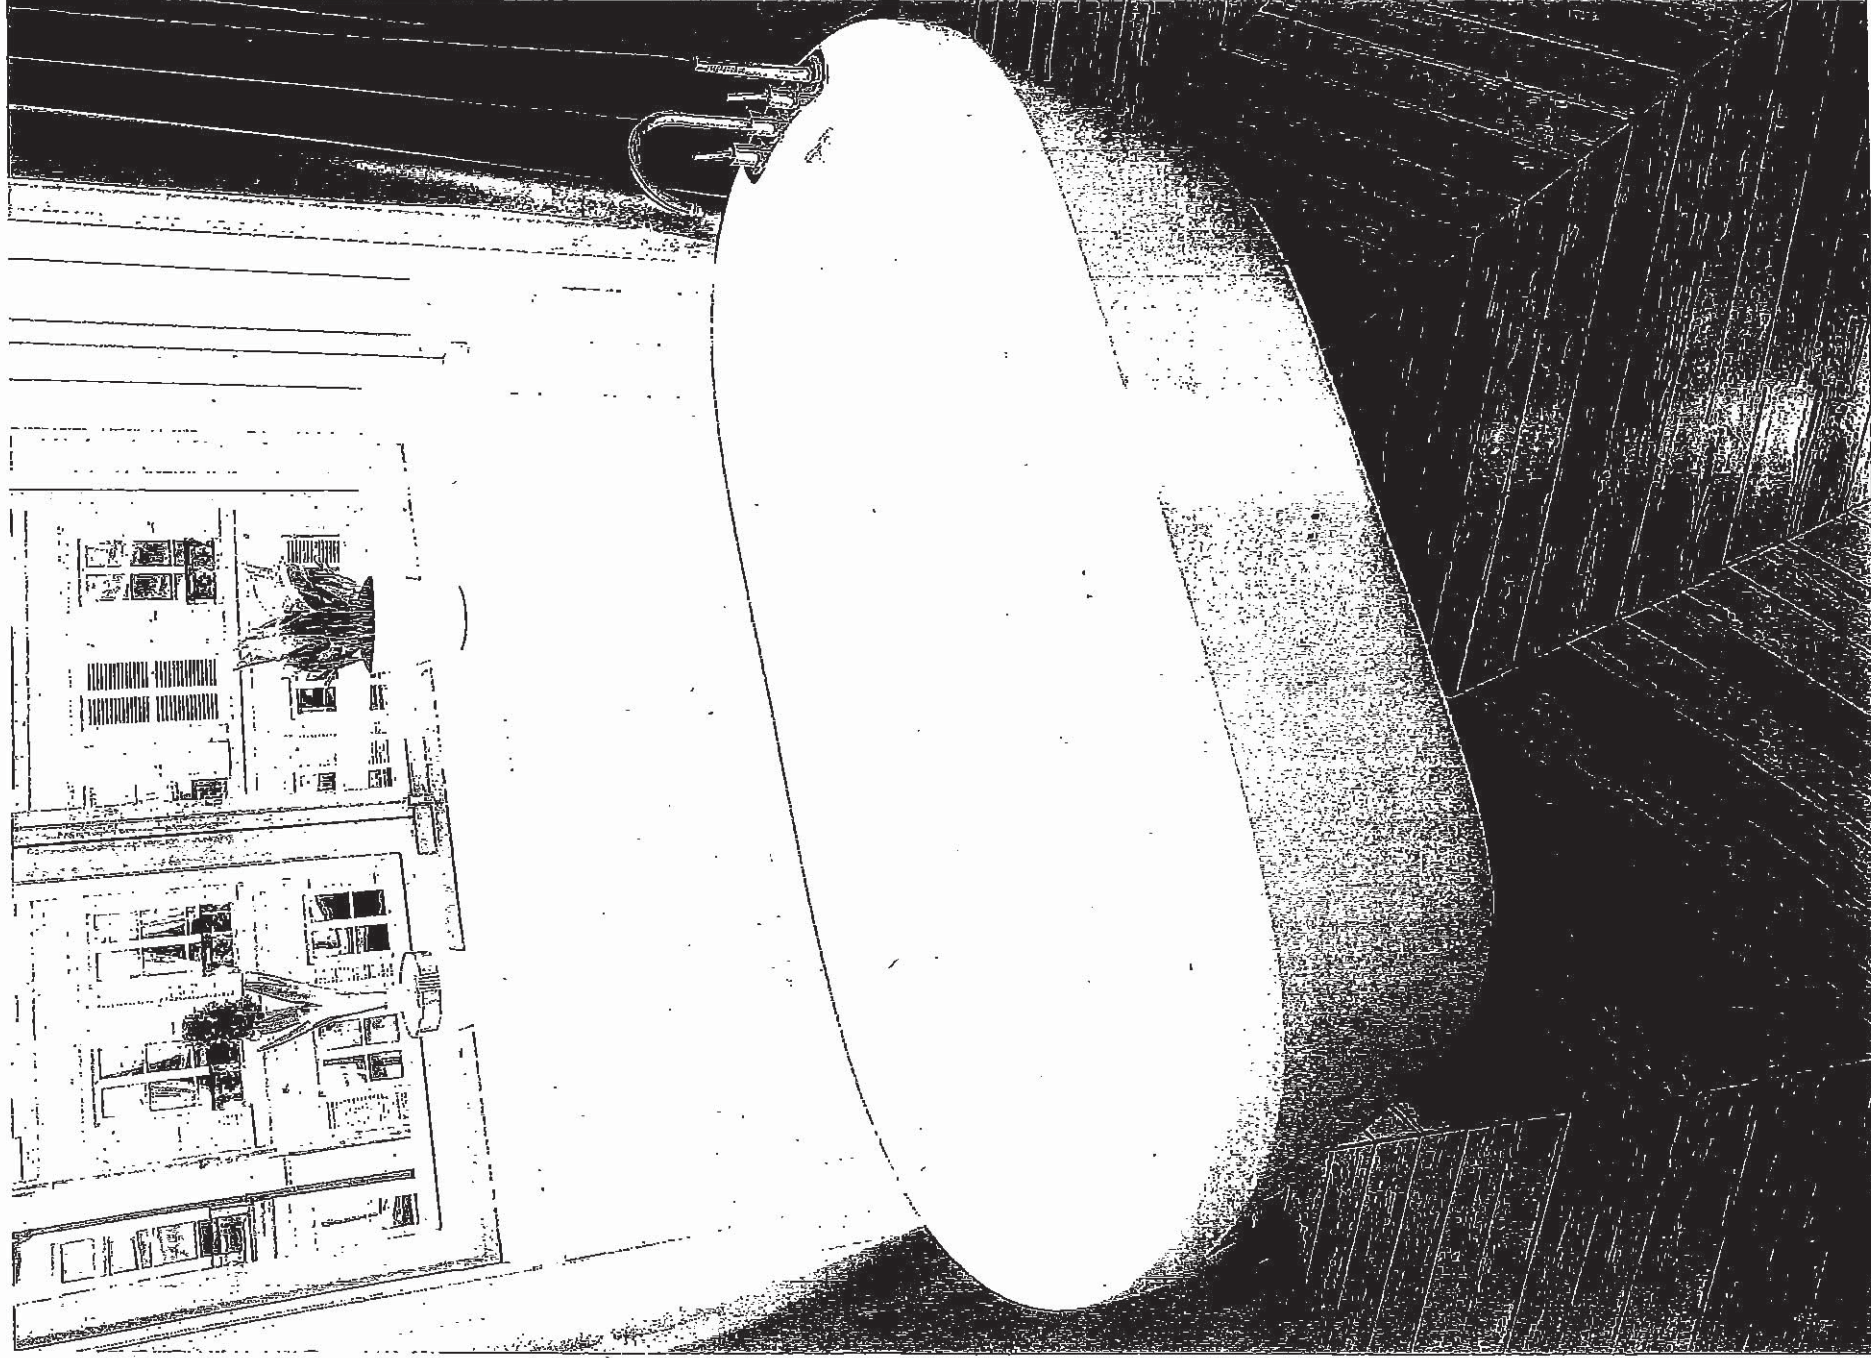

Demi CF2007


AP - 108

CU-COUNTRY LANE
LOT 1-2
20-2447 ELEV A
THE JAMESPORT

24 of 39


Chateau

Transitional



Lavatory Faucet with Pop-Up Drain
Model L4621+

VANITY SINKS AND PEDESTAL

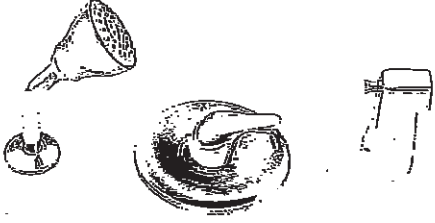

Posi-Temp® Pressure Balancing Tub/Shower
Model 62320 / TL183+

OR

Posi-Temp Valve and Tub/Shower Trim
with Eco-Performance Easy Clean® XL
Model 62320 / TL183EP+
(TL183EP not available in BC)

AP 623



2 Handle Roman Tub with 9" Spout
Model 4796 / T990+

FREESTANDING TUB FAUCETS

SHOWER AND 5' TUB FAUCETS

CU-COUNTRY LANE
LOT 1-2
20-2447 ELEV A
THE JAMESPORT

25 of 39



SC(B)500 | ALITO Collection

1930

Features

- Wall mount range hood
- 6" round duct adapter
- Non-stick aluminum fan blades
- 3-speed push button control
- 2 LED lights (2 x 1.4W)
- Dishwasher-safe mesh or baffle filters
- Standard chimney fits up to 9 ft. ceiling
- Up to 9 minute time-delay OFF feature
- Plug-in connection

Cyclone[®]
Breathe Better

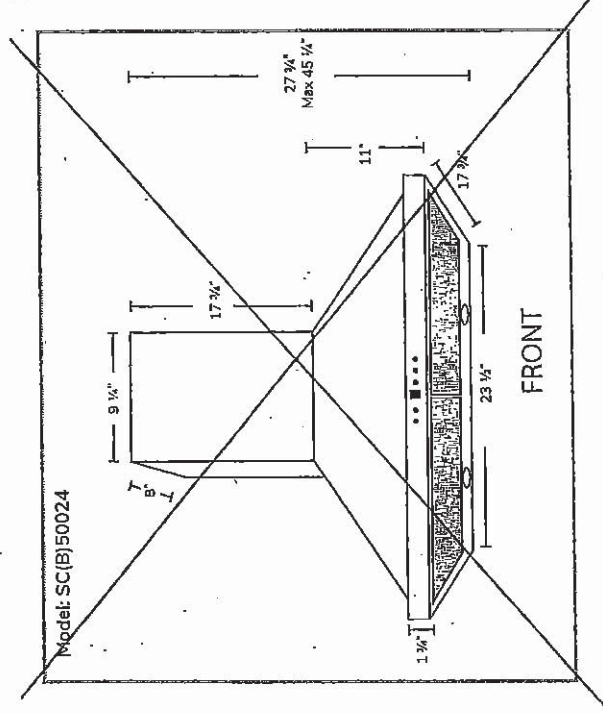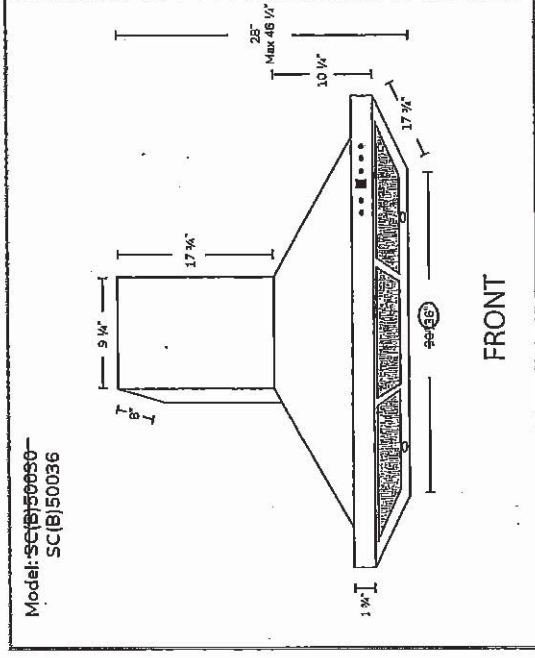

Options

- Filters: ~~SC500~~ - Quick Release Aluminum Mesh Filters
- SCB500 - Quick Release Stainless Steel Baffle Filters ✓
- Available Chimney Flues:
 - Short (7 ft. - 8 ft.: A1.CH10)
 - Standard (8 ft. - 9 ft.: A1.CH18)
 - Extended (9 ft. - 11 ft.: A1.CH30)
- Widths: ~~24", 30", 36"~~

Specifications

- Air Flow Volume: 550 CFM
- Electrical Connection: 120V/60Hz
- Power Consumption: 210 Watts
- Current: 2.5 Amps
- Fan Speed: 1600RPM
- Fan Type: Centrifugal Blower

- Finishes: Stainless Steel

- Ducting: 6" Round

- Dimensions: Width: 24", 30", 36"
Height: 46"
Depth: 18"

- Noise Level: Min. 2 Sones
Max. 6 Sones



Toronto • Vancouver • Boston
www.CycloneRangeHoods.com

AL KS

CU- COUNTRY LANE
LOT 1-2
20-2447 ELEV A
THE JAMESPORT

26 of 39

Whirlpool® Top Mount Refrigerator

PRODUCT MODEL NUMBERS

WRT311FZD
WRT511SZD

WRT541SZD

Electrical: A 115-volt, 60-Hz, AC-only, 15- or 20-amp fused, grounded electrical supply is required. It is recommended that a separate circuit serving only your refrigerator be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.


NOTE: Before performing any type of installation, cleaning, or removing a light bulb, turn the control (Thermostat, Refrigerator or Freezer Control depending on the model) to OFF and then disconnect the refrigerator from the electrical source. When you are finished, reconnect the refrigerator to the electrical source and reset the control (Thermostat, Refrigerator or Freezer Control depending on the model) to the desired setting. See "Using the Controls."

Water: A cold water supply with water pressure between 30 and 120 psi (207 and 827 kPa) is required to operate icemaker and water dispenser. If you have questions about your water pressure, call a licensed, qualified plumber.

IMPORTANT: The pressure of the water coming out of a reverse osmosis system going to the water inlet valve of the refrigerator needs to be between 30 and 120 psi (207 and 827 kPa).

Reverse Osmosis Water Supply: If a reverse osmosis water filtration system is connected to your cold water supply, the water pressure to the reverse osmosis system needs to be a minimum of 40 to 60 psi (276 to 414 kPa).

LOCATION REQUIREMENTS

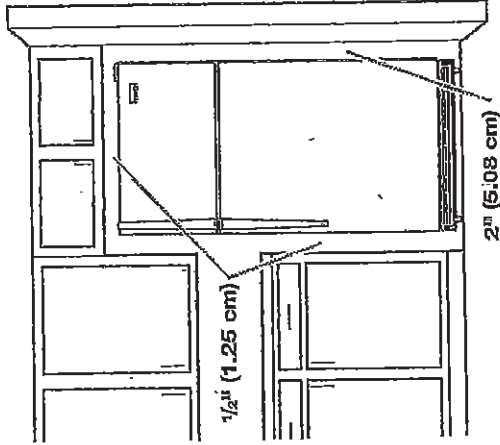


To ensure proper ventilation for your refrigerator, allow for a 1/2" (1.25 cm) space on each and between overhead cabinets and refrigerator top. Allow at least 1" (2.5 cm) between back of cabinet and the wall. If your refrigerator has an ice maker, make sure you leave some extra space at the back for the water line connections.

If you are installing your refrigerator next to a fixed wall, leave 2" (5 cm) minimum on the hinge side (depending on your model) to allow for the door to swing open.

NOTE: This refrigerator is intended for use in a location where the temperature ranges from a minimum of 55°F (13°C) to a maximum of 110°F (43°C). The preferred room temperature range for optimum performance, which reduces electricity usage and provides superior cooling, is between 60°F (15°C) and 90°F (32°C). It is recommended that you do not install the refrigerator near a heat source, such as an oven or radiator.

PRODUCT DIMENSIONS

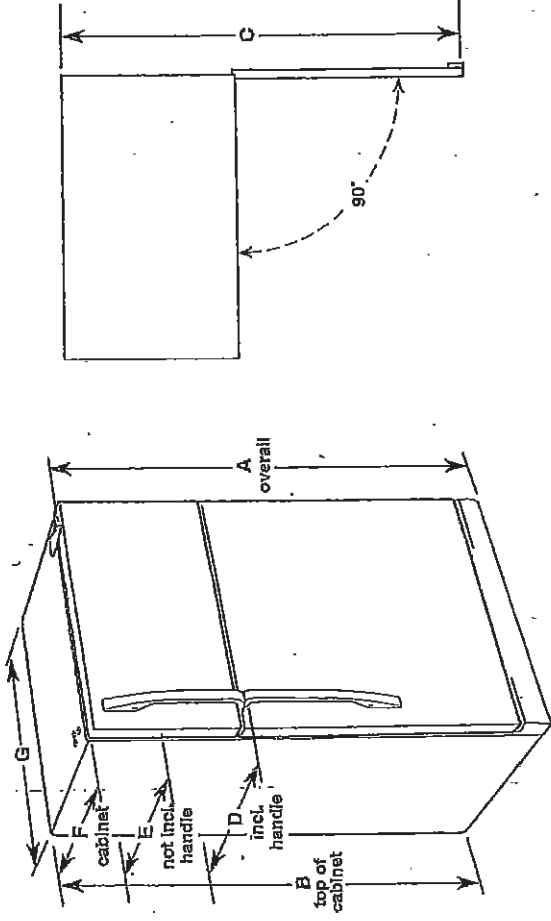

Model Number	Model Size	Reversible Door	Height - Overall "A"	Height - Top of Cabinet "B"	Depth - Door Open 90° "C"	Depth - With Handles "D"	Depth - Without Handles "E"	Depth - Cabinet Only "F"	Width - Cabinet "G"
WRT311FZD	20.5 cu. ft.	Yes	65 1/2" (168.3 cm)	65 1/2" (168.4 cm)	62 1/4" (158.1 cm)	32 1/4" (83.5 cm)	30 3/4" (77.8 cm)	28 1/2" (72.4 cm)	32 3/4" (83.2 cm)
WRT511SZD WRT541SZD	21.3 cu. ft.	Yes	66 1/4" (168.3 cm)	65 1/2" (168.4 cm)	62 1/4" (158.1 cm)	34" (86.4 cm)	32 1/2" (82.3 cm)	28 1/2" (72.4 cm)	32 3/4" (83.2 cm)

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.





Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

Ref. W10674106
10/29/14

CU-COUNTRY LANE
LOT 1-2
20-2447 ELEV A
THE JAMESPORT

27 of 39

Refrigerator Door Swing Verification

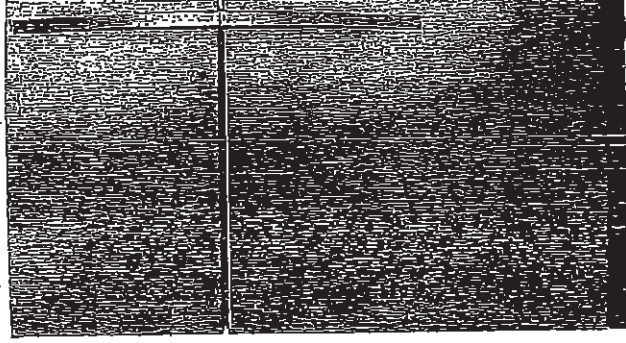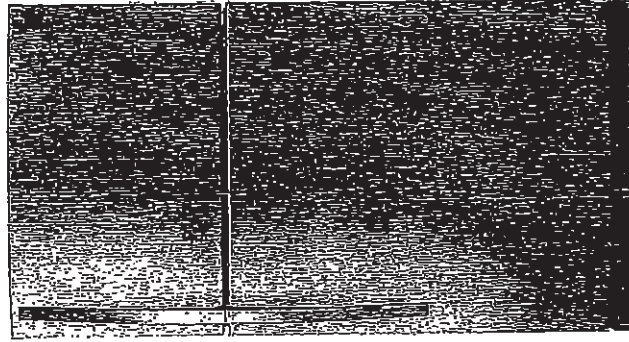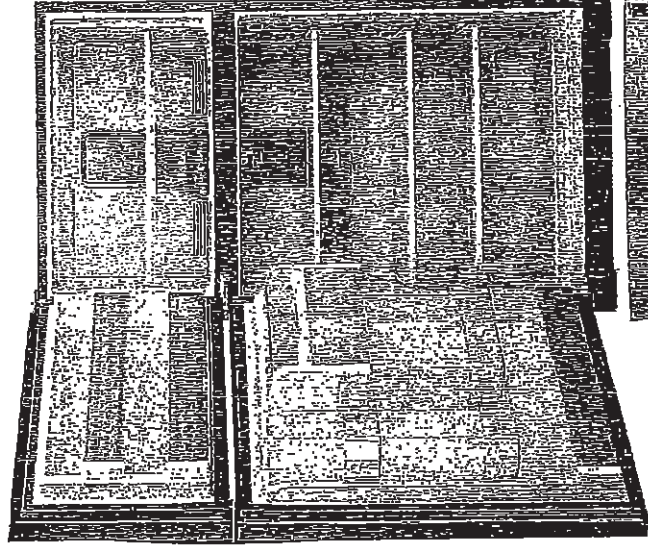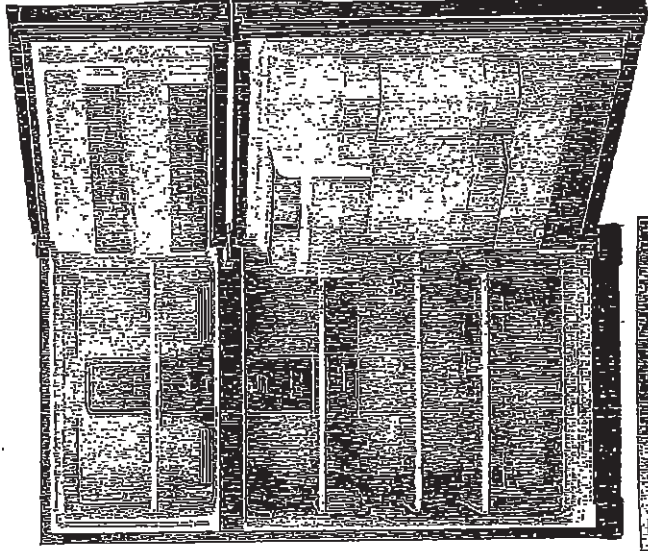

When facing the refrigerator



RIGHT HAND
DOOR OPENING

- Hinges on right
- Handle on left

mpf
INITIAL



LEFT HAND
DOOR OPENING

- Hinges on left
- Handle on right

INITIAL


Garage Right

Please check and INITIAL your door swing selection.

mpf

CU-COUNTRY LANE
LOT 1-2
20-2447 ELEV A
THE JAMESPORT

28 of 39

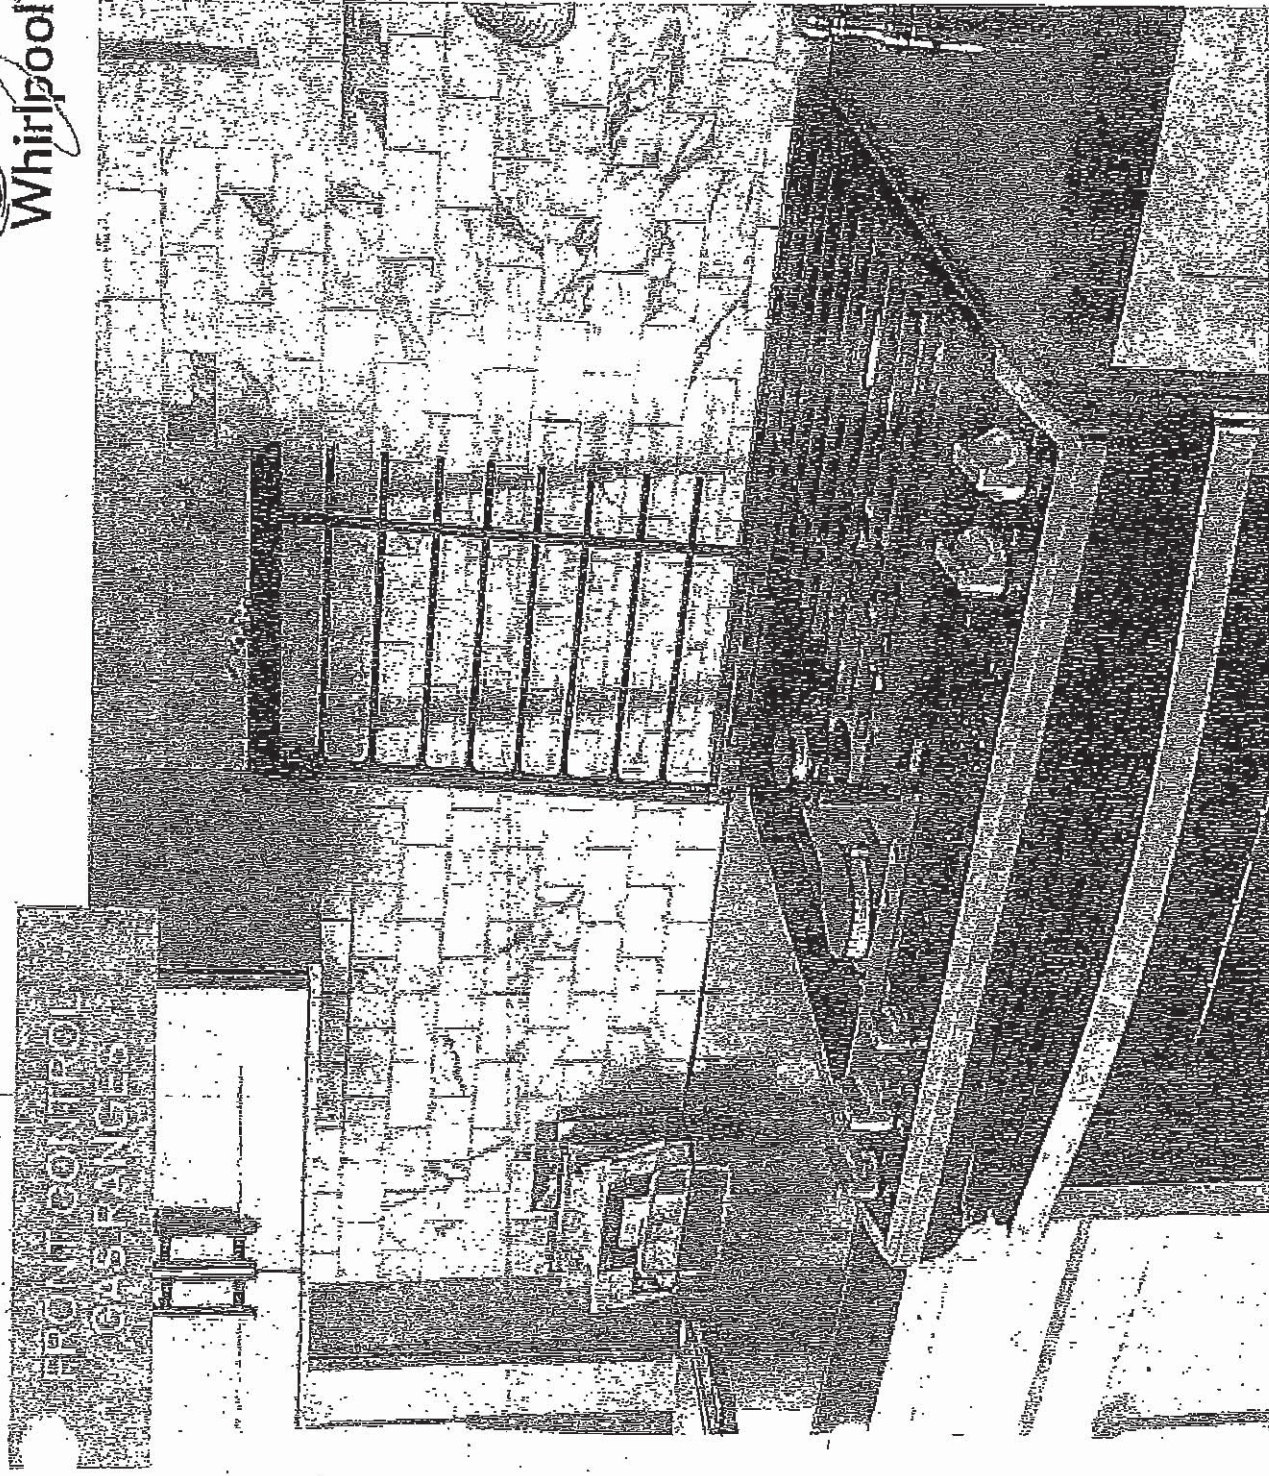

FEATURING



TimeSaver™ system

The TimeSaver™ system's Frozen Bake Technology allows you to skip preheating for favorites like pizza, lasagna, chicken nuggets, fries or pies so you can cook frozen foods faster.



HeatRight™ system

The HeatRight™ system's True convection helps you to cook food faster* with a rear fan and third heating element to circulate hot air over, under, and around food.



CompleteClean™ system

The CompleteClean® system's EZ2-Lit™ hinged grates give you quick access to spills on the cooktop. The industry first hinged design allows you to wipe up under them without removing them.

Every day, care



A 68

From the #1 Selling Appliance brand in the USA*

CU-COUNTRY LANE
LOT 1-2
20-2447 ELEV A
THE JAMESPORT

29 of 39


Front Control Gas Ranges

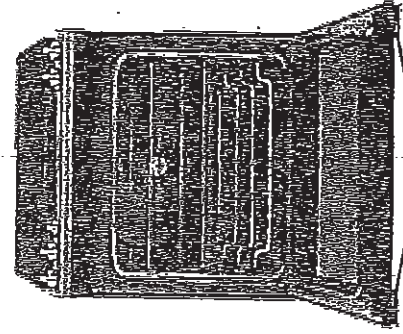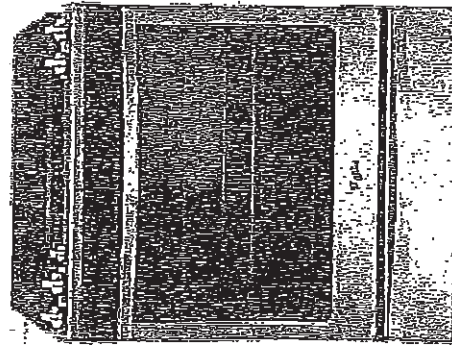

Available colors



S
Stainless
Steel



H
White
Top



B
Black
Finish

WEG745HOF

30" Freestanding Range - 5.8 cu. ft.



TimeSaver™ system
• Frozen Bake™ Technology



HeatRight™ system
• True Convection
• Convection Conversion
• AccuSimmer™ burner
• Center Oval burner
• Temperature Sensor




CompleteClean System
• EZ-2-Lift™ Hinged Grates
• Aquadial® Self-cleaning Technology
• Dishwasher-safe knobs



ReadySet™ system
• (2) SpeedHeat™ burners
• Rapid Preheat
• Keep Warm
• Delay Cook

PRODUCT DIMENSIONS


The finished series model pieces shown may appear different from the actual product. Dimensions shown are for the actual product.



- 15 1/4" (391 mm) front panel depth
- 20 1/4" (518 mm) front panel depth
- 20 1/4" (518 mm) front panel depth
- 20 1/4" (518 mm) front panel depth
- 20 1/4" (518 mm) front panel depth
- 20 1/4" (518 mm) front panel depth
- 20 1/4" (518 mm) front panel depth
- 20 1/4" (518 mm) front panel depth

NOTE: Dimensions are for the actual product. Dimensions shown are for the actual product.

CABINET OPENING DIMENSIONS

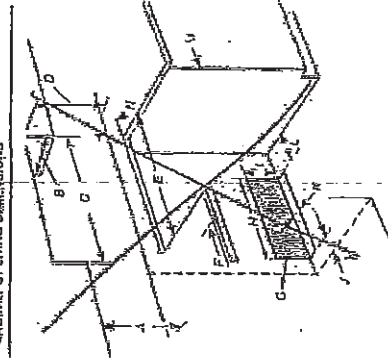

NOTE: Dimensions are for the actual product. Dimensions shown are for the actual product.

TYPE A/CUT

NOTE: Dimensions are for the actual product. Dimensions shown are for the actual product.

*Compared to a traditional product and bake cycle for pizza, muffins, etc. and buns. **Compared to thermal-bake cycle on the same model. †Based on 12-month average of unit sales. Refrigeration, Cooling, Dishwashers, and Laundry appliances. Trulieve, 2014.

pool

CU-COUNTRY LANE
LOT 1-2
20-2447 ELEV A
THE JAMESPORT

30 of 39

Whirlpool®

30" (76.2 cm) Slide-in Gas Range

C

PRODUCT MODEL NUMBERS

WEG760H0D WEG745H0F

GAS SUPPLY REQUIREMENTS

Gas supply line:


- Provide a gas supply line of $\frac{3}{4}$ " (1.9 cm) rigid pipe to the range location. A smaller size pipe on longer runs may result in inefficient gas supply. With LP gas, piping or tubing size can be $\frac{1}{2}$ " (1.3 cm) minimum. Usually, LP gas suppliers determine the size and materials used in the system.
- NOTE: Pipe-joint compounds that resist the action of LP gas must be used. Do not use TEFLON® tape.

Flexible metal appliance connector:

- If local codes permit, a new CSA design-certified, 4 to 6 ft (122 to 182.4 cm) long, $\frac{1}{2}$ " (1.3 cm) or $\frac{3}{4}$ " (1.9 cm) I.D., flexible metal appliance connector may be used for connecting range to the gas supply line.



- A $\frac{1}{2}$ " (1.3 cm) male pipe thread is needed for connection to the female pipe threads of the inlet to the appliance pressure regulator.
- Do not kink or damage the flexible metal tubing when moving the range.
- Must include a shutoff valve:
The supply line must be equipped with a manual shutoff valve. This valve should be located in the same room but external to the range opening, such as an adjacent cabinet. It should be in a location that allows ease of opening and closing. Do not block access to shutoff valve. The valve is for turning on or shutting off gas to the range.



- A. Gas supply line
- B. Shutoff valve "open" position
- C. To range

Gas Pressure Regulator

The gas pressure regulator supplied with this range must be used. The inlet pressure to the regulator should be as follows for proper operation:


Natural gas:
Minimum pressure: 6" WCP
Maximum pressure: 14" WCP

LP gas:
Minimum pressure: 11" WCP
Maximum pressure: 14" WCP

Contact local gas supplier if you are not sure about the inlet pressure.

PRODUCT DIMENSIONS

This manual covers several models. Your model may appear different from the models depicted. Dimensions given are maximum dimensions across all models.

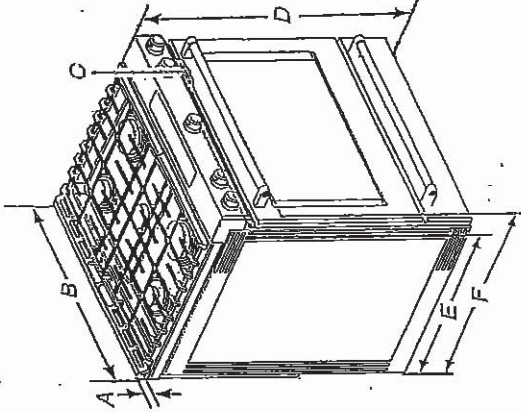

- A. $1\frac{1}{8}$ " (3.0 cm) Height from cooktop to top of vent
- B. $29\frac{1}{4}$ " (75.9 cm)
- C. Model/serial number plate (located behind the oven door on the top right-hand side of the oven frame)
- D. 36" (91.4 cm) height to top of cooktop edge with leveling legs screwed all the way in*
- E. $28\frac{1}{8}$ " (71.9 cm) max. depth from front of console to back of range.
- F. $29\frac{1}{8}$ " (73.3 cm) max. depth from handle to back of range.

IMPORTANT: Range must be level after installation. Follow the instructions in the "Level Range" section. Using the cooktop as a reference for leveling the range is not recommended.

* Range can be raised approximately 1" (2.5 cm) by adjusting the leveling legs.

Type of Gas

Natural gas:

- This range is factory set for use with Natural gas. See "Gas Conversions" section. The model/serial rating plate located behind the control panel has information on the types of gas that can be used. If the types of gas listed do not include the type of gas available, check with the local gas supplier.

LP gas conversion:

Conversion must be done by a qualified service technician. No attempt shall be made to convert the appliance from the gas specified on the model/serial rating plate for use with a different gas without consulting the serving gas supplier. See "Gas Conversions" section.

TEFLON is a registered trademark of Chemours.


AP
AR

CU-COUNTRY LANE
LOT 1-2
20-2447 ELEV A
THE JAMESPORT

31 of 39



Whirlpool® Dishwasher with ENERGY STAR® qualification

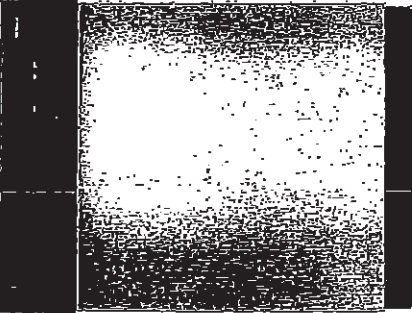

WDF310PAAS
Black-on-Stainless

OTHER AVAILABLE COLORS



Black
Model: WDF310PAAB



Black-on-Stainless
Model: WDF310PAAT



White
Model: WDF310PAAW



Universal Silver
Model: WDF310PAAD

DIMENSIONS		KEY FEATURES
Maximum Height	34 1/2 Inches	ENERGY STAR® Qualified
Minimum Height	33 1/2 Inches	No One Has Fewer Repairs 17 Years In A Row
Height	34 1/2 Inches	Resource - Efficient Wash System
Depth	24 1/2 Inches	CEE Tier 1 qualified
Width	23 7/8 Inches	Tall Tub Design
Dimensions shown are for planning purposes only. Dimensions may vary. See installation instructions packaged with product.		White Plastic Interior
		Quiet Partner(TM) Sound Package
ELECTRICAL		Auto Soil Sensor
		Electronic Controls
15 Amps Amps. 60 Hz 120 V. 15.		3 Automatic Cycles
		1-Hour Wash Cycle
Before purchasing this appliance, read important information about its estimated annual energy consumption or energy efficiency rating that is available from your dealer.		Heavy Wash Cycle
		Normal Cycle
		4 Options
		High Temperature Wash System
		Heated Dry Option
		4 Hour Delay Wash Option
		4-Tier SheerClean Direct Feed Wash System
		Control Lock
		Vinyl Racks
		In-Rack Silverware Basket

AP

CU- COUNTRY LANE
LOT 1-2
20-2447 ELEV A
THE JAMESPORT

32 of 39

Whirlpool® Undercounter Dishwasher

PRODUCT MODEL NUMBERS

WDF110PAB WDE310BLA WDF530PSY
WDF111PAB WDF320PAD WDF540PAD
WDF120PAF WDF510PAP WDF730PAY
WDF121PAF WDF520PAD WDT170PAY
WDF310PAA WDF530PAY WDT720PAD
WDF310PCA WDF530PLY WDT770PAY

Electrical Requirements: 120-volt, 60-Hz, AC only, 15- or 20-amp. fused electrical supply. Copper wire only. A time delay fuse or circuit breaker and separate circuit is recommended.

If direct wiring dishwasher: Use flexible, armored, or nonmetallic, sheathed copper wire with grounding wire that meets the wiring requirements for your home and local codes and ordinances.

Use a UL listed or CSA approved conduit connector.

If connecting dishwasher with a power supply cord:

Use Power Supply Cord Kit (Part No. 4317824) marked for use with dishwashers. Follow the kit, instructions for installing the power supply cord. Power supply cord must plug into a grounded 3 prong, outlet, located in the cabinet next to the dishwasher opening. Outlet must meet all local codes and ordinances.


Water Supply Requirements: A hot water line with 20 to 120 psi (138 to 852 kPa) water pressure. Water temperature must be 120°F (49°C) water at dishwasher. Use 3/8" O.D. copper tubing with compression fitting or flexible braided water supply line (1/2" minimum plastic tubing is not recommended). Use a 90° elbow with 3/4" N.P.T. external pipe threads on one end. Do not solder within 6" (15.2 cm) from water inlet valve.

Drain Requirements: A new drain hose is supplied with your dishwasher. If this is not long enough, use a new drain hose with a maximum length of 12' (3.7 m) (Part No. 3385556) that meets all current AHAM/JAPMO test standards, is resistant to heat and detergent, and fits the 1" (2.5 cm) drain connector of the dishwasher.

Make sure to connect the drain hose to waste tee or disposer inlet above drain trap in house plumbing and 20" (50.8 cm) minimum above the floor. It is recommended


that the drain hose either be looped up and securely fastened to the underside of the counter or be connected to an air gap.

Make sure to use an air gap if the drain hose is connected to house plumbing lower than 20" (50.8 cm) above subfloor or floor.



Use 1/2" (1.3 cm) minimum I.D. drain line fittings. If required, the air gap should be installed in accordance with the air gap installation instructions. When connecting the air gap, a rubber hose (not provided) will be needed to connect to the waste tee or disposer inlet.

PRODUCT DIMENSIONS

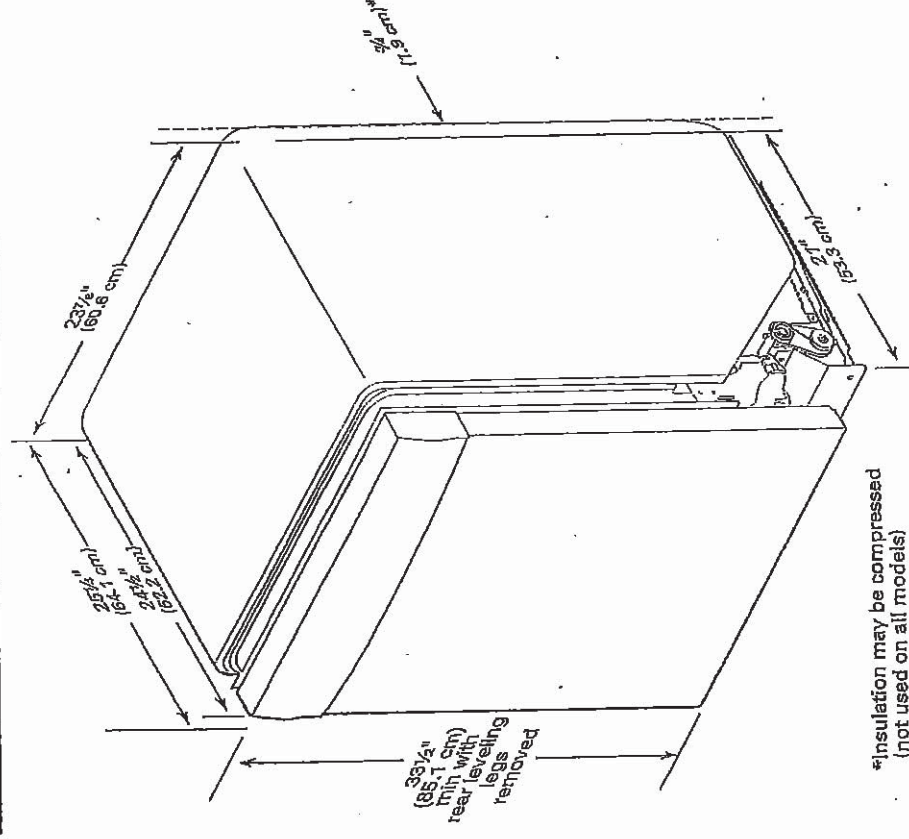

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

CU-COUNTRY LANE
LOT 1-2
20-2447 ELEV A
THE JAMESPORT

33 of 39


CABINET CUTOUT DIMENSIONS

WDF320PAB

NOTE: Shaded areas of cabinet walls show where utility connections may be installed.

*Measure from the lowest point on the underside of the countertop. May be reduced to 33½" (85.1 cm) by removing the rear leveling legs from dishwasher.

**Minimum, measured from narrowest point of opening.

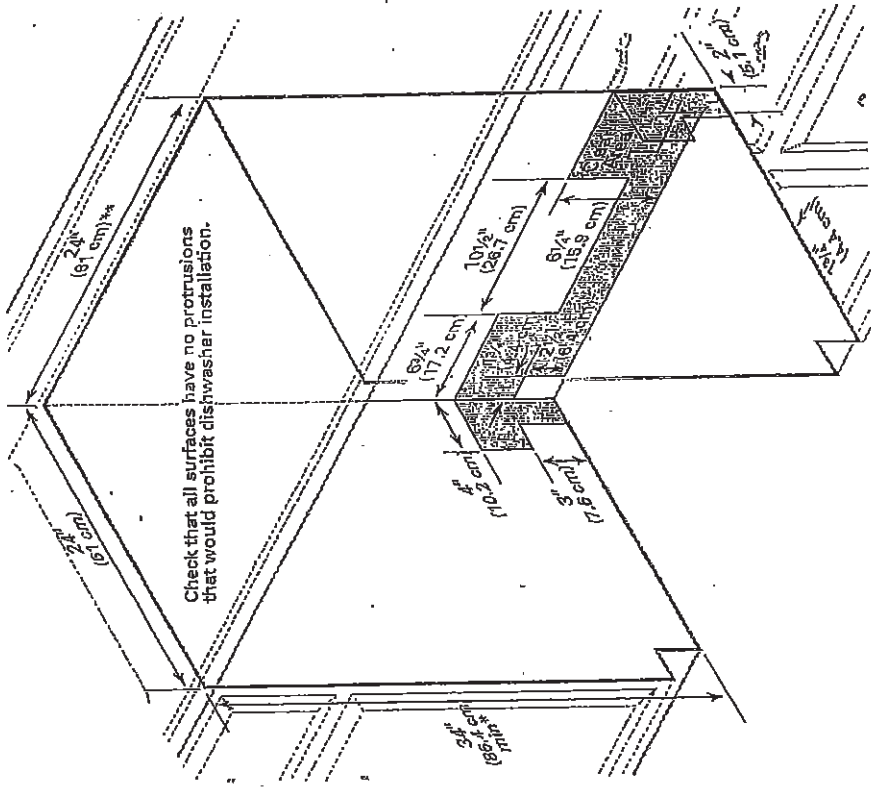


AC

CU-COUNTRY LANE
LOT 1-2
20-2447 ELEV A
THE JAMESPORT

34 of 39

WHIRLPOOL WASHER Model #: WFW5620HW

Whirlpool Brand Canada English | Washer and Dryer | Vitreous | Front Load Washer | WFW5620HW

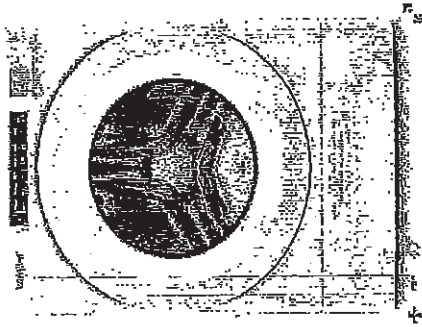

5.2 cu. ft. I.E.C. Closet-Depth
Front Load Washer with
Load & Go™ Dispenser



Whirlpool
5.2 cu. ft. I.E.C. Closet-Depth Front Load Washer with Load & Go™
Dispenser
Model #: WFW5620HW

Dimensions

Depth	80.17 cm; 31-9/16 in
Depth With Door Open 90 Degree	143.51 cm; 56-1/2 in
Minimum Height	98.11 cm; 38-5/8 in
Width	68.58 cm; 27.0 in

Appearance

LCD Touch Screen	No
Window	Yes

Details

Drum Material	Stainless Steel
---------------	-----------------

Cycles and Options

Number of Wash Cycles	37
-----------------------	----

Electrical

Hz	60
Power Cord Included	Yes

AR

CU- COUNTRY LANE
LOT 1-2
20-2447 ELEV A
THE JAMESPORT

35.39

WHIRLPOOL WASHER Model #: WFW5620HW

LOCATION REQUIREMENTS


Proper installation is your responsibility.

You will need:


- A water heater set to 120°F (49°C).
- A grounded electrical outlet located within 6 ft (1.8 m) of power cord on back of washer.
- Hot and cold water faucets located within 4 ft (1.2 m) of hot and cold water fill valves on washer, and water pressure of 20–100 psi (137.9–689.6 kPa).
- A level floor with maximum slope of 1" (25 mm) under entire washer. Installing on carpet or surfaces with foam backing is not recommended.
- Floor must support washer's total weight (with water and load) of 315 lbs (143 kgs).

IMPORTANT: Do not install, store, or operate washer where it will be exposed to weather or in temperatures below 32°F (0°C). Water remaining in washer after use may cause damage in low temperatures. See "Washer Care" in your Use and Care Guide for winterizing information.

Whirlpool Models*

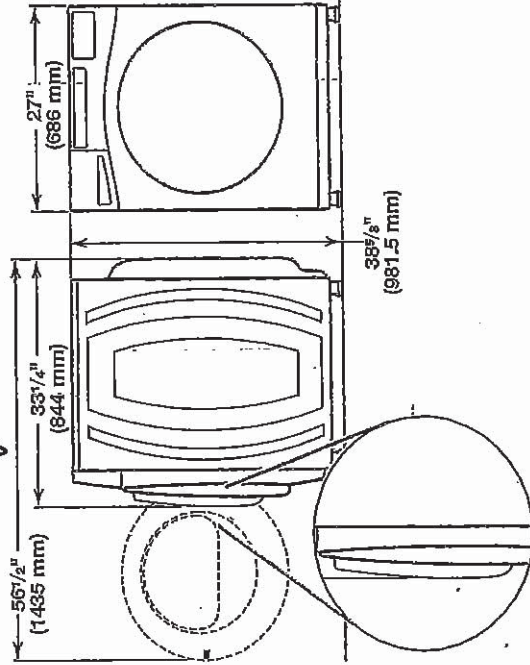



Maytag Models

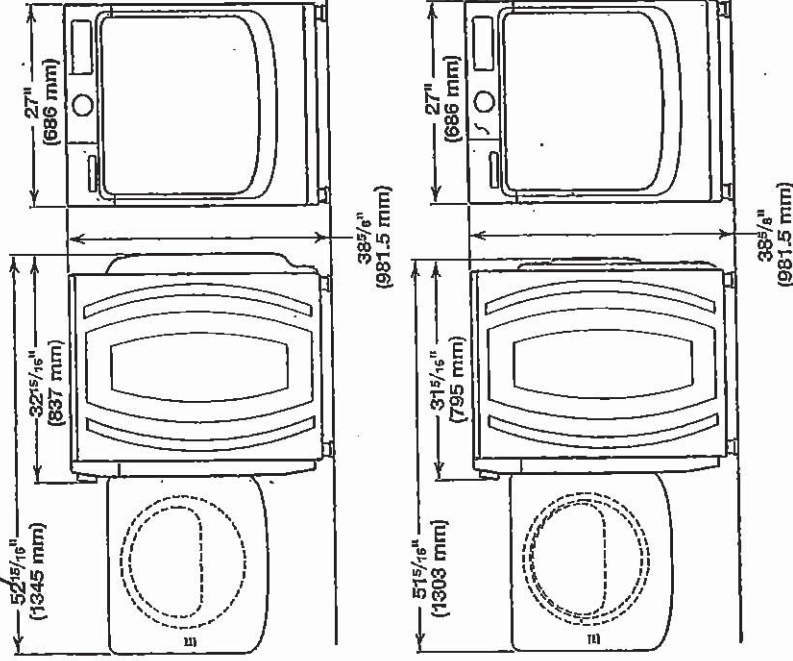

All dimensions show minimum spacing allowed. For each arrangement, consider allowing more space for ease of installation and servicing, and spacing for companion appliances and clearances for walls, doors, and floor moldings.

Space must be large enough to allow door to fully open. Add spacing of 1" (25 mm) on all sides of washer to reduce noise transfer. If a closet door or louvered door is installed, top and bottom air openings in door are required.


Recessed area or closet installation
(stacked washer and dryer):

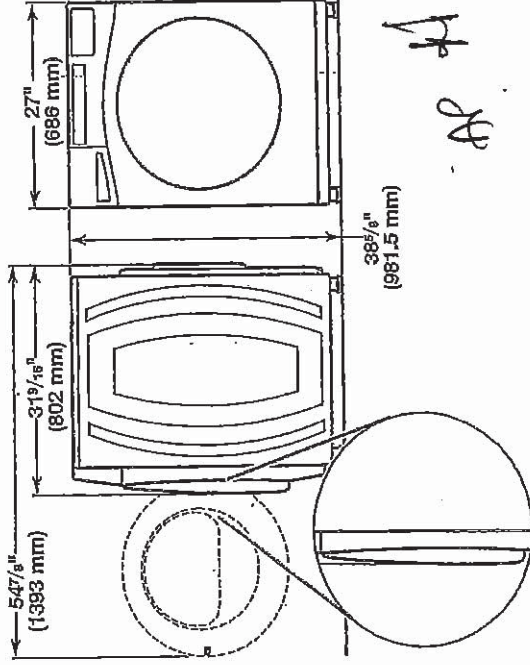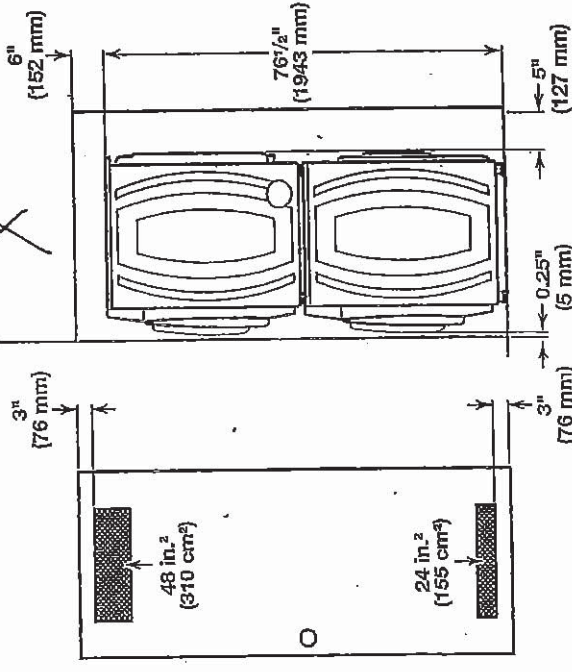


*For additional details (or information) specific to your model, refer to the 'Dimensions' listed for your model at www.whirlpool.com.

WHIRLPOOL WASHER Model #: WFW5620HW


Custom under-counter installation:

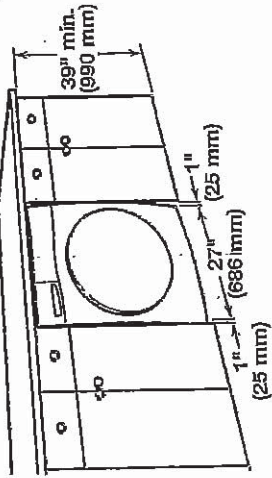

Recessed area or closet installation:

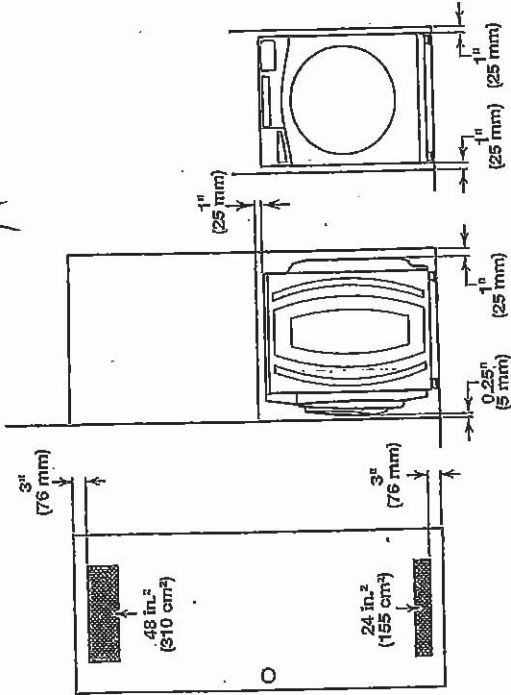

Custom cabinet installation:

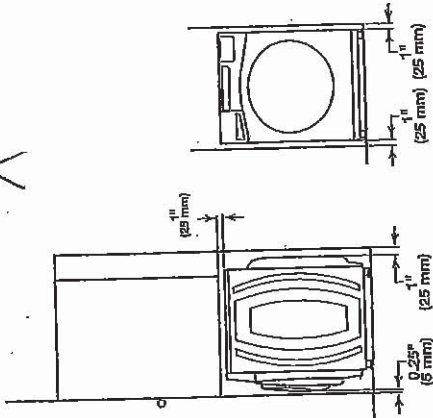


DRAIN SYSTEM

The drain system can be installed using a floor drain, wall standpipe, floor standpipe, or laundry tub. Select the method you need.


IMPORTANT: To avoid siphoning, only 4.5" (114 mm) of drain hose should be inside standpipe. Always secure drain hose with cable tie.

Floor standpipe drain system

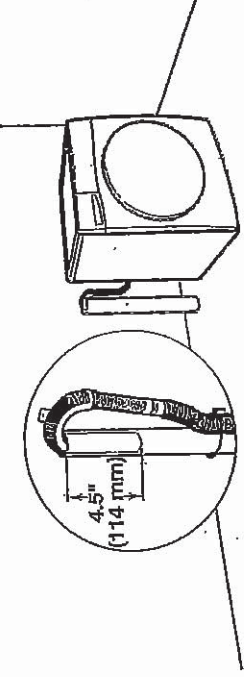


Minimum diameter for a standpipe drain: 2" (51 mm). Minimum carry-away capacity: 17 gal. (64 L) per minute. A 1/4" (6 mm) diameter to 1" (25 mm) diameter Standpipe Adapter Kit is available (Part Number 3363920). Top of standpipe must be at least 30" (762 mm) high; install no higher than 96" (2.44 m) from bottom of washer. If you have an overhead sewer and need to pump higher than 96" (2.44 m), a sump pump and associated hardware are needed. See "Alternate parts."

Wall standpipe drain system

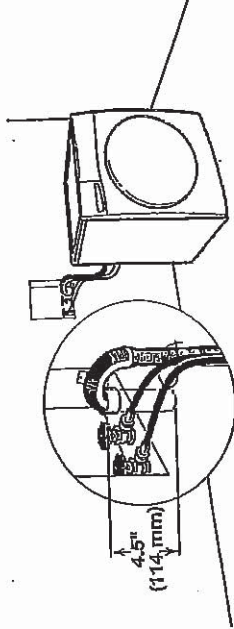

See requirements for floor standpipe drain system.

Laundry tub drain system

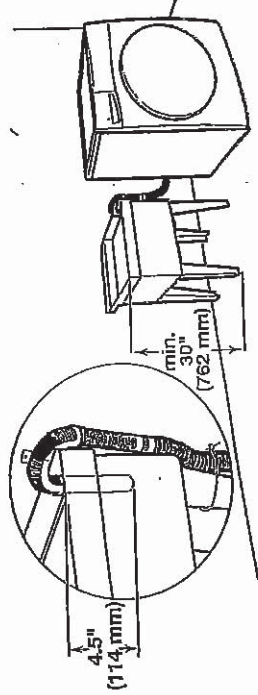

Minimum capacity: 20 gal. (76 L). Top of laundry tub must be at least 30" (762 mm) above floor; install no higher than 96" (2.44 m) from bottom of washer.


AL 22

CU-COUNTRY LANE
LOT 1-2
20-2447 ELEV A
THE JAMESPORT

37 of 39

WHIRLPOOL DRYER Model #: YWED5620HW

Whirlpool Brand Canada English | Washer and Dryers | Dryers | Electric Dryers | YWED5620HW

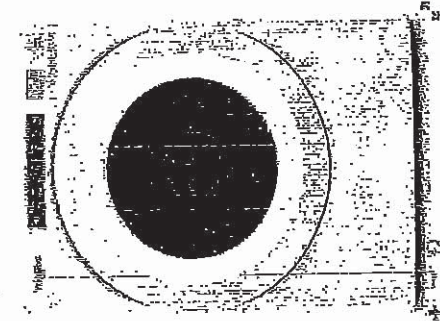

7.4 cu. ft. Front Load Electric
Dryer with Intuitive Touch
Controls



Whirlpool 7.4 cu. ft. Front Load Electric Dryer with Intuitive Touch Controls
Model #: YWED5620HW

Dimensions

Depth	78.74 cm, 31.0 in
Depth With Door Open 90 Degree	138.43 cm, 54-1/2 in
Height	98.42 cm, 38-3/4 in
Width	68.58 cm, 27.0 in

Configuration and Overview

Fuel Type	Electric
-----------	----------

Cycles and Options

Cycle Time Remaining	Yes
Lint Filter Indicator	No
Number of Dryer Cycles	36
Number of Dryness Levels	3

Ventilation System

Lint Vent	No
Maximum Vent Length	64
Venting Direction	Left, Right, Bottom, Rear

Electrical

Hz	60
Power Cord Included	Yes


AP 101

CU-COUNTRY LANE
LOT 1-2
20-2447 ELEV A
THE JAMESPORT

38 of 39

WHIRLPOOL DRYER Model #: YWED5620HW

Back view:

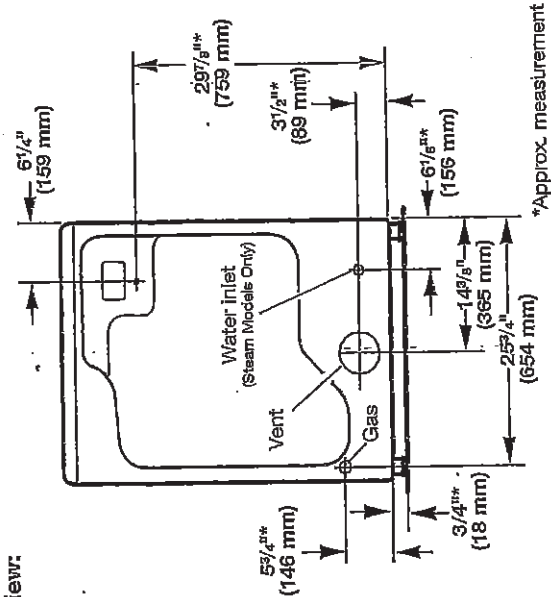

NOTE: Most installations require a minimum of 5" (127 mm) clearance behind dryer for exhaust vent with elbow. See "Venting Requirements."

Installation Clearances


For each arrangement, consider allowing more space for ease of installation and servicing, spacing for companion appliances, and clearances for walls, doors, and floor moldings. Space must be large enough to allow door to fully open. Add spacing on all sides of dryer to reduce noise transfer. If a closet door or louvered door is installed, top and bottom air openings in door are required. Check code requirements. Some codes limit, or do not permit, installation of the dryer in garages, closets, mobile homes, or sleeping quarters. Contact your local building inspector.

NOTE: No other fuel-burning appliance can be installed in the same closet as a dryer.

Installation spacing for recessed area or closet installation


- All dimensions show recommended and minimum spacing allowed.
- Additional spacing should be considered for ease of installation and servicing.
- Additional clearances might be required for wall, door; floor moldings, dryer venting, and gas line.
- Additional spacing should be considered on all sides of the dryer to reduce noise transfer.
- For closet installation with a door, minimum ventilation openings in the top and bottom of the door are required. Louvered doors with equivalent ventilation openings are acceptable.
- Companion appliance spacing should also be considered.

Recommended installation clearances (dryer only):

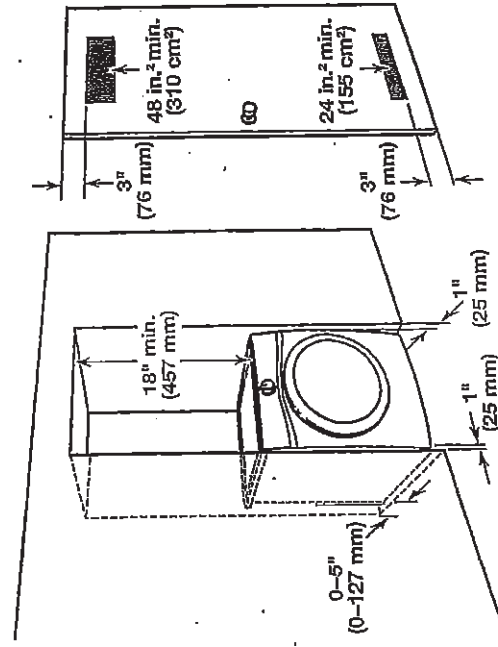

0" (0 mm) rear spacing is allowed for straight back venting only. For steam models only, inlet hose must not be kinked.

Custom under-counter installation:

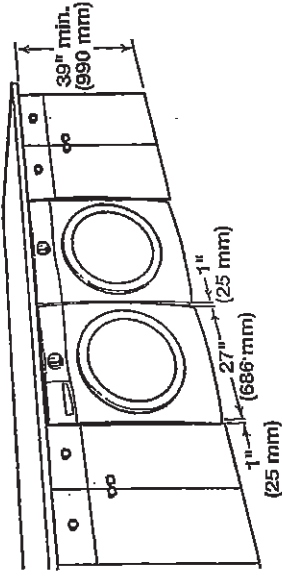

Mobile home - Additional installation requirements:

This dryer is suitable for mobile home installations. The installation must conform to the Manufactured Home Construction and Safety Standard, Title 24 CFR, Part 3280 (formerly the Federal Standard for Mobile Home construction and Safety, Title 24, HUD Part 280) or Standard CAN/CSA-Z240 MH.

Mobile home installations require:

- Metal exhaust system hardware, available for purchase from your dealer. For further information, see "Assistance or Service" in your Use and Care Guide.
- Special provisions must be made in mobile homes to introduce outside air into dryer. Openings (such as a nearby window) should be at least twice as large as dryer exhaust opening.

For mobile home installation of gas dryers:

- Mobile Home Installation Hold-down Kit Part Number 346764 is available to order. For further information, see "Assistance or Service" in your Use and Care Guide.

CU-COUNTRY LANE

LOT 1-2

20-2447 ELEV A

THE JAMESPORT

39 of 39

WHIRLPOOL DRYER Model #: YWED5620HW

Additional parts may be required, depending on your installation. Check local codes. Check existing electrical supply and venting. Read "Electrical Requirements" and "Venting Requirements" before purchasing parts.

If using a power supply cord:

Use a UL Listed power supply cord kit marked for use with clothes dryers. The kit should contain:

- A UL Listed 30 amp power supply cord, rated 120/240 volt minimum. The cord should be type SRD or SRDT and be at least 4 ft. (1.22 m) long. The wires that connect to the dryer must end in ring terminals or spade terminals with upturned ends.

- A UL Listed strain relief.

Optional Equipment (not supplied with dryer):

Refer to your Use and Care Guide for information about accessories available for your dryer.

LOCATION REQUIREMENTS

Check code requirements. Some codes limit, or do not permit, installing dryer in garages, closets, mobile homes, or sleeping quarters. Contact your local building inspector.

⚠ WARNING


Explosion Hazard
Keep flammable materials and vapors, such as gasoline, away from dryer.
Place dryer at least 18 inches (460 mm) above the floor for a garage installation.
Failure to do so can result in death, explosion, or fire.

You will need:

- A location allowing for proper exhaust installation. See "Venting Requirements."
 - A separate 15 or 20 amp circuit for a gas dryer or 30 amp circuit for an electric dryer.
 - If using power supply cord, a grounded electrical outlet located within 2 ft. (610 mm) of either side of dryer. See "Electrical Requirements."
 - Floor must support dryer weight of 200 lbs. (90.7 kg). Also consider weight of companion appliance.
 - Cold water faucets located within 4 ft. (1.2 m) of the water fill valves, and water pressure of 20–120 psi (138–827 kPa). You may use your washer's water supply by purchasing the necessary parts noted in "Parts needed."
 - Level floor with maximum slope of 1" (25 mm) under entire dryer. If slope is greater than 1" (25 mm), install Extended Dryer Feet Kit, Part Number 279810. If not level, clothes may not tumble properly and automatic sensor cycles may not operate correctly.
 - For garage installation, place dryer at least 18" (460 mm) above floor. If using a pedestal, you will need 18" (460 mm) to bottom of dryer.
 - The dryer must not be installed or stored in an area where it will be exposed to water and/or weather.
- IMPORTANT:** Do not operate, install, or store dryer where it will be exposed to water, weather, or at temperatures below 40°F (4°C). Lower temperatures may cause dryer not to shut off at end of automatic sensor cycles, resulting in longer drying times.


DRYER DIMENSIONS

Front view:

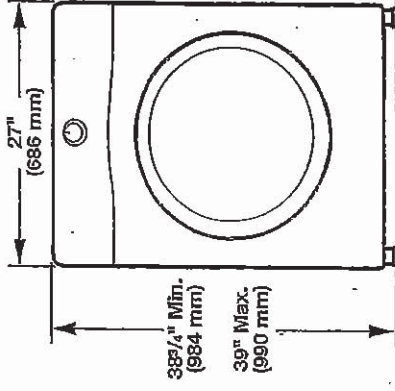


Side view:

Whirlpool Models

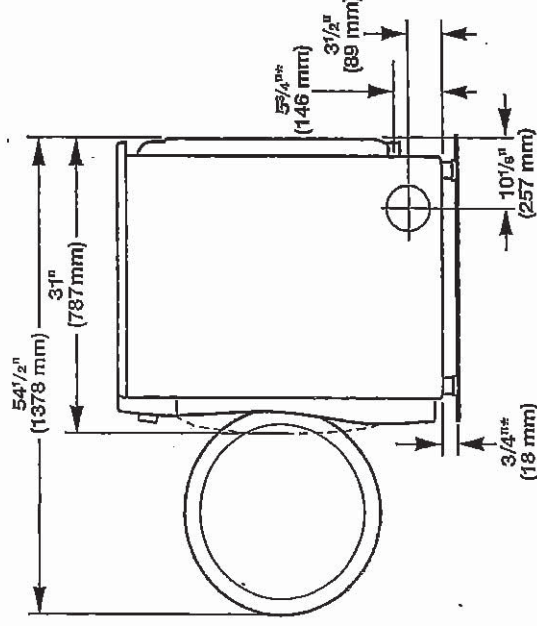

*Approx. measurement

Maytag Models

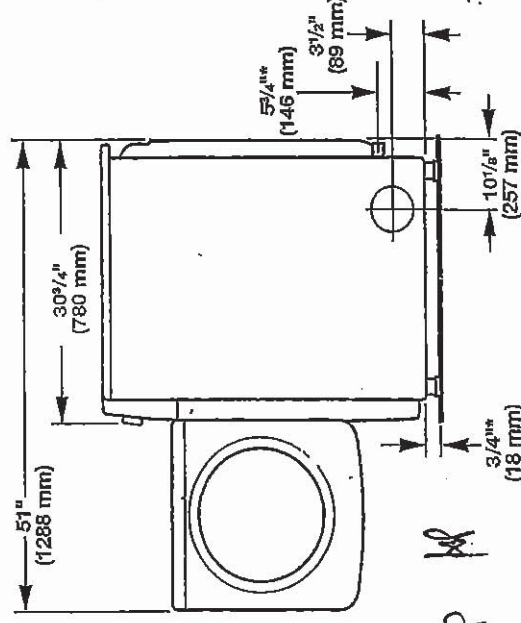

*Approx. measurement