

LG COOKING

LSEL6335_

6.3 cu. ft. Smart Wi-Fi Enabled ProBake Convection®
InstaView™ Electric Slide-in Range with Air Fry

- 6.3 cu. ft. Large Capacity
- InstaView™ Window – Knock Twice to See What’s Cooking
- Built-In Air Fry with ProBake Convection®
- EasyClean® + Self Clean
- 3-in-1 Element for cooking flexibility
- LG ThinQ® App with ThinQ Care

AVAILABLE COLORS

- PRINTPROOF™ STAINLESS STEEL
- PRINTPROOF™ BLACK STAINLESS STEEL

ThinQ Care

Proactive Smart Alerts to Keep Your Appliances Running Smoothly

- Preventative Alerts help you stay a step ahead of potential issues to find proactive solutions before problems arise.
- Avoid preventable repairs and service calls with real-time diagnostics for a hassle-free experience.
- Integrated within LG's ThinQ app—a smart home hub for managing your smart devices and appliances.

DUV 495



SUMMARY	
Cooktop Type	Radiant, Ceramic Glass
Number of Cooktop Burners	5
Oven Type	Single Oven
Oven Cooking System	ProBake Convection®
Oven Capacity (cu. ft.)	6.3
Oven Cleaning Type	EasyClean® + Self Clean
Drawer Type	Storage
Size in Width (in.)	30"
APPEARANCE	
Color	PrintProof™ Stainless Steel PrintProof™ Black Stainless Steel
Control Type	SmoothTouch™ Glass
Knobs	Stainless Steel Appearance, Weighted
Oven Door Feature	InstaView & WideView™ Window
Cooktop Finish	Ceramic Glass, Stainless Steel, Porcelain Enamel
COOKTOP	
Cooktop Type	Radiant, Ceramic Glass
Number of Cooktop Burners	5
Element/Burner - Left Front	9" / 6" Dual, 3200W UltraHeat™
Element/Burner - Left Rear	6" Single, 1200W
Element/Burner - Right Front	12" / 9" / 6" Triple, 3000W
Element/Burner - Right Rear	6" Single, 1200W
Element/Burner - Center	7" Single, 100W Warming Zone
Hot Surface Indicator Light	Yes


OVEN	
Oven Type	Single Oven
Oven Cooking System	ProBake Convection®
Convection Conversion Auto-Adjust	Yes
Oven Cleaning Type	EasyClean® + Self Clean
Self-Clean Oven Door Lock	Automatic
Oven Capacity (cu. ft.)	6.3
Broiler Element Power	4200W
Number of Rack Positions	7
Number of Oven Racks	2
Oven Rack Type	2 Heavy Duty
Drawer Type	Storage
Oven Modes	Bake, Conv. Bake, Conv. Roast, Broil High, Broil Low, Warm, Proof, Frozen Meal, Air Fry, Slow Cook, EasyClean, SelfClean
Oven Light Type	Halogen
CONTROL FEATURES	
Kitchen Timer	Yes
Timed Cook	Yes
Oven Control Lock	Yes (Cooktop, Key)
Sabbath Mode	Yes

SMART FEATURES	
Wi-Fi Connect	Yes
ThinQ Care	Yes
Smart Diagnosis™	Yes
Works with	LG ThinQ® Amazon Alexa Google Assistant SIDECHEF Innit (*) Nestle (*) Kraft-Heinz(*)
INCLUDED ACCESSORIES	
Air Fry Tray	Yes
POWER/RATINGS	
Amp Rating at 208V	46.9A
Amp Rating at 240V	54.2A
KW Rating at 208V	9.8kW
KW Rating at 240V	13.0kW
Required Power Supply Amp	40A
DIMENSIONS & WEIGHT	
Cabinet Width (in.)	30"
Overall Depth (in.) - including handle	29 5/16" (743.9 mm)
Overall Height (in.)	36 1/2" (927.9 mm)
Overall Width (in.)	29 7/8" (758.8 mm)
Product Weight (lbs.)	161.7
Shipping Weight (lbs.)	221
Shipping Dimensions (W x H x D) (in.)	32 1/2" x 44" x 30 1/2"
UPC CODES	
LSEL6335F (PrintProof™ Stainless Steel)	048231341844
LSEL6335D (PrintProof™ Black Stainless Steel)	048231341851

*These partners may not yet be available at the time of purchase of this product, please continue to check for app updates


Dimensions and Clearances

Dimensions

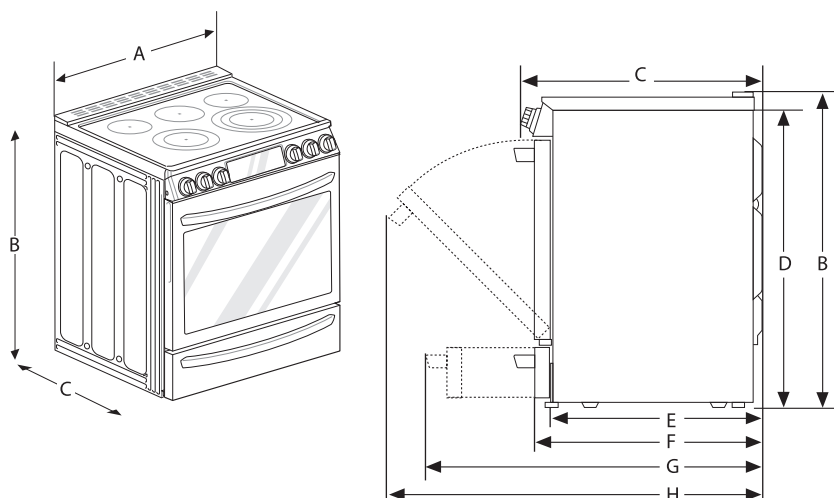

-	Dimensions	LSEL6337*, LSEL6335*
A	Width	29 7/8" (758.8 mm)
B	Height	36 1/2" (927.9 mm)
C	Depth (Includes Door Handle)	29 9/32" (743.9 mm)
D	Height (Excludes Vent Trim)	36" (913.0 mm)
E	Depth (Includes only the product body that is loaded into the cabinet. Excludes door, drawer, and handles)	24 3/4" (629.4 mm)
F	Depth (Excludes Door Handle)	26 7/8" (683 mm)
G	Depth when drawer is fully opened	38 7/16" (976.7 mm) 36 1/16" (916.2 mm) (Excludes handle)
H	Depth when door is fully opened	48 5/8" (1235.9 mm)

Clearances

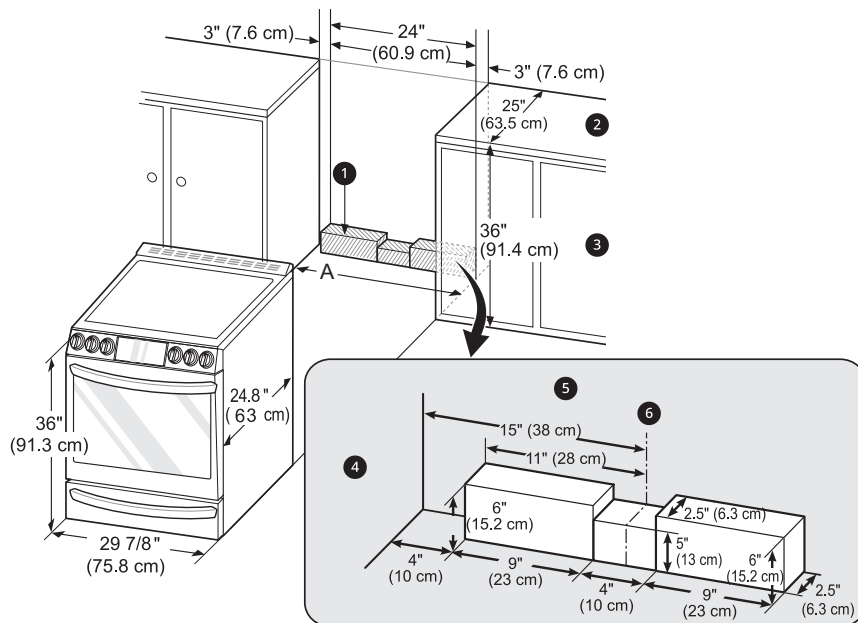

❶ Acceptable electrical outlet area

❷ Normal counter top depth

❸ Counter top height

❹ Cabinet

❺ Wall

❻ Center

A (Cabinet opening)

= 30" (76.2 cm) For U.S.A

= 30" (76.2 cm) ~ 31" (78.7 cm) For CANADA

Minimum Dimensions

