



## APPLIANCE CHECKLIST

It may seem early to be thinking about appliances, but they are an important part of your kitchen design and may require upgrades to your HVAC, plumbing and electrical plans. It's important that we are provided with your appliance information during the structural and foundation part of the Design Process, so that these upgrades can be included on your invoice, if required.

ITEM	BRAND	MODEL NUMBER
<b>FRIDGE</b>	CAFE	CVE28DP2NS1
<b>DISHWASHER</b>	CAFE	CDT875P2NS1
<b>RANGE</b>	NA	
Type: Gas <input type="checkbox"/>	Electric <input type="checkbox"/>	Induction <input type="checkbox"/>
Electrical: 15 Amp <input type="checkbox"/>	40 Amp <input type="checkbox"/>	50 Amp <input type="checkbox"/>
<b>WALL OVEN</b>	FRIGIDAIRE	PCWD3080AF
Type: Gas <input type="checkbox"/>	Electric <input checked="" type="checkbox"/>	Waterline Required <input type="checkbox"/>
Electrical: 30 Amp <input type="checkbox"/>	40 Amp <input checked="" type="checkbox"/>	
<b>WARMING DRAWER</b>	NA	
Electrical: 15 Amp <input type="checkbox"/>	Other: Specify	
<b>COOKTOP</b>	CAFE	CEP90302TSS
Type: Gas <input type="checkbox"/>	Electric <input checked="" type="checkbox"/>	Induction <input type="checkbox"/>
Electrical: 15 Amp <input type="checkbox"/>	40 Amp <input checked="" type="checkbox"/>	50 Amp <input type="checkbox"/>
<b>BUILT IN MICROWAVE</b>	PANASONIC	NN-CD87KS
Electrical: 15 Amp <input type="checkbox"/>	30Amp <input type="checkbox"/>	240 Volt <input type="checkbox"/>
<b>MICROWAVE TRIM KIT</b>	ESTORE	NNTK81KC
<b>OTR MICROWAVE</b>	NA	
<b>WASHING MACHINE</b>	LG	WM3850HVA
<b>DRYER</b>	LG	DLEX3850V
Type: Gas <input type="checkbox"/>	Electric <input checked="" type="checkbox"/>	Stacked <input type="checkbox"/>
<b>OTHER: WINE/BAR FRIDGE</b>	DANBY	SPRBC047D1SS
<b>OTHER: HOODFAN</b>	CYCLONE	BX21234
<b>OTHER:</b>		

Hood Fans must be purchased through Phoenix Homes, and will require an upgrade to a make up air system for any hood fans above 300CFM. Standard hood fan vent pipe is 6".

A make up air system is a required upgraded for all gas stoves/cooktops.

Any changes from the standard kitchen plan and/or standard electrical, plumbing and electrical specifications/plans may be subject to additional fees.


**Community:** DIAMONDDVIEW (3)

**Lot #:** 77

**Purchaser Signature:**

Signed by:  
  
 DC36A81057F342F...

**Purchaser Signature:**

Signed by:  
  
 9008FA54FD5F4D9...

Café™ 30" Built-In Touch Control Electric Cooktop

CEP90302TSS

C A F É

DISTINCT BY DESIGN™



FEATURES & BENEFITS

Power Boil Tri- and Dual-Ring Element - Cook more faster with a 3,000W Tri-ring element and a 2,200W dual-ring element that can handle any pan size.

Easy Clean Surface - A smooth glass surface makes this an easy clean electric cooktop that adds a level of aesthetic sophistication.

Glide Touch Controls - Choose from 19 different heat settings with one easy swipe for precise heat control on this easy-to-clean electric cooktop.

Guided Cooking - Follow along a video-guided recipe and your burners will automatically adjust time and temperature using a smart pan. Experience the joy of a perfectly cooked meal, from scallops to scrambles. Pan sold separately.

Precision Temperature Control - Set your burner to an exact degree, not just high, medium or low, with Precision Temperature Control. Using a smart pan, the cooktop maintains a specific temperature – from 100 to 500 degrees. Perfect for sauces, candies and frying.

Synchronized Elements - Connect and control two cooktop burners as one to create a bigger cooking surface for pans such as griddles.

Chef Connect - Synchronize your cooktop and Café over-the-range microwave or hood so that your fan or hood and lights automatically come on when a burner is activated with Chef Connect.

Keep Warm Setting - This electric cooktop's 7" element features a range of heat - from a dedicated "Keep Warm" setting to the power to boil water.

Control Lock - Protect against unintentionally turning your cooktop on with a safety control lock setting.

Hot Surface Indicator Lights - A quick glance is all it takes to know when elements are hot on this electric cooktop with hot surface indicator lights.

Smart Cookware Rebate - Smart pans and a wireless sous vide probe easily pair with this smart cooktop to ensure you get the perfect cooking results. Earn a rebate for your choice of a Hestan Cue Smart Pan.

Built-in WiFi - This smart cooktop features Built-In WiFi so you can monitor your burners and view power levels, precision temperature, or on/off.

Fit Guarantee - This cooktop will fit your existing 30" cut-out or Café will help pay for modifications up to \$100.

FEATURES

Cooktop Surface	Slate Ceramic Glass with Stainless Trim
Cooktop Burner Type	5 Ribbon, Smoothtop
Element - Left Front	7" 1500W
Element - Left Rear	7" 1500W
Element - Right Front	8"/5" 2200W Dual
Element - Right Rear	6" 1200W
Element - Center	9"/7"/5" 3000W Power Boil
Control Location	Front Center
Control Type	Glass Touch
Cooktop Control Features	Control Lock Capability, Keep-Warm Setting, Sync-Burners Capability, Melt Setting
Melt Setting	Yes
Indicator Lights	5 Hot Surface, Surface Element "ON" Red

WEIGHTS & DIMENSIONS

Approximate Shipping Weight	46 lb
Cabinet Width	30 in
Cooktop Size	30 in
Cutout Dimensions (Width x Depth) (in.)	28-1/2 x 19-5/8
Net Weight	40 lb
Overall Depth	21-1/2 in
Overall Height	5-13/16 in
Overall Width	29-7/8 in

POWER/RATINGS

Max. Connected Load (kW) at 208V	7.1
Max. Connected Load (kW) at 240V	9.5
Max. Current Draw (Amps) at 208V	34.1
Max. Current Draw (Amps) at 240V	39.6
Recommended Circuit Breaker (Amps) at 208V	40
Recommended Circuit Breaker (Amps) at 240V	40

ACCESSORIES

Filler trim kit	JXTR32B
Smart Cookware	With rebate

APPEARANCE

Color Appearance	Slate Ceramic Glass
Frameless	No

Initial Initial

# Café™ 30" Built-In Touch Control Electric Cooktop

CEP90302TSS



## WARRANTY

Parts warranty	Limited 1-year entire appliance 90 days post-install on cooktop glass
Labor warranty	Limited 1-year entire appliance
Warranty notes	See written warranty for full details

## DIMENSIONS AND INSTALLATION

**Important:** Requires a 5" free area between the bottom of the cooktop to any combustible material, i.e., shelving. Free area not required when installing wall oven underneath cooktop. Refer to installation instructions. Requires a 15" minimum from cooktop to adjacent overhead cabinets. Units are furnished with a 48" flexible armored cable.


**Note:** 30" Ribbon cooktops are approved for use over select Café 27" and Café 30" Single Wall Ovens and Warming Drawers. Refer to cooktop and wall oven/warming drawer installation instructions packed with product for current dimensional data. If installed with a Telescopic Downdraft System, consult both the cooktop and downdraft installation instructions packed with product before installing. Cooktop gas/electric supply may need to be re-routed to install downdraft. The countertop cutout requires 23-1/2" minimum flat countertop surface and 25" minimum total countertop depth. In addition, other clearances to front edge of the countertop must be considered. Before installing, consult installation instructions packed with product for current dimensional data.

**Cutout filler trim kit:** A filler trim kit is available for use if your countertop cutout is larger than the dimension shown, up to 29-13/16" x 20-7/16". Order JXTR32B to reduce the cutout opening for installation of this cooktop. These kits may be ordered from your Café Appliances Dealer.


Voltage (60HZ AC)	240V	208V
Connected load (max.)	9.4Kw	7.1Kw
Current draw (max.)	39.2 Amps	33.9 Amps
Recommended circuit breaker†	40 Amps	40 Amps

†Note: Check local codes for required breaker size.


### Installation above a wall oven

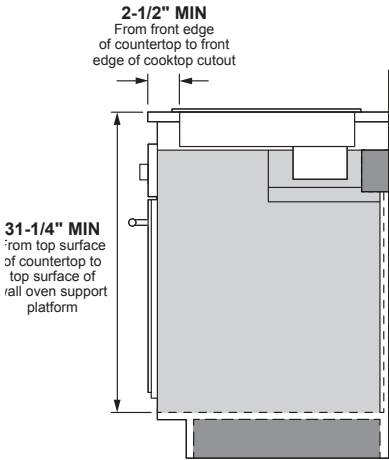

### Approximate Cooking Dimensions

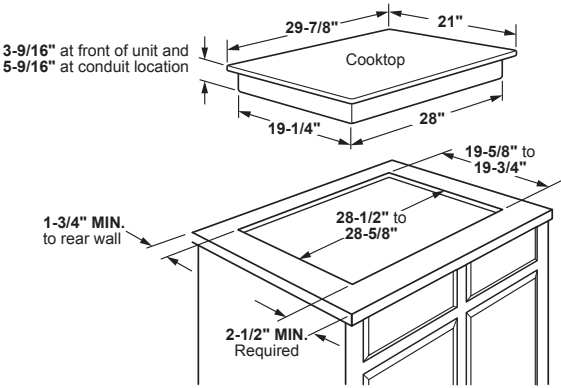

To insure accuracy, it is best to make a template when cutting the opening in the counter

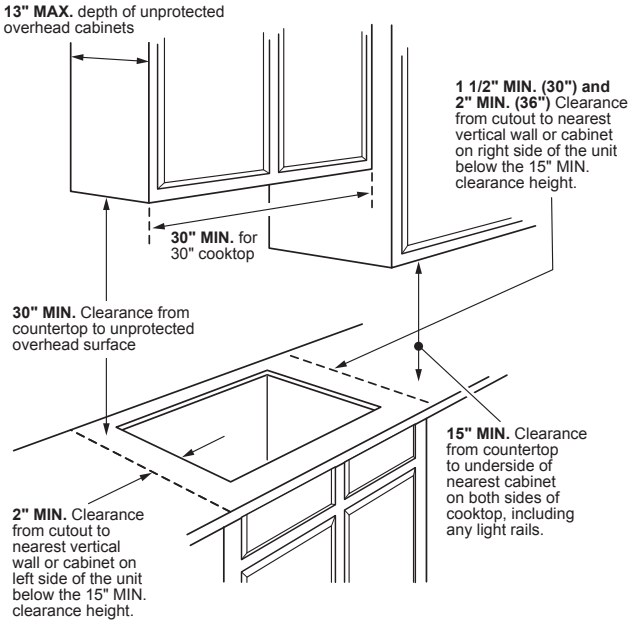

# LORRAINE

SPRBC047D1SS

Silhouette  
PROFESSIONAL™

www.silhouetteappliances.com

DV3 LOT 77 - BAR FRIDGE



Dual Temperature Zone



LED Perimetrical Lighting

## PRODUCT FEATURES



### Pro-vection Cooling

Our fan forced cooling system incorporates AO (always on) fans to continually circulate the air. Multiple sensors are used to continually adjust and provide a stable internal temperature.



### Pro Luminosity

Perimetrical lighting down the sides casts a warm glow and includes 3 different light settings



### Pro Security

Integrated door lock secures the contents



Quiet operation



# LORRAINE

SPRBC047D1SS

*Silhouette*

PROFESSIONAL™

www.silhouetteappliances.com

## BENEFITS

<b>Model #</b>	SPRBC047D1SS
<b>Capacity-Wine</b>	21 bottles of wine
<b>Capacity-Beverage</b>	Up to 61 beverage cans
<b>Volume</b>	4.7 cu. ft.
<b>Temp Range – Wine</b>	41°F–64°F(5°C–18°C)
<b>Temp Range – Beverage</b>	34°F–50°F(1°C–10°C)
<b>Noise</b>	37.1 dB
<b>Door Frame</b>	Durable 304 grade stainless steel
<b>Cabinet</b>	Matte black textured steel
<b>Interior Finish</b>	Matte black
<b>Door Style</b>	French door design
<b>Door Hinge</b>	Hidden for flush fit installation
<b>Door Glass</b>	Low E, dual pane argon filled
<b>Door Handle</b>	Pro-style, 20% longer than previous model
<b>Door Lock</b>	Yes
<b>Shelving</b>	Pro-glide, anti-vibration 100% extension for wine compartment
	Plastic coated wire
<b>Shelving-Wine</b>	
<b>Shelving-Beverage</b>	Clear Glass
<b>Wave Wine Storage</b>	Yes
<b>Lighting Option 1</b>	On/Off with door opening
<b>Lighting Option 2</b>	On 100% illumination for 2 hours
<b>Lighting Option 3</b>	On 50% illumination for 2 hours
<b>Light Colours</b>	Choose between Arctic white or Azure blue
<b>Controls</b>	Digital seamless capacitive touch
<b>Temperature Recall</b>	Yes reverts to last set temperature after power outage
<b>Alarm</b>	Yes, temperature and door ajar
<b>Sabbath Mode</b>	Yes



\*based on standard 750ml bordeaux style bottle

## PRODUCT SPECIFICATIONS

**UPC** 067638024440

### Unit Dimensions

Width	23.8" in.
Min. Height	34.1" in.
Max. Height	34.3" in.
Depth	23.7" in.

(DOES NOT INCLUDE HANDLE)

### Installation


Gross Weight: 150 lbs.  
Built-in under counter or free standing  
Refrigerant: R600a  
Size: Min 24" wide opening required

### AC Power

115V, 60Hz at MAX 1.5A  
Power cord length: 6.5 ft.

### Platinum Warranty

2 year parts and labor coverage:  
In home service

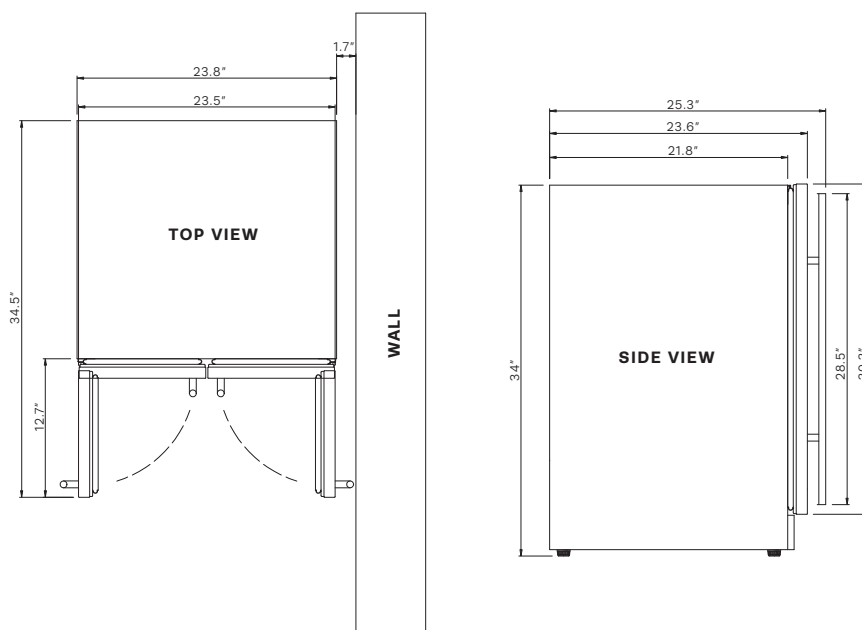




DV3 LOT 77 - DISHWASHER CDT875P2NS1

Café™ Stainless Interior Built-In Dishwasher with Hidden Controls

CDT875P4NW2 / CDT875P3ND1 / CDT875P2NS1

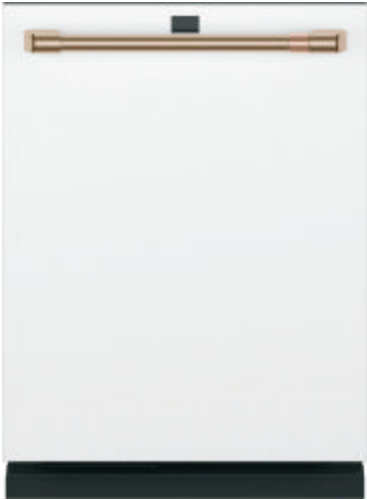

CDT875P4NW2  
Matte White with Brushed Bronze handles



ALSO AVAILABLE IN



CDT875P3ND1  
Matte Black with Brushed Stainless handles



CDT875P2NS1  
Stainless Steel with Brushed Stainless handles

FEATURES & BENEFITS

Ultra Wash & Dry Plus – Expect precision cleaning and superior dryness on fine china, dinnerware and even dishwasher-safe plastics, with exceptional features like Variable-Pressure Jets and Dual-Convection Ultra Dry

Loading Flexibility – Clean up quickly after hosting any event with a dishwasher that accommodates large items – like charcuterie platters – and dishwasher-safe plastics, like storage containers, conveniently in the lower rack

Status Center – Continue conversations without interruption and easily know when extra dinnerware is available via an LCD screen that displays the dishwasher cycle status

Adjustable Upper Racks – You'll have room for your finest stemware and space for tall bakeware with a rack that can be moved two inches up or down, creating ultimate loading flexibility

WiFi – Always have clean dishes ready for surprise guests with WiFi Connect, which lets you operate your dishwasher from your smartphone. Track and automatically reorder detergent and rinse aid with just the tap of an app

Create a look that matches your personal style – Select any combination of premium finishes and hardware options to create a stunning look customized to any owner's taste

APPEARANCE

Door Style	Long Door with Top Controls
Installation	Side Installation or Top Installation Included; Built-Up Floor Capable; Flush Cabinet Installation
Door Appearance	Full-length flat door

FEATURES

Style	Built-In
Tub and Door Liner	Stainless Steel
Tub Type	Tall Tub
Control Type	Top Controls; Cap Touch Controls; 12 Touchpads
Dishwasher Control Features	Cycle Countdown with LCD Status Center on door; Multi function display; Last Cycle Memory; Audible End-of-Cycle Signal
Wash System	3-Level; 800 Series
Wash System Features	Variable Speed Dual Pumps and Motors; Automatic Temperature Control; Drain Pump; Hard Food Disposer with removable filter; Reversing Quad Blade Lower Wash Arm; Quad Blade Middle Wash Arm; Deep Clean Silverware Jets; Side Jets; 90+ Spray Jet Wash System; Hidden Heater; Automatic HotStart; Bottle Jets (4)
Sensor	Clean Sensor
Wash Arms	3 Wash Levels; Lower- Reversing Quad Blade; Middle - Quad Blade; Bottle Jets; Jets - Variable Pressure; Deep Clean Silverware Jets
Water Filtration System	100% Filtration with Hard Food Disposer and Removable Filter
Dispenser	Rinse Aid with Indicator and Adjustment; Electronic Low Rinse Aid Sensor
Number of Cycles	5
Dishwasher Cycles	Auto; Pots; Normal; China; Express
Number of Options	10
Dishwasher Options	Delay Start 1-12 Hr.; Hi-Temp Wash; Presoak + Sanitize (NSF Certified); Heated Dry Off; Normal Dry; Dual Convection Ultra Dry; Wash Zone Upper Only; Wash Zone Lower Only; Start/Reset; Bottle Wash; Lock Controls
Rack Features	2 Utility Shelves with Stem Safe and Chop-stick slots - Upper Ball-Tipped Tines; Adjustable Upper Rack; 3-Piece Silverware Basket with Cell Covers; Full Extension Slides - Upper
Racking Material	Nylon
Rack Color	Black Pearl
Number of Place Settings	Up to 16
Upper Rack	Premium Height Adjustable; Ball-Tip Tines; 2 Stem Safe Shelves; Chop stick slots; 1/2 fixed tines, 1/2 fold down tines
Lower Rack	Fixed tines with Bottle Jets; 1 Rack handle
Additional Protection	Ball-Tip Tines; 1/2 fixed tines, 1/2 fold down tines
Dishwasher Drying Features	Active Flood Protect; Leak Defense with Active Flood Protect
Cutlery Tray	Dual Convection Ultra Dry; Ultra/Normal/Off; Fan Assist Dry
Floor Protection	One piece removable 3rd rack
Leveling System	Leak Defense with Active Flood Protect; Leak Pan with Sensor
Latch	3 Point Leveling
Showroom Power Mode	Pull with Handle
WiFi Connect	Yes
Exterior Style	Built-In
Handle Design	Traditional
Racking System	Customizable
	Full 3rd Rack

ECONOMICAL/QUIET

Quiet Package	39 dBA
Quiet Features	Quiet Water Valve; Sealed Toe Kick; Tub Collar Trim
Motor Type	Variable Speed
Outer Wrap	Full-wrap Blanket; Bitumen
Door Insulation	Insulation; Mastic

WEIGHTS & DIMENSIONS

Cabinet Width	24 in
Approximate Shipping Weight	137 lb
Net Weight	124 lb
Overall Height	34 in
Height w/ Legs Retracted - Minimum Height	33-3/8 in
Height w/Legs Extended - Maximum Height	34-5/8 in
Overall Depth	24 in
Overall Width	23-3/4 in



Café™ Stainless Interior Built-In  
Dishwasher with Hidden Controls

CDT875P4NW2 / CDT875P3ND1 / CDT875P2NS1




TECHNICAL DETAILS

Calrod Heater Watts	1200/400
Power Connection	Optional cord kit (GPFCORD - WX09X70910, WX09X70911)
Volts/Hertz/Amps	120 V; 60 Hz; 10.2 A


WARRANTY

Parts warranty	Limited 1-year entire appliance
Labor warranty	Limited 1-year entire appliance
Warranty notes	See written warranty for full details

DIMENSIONS

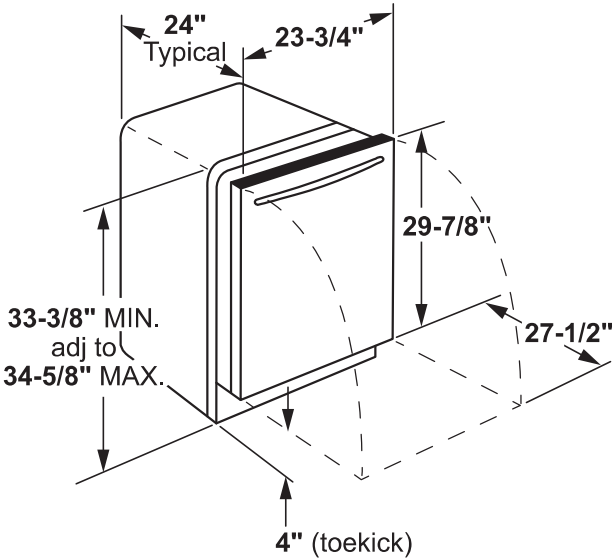

INSTALLATION DIMENSIONS

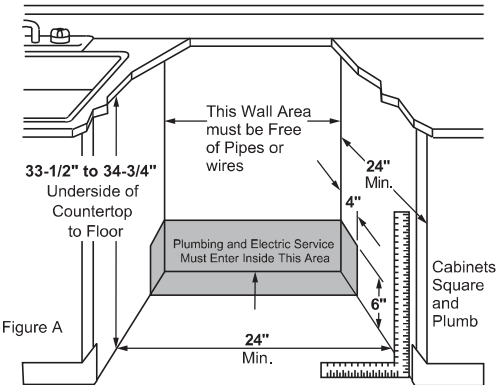

ADDITIONAL ACCESSORIES



Brushed Bronze  
CXADTH1PMBZ  
(Standard on Matte White)



Brushed Stainless  
CXADTH1PMSS  
(Standard on Matte Black and Stainless steel)



Brushed Black  
CXADTH1PMBT



Brushed Copper  
CXADTH1PMCU

DV3 LOT 77 - DRYER

HOME APPLIANCES



LG LAUNDRY

DLEX3850V  
7.4 cu.ft. Capacity Electric Dryer

KEY FEATURES

- TurboSteam™ Technology
- AI Sensor Dry™
- Aluminized Alloy Steel Drum
- Touch Control Panel
- ENERGY STAR® Qualified
- ThinQ Technology (Wi-Fi Enabled)
- FlowSense™ Duct Clogging Indicator

SMART APPLIANCE

Enjoy new ways to control your home with LG smart appliances

• Start the laundry while you're out shopping

• Get alerts when the cycle is finished

• Works with the LG ThinQ® app



PRODUCT FEATURES

CAPACITY		ThinQ® TECHNOLOGY	
Capacity (cu.ft.)	7.4	SmartDiagnosis™ (v3.0)	•
APPEARANCE		Wi-Fi	•
Design Look	Front Control	Remote Start and Cycle Monitor	•
Intelligent Electronic Controls with LED Display	•	Energy Monitoring	•
Touch Buttons	•	MATERIALS AND FINISHES	
Dial-A-Cycle™	•	Aluminized Alloy Steel Drum	
ENERGY		Cabinet	Painted Steel
ENERGY STAR® Qualified	•	Control Panel	Plastic
DRYING PROGRAMS		Door	Tempered Glass
No. of Programs - 12	Normal, Heavy Duty, Bedding, Anti Bacterial, SteamSanitary™, SteamFresh™, Perm Press, Delicates, Towels, Speed Dry (Manual Dry), Air Dry (Manual Dry), Downloaded	All Available Colours	Graphite Steel (V)
		POWER SOURCE	
No. of Options - 12	More Time, Less Time, Damp Dry Signal, Wrinkle Care, Control Lock, Wi-Fi, Energy Saver, TurboSteam™, Reduce Static, Remote Start, Drum Light, Signal	Ratings	CSA Listed
		Electrical Requirements	Electric: 240V, 30 Amps
Temperature Settings	5 High, Mid High, Medium, Low, Ultra Low	Type	Electric
		BTU Rating	10,000 ft.
		OPTIONS	
Drying Levels	5 Very, More, Normal, Less, Damp	Pedestal	WDP4V
		Pedestal (WxHxD)	27" x 14 1/8" x30 3/4"
Manual Dry Times	60 min, 50 min, 40 min, 30 min, 20 min, More Time/Less Time	Stacking Kit	KSTK1
FABRIC CARE FEATURES		DIMENSIONS	
AI Sensor Dry™	•	Product (WxHxD)	27" x 39" x 30 1/8" 51 3/8" (With door open)
TurboSteam™	•	Carton (WxHxD)	29 1/2" x 42 1/4" x 31 1/4"
Precise Temperature Control and Variable Heater	•	Weight (Product/Carton)	126.2 lbs / 139.4 lbs
CONVENIENCE FEATURES		LIMITED WARRANTY	
3 Minute Installation Check	•	1 Year Parts and Labour, 3 Years on Drum	
LoDecibel™ Quiet Operation	•	UPC CODES	
End of Cycle Signal	•	WM3850HVA	772454073625
Drum Light	•	DLEX3850V	772454073304
Reversible Door	•	WD100CV	772454052866
FlowSense™ Duct Clogging Indicator	•	WDP4V	048231015165
Wrinkle Care Option	•	KSTK1	772454059896
Control Lock	•		
Venting Option	Electric: 4 Way Venting		
Leveling Legs	4 Adjustable Legs		
Remaining Time Display/Status Indicator(s)	•		

Initial

Initial



DV3 LOT 77 - FRIDGE CVE28DP2NS1

Café™ ENERGY STAR® 27.8 Cu. Ft. 4- Door  
French-Door Refrigerator

CVE28DP4NW2 / CVE28DP2NS1 CVE28DP3ND1



CVE28DP4NW2  
Matte White with  
Brushed Bronze handles



ALSO  
AVAILABLE IN



CVE28DP2NS1  
Stainless Steel  
with Brushed  
Stainless handles



CVE28DP3ND1  
Matte Black  
with Brushed  
Stainless handles

FEATURES & BENEFITS

Enjoy the flexibility of a **Convertible Drawer with Soft Freeze** with settings as low as 23 degrees or as high as 42 degrees, and keep items organized with sliding glass dividers

Relish the bright, uniform light of an **LED light wall** that spans the back wall of the refrigerator, illuminating the fresh food section so every item is easy to find

Effortlessly fill containers with filtered water by simply pressing the **AutoFill** button which uses sensors to dispense the perfect amount every time

A **Humidity Control System** provides an environment for leafy green vegetables to last 2-1/2 times longer than standard vegetables drawers. (\*Based on internal testing vs. similar size vegetable drawers with humidity controls from a leading competitor.)

Easily pull out a slim, **full-width tray** to accommodate gourmet pizzas and other frozen, uniquely shaped items

Receive alerts on your smart device whenever your refrigerator’s internal temperature dips below normal, thanks to **built-in WiFi connectivity** that helps you keep foods party-platter ready

From produce to packaged goods, keep any food fresh with **TwinChill™ evaporators** that create separate climates in the fresh food and freezer sections

Spend more time filling and less time fumbling thanks to the **Integrated Dispenser Design**, which senses your proximity and automatically illuminates, so you never have to compromise on function and fashion

APPEARANCE

Exterior design	Bowed flat top
Handle	Café™
Handle design	Café Pro
Hidden door hinge(s)	Yes

FEATURES


Configuration	French-door & Double drawer
WiFi connect	Built-in
Connected capabilities	Amazon Alexa; The Google Assistant; IFTTT
Temperature management features	Multiflow air system
Temperature management system	TwinChill™ evaporators
Defrost type	Frost Guard
Control type	Electronic temperature controls
Dispenser	Large stainless steel; Cubes, crushed ice and chilled water
Dispenser features	Hands-free AutoFill; Door alarm; LED dispenser light; Water filter indicator light
Icemaker	Space saving ice
Water filtration	GE water filtration 6 month; XWF; Water filter indicator light
Filter location	Left wall
Fresh food cabinet drawers	2 total; 2 adjustable humidity drawers
Fresh food cabinet shelves	4 glass split; 1 Quick Space shelf
Fresh food door bins	6 total; 2 with gallon storage; 1 adjustable
Fresh food door features	Dairy compartment
Fresh food features	LED light wall; Deli pan
Freezer door bins	3 (2 adjustable tilt-out)
Freezer storage baskets	2 full-width
Freezer features	Interior lighting - LED; Freezer drawer with full-extension slides
Exterior style	Free-standing
Leveling system	2 point front adjustable
Performance features	Easily removable door gaskets; Sabbath Mode capable
Center drawer features	Convertible drawer; 6 temperature settings (Soft Freeze, Meats, Beverages, Snacks, Wine, Lock); 2 Tuck Away glass dividers; Full-extension slides

CAPACITY

Total capacity (cubic feet)	27.8 cu. ft.
Fresh food capacity	15.62 cu. ft.
Freezer capacity	8.57 cu. ft.
Convertible drawer capacity	3.62 cu. ft.

WEIGHTS & DIMENSIONS

Overall depth	36-3/4 in.
Overall height	69-7/8 in.
Overall width	35-5/8 in.
Case depth without door	29-3/8 in.
Depth with door open 90°	48-3/8 in.
Depth without handle	34-1/4 in.
Height to top of hinge	69-3/4 in.
Height to top of case	68-5/8 in.
Width w/door open 90 degrees incl. handle	44-7/8 in.
Back air clearances	2 in.
Side air clearances	1/8 in.
Top air clearances	1 in.
Approximate shipping weight	408 lb.
Net weight	375 lb.



Café™ ENERGY STAR® 27.8 Cu. Ft. 4- Door  
French-Door Refrigerator


CVE28DP4NW2 / CVE28DP2NS1 / CVE28DP3ND1



WARRANTY

Parts warranty	Limited 1-year entire appliance; Limited 5-year sealed refrigerating system
Labor warranty	Limited 1-year entire appliance; Limited 5-year sealed refrigerating system
Warranty notes	See written warranty for full details

DIMENSIONS

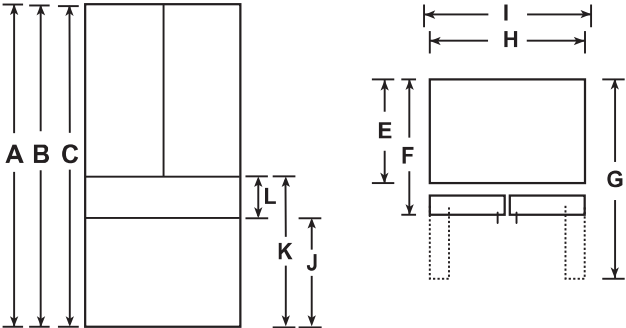

Overall Dimensions	A - Overall Height to top of door (in)	69 7/8
	B - Height to top of hinge cover (in)	69 3/4
	C - Height to top of case (in)	68 5/8
	D - Hinge Cover Depth from Case Flange (in)	6
	E - Case Depth without door (in)	29 3/8
	F - Case Depth without Door Handle (in)	34 1/4
	G - Depth with FF Door open 90 deg (in)	48 3/8
	H - Case Width (in)	35 5/8
	I - Width with door open 90 deg including handle (in)	44 7/8
	J - Top endcap of FZ drawer to floor (in)	24 1/2
	K - Top endcap of Middle drawer to floor (in)	33 1/2
	L - End cap to End cap height of middle drawer (in)	8 5/8

ADDITIONAL ACCESSORIES



CXQB4H4PNBZ  
Brushed Bronze  
4 handles  
(Standard on Matte White)



CXQB4H4PNSS  
Brushed Stainless  
4 handles  
(Standard on Matte Black and Stainless Steel)



CXQB4H4PNBT  
Brushed Black  
4 handles



CXQB4H4PNCU  
Brushed Copper  
4 handles

BX212 | CLASSIC Collection



22"



28"



34"

Insert

The three speed control is located on the underside of the BX212 for easy access and control. The range hood cannot be seen from eye-level, allowing you to arrange your cabinets as though there were no fan, creating a fluid and classy look. Mesh filters efficiently filter the air while bright halogen light bulbs provide all the illumination you'll need. Another innovative design unique to Cyclone.

Green Features



3 Speed Push Button Control Panel (22" Only)



3 Speed Slide Control Panel (28"/34" Only)



Halogen Light Bulbs



Grease Cup (28"/34" Only)



Model	Colour	Ducting	Filters	Size	CFM	Fits Cabinet
BX21222	Stainless Steel	6"	Mesh	22"	300	24"
BX21228	Stainless Steel	6"	Mesh	28"	300	30"
BX21234	Stainless Steel	6"	Mesh	34"	300	36"

Cyclone Range Hoods Inc.

1361 Huntingwood Drive, Unit 16. Toronto, ON. M1S 3J1. Canada.



Toll Free: 1-888-293-5662 Tel: (416) 293-0933 Fax: (416) 293-4793 Website: www.CycloneRangeHoods.com

# BX212 | CLASSIC Collection



## Features

- Insert range hood
- 6" round duct adapter
- Non-stick aluminum fan blades
- 3 speed push button control for 22"
- 3 speed slide control for 28" and 34"
- Quick release aluminum mesh filters
- 2 halogen light bulbs (2 x 25W E26)
- Plug-in connection

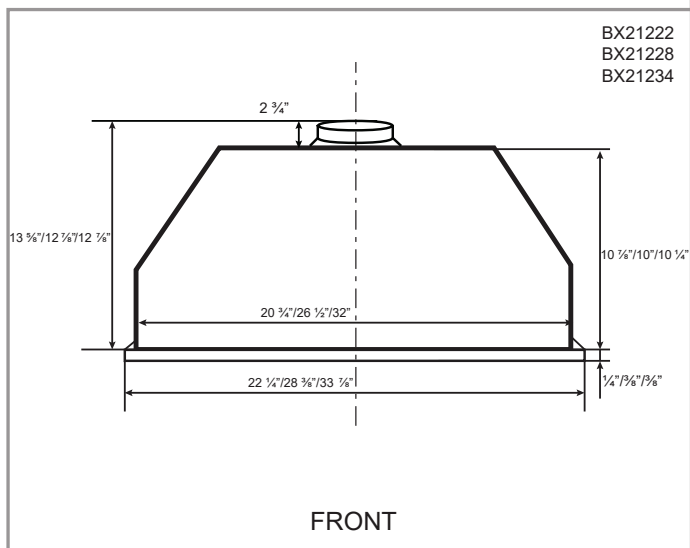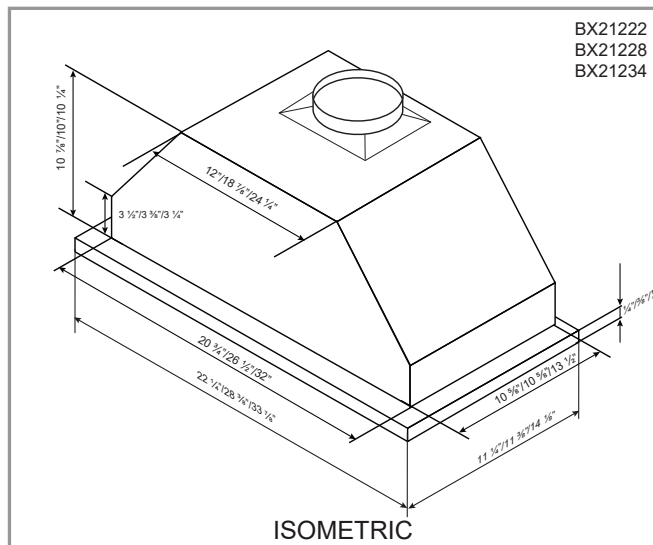

## Options

- Widths: 22", 28", 34"
- Charcoal Filter: CF01

\*Charcoal filter only available for 28" and 34"

## Specifications

- |                                      |                                |   |
|--------------------------------------|--------------------------------|---|
| ▪ Air Flow Volume: 300 CFM           | ▪ Current: 2.5 Amps            | ▪ Finishes: Stainless Steel                 |
| ▪ Electrical Connection: 120 V/60 Hz | ▪ Fan Speed: 1350 RPM          | ▪ Ducting: 6" Round                         |
| ▪ Power Consumption: 300 Watts       | ▪ Fan Type: Centrifugal Blower | ▪ Noise Level: Min. 2 Sones<br>Max. 4 Sones |





Combination Microwaves NN-CD87KS

SPECIFICATIONS	Oven Capacity	34 L
	Inverter	Yes
	Microwave Power	1000 W
	Grill Power	Quartz 1300 W
	Fan Assisted Convection Oven	40, 100-220 °C
	Microwave Power Levels	7
	Broil Power Levels	2
	Combo settings	2
	Auto Programs	21
	Turntable Size	360 mm
	Interior	Stainless Steel
	Door Screen	Nomal Glass
	LCD Display	White
	Control Panel	Mecha button & One Dial
	Interior Dimensions W x D x H	380 x 390 x 228.4 mm
	Exterior Dimensions W x D x H	560 x 450 x 343 mm
ACCESSORIES	Turntable (Round Glass Tray)	Yes
	Round Wire Rack	Yes
	Round Enamel Tray	Yes
	Airfry Basket	Yes
KEY FEATURES	Turbo Reheat	Sensor Reheat
	Sensor Cook	Yes
	Demo Mode	Yes
	Child Lock	Yes





# Installation and Grounding Instructions

## Examine Your Oven

Unpack oven, remove all packing material and examine the oven for any damage such as dents, broken door latches or cracks in the door. Notify dealer immediately if oven is damaged. **DO NOT** install if oven is damaged.

## Placement of Oven

- The oven must be placed on a flat, stable surface, which is more than 36 inches (91.6 cm) height from the ground. Place the front surface of the door 3 inches (7.6 cm) or more from the counter top edge to avoid accidental tipping of the microwave oven during normal use. For proper operation, the oven must have sufficient air flow. **Allow 6 inches (15 cm) of space on the top of the oven, 4 inches (10 cm) at back and 2 inches (5 cm) on both sides. If one side of the oven is placed flush to a wall, the other side or top must not be blocked. Do not remove feet.**
  - DO NOT** block air vents. If they are blocked during operation, the oven may overheat and be damaged.
  - DO NOT** place oven near a hot, damp surface such as a gas or electric range, or dishwasher.
  - DO NOT** operate oven when room humidity is excessive.
- This oven is manufactured for household use only. It is not approved or tested for mobile vehicle, marine, or commercial use.

## Installation

- DO NOT** block air vents. If they are blocked during operation, the oven may overheat. If the oven overheats, a thermal safety device will turn the oven off. The oven will remain inoperable until it has cooled.
- If the oven is designed for installation into a wall cabinet, only use the proper Panasonic trim kit available from a local Panasonic dealer, or online from the Panasonic Canada eStore. Follow all instructions packed with the trim kit.
- Use of a non-Panasonic trim kit will void the Manufacturer's warranty for the Microwave oven.

## WARNING: IMPROPER USE OF THE GROUNDING PLUG CAN RESULT IN A RISK OF ELECTRIC SHOCK.

Consult a qualified electrician or service person if the grounding instructions are not completely understood, or if doubt exists as to whether the appliance is properly grounded. If it is necessary to use an extension cord, use only a three-wire extension cord that has a three-prong polarized grounding plug, and a three-slot receptacle that will accept the plug of the appliance. The marked rating of the extension cord should be equal to or greater than the electrical rating of the appliance.

## Grounding Instructions


### THIS APPLIANCE MUST BE GROUNDED.

In the event of an electrical short circuit, grounding reduces the risk of electric shock by providing an escape wire for the electric current. This appliance is equipped with a cord having a grounding wire with a grounding plug. The plug must be plugged into an outlet that is properly installed and grounded.

- Plug into properly installed and grounded three-prong outlet.**
- DO NOT** remove ground prong.
- DO NOT** use an adapter.

## Power Supply

- A short power-supply cord is provided to reduce the risks resulting from becoming entangled in or tripping over a longer cord.
- Longer cord sets or extension cords may be used if care is exercised in their use. **DO NOT** let cord hang over edge of a table or counter.
- If a long cord or extension cord is used,
  - The marked electrical rating of the cord set or extension cord should be at least as great as the electrical rating of the appliance.
  - The extension cord must be a grounding-type 3-wire cord.
  - The longer cord should be arranged so that it will not drape over the counter top or tabletop where it can be pulled on by children or tripped over accidentally.



## Wiring Requirements

- The oven must be operated on a SEPARATE CIRCUIT. No other appliance should share the circuit with the microwave oven. If it does, the branch circuit fuse may blow or the circuit breaker may trip.
- The oven must be plugged into at least a 15 A or 20 A, 120 V, 60 Hz GROUNDED OUTLET. **(Beginning in 2017, all new construction and all renovated single family homes must have at least a 20 A, 120 VOLT, 60 Hz GROUNDED OUTLET).** Where a standard two-prong outlet is encountered, it is the personal responsibility and obligation of the consumer to have it replaced with a properly grounded three-prong outlet.
- The VOLTAGE used must be the same as specified on this microwave oven (120 V, 60 Hz). Using a higher voltage is dangerous and may result in a fire or oven damage. Using a lower voltage will cause slow cooking. Panasonic is NOT responsible for any damages resulting from the use of the oven with any voltage other than specified.

## TV / RADIO / WIRELESS EQUIPMENT INTERFERENCE

This product has been tested and found to comply with the limits for Microwave Oven. This product can radiate radio frequency energy, which could cause interference to such products as radio, TV, baby monitor, cordless phone, Bluetooth, wireless router, etc., which can be confirmed by turning this product off and on. If present, the user is encouraged to try to correct by taking one or more of the following countermeasures:


- Increase the spacing distance between the microwave oven and other product receiving the interference.
- If possible, use a properly installed receiver antenna and/or reorient the receiving antenna of the other product receiving the interference.
- Plug the microwave oven into a different outlet from the other product receiving the interference.
- Clean door and sealing surfaces of the oven. (See Care and Cleaning of Your Microwave Oven)

## Fan Motor Operation

After using the oven, the fan may rotate to cool the electric components and "COOLING" appears in the display window. You can take out the food from the oven while the fan operates. It is recommended to keep the oven plugged in until the Fan Motor completely stops operating.

Note: It's normal for the door cooling fan (inside the door) to remain operating after the cooking. No "COOLING" display during this cooling period.

FREE SHIPPING ON ALL ORDERS OVER \$19.95\*

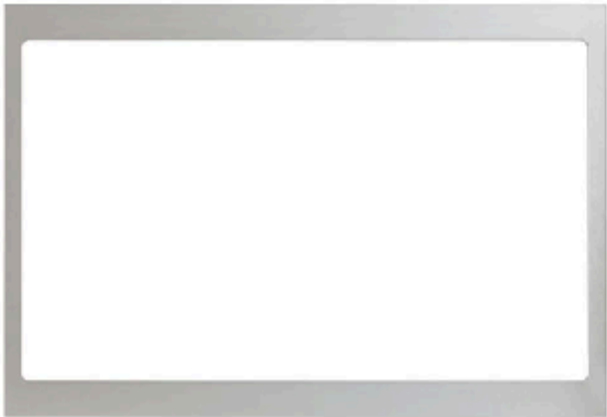

NNTK81KC  
24" Stainless Steel Trimkit

\$429.99

IN STOCK

ADD TO CART

Previous

Next

PRODUCT INFORMATION

- Outside Dimensions:  
Width: 23 1/2" (596 mm)  
Height: 16 1/8" (410 mm)

Cabinet Opening:  
Width: 23 5/8" ± 5/64" (600 mm ± 2mm)  
Height: 15 9/16" ± 5/64" (395 mm ± 2 mm)  
Depth: 21" (533 mm)

Installation Instructions


Installation demo video

Warranty information

- Compatible with NNCD8787KSC, [NNCD87KS](#)

\*1 Current models are hyperlinked and available for purchase on this site

Operating Instructions





30" Double Wall Oven with Total Convection

Double Wall Oven

Available Products: PCWD3080AF

Available Colors: Stainless Steel

Version: 05/24

DV3 LOT 77 - DOUBLE WALL OVEN

Initial  
AQ

Initial  
VM

Product Specifications

Cooking Controls

Air Fry	Yes
Bake	Yes
Broil	Yes
Cancel	Yes
Child Lock	Yes
Clear Off	Yes
Clock	Yes
Convection Bake	Yes
Convection Roast	Yes
Delay Clean	Yes
Delay Start	Yes
Fast Preheat	Yes
Keep Warm	Yes
Kitchen Timer	Yes
Light	Yes
My Favorite	Yes
No Preheat	Yes
Off	Yes
Oven Light	Yes
Preheat	Yes
Probe	Yes
Quick Preheat	Yes
Self Clean	Yes
Set Clock	Yes
Slow Cook	Yes
Start	Yes
Steam Bake	Yes
Steam Clean	Yes
Steam Roast	Yes
Stop	Yes
Temperature Display	Yes
Timer On / Off	Yes
User Preferences	Yes

Cooking Controls Function

Change between Continuous Bake Setting or 12-Hour	Yes
Energy Saving Feature	
Delayed Bake	Yes
Program Fahrenheit or Celsius	Yes
Silent Control Panel	Yes

Controls

Control Lock	Yes
Sabbath Mode	Yes

Dimensions and Volume

Height	50 3/4"
Width	29 7/8"
Depth	25 3/16"
Depth With Door 90° Open	48 3/16"
Depth With Handle	27 6/10"
Lower Oven Interior Height	18 1/8"
Lower Oven Interior Width	25 2/10"
Lower Oven Interior Depth	19 7/8"
Upper Oven Interior Height	18 1/8"
Upper Oven Interior Width	25 2/10"
Upper Oven Interior Depth	19 7/8"
Minimum Cutout Height	48 7/8"
Minimum Cutout Width	28 1/2"
Maximum Cutout Height	50 1/4"
Maximum Cutout Width	29"
Oven Lower Capacity	5.3 Cu. Ft.
Oven Upper Capacity	5.3 Cu. Ft.
Total Capacity	10.6 Cu. Ft.

Installation

Power Supply Connection Location	Top Left
----------------------------------	----------

Safety Certifications and Approvals

CSA Listed	Yes
RoHS	Yes
UL Listed	Yes

DocuSign Envelope ID: 19874CAE-EA9B-411A-BBE5-0DFAD40D7894	Double Wall Oven
Available Products: PCWD3080AF	Available Colors: Stainless Steel
Version: 05/24	

Oven

Bake Element	2500 Watts
Bake Element Pass	8
Bake Element Type	Hidden
Broil Element	4000 Watts
Broil Element Pass	6
Broil System	Yes
Cleaning System	Yes
Convection	Yes
Convection Element	3800 Watts
Convection Type	Total
Number of Convection Fans	1
Number of Rack Positions	6
Oven Interior Color	Midnight Black
Oven Light Quantity	2
Oven Light Type	Halogen
Oven Light Watts	40 Watts
Rack Position Type	Embossed
Rack Type 1	Handle
Rack Type 1 Quantity	4
Rack Type 2	Glide
Rack Type 2 Quantity	1
Rack Type 3	Air Fry Tray
Rack Type 3 Quantity	1

Display

Display Interface Color	White
Display Light Color	White
Display Type	Capacitive Touch


Electrical Specifications

Amps @ 240 Volts	40 Amps
Connected Load @ 240V	9 kW
Minimum Circuit Required	40 Amps
Voltage Rating	240 V

General Specifications

Frigidaire Fit Promise	Yes
Prop 65 Label	Yes
Warranty - Labor	1 Year
Warranty - Parts	1 Year

Installation Diagram

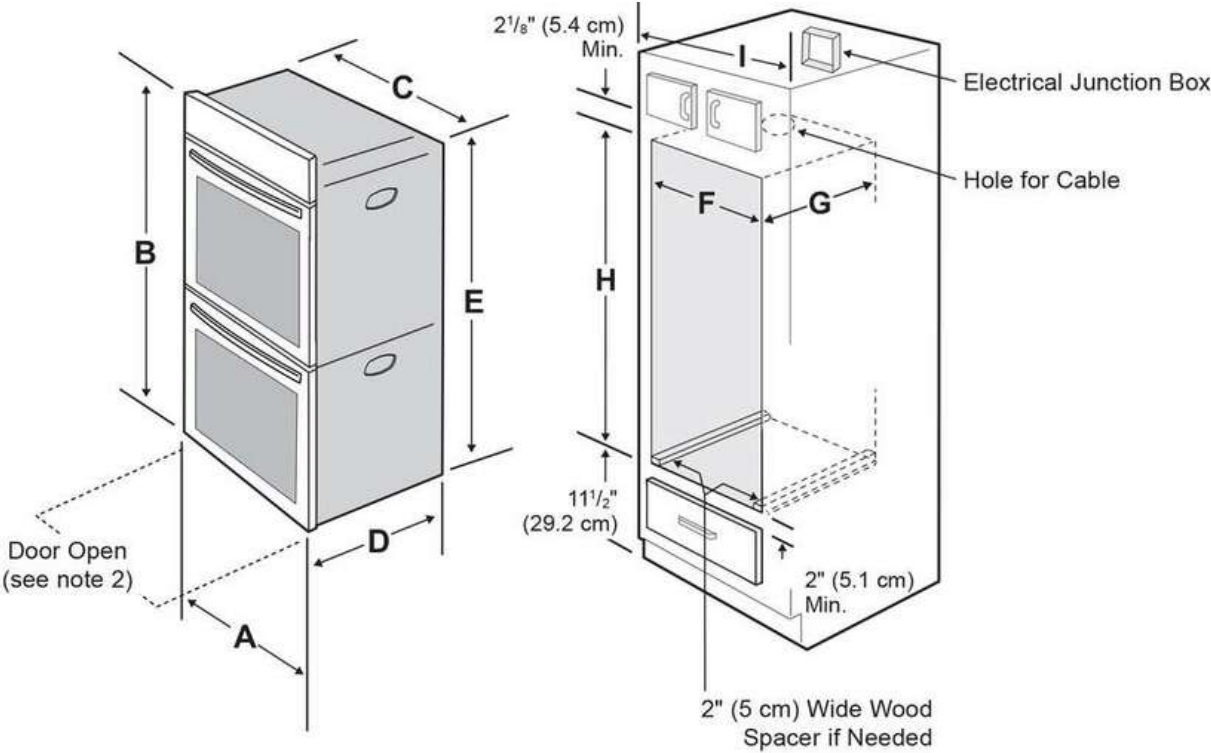

NOTES:

1. Allow at least 23" (58.4 cm) clearance in front of oven for door depth when it is open.

2. Dimension G (cutout depth) is critical to the proper installation of the built-in oven. If the oven trim does not butt against the cabinet, or if noise is heard on convection models, verify dimension G to assure it is according to the required dimension.
3. For a cutout height greater than the maximum (H), add one 2"(5 cm) wide wood shim of appropriate height to each side of the opening under the appliance side rails. A trim kit may be purchased through a dealer, service, or on the brand website.

PRODUCT DIMENSIONS						
A		B	C	D		E
29 <sup>7</sup> / <sub>8</sub> (75.9 cm)		50 <sup>3</sup> / <sub>4</sub> (128.9 cm)	28 <sup>7</sup> / <sub>16</sub> (72.2 cm)	25 <sup>3</sup> / <sub>16</sub> (63.9 cm)		48 <sup>7</sup> / <sub>8</sub> (124.1 cm)
CUTOUT DIMENSIONS AND CABINET WIDTH						
F		G	H. Standard Height (*Others, see note 3)		I	
Min.	Max.	Min.	Min.	Max.		
28 <sup>1</sup> / <sub>2</sub> (72.4 cm)	29 (73.7 cm)	23 <sup>1</sup> / <sub>2</sub> (59.7 cm)	48 <sup>7</sup> / <sub>8</sub> (124.1 cm)	50 <sup>1</sup> / <sub>4</sub> (127.6 cm)	30 <sup>1</sup> / <sub>8</sub> (76.5 cm) Min	



DV3 LOT 77 - WASHER

HOME APPLIANCES



LG LAUNDRY

WM3850HVA  
5.2 cu. ft. Capacity Front Load Washer

KEY FEATURES

- AI DD™
- Steam Technology
- ENERGY STAR® Qualified
- SmartDiagnosis™
- Touch Control Panel
- ThinQ™ Technology (Wi-Fi Enabled)

SMART APPLIANCE

Enjoy new ways to control your home with LG smart appliances

- Start the laundry while you're out shopping
- Get alerts when the cycle is finished
- Works with the LG ThinQ® app

PRODUCT FEATURES

CAPACITY	
Capacity (cu.ft.)	5.2
APPEARANCE	
Design Look	Front Control
Intelligent Electronic Controls with LED Display	•
Touch Buttons	•
Dial-A-Cycle™	•
ENERGY	
ENERGY STAR® Qualified	•
CEE Tier	2
DRYING PROGRAMS	
No. of Programs - 12	Normal, Perm. Press, Heavy Duty, Delicates, Towels, Speed Wash, Bedding, Tub Clean, Bright Whites™, Sanitary, Allergiene™, Downloaded
No. of Options - 13	Steam, Fresh Care, Pre-wash, Remote Start, Delay Wash, Wi-Fi, Add Item, Cold Wash, Extra Rinse, Rinse+Spin, Control Lock, Spin Only, Signal
Temperature Settings	5 Extra Hot, Hot, Warm, Cold, Tap Cold
Spin Speeds	5 Extra High, High, Medium, Low, No Spin
Water Levels	Load Sensing
Soil Levels	5
FABRIC CARE FEATURES	
AI DD™	•
Steam Technology	•
Allergiene™ Cycle	•
Sanitary Cycle	•
ColdWash™ Option	•
CONVENIENCE FEATURES	
4 Tray Dispenser	Prewash, Main Wash (with liquid detergent cup), Bleach, Fabric Softener
TrueBalance™ Anti-Vibration System	•
Load Sense	•
Control Lock	•
Auto Suds Removal	•
Leveling Legs	4 Adjustable Legs
ThinQ® TECHNOLOGY	
SmartDiagnosis™ (v3.0)	•



Wi-Fi	•
Remote Start and Cycle Monitor	•
Energy Monitoring	•
Tub Clean Coach	•
MOTOR	
Motor Type	Inverter Direct Drive Motor
Motor Speed	Variable
Max RPM	1,300
Axis	Horizontal
MATERIALS AND FINISHES	
NeveRust™ Stainless Steel Drum	•
Cabinet	PCM
Control Panel	Plastic
Top Plate	Painted
Door Cover	Tempered Glass Door
Door / Rim	Glass / Shiny Rose Gold
All Available Colours	Graphite Steel (V)
POWER SOURCE	
Ratings	UL Listed
Electrical Requirements	120V, 10 Amps
Type	Electric
OPTIONS	
Pedestal	WDP4V 27" x 14 1/8" x 30 3/4"
SideKick™ Pedestal Washer	WD100CV 27" x 14 1/8" x 30 3/4"
Stacking Kit	KSTK1
DIMENSIONS	
Product (WxHxD)	27" x 39" x 30 1/4" 55" (With door open)
Carton (WxHxD)	29 23/32" x 42 27/32" x 31 17/32"
Weight (Product/Carton)	198.4 lbs / 212.1 lbs
LIMITED WARRANTY	
1 Year Parts and Labour, 3 Years on Drum, 10 Years on Direct Drive Motor	
UPC CODES	
WM3850HVA	772454073625
DLEX3850V	772454073304
WD100CV	772454052866
WDP4V	048231015165
KSTK1	772454059896

