



25-Aug-21

PRE-Sales Selection Sheet
CHECKLIST

7 OF 40

LOT	004-6	20-2212 ELEV B THE ROSLYN
PURCHASERS: RAMESH CHALUMURI CONTACT NO: 416-677-0457		
SRIDEVI CHEEPURUPALLI		
VENDOR: HEATHWOOD HOMES (UPCOUNTRY) LIMITED		

☒ FINISHED BASEMENT	
☐ COLD CELLAR	
UPGRADED / MODIFIED ELEVATION	
☐ CORNER UPGRADE	☐ WALK OUT DECK
☐ SIDE UPGRADE	☐ WALK OUT BASEMENT
☐ REAR UPGRADE	
CEILING UPGRADE - SMOOTH	
☒ MAIN FLOOR	☐ BASEMENT
☐ SECOND FLOOR	
ADDITIONAL ROUGH-INS	
☒ 200 AMP SERVICE	☐ HUMIDIFIER
☐ WET BAR ROUGH IN	☒ AIRCON
GAS ROUGH-IN	
☒ STOVE	☐ DRYER
☐ BBQ	☐ ADDITIONAL FIREPLACE
HOODFAN VENTING	
☒ 6" ROUND DUCT	
☐ 7" ROUND DUCT	
PAINT GRADE	
FULL BASEMENT STAIRS:	N/A
UPPER BASEMENT STAIRS:	N/A
LOWER BASEMENT STAIRS:	N/A
STAIRS TO LOWER LEVEL:	ALL OAK
STAIRS TO UPPER LEVEL:	N/A
MAIN STAIRS:	ALL OAK
MEDIA STAIRS (if applicable):	N/A

Date	Aug 25/21	Signatures	Aug 25/21	IRIT SALEM
Date		Purchaser on file	Date	Décor Consultant
Date		Purchaser		<i>Infosen</i>

Date Approved	HEATHWOOD HOMES (UPCOUNTRY) LIMITED
---------------	--



24-Aug-21

Interior Finishing ~~Selectida Sheet~~ of 10

LOT 004-6

20-2212 ELEV B THE ROSLYN

PURCHASERS: RAMESH CHALUMURI
SRIDEVI CHEEPURUPALLI

CONTACT NO: 416-677-0457

VENDOR: HEATHWOOD HOMES (UPCOUNTRY) LIMITED

UPG

Appliances

6-8909 Kitchen HoodFan

☒ KITCHEN AID 30" STAINLESS CHIMNEY HOOD STAINLESS STEEL
KQWB600DSS UPG 30" PAGE 26

Cabinetry

1-8379 Kitchen Cabinet Colour/Style

☐ TORONTO POPPY SEED Viking III MAPLE

3-7676 Kitchen Cabinet Hardware

☐ HARDWARE 12843 STD

101-8379 Laundry Room Opt. Cabinet

☐ TORONTO POPPY SEED Viking III MAPLE

103-7676 Laundry Room Opt. Cabinet Hardware

☐ HARDWARE 12843 STD

25-6243 Main Bathroom Cabinet Colour/Style

☐ CAMDEN OYSTER CL Viking III MAPLE

29-7672 Main Bathroom Cabinet Hardware

☐ HARDWARE 135 STD

28-8822 Main Bathroom Countertop

☐ Countertop WHITE CARRARA 4924-38 Wilsonart

20-9111 Master Ensuite Cabinet Colour/Style

☐ SIMCOE ORCHID VIKING III STD 3DL

22-7672 Master Ensuite Cabinet Hardware

☐ HARDWARE 135 STD

21-8801 Master Ensuite Countertop

☐ Countertop INUKSHUK GREY P-344 LM Arborite

414-8374 Powder Room Lower Level Cabinet Colour/Style

☐ CAMDEN OREGANO Viking III MAPLE

416-7676 Powder Room Lower Level Cabinet Hardware

☐ HARDWARE 12843 STD

415-8827 Powder Room Lower Level Countertop

☐ Countertop CALCUTTA MARBLE 4925K-07 Wilsonart

Carpet

37-9248 Bedroom 2 Flooring

☐ Dynasty Tex 40 oz Poly BLACK ICE DY 89418 STD

38-9248 Bedroom 3 Flooring

☐ Dynasty Tex 40 oz Poly BLACK ICE DY 89418 STD

14-9248 Family Room Flooring

☐ Dynasty Tex 40 oz Poly BLACK ICE DY 89418 STD

36-9248 Master Bedroom Flooring

☐ Dynasty Tex 40 oz Poly BLACK ICE DY 89418 STD

52-1079 Throughout Underpad

☐ Underpad 500 Series STD

Ceramics

16-9257 Foyer Flooring

☐ CARRARA White / Grey GE.CR.WHIT.1313.MT STD 13 x 13

1. The Purchaser acknowledges these selections are subject to the terms and conditions of the applicable Agreement of Purchase and Sale.
2. The Purchaser acknowledges that the Vendor accepts no responsibility in the event the Vendor is unable to supply a selection. The Purchaser agrees to reselect from the currently available selections immediately upon request.
3. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
4. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
5. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
6. Selections will not be processed unless signed by Heathwood Homes Head Office.
7. The colour selections made on the Colour Chart are final and cannot be changed once submitted.
8. The Purchaser has checked and acknowledges the accuracy of this Colour Chart.

Aug 24 21 Signature on file

See 24 21

Date

Purchaser

Décor Consultant

Date

Purchaser

Date Approved

HEATHWOOD HOMES (UPCOUNTRY) LIMITED



Interior Finishing Selection Sheet

18-Aug-21

LOT 004-6

20-2212 ELEV B THE ROSLYN

PURCHASERS: RAMESH CHALUMURI CONTACT NO: 416-677-0457

SRIDEVI CHEEPURUPALLI

VENDOR: HEATHWOOD HOMES (UPCOUNTRY) LIMITED

UPG

Ceramics

17-2225 Foyer Grout	☐ Grout (27) Silver STD
4-5721 Kitchen Backsplash	☐ Colour and Dimension Bright Arctic White QT.CD.ARW.0306.BR UPG_1 3 x 6 TO BE INSTALLED IN A SUBWAY DESIGN
5-2226 Kitchen Backsplash Grout	☐ Grout (00) White STD
7-9257 Kitchen/Breakfast Flooring	☐ CARRARA White / Grey GE.CR.WHIT.1313.MT STD 13 x 13
8-2225 Kitchen/Breakfast Grout	☐ Grout (27) Silver STD
66-9257 Laundry Room Flooring	☐ CARRARA White / Grey GE.CR.WHIT.1313.MT STD 13 x 13
67-2225 Laundry Room Grout	☐ Grout (27) Silver STD
30-9255 Main Bathroom Flooring	☐ SEMPRE White Matte TR.SP.WHITE.1313 STD 13" x 13"
31-2225 Main Bathroom Grout	☐ Grout (27) Silver STD
27-9020 Main Bathroom Tub Wall Tile	☐ Weave White QT.WV.WHT.0810 STD 8 x 10 TO BE INSTALLED HORIZONTALLY
26-2226 Main Bathroom Tub Wall Tile Grout	☐ Grout (00) White STD
23-9255 Master Ensuite Floor Tile	☐ SEMPRE White Matte TR.SP.WHITE.1313 STD 13" x 13"
24-2225 Master Ensuite Floor Tile Grout	☐ Grout (27) Silver STD
73-8661 Master Ensuite Shower Floor Tile	☐ Ontario Series Mosaic Snow White Matte OD.ON.SWT.0202.MT.N STD 2 x 2
74-2226 Master Ensuite Shower Floor Tile Grout	☐ Grout (00) White STD
147-8923 Master Ensuite Shower Jamb(s) and Sill(s)	☐ Shower Jamb / Sill Thassos White STD
104-9020 Master Ensuite Shower Wall Tile	☐ Weave White QT.WV.WHT.0810 STD 8 x 10 TO BE INSTALLED VERTICALLY
105-2226 Master Ensuite Shower Wall Tile Grout	☐ Grout (00) White STD
191-9255 Mud Room Flooring	☐ SEMPRE White Matte TR.SP.WHITE.1313 STD 13" x 13"
190-2225 Mud Room Grout	☐ Grout (27) Silver STD
32-9257 Powder Room Flooring	☐ CARRARA White / Grey GE.CR.WHIT.1313.MT STD 13 x 13

1. The Purchaser acknowledges these selections are subject to the terms and conditions of the applicable Agreement of Purchase and Sale.
2. The Purchaser acknowledges that the Vendor accepts no responsibility in the event the Vendor is unable to supply a selection. The Purchaser agrees to reselect from the currently available selections immediately upon request.
3. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
4. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
5. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
6. Selections will not be processed unless signed by Heathwood Homes Head Office.
7. The colour selections made on the Colour Chart are final and cannot be changed once submitted.
8. The Purchaser has checked and acknowledges the accuracy of this Colour Chart.

Date	<u>18-Aug-21</u>	Date	<u>18-Aug-21</u>
Purchaser	<u>[Signature]</u>	Purchaser	<u>[Signature]</u>
Date	<u>5-SEP-2021</u>	Date	<u>5-SEP-2021</u>
Purchaser	<u>[Signature]</u>	Purchaser	<u>[Signature]</u>

Date		Date Approved	HEATHWOOD HOMES (UPCOUNTRY) LIMITED
------	--	---------------	-------------------------------------



Interior Finishing Selection Sheet

18-Aug-21

LOT 004-6

20-2212 ELEV B THE ROSLYN

PURCHASERS: RAMESH CHALUMURI
SRIDEVI CHEEPURUPALLI

CONTACT NO: 416-677-0457

VENDOR: HEATHWOOD HOMES (UPCOUNTRY) LIMITED

UPG

Ceramics

33-2225 Powder Room Grout

☐ Grout (27) Silver STD

369-9257 Powder Room Lower Level Flooring

☐ CARRARA White / Grey GE.CR.WHIT.1313.MT STD 13 x 13

371-2225 Powder Room Lower Level Plumbing Fixture (Colour)

☐ Grout (27) Silver STD

53-2232 Throughout Thresholds

☐ Metal Thresholds STD

Electrical

91-5796 Throughout Trim Size

☐ Decora White Switches and Plugs STD

Fireplace

136-9114 Great Room Fireplace Mantle

☐ Paint Grade Mantel- Cabinet (Per Plan) WHITE NF 15 STD
PAGE 19

135-8865 Great Room Fireplace Type

☐ Dimplex FP3033HL Electric Fireplace

Granite

2-9069 Kitchen Countertop

☐ MSI Quartz ICED WHITE Group 1 STD 3/4"

Hardwood

11-7497 Great Room Flooring

☐ Vintage Northern Solid Sawn Engineered Select V : Red Oak Pearl AURORA (COCOA) Red Oak Pearl 3/4" x 3 1/4"

367-7497 Lower Level Hall Flooring

☐ Vintage Northern Solid Sawn Engineered Select V : Red Oak Pearl AURORA (COCOA) Red Oak Pearl 3/4" x 3 1/4"

100-7497 Main Stairs Landing(s) Flooring

☐ Vintage Northern Solid Sawn Engineered Select V : Red Oak Pearl AURORA (COCOA) Red Oak Pearl 3/4" x 3 1/4"

78-7497 Stair Landing to Lower Level Flooring

☐ Vintage Northern Solid Sawn Engineered Select V : Red Oak Pearl AURORA (COCOA) Red Oak Pearl 3/4" x 3 1/4"

35-7497 Upper Hall Flooring

☐ Vintage Northern Solid Sawn Engineered Select V : Red Oak Pearl AURORA (COCOA) Red Oak Pearl 3/4" x 3 1/4"

Interior Railings

145-8148 Main Stairs Handrail/Pickets/Posts Type

☐ Single Collar Alt. Plain w/ Shoes with 3 1/2" Square/Cap Post(s) BLACK METAL STD

49-8148 Stairs to Lower Level Handrail/Pickets/Posts Type

☐ Single Collar Alt. Plain w/ Shoes with 3 1/2" Square/Cap Post(s) BLACK METAL STD

Interior Stairs

116-1713 Basement Stairs Type

☐ Paint Grade Stairs STD

1. The Purchaser acknowledges these selections are subject to the terms and conditions of the applicable Agreement of Purchase and Sale.
2. The Purchaser acknowledges that the Vendor accepts no responsibility in the event the Vendor is unable to supply a selection. The Purchaser agrees to reselect from the currently available selections immediately upon request.
3. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
4. The Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
5. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
6. Selections will not be processed unless signed by Heathwood Homes Head Office.
7. The colour selections made on the Colour Chart are final and cannot be changed once submitted.
8. The Purchaser has checked and acknowledges the accuracy of this Colour Chart.

R. Chalumuri
Purchaser

Aug 21 2021
Date

M. Rosen
D cor Consultant

Date

Purchaser

Date

Purchaser

Date Approved *Aug 21 2021* HEATHWOOD HOMES (UPCOUNTRY)
LIMITED



Interior Finishing Selection Sheet

18-Aug-21

LOT 004-6

20-2212 ELEV B THE ROSLYN

PURCHASERS: RAMESH CHALUMURI

CONTACT NO: 416-677-0457

SRIDEVI CHEEPURUPALLI

VENDOR: HEATHWOOD HOMES (UPCOUNTRY) LIMITED

UPG

Interior Stairs

142-1712 Main Stairs Type

☐ Oak Stairs UPG_1

45-1712 Stairs to Lower Level Type

☐ Oak Stairs UPG_1

Interior Trim

91-9374 Throughout Trim Size

☐ 4 1/4" Baseboards and 2 3/4" Integrated Backbend Casings
STD-Towns

Painting

143-7761 Main Stairs Colour

☐ Stain handrail, stringers, treads, risers, nosing & posts. (Metal pickets) STAIN TO COMPLEMENT Red Oak Pearl AURORA (COCOA) SHADE WILL VARY

46-7761 Stairs to Lower Level Colour

☐ Stain handrail, stringers, treads, risers, nosing & posts. (Metal pickets) STAIN TO COMPLEMENT Red Oak Pearl AURORA (COCOA) SHADE WILL VARY

240-1716 Throughout Trim - Paint Colour

☐ Trim WHITE STD

51-1717 Throughout Walls - Paint Colour

☐ Wall WARM GREY 22 STD

Plumbing

266-1737 Main Bathroom Plumbing Fixture (Colour)

☐ Plumbing Fixtures WHITE STD

149-1737 Master Ensuite Plumbing Fixture (colour)

☐ Plumbing Fixtures WHITE STD

34-1737 Powder Room Plumbing Fixture (Colour)

☐ Plumbing Fixtures WHITE STD

371-1737 Powder Room Lower Level Plumbing Fixture (Colour)

☐ Plumbing Fixtures WHITE STD

1. The Purchaser acknowledges these selections are subject to the terms and conditions of the applicable Agreement of Purchase and Sale.
2. The Purchaser acknowledges that the Vendor accepts no responsibility in the event the Vendor is unable to supply a selection. The Purchaser agrees to reselect from the currently available selections immediately upon request.
3. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
4. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
5. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
6. Selections will not be processed unless signed by Heathwood Homes Head Office.
7. The colour selections made on the Colour Chart are final and cannot be changed once submitted.
8. The Purchaser has checked and acknowledges the accuracy of this Colour Chart.

Date August 18, 2021
Purchaser Ramesh Chalumuri
Sridevi Cheepurupalli

Date August 18, 2021
D cor Consultant Myra Roan

Date _____ Purchaser _____

Date Approved August 18, 2021 HEATHWOOD HOMES (UPCOUNTRY) LIMITED



18-Aug-21

Sales Selection Sheet
2 of 10

LOT	004-6	20-2212 ELEV B THE ROSLYN
PURCHASERS: RAMESH CHALUMURI SRIDEVI CHEEPURUPALLI		
CONTACT NO: 416-677-0457		
VENDOR:	HEATHWOOD HOMES (UPCOUNTRY) LIMITED	
HST #		

It is herein understood and agreed between the undersigned parties hereto that the following changes shall be made to the above mentioned Agreement of Purchase and Sale in accordance with the agreement and except for such changes noted below, all other terms and conditions in the Agreement of Purchase and Sale shall remain as stated herein: It is further understood that and agreed that all changes and additions shall be installed as per builder's specifications, location and available selections. The Purchaser hereby agrees to purchase the following extras:

AMOUNT:

Appliances

795	Kitchenaid 30" Chimney Hood SS	Qty: 1
	KVWB600DSS	
	PAGE 26	

Cabinetry

897	Optional Upgrade	Qty: 1
	Optional Upgrade VIKING I/II/III	
	SKETCH # 7	
	Ldry Uppers	
	PAGE 17	

Ceramics

493	Optional Extras	Qty: 1
	Supply and install additional backsplash due to chimney hoodfan installation	
	Upgrade 1	

916	Kitchen Optional Backsplash	Qty: 1
-----	-----------------------------	--------

Drywall

920	Ceiling Upgrades	Qty: 1
	Smooth Ceilings Main Floor	

Electrical

1. This Sales Selection Sheet when properly executed forms part of our Agreement of Purchase and Sale.
2. All extras and upgrades listed above are subject to Construction Progress and Architectural and Municipal requirements.
3. In the event the Vendor is unable to incorporate the work approved above in the construction of the house for any reason whatsoever, the Vendor will not be liable to the Purchaser in any way. The monies paid for any changes or optional extras not proceeded with shall be returned to the Purchaser, without interest. The cost of options or extras is non-refundable in all other circumstances. If for any reason whatsoever the Agreement of Purchase and Sale is not completed, the total cost of work approved above will be retained by the Vendor.
4. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
5. The Vendor acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
6. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
7. Selections will not be processed unless signed by Heathwood Homes Head Office.
8. The selections made on this schedule are final and cannot be changed once submitted.
9. The Purchaser has checked and acknowledges the accuracy of this schedule.

Date	<u>18-Aug-21</u>	Date	<u>Aug 10, 21</u>
	<u>Purchaser</u>		<u>Décor Consultant</u>
	<u>chidig</u>		<u>myRosen</u>

Date			
	<u>Purchaser</u>		

—Date Approved— HEATHWOOD HOMES (UPCOUNTRY)
LIMITED



18-Aug-21

Sales Selection Sheet
Of

20-2212 ELEV B THE ROSLYN

LOT	004-6
PURCHASERS:	RAMESH CHALUMURI SRIDEVI CHEEPURUPALLI
VENDOR:	HEATHWOOD HOMES (UPCOUNTRY) LIMITED
HST #	

It is herein understood and agreed between the undersigned parties hereto that the following changes shall be made to the above mentioned Agreement of Purchase and Sale in accordance with the agreement and except for such changes noted below, all other terms and conditions in the Agreement of Purchase and Sale shall remain as stated herein: It is further understood that and agreed that all changes and additions shall be installed as per builder's specifications, location and available selections. The Purchaser hereby agrees to purchase the following extras:

AMOUNT:

Qty: 1

282 **Décor Package**
Potlight Bundle - 8 x T477GR-W 4" line voltage potlights installed on main floor includes 2 switches
6X TO BE INSTALLED IN THE GREAT ROOM- USE SEPARATE SWITCH
2X IN THE KITCHEN- USE SEPARATE SWITCH
SEE SKETCH # 7 PAGE 17

Qty: 1

284 **Optional Extras**
Extra wall interior outlet on Existing Circuit (does not include kitchen outlets) TO BE I INSTALL ABOVE THE FIRE PLACE 70" FROM FLOOR
SEE SKETCH # 7 PAGE 17

Qty: 1

286 **Optional Extras**
Ceiling rough-in (Capped)
TO BE INSTALLED ABOVE THE BREAKFAST BAR- USE STD. TOGETHER WITH KITCHEN LIGHT SWITCH
2X TO BE INSTALLED IN THE KITCHEN- USE SEPARATE SWITCH
SEE SKETCH # 7 PAGE 17

Heating / Air

Qty: 1

277 **Optional Extras**
ROUGH-IN GAS LINE FOR GAS STOVE AT MAIN FLOOR (See specs) (Hook-up not included) Leave standard 120 volt electrical outlet on a separate circuit.
SKETCH # 7 PAGE 17 STOVE SPECS PAGES 29-31

Plumbing

Qty: 1

225 **STANDARD Kitchen Sink Option**
KINDRED Kitchen Sink Collection - Reginox ND1831 UA/9 Stainless Kitchen Double (equal size) Bowl Undermount Sink (or equivalent) PAGE 20

1. This Sales Selection Sheet when properly executed forms part of our Agreement of Purchase and Sale.
2. All extras and upgrades listed above are subject to Construction Progress and Architectural and Municipal requirements.
3. In the event the Vendor is unable to incorporate the work approved above in the construction of the house for any reason whatsoever, the Vendor will not be liable to the Purchaser in any way. The monies paid for any changes or optional extras not proceeded with shall be returned to the Purchaser, without interest. The cost of options or extras is non-refundable in all other circumstances. If for any reason whatsoever the Agreement of Purchase and Sale is not completed, the total cost of work approved above will be retained by the Vendor.
4. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
5. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
6. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
7. Selections will not be processed unless signed by Heathwood Homes Head Office.
8. The selections made on this schedule are final and cannot be changed once submitted.
9. The Purchaser has checked and acknowledges the accuracy of this schedule.

Date	<u>Aug 10, 21</u>	Date	<u>Aug 10, 21</u>
Purchaser	<u>[Signature]</u>	Décor Consultant	<u>[Signature]</u>
Purchaser	<u>[Signature]</u>		

Date Approved HEATHWOOD HOMES (UPCOUNTRY)
LIMITED



18-Aug-21

Sales Selection Sheet

LOT	004-6	20-2212 ELEV B THE ROSLYN
PURCHASERS:	RAMESH CHALUMURI SRIDEVI CHEEPURUPALLI	CONTACT NO: 416-677-0457
VENDOR:	HEATHWOOD HOMES (UPCOUNTRY) LIMITED	HST #

It is herein understood and agreed between the undersigned parties hereto that the following changes shall be made to the above mentioned Agreement of Purchase and Sale in accordance with the agreement and except for such changes noted below, all other terms and conditions in the Agreement of Purchase and Sale shall remain as stated herein: It is further understood that and agreed that all changes and additions shall be installed as per builder's specifications, location and available selections. The Purchaser hereby agrees to purchase the following extras:

AMOUNT:

1. This Sales Selection Sheet when properly executed forms part of our Agreement of Purchase and Sale.
2. All extras and upgrades listed above are subject to Construction Progress and Architectural and Municipal requirements.
3. In the event the Vendor is unable to incorporate the work approved above in the construction of the house for any reason whatsoever, the Vendor will not be liable to the Purchaser in any way. The monies paid for any changes or optional extras not proceeded with shall be returned to the Purchaser, without interest. The cost of options or extras is non-refundable in all other circumstances. If for any reason whatsoever the Agreement of Purchase and Sale is not completed, the total cost of work approved above will be retained by the Vendor.
4. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
5. The Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
6. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
7. Selections will not be processed unless signed by Heathwood Homes Head Office.
8. The selections made on this schedule are final and cannot be changed once submitted.
9. The Purchaser has checked and acknowledges the accuracy of this schedule.

Date	<u>18 Aug 21</u>	Date	<u>18 Aug 21</u>
Purchaser	<u>[Signature]</u>	Décor Consultant	<u>[Signature]</u>
Purchaser	<u>[Signature]</u>		

Date Approved - HEATHWOOD HOMES (UPCOUNTRY) LIMITED


CU 423 UPCOUNTRY
LOT 4-6
20-2212 ELEV B
THE ROSLYN

15 of 40
The Roslyn

20-2212 ELEV. B

ELEVATION B: 2,217 SQ FT

Sketch # 5

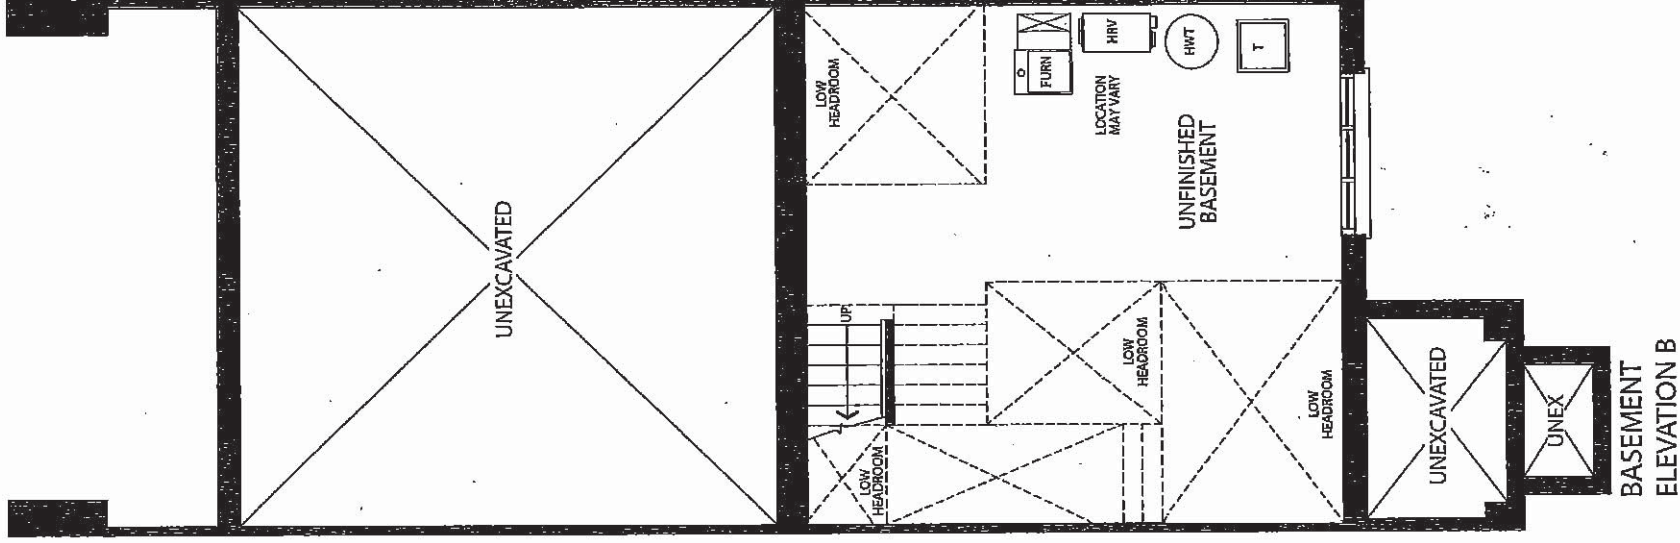


CU 423 UPCOUNTRY
LOT 4-6
20-2212 ELEV B
THE ROSLYN

16 of 40
The Roslyn

20-2212 ELEV. B

ELEVATION B: 2,217 SQ FT

Sketch #6

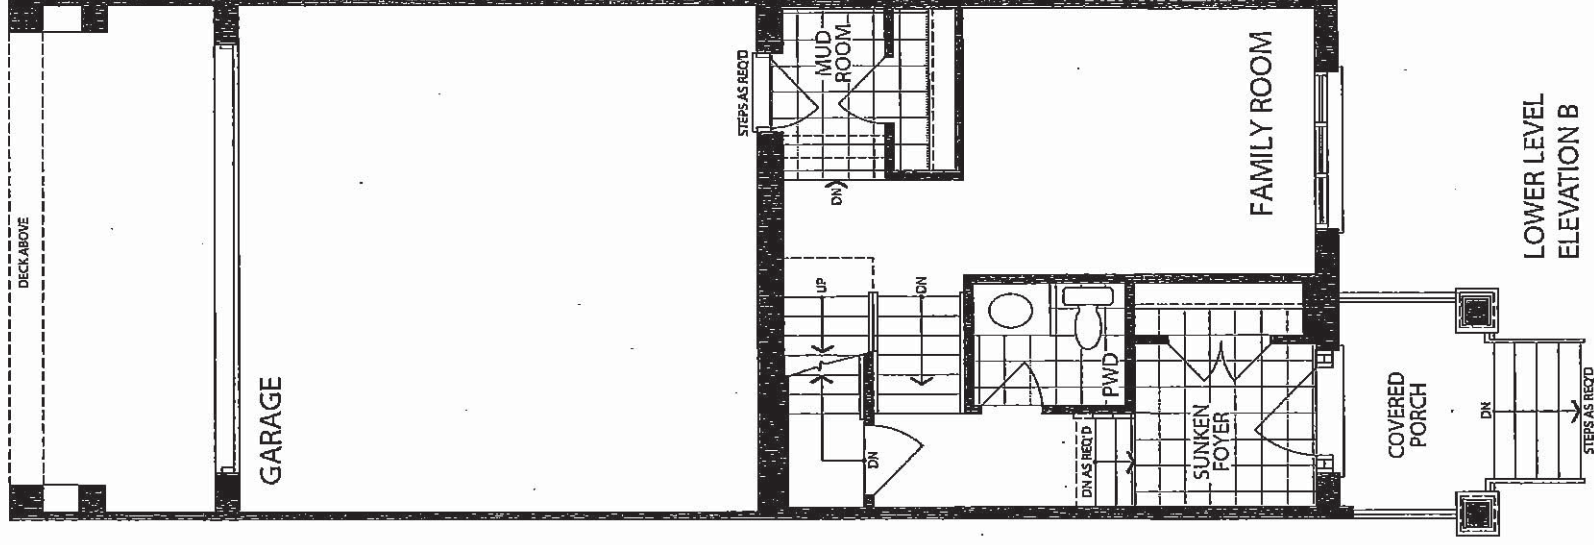

LOWER LEVEL
ELEVATION B

John

Legal Plan: September 17, 2020


CU 423 UPCOUNTRY
LOT 4-6
20-2212 ELEV B
THE ROSLYN

17 or 40
The Roslyn

20-2212 ELEV. B

ELEVATION B: 2,217 SQ FT

Sketch #7

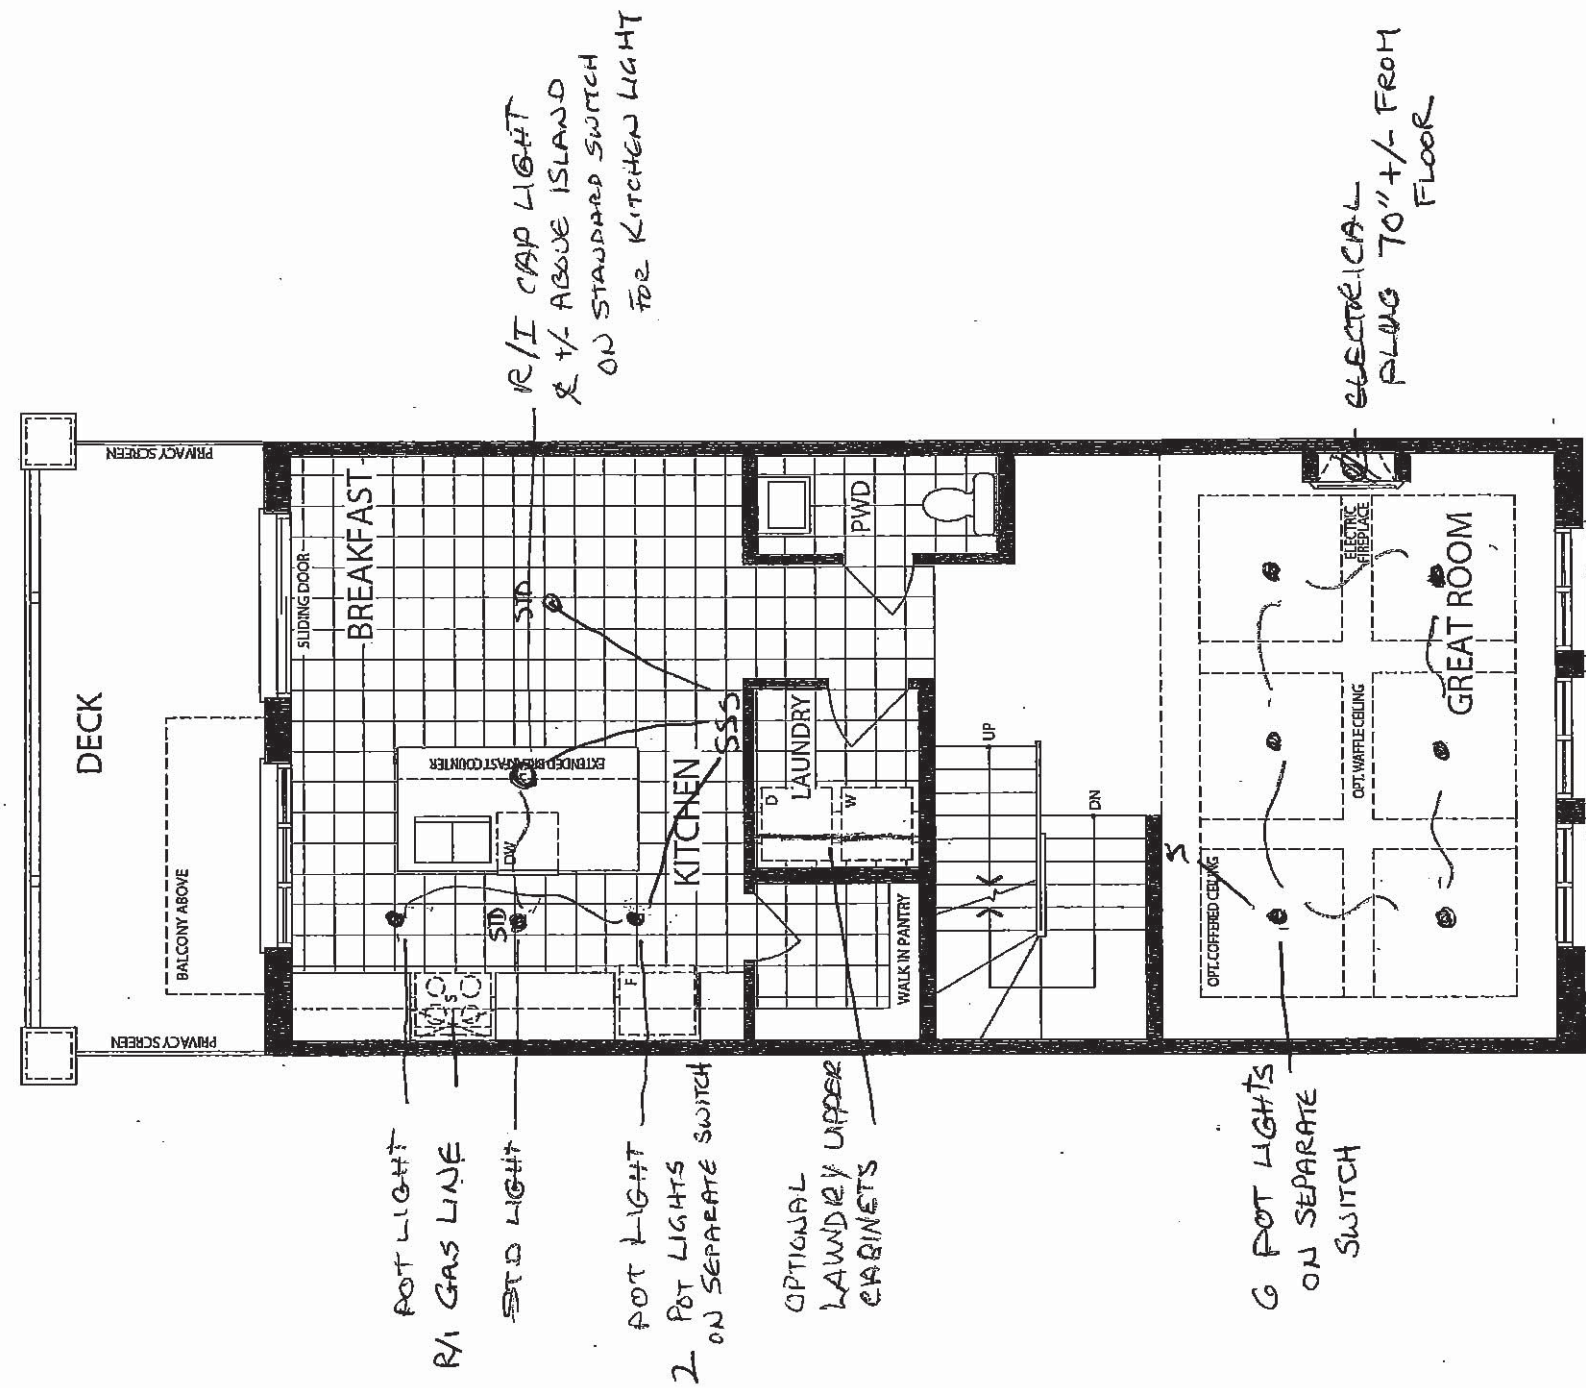

MAIN LEVEL
ELEVATION B

jd
ll


CU 423 UPCOUNTRY
LOT 4-6
20-2212 ELEV B
THE ROSLYN

18 of 40
The Roslyn

20-2212 ELEV. B

ELEVATION B: 2,217 SQ FT

Sketch # 8

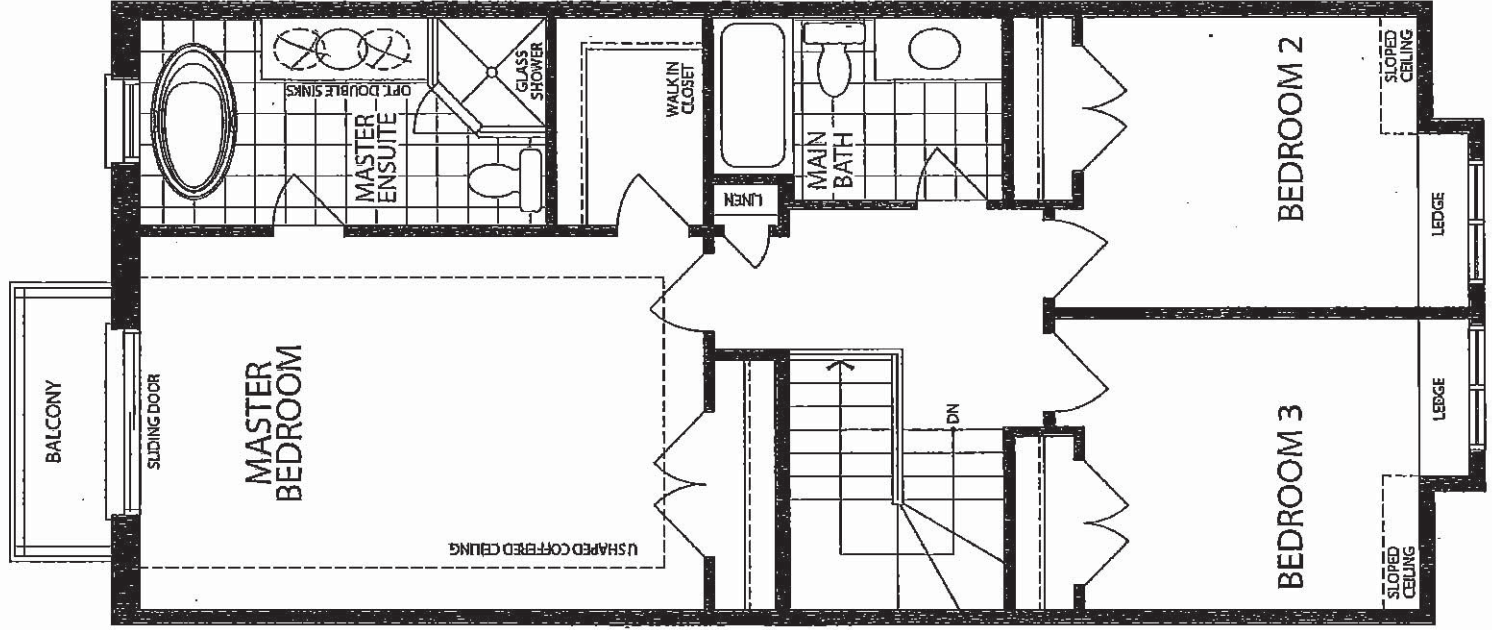

UPPER LEVEL
ELEVATION B

20
JHL


CU 423 UPCOUNTRY

LOT 4-6

20-2212 ELEV B

THE ROSLYN


19 of 40

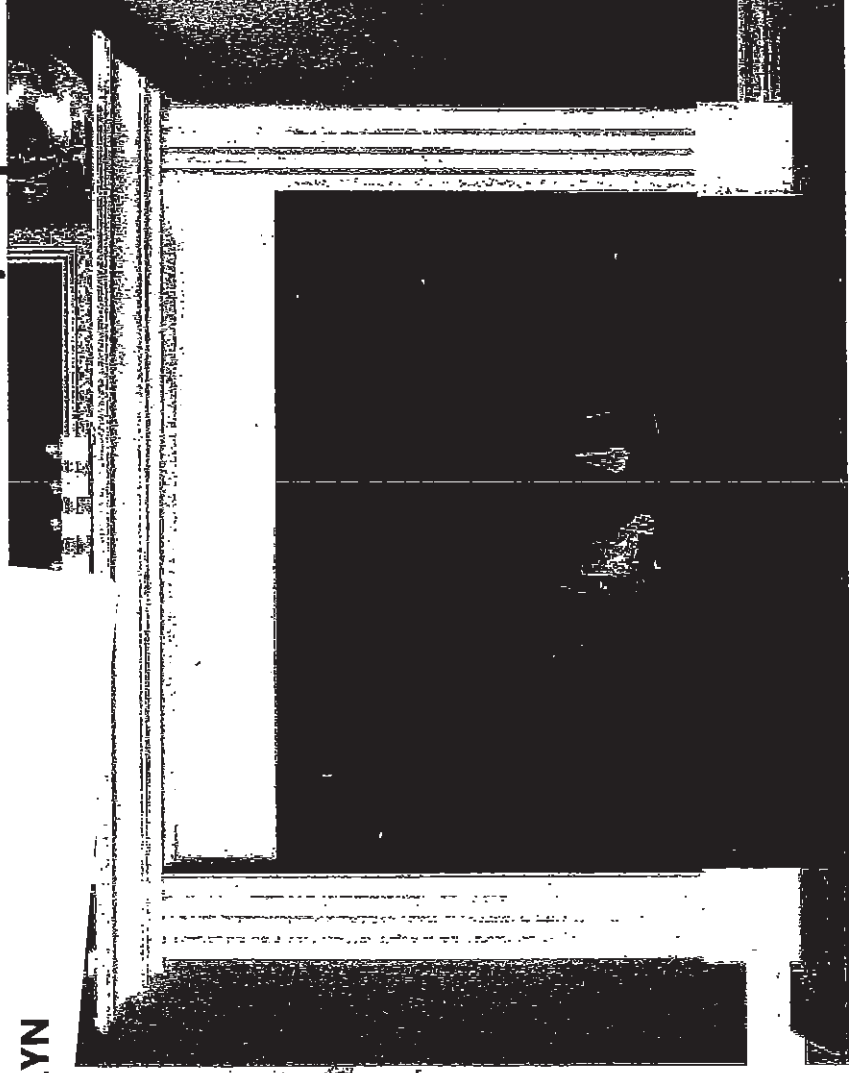

' CABINET ' ✓
STANDARD NF 15 Mantel

Clean apron finish with fluted legs
WHITE PAINT GRADE FINISH

(PICTURE SHOWN WITH UPGRADE SURROUND AND HEARTH -PRICED SEPARATELY)

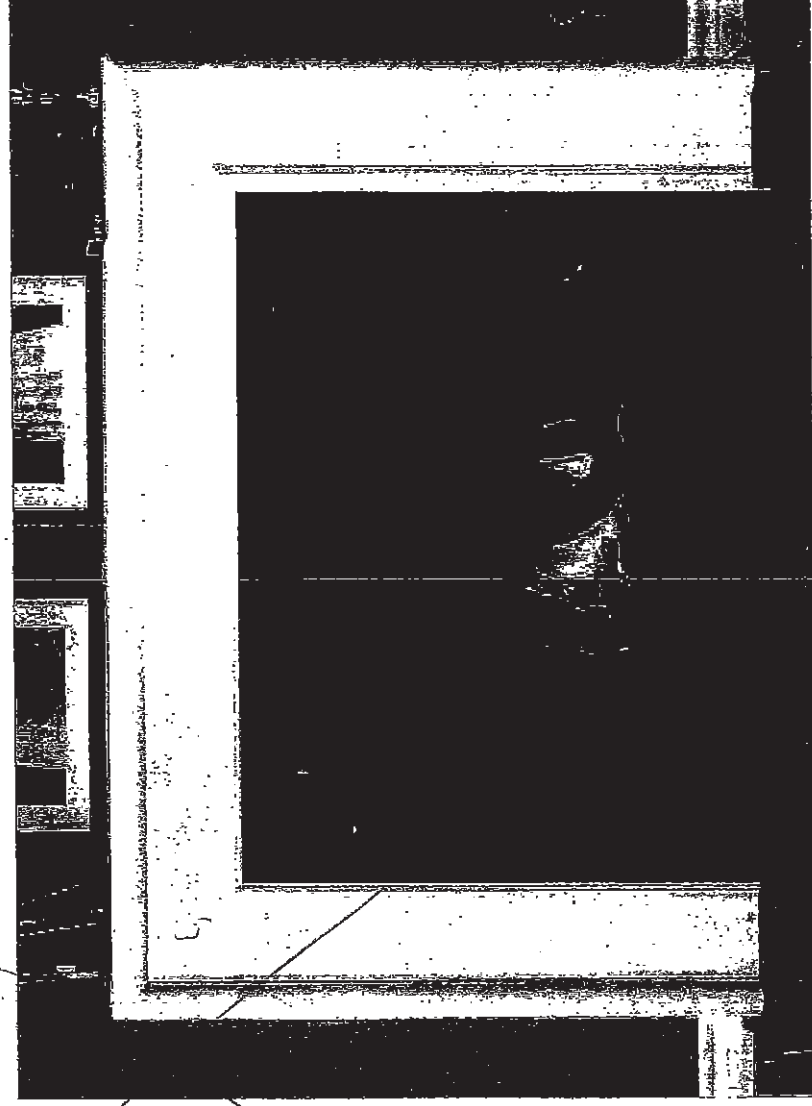

STANDARD NF 17 Mantel X
WHITE PAINT GRADE FINISH

(PICTURE SHOWN WITH UPGRADE SURROUND AND HEARTH -PRICED SEPARATELY)

oh Re


CU 423 UPCOUNTRY
LOT 4-6
20-2212 ELEV B
THE ROSLYN

20 of 48

Roslyn

STANDARD KITCHEN SINK

ND1831UA/9

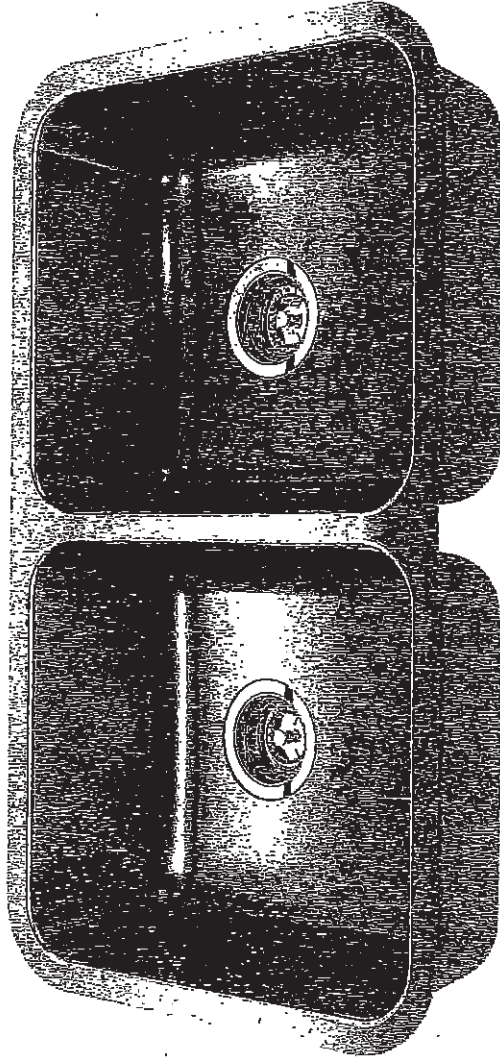

Optional Accessories





BG10S

BG10S

MB100

CA1W

DBR10S

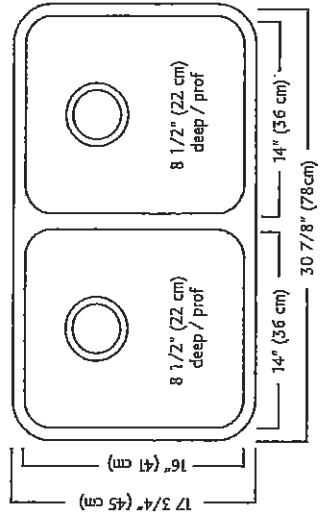

ND1831UA/9 SPECIFICATION

Model ND1831UA/9 is a double (two equal size) bowl undermount sink manufactured by Franke Kindred Canada Limited from 18 gauge stainless steel. Product has silk finished rims and linear brush finished bowls. Sink is fully undercoated. Basket strainer waste fittings (3 1/2", 89 mm) are included. Sink is backed with a limited lifetime warranty.

- O.D. 17 3/4" x 30 7/8" x 8 1/2" (45 x 78 x 22 cm)
- Recommended for minimum 36" cabinet

Franke Kindred Canada Limited
P.O. Box 190, 1000 Franke Kindred Road, Midland, Ontario, Canada, L4R 4K9 Phone: 866-687-7465 Fax: 800-361-8408

John


CU 423 UPCOUNTRY
LOT 4-6
20-2212 ELEV B
THE ROSLYN

21 of 40

STANDARD KITCHEN FAUCET

Align

Modern

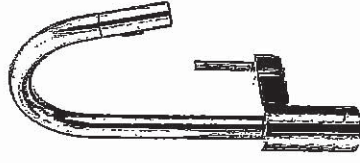

Single Handle Pull-Down Kitchen
Faucet[®]

Model 7565†

CU 423 UPCOUNTRY
LOT 4-6
20-2212 ELEV B
THE ROSLYN

22 of 40



BOULEVARD®
PEDESTAL SINK
VITREOUS CHINA

BOULEVARD® PEDESTAL SINK

- ☐ 0641.800 Faucet holes on 8" (203mm) centers (illustrated).
- ☒ 0641.400 Faucet holes on 4" (102mm) centers
- ☐ 0641.100 Center hole only
 - Classic styled rectangular pedestal lavatory
 - Vitreous china
 - Rear overflow
 - Supplied with mounting kit
 - Right Height® for greater comfort during use
 - Faucet ledge with large deck area (faucet not included)
 - **Design coordinates with Boulevard® Toilet**
 - Basin has flat bottom to also allow use as an above counter sink or a **drop-in** sink (with u-shaped cut out)

Nominal Dimensions:

24" x 19" x 35-1/2"
(610 x 483 x 902mm)

- ☐ 0641.008 Pedestal top-8" (203mm) centers
- ☐ 0641.004 Pedestal top-4" (102mm) centers
- ☐ 0641.001 Pedestal top-center hole only
- ☐ 0010.000 Pedestal only


Bowl sizes:

17" (432mm) wide,
12-1/2" (318mm) front to back,
5" (127mm) deep

Compliance Certifications -

Meets or Exceeds the Following Specifications:

- ASME A112.19.2 - 2008/CSA B45.1-08

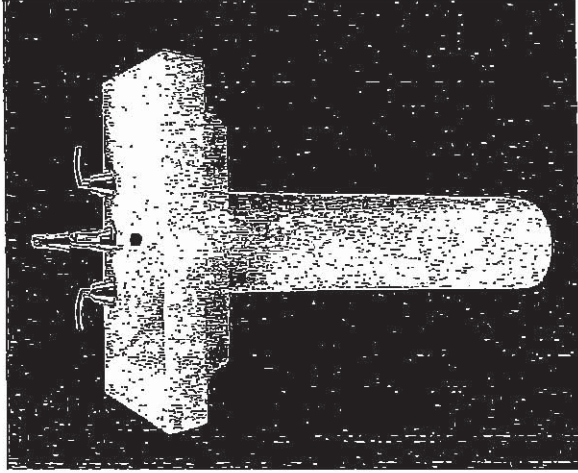

SEE REVERSE FOR ROUGHING-IN DIMENSIONS

To Be Specified:

- ☐ Color: ☐ White ☐ Linen
- ☐ Faucet Finish:
- ☐ Supplies:
- ☐ 1-1/4" Trap:
- ☐ Nipple:

* See faucet section for additional models available



BARRIER FREE

COLONY COUNTERTOP SINK

- Vitreous china
 - Self-rimming
 - Front overflow
 - Supplied with template
 - Faucet deck
- (Faucet shown not included)



0346 803

Faucet holes on 203mm (8") centres



0346 403 (Illustrated)

Faucet holes on 102mm (4") centres



0346 001

Centre hole only

Nominal Dimensions:

521 x 448mm (20-1/2" x 17-5/8")

Bowl sizes:

422mm (16-5/8") wide, 279mm (11") front to back, 143mm (5-5/8") deep

COMPLIANCE CERTIFICATIONS -

- Meets or exceeds the following Specifications:
- ASME A112.19.2M for Vitreous China Fixtures.
 - CAN/CSA B45 Series.

To Be Specified

- Colour: ☒ White ☐ Bone ☐ Silver Gray
- ☐ Linen
- Faucet*: ☐
- Faucet Finish: ☐
- Supplies & Stops: ☐
- Trap 1-1/4" (32 mm): ☐

* See faucet section for additional models available




BAS-198

© 2000 American Standard Inc.

01/07

CU 420 COUNTRY LANE
20-2212 ELEV B
THE ROSLYN
LOT 4 - 6

23 of 1
COUNTRY™
COUNTERTOP SINK
VITREOUS CHINA

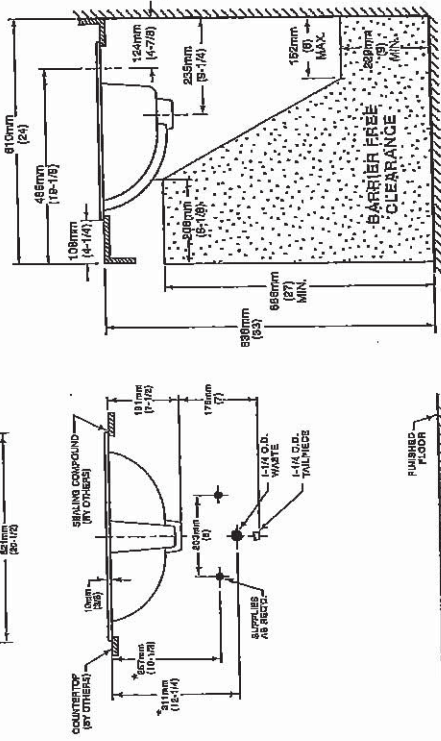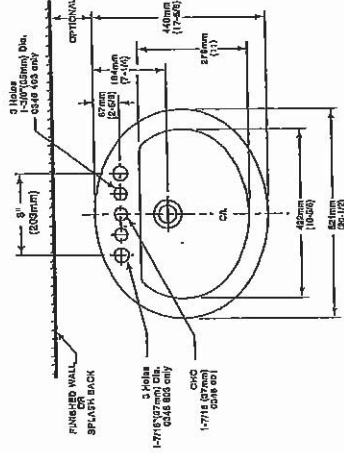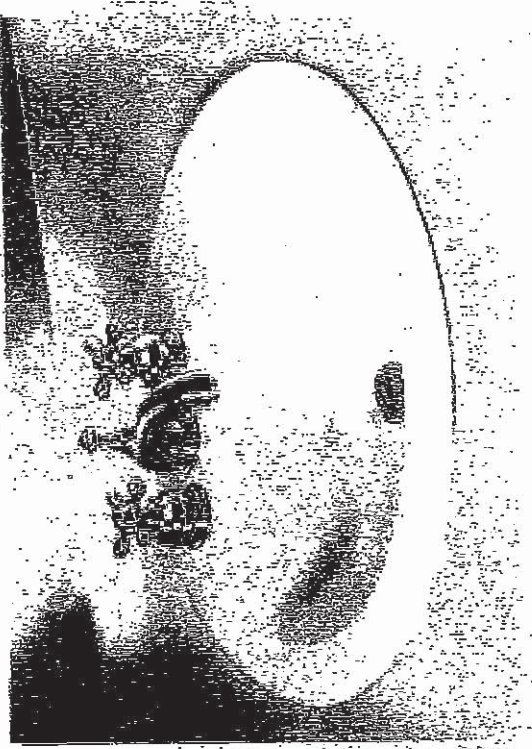

NOTES:
* DIMENSIONS SHOWN FOR LOCATION OF SUPPLIES AND 1/2" TRAP ARE SUGGESTED. FOR COUNTERTOP CUTOOUT AND INSTALLATION INSTRUCTIONS USE TEMPLATE SUPPLIED WITH SINK.
FAUCETS NOT INCLUDED AND MUST BE ORDERED SEPARATELY.
IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard A112.19.2.
These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.


CU 423 UPCOUNTRY

LOT 4-6

20-2212 ELEV B

THE ROSLYN

24 of 40

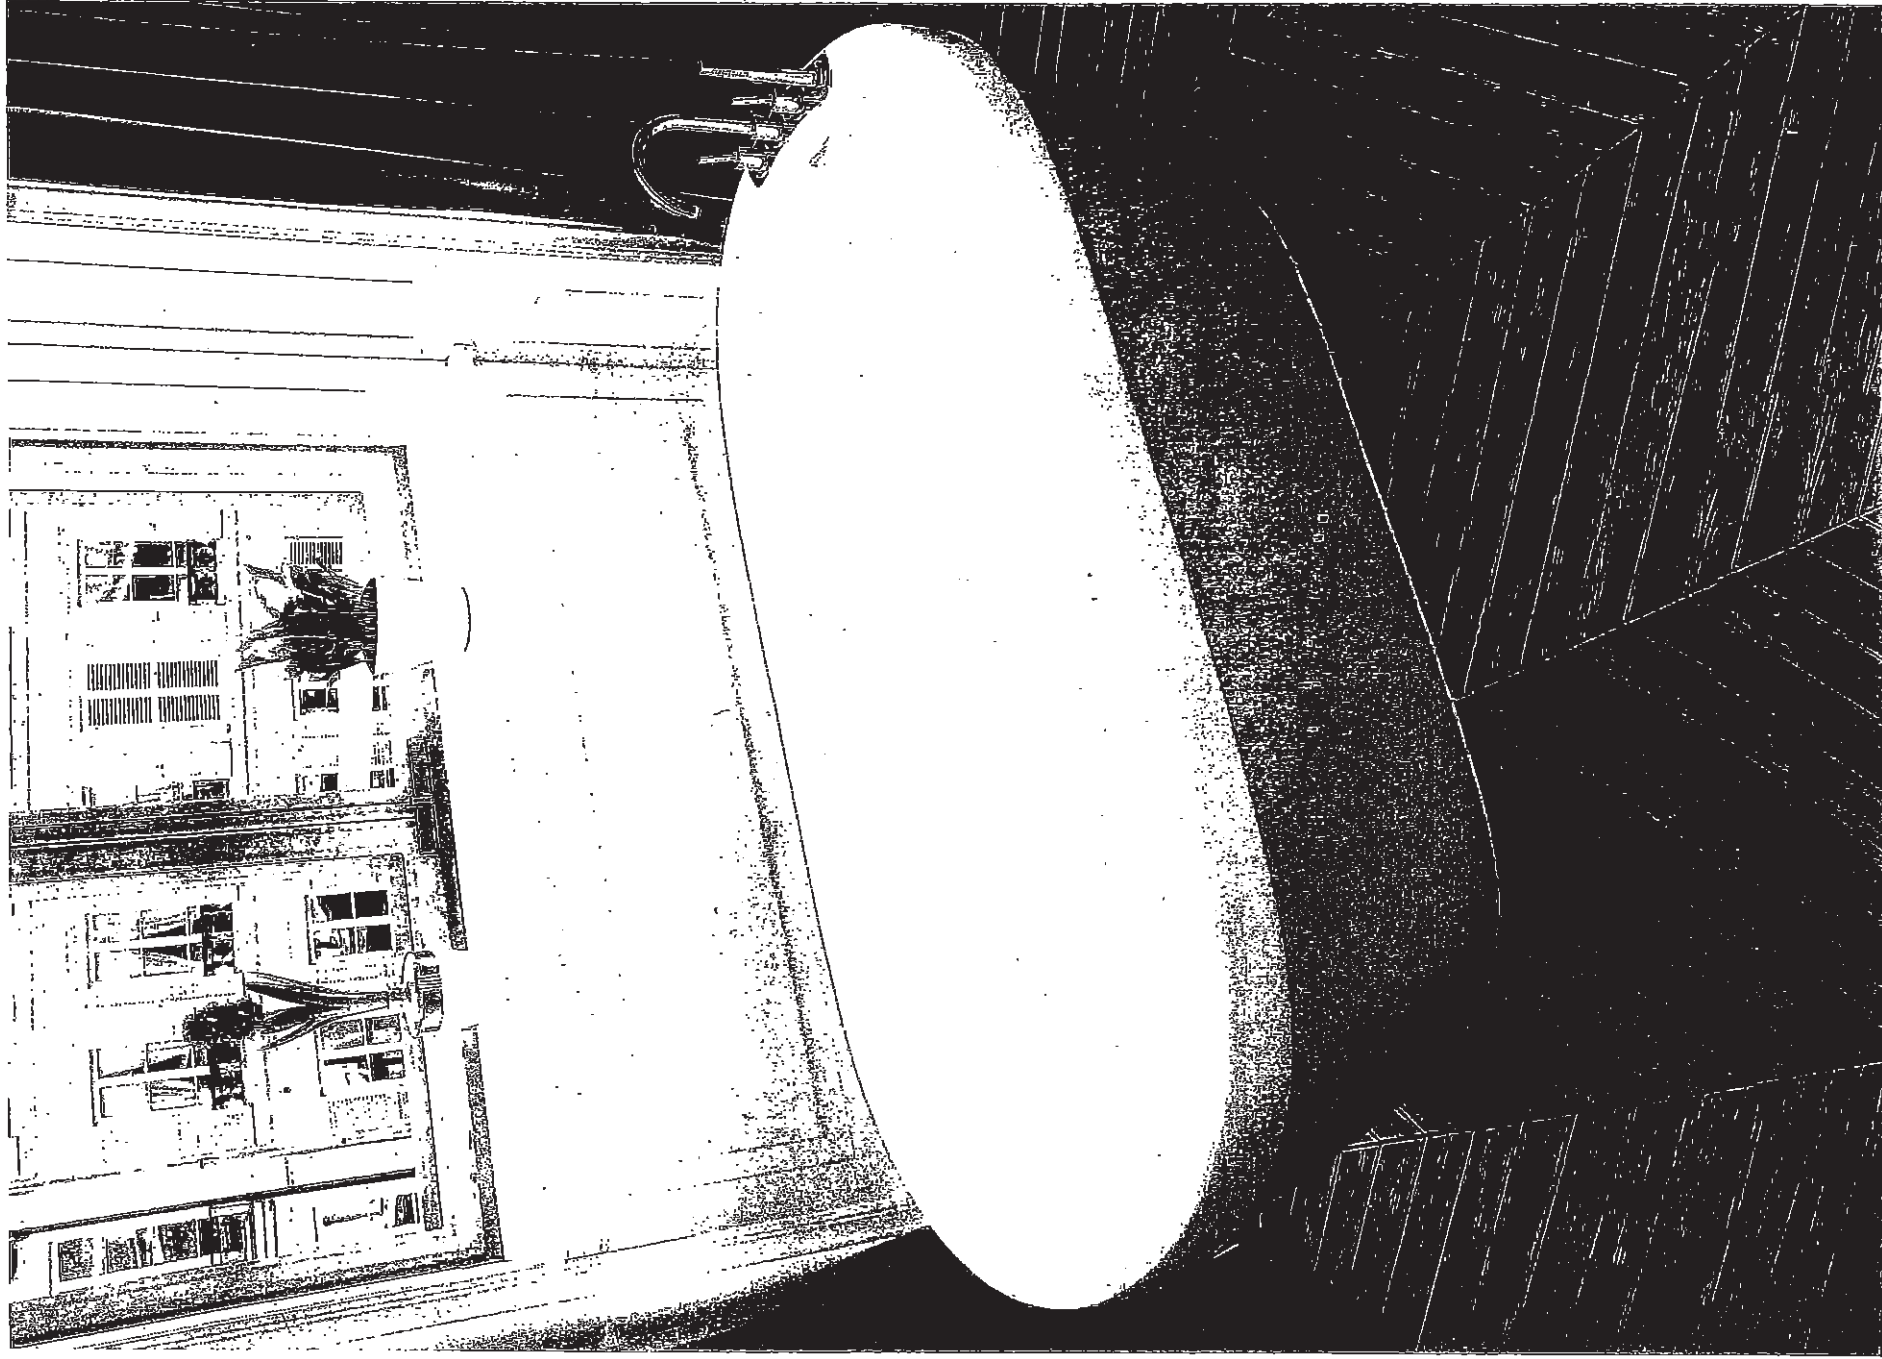


Demit CP2007

CU 423 UPCOUNTRY
LOT 4-6
20-2212 ELEV B
THE ROSLYN

25 of 40


Chateau

Transitional



Lavatory Faucet with Pop-Up Drain
Model L4621+

VANITY SINKS AND PEDESTAL



Posi-Temp® Pressure Balancing Tub/Shower
Model 62320 / TL183+

OR

Posi-Temp Valve and Tub/Shower Trim
with Eco-Performance Easy Clean® XL

Model 62320 / TL183EP+

(TL183EP not available in BC)


SHOWER AND 5' TUB FAUCETS



2 Handle Roman Tub with 9" Spout
Model 4796 / T990+

FREESTANDING TUB FAUCETS

26 of 40

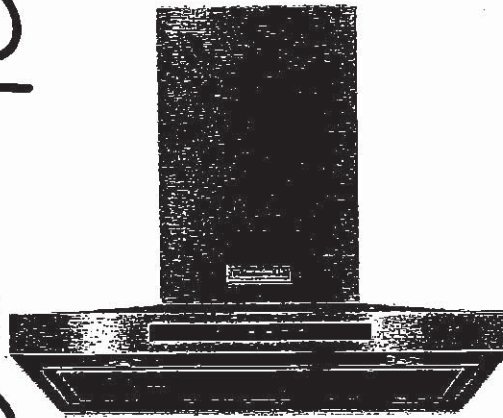

FOR THE WAY IT'S MADE.
FOR THE MAXIMUM WIDE.

MODEL: KVWB600DSS

30-In. Width | Wall-Mount Canopy | 600 CFM Motor

This 3-speed vent hood has power to effectively vent an output of up to 65K BTUs. Auto speed sensing keeps the vent at the proper fan speed by sensing the amount of heat coming from the cooktop. This 30-inch wall-mount canopy hood has both LED and halogen lights to brighten almost any work area.

PRODUCT FEATURES

600 CFM/65K BTU Threshold


Allows installation over any KitchenAid regular 30-inch range or cooktop, and some commercial-style cooking surfaces with outputs up to 65K BTU

Perimeter Ventilation

Increases ventilation system efficiency by pulling air from the hood and speeding up the movement of air allowing it to efficiently handle up to a 65K BTU output. Perimeter ventilation helps work out of protecting cabinets from steam, moisture by automatically adjusting fan speed speeds depending on the heat being produced.

Lighting over the cooking surface to help in the safety of the ventilation system by providing lighting in the kitchen.

CU 423 UPCOUNTRY
LOT 4-6
20-2212 ELEV B
THE ROSLYN

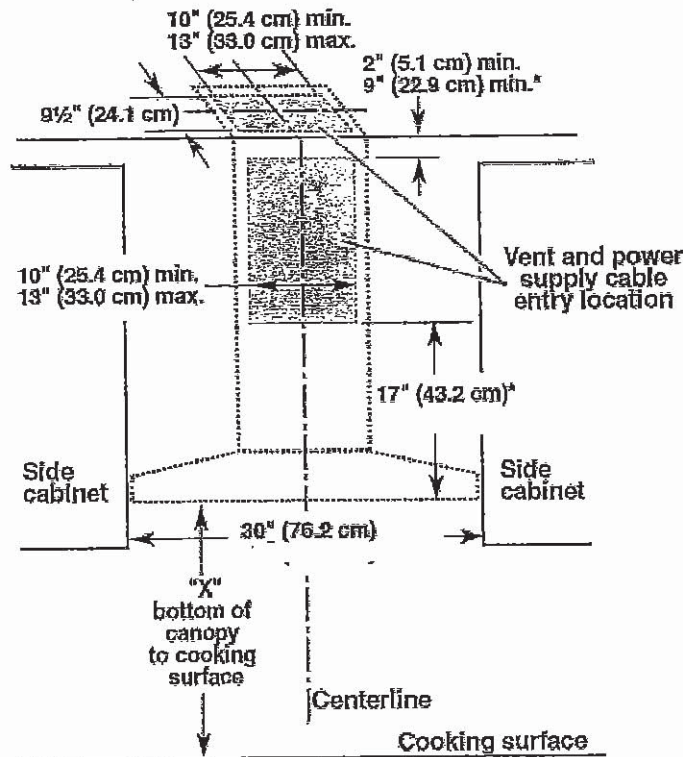

*For non-vented (recirculating) installations

IMPORTANT:


Minimum distance "X": 24" (61.0 cm) from electric cooking surface.
Minimum distance "X": 27" (68.6 cm) from gas cooking surfaces.
Suggested maximum distance "X": 36" (91.4 cm)

PERFORMANCE

Duct Outlet Type: Round
Duct Outlet Size: 6"

ELECTRICAL

15amp, 60 Hz. 120 V.

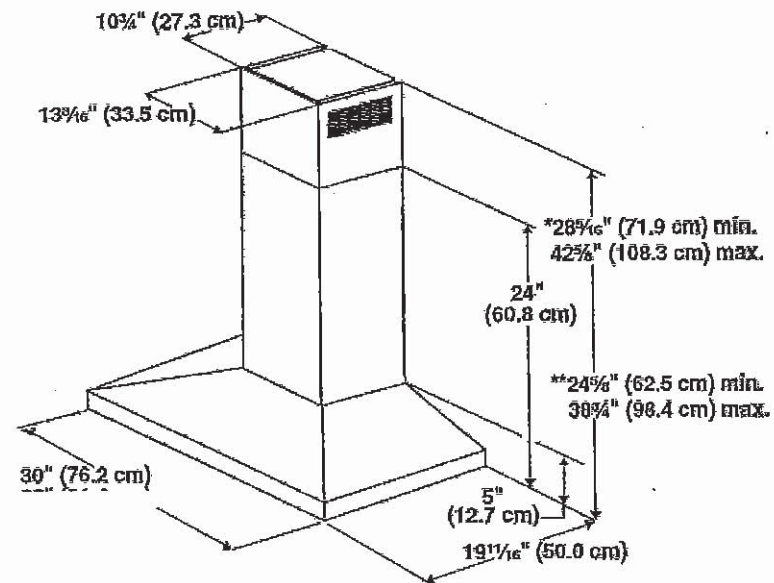

*For non-vented (recirculating) installations

**For vented installations

CU 423 UPCOUNTRY
LOT 4-6
20-2212 ELEV B
THE ROSLYN

27 of 40

Whirlpool® Top Mount Refrigerator

PRODUCT MODEL NUMBERS

WRT311FZD
WRT511SZD

WRT541SZD

Electrical: A 115-volt, 60-Hz, AC-only, 15- or 20-amp fused, grounded electrical supply is required. It is recommended that a separate circuit serving only your refrigerator be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.


NOTE: Before performing any type of installation, cleaning, or removing a light bulb, turn the control (Thermostat, Refrigerator or Freezer Control depending on the model) to OFF and then disconnect the refrigerator from the electrical source. When you are finished, reconnect the refrigerator to the electrical source and reset the control (Thermostat, Refrigerator or Freezer Control depending on the model) to the desired setting. See "Using the Controls."

Water: A cold water supply with water pressure between 30 and 120 psi (207 and 827 kPa) is required to operate ice maker and water dispenser. If you have questions about your water pressure, call a licensed, qualified plumber.

IMPORTANT: The pressure of the water coming out of a reverse osmosis system going to the water inlet valve of the refrigerator needs to be between 30 and 120 psi (207 and 827 kPa).


Reverse Osmosis Water Supply: If a reverse osmosis water filtration system is connected to your cold water supply, the water pressure to the reverse osmosis system needs to be a minimum of 40 to 60 psi (276 to 414 kPa).

PRODUCT DIMENSIONS

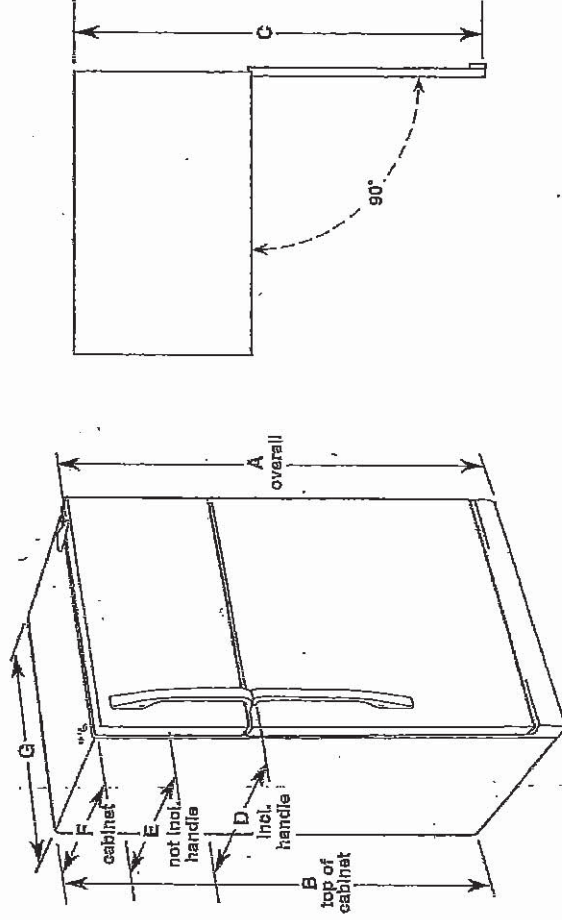

Model Number	Model Size	Reversible Door	Height - Overall "A"	Height - Top of Cabinet "B"	Depth - Door Open 90° "C"	Depth - With Handles "D"	Depth - Without Handles "E"	Depth - Cabinet Only "F"	Width - Cabinet "G"
WRT311FZD	20.5 cu. ft.	Yes	66 1/4" (168.3 cm)	65 1/2" (166.4 cm)	62 1/4" (158.1 cm)	32 1/4" (82.5 cm)	30 9/16" (77.8 cm)	28 1/2" (72.4 cm)	32 3/4" (83.2 cm)
WRT511SZD WRT541SZD	24 1/3 cu. ft.	Yes	66 1/4" (168.3 cm)	65 1/2" (166.4 cm)	62 1/4" (158.1 cm)	34" (86.4 cm)	32 1/4" (82.3 cm)	28 1/4" (72.4 cm)	32 3/4" (83.2 cm)

LOCATION REQUIREMENTS

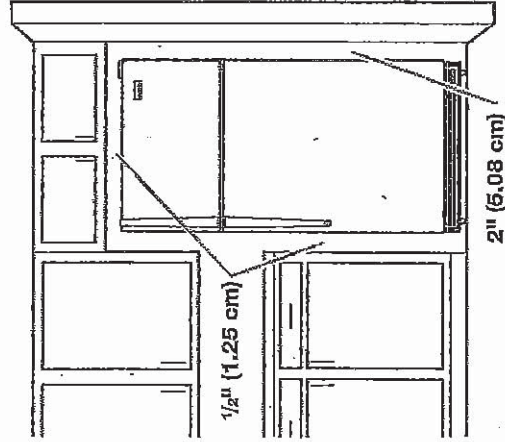

To ensure proper ventilation for your refrigerator, allow for a 1/2" (1.25 cm) space on each and between overhead cabinets and refrigerator top. Allow at least 1" (2.5 cm) between back of cabinet and the wall. If your refrigerator has an ice maker, make sure you leave some extra space at the back for the water line connections.

If you are installing your refrigerator next to a fixed wall, leave 2" (5 cm) minimum on the hinge side (depending on your model) to allow for the door to swing open.

NOTE: This refrigerator is intended for use in a location where the temperature ranges from a minimum of 55°F (13°C) to a maximum of 110°F (43°C). The preferred room temperature range for optimum performance, which reduces electricity usage and provides superior cooling, is between 60°F (15°C) and 90°F (32°C). It is recommended that you do not install the refrigerator near a heat source, such as an oven or radiator.

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

Ref. W10674108
10/29/14

AC

CU 423 UPCOUNTRY





LOT 4-6

20-2212 ELEV B

THE ROSLYN

28 of 40

Refrigerator Door Swing Verification

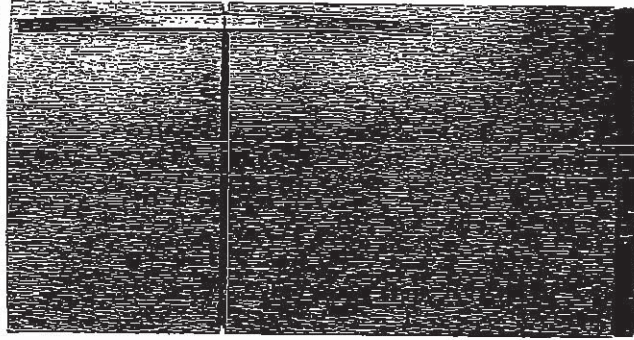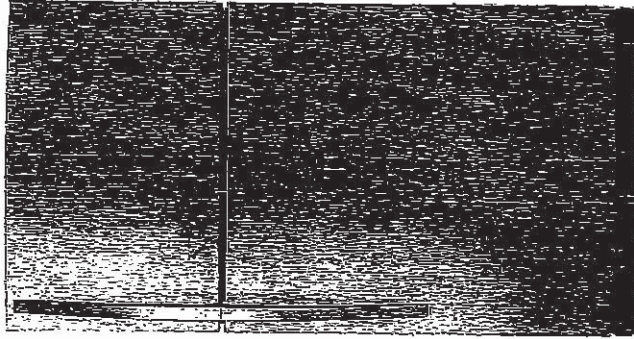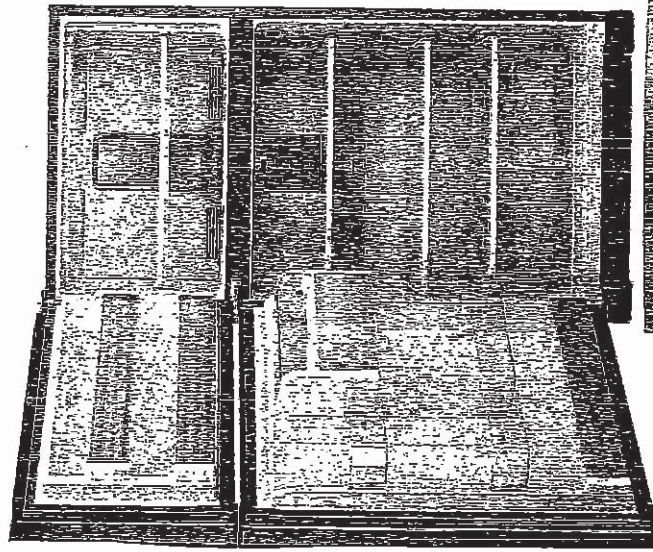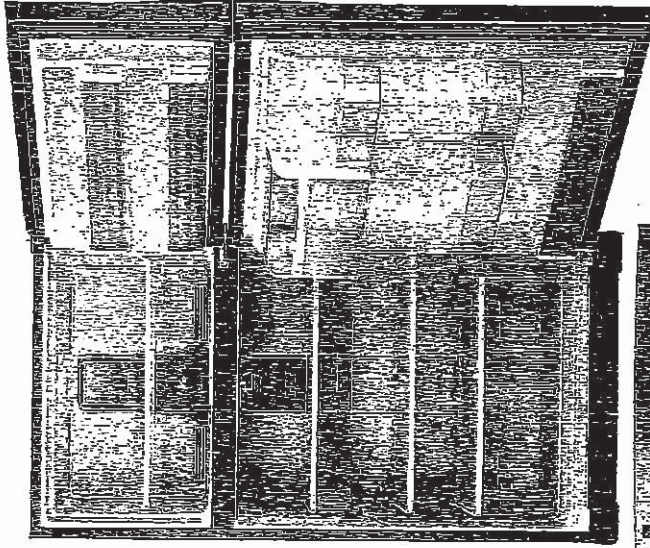

When facing the refrigerator



RIGHT HAND

DOOR OPENING

- Hinges on right
- Handle on left

mx

INITIAL

LEFT HAND

DOOR OPENING

- Hinges on left
- Handle on right



INITIAL

Please check and INITIAL your door swing selection.

CU 423 UPCOUNTRY

LOT 4-6

20-2212 ELEV B

THE ROSLYN

29 of 40

FRONT CONTROL GAS RANGES



FEATURING



TimeSaver™ system

The TimeSaver™ system's Frozen Bake Technology allows you to skip preheating for favorites like pizza, lasagna, chicken nuggets, fries or pies so you can cook frozen foods faster.



HeatRight™ system

The HeatRight™ system's True convection helps you to cook food faster with a real fan and third heating element to circulate hot air over, under, and around food



CompleteClean™ system

The CompleteClean™ system's EZ-2-Lift™ hinged grates give you quick access to spills on the cooktop. The industry first hinged design allows you to wipe up under them without removing them entirely. For a more thorough clean, the grates are also dishwasher-safe.

Every day, care.™

From the #1 Selling Appliance brand in the USA*

John

DC

Whirlpool® 30" (76.2 cm) Slide-in Gas Range C

PRODUCT MODEL NUMBERS



GAS SUPPLY REQUIREMENTS

Gas supply line:

- Provide a gas supply line of 1/4" (1.9 cm) rigid pipe to the range location. A smaller size pipe or longer runs may result in insufficient gas supply. With LP gas, piping or tubing size can be 1/2" (1.3 cm) minimum. Usually, LP gas suppliers determine the size and materials used in the system.

NOTE: Pipe/joint compounds that resist the action of LP gas must be used. Do not use TEFLON® tape.


Flexible metal appliance connector:

- If local codes permit, a new CSA design-certified, 4 to 5 ft (122 to 152.4 cm) long, 1/2" (1.3 cm) or 3/4" (1.9 cm) I.D., flexible metal appliance connector may be used for connecting range to the gas supply line.



- A 1/4" (1.3 cm) male pipe thread is needed for connection to the female pipe threads of the inlet to the appliance pressure regulator.
- Do not kink or damage the flexible metal tubing when moving the range.
- Must include a shutoff valve:

The supply line must be equipped with a manual shutoff valve. This valve should be located in the same room but exterior to the range opening, such as an adjacent cabinet. It should be in a location that allows ease of opening and closing. Do not block access to shutoff valve. The valve is for turning on or shutting off gas to the range.



- A. Gas supply line
- B. Shutoff valve "open" position
- C. To range

Gas Pressure Regulator

The gas pressure regulator supplied with this range must be used. The inlet pressure to the regulator should be as follows for proper operation:

Natural gas:

Minimum pressure: 5" WCP
Maximum pressure: 14" WCP


LP gas:

Minimum pressure: 11" WCP
Maximum pressure: 14" WCP

Contact local gas supplier if you are not sure about the inlet pressure.

PRODUCT DIMENSIONS

This manual covers several models. Your model may appear different from the models depicted. Dimensions given are maximum dimensions across all models.

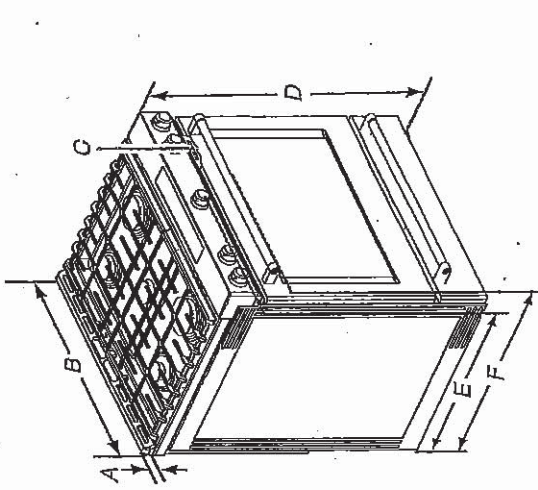

- A. 13 1/8" (33.0 cm) height from cooktop to top of vent
- B. 29 3/4" (75.9 cm)
- C. Model/serial number plate (located behind the oven door on the top right-hand side of the oven frame)
- D. 36" (91.4 cm) height to top of cooktop edge with leveling legs screwed all the way in*
- E. 28 5/8" (71.9 cm) max. depth from front of console to back of range.
- F. 28 3/4" (73.3 cm) max. depth from handle to back of range.

IMPORTANT: Range must be level after installation. Follow the instructions in the "Level Range" section. Using the cooktop as a reference for leveling the range is not recommended.

* Range can be raised approximately 1" (2.5 cm) by adjusting the leveling legs.

Type of Gas

Natural gas:

- This range is factory set for use with Natural gas. See "Gas Conversions" section. The model/serial rating plate located behind the control panel has information on the types of gas that can be used. If the types of gas listed do not include the type of gas available, check with the local gas supplier.

LP gas conversion:



Conversion must be done by a qualified service technician. No attempt shall be made to convert the appliance from the gas specified on the model/serial rating plate for use with a different gas without consulting the serving gas supplier. See "Gas Conversions" section.

®TEFLON is a registered trademark of Chemours.

CU 423 UPCOUNTRY
LOT 4-6
20-2212 ELEV B
THE ROSLYN

31 of 40

Front Control Gas Ranges

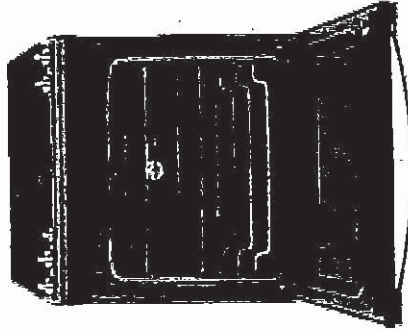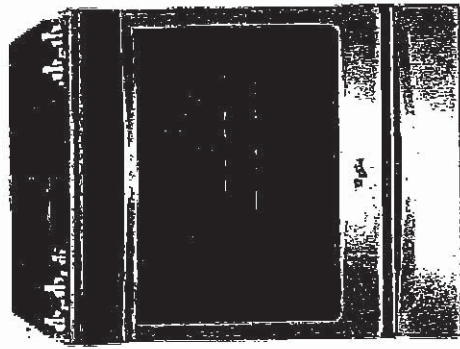

Available colors



S
Stainless
Steel



H
White
Enamel



E
Black
Enamel

WEG745HOF NEW

30" Freestanding Range - 5.8 cu. ft.



Time Savor™ system
• Frozen Bake™ Technology



HeatRight™ system
• True Convection
• Convection Convert-on
• AccuSimmer™ burner
• Center Oval burner
• Temperature Sensor




CompleteClean System
• EZ-2-Lit™ Hinged Grates
• AquaLit™ Self-cleaning Technology
• Dishwasher-safe knobs



ReadySet™ system
• (2) SpeedHeat™ burners
• Rapid Preheat
• Keep Warm
• Delay Cook

PRODUCT DIMENSIONS

The overall dimensions shown are for the range only. Always refer to the installation instructions for the range for the correct clearances and venting requirements.




- 13 1/4" (340 mm) height from floor to top of hood
- 26 1/2" (675 mm) height from floor to top of hood
- 26 1/2" (675 mm) height from floor to top of hood
- 26 1/2" (675 mm) height from floor to top of hood
- 26 1/2" (675 mm) height from floor to top of hood
- 26 1/2" (675 mm) height from floor to top of hood

NOTE: The range must be installed on a level surface. The installation should be done by a qualified technician. Always refer to the installation instructions for the range for the correct clearances and venting requirements.

Type of Gas

The range is designed to operate on either natural gas or LP gas. The range must be installed on a level surface. The installation should be done by a qualified technician. Always refer to the installation instructions for the range for the correct clearances and venting requirements.

CABINET OPENING DIMENSIONS

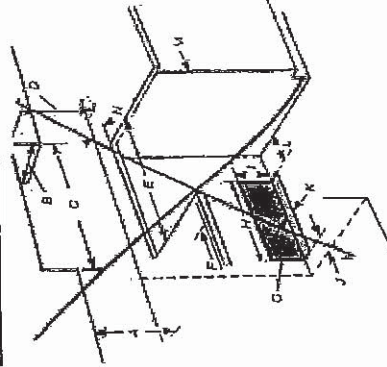

- 13 1/4" (340 mm) height from floor to top of hood
- 26 1/2" (675 mm) height from floor to top of hood
- 26 1/2" (675 mm) height from floor to top of hood
- 26 1/2" (675 mm) height from floor to top of hood
- 26 1/2" (675 mm) height from floor to top of hood
- 26 1/2" (675 mm) height from floor to top of hood
- 26 1/2" (675 mm) height from floor to top of hood
- 26 1/2" (675 mm) height from floor to top of hood
- 26 1/2" (675 mm) height from floor to top of hood
- 26 1/2" (675 mm) height from floor to top of hood
- 26 1/2" (675 mm) height from floor to top of hood

*Compared to a traditional preheat and bake cycle for pizza, suggested times, suggested times, suggested times. Always refer to the installation instructions for the range for the correct clearances and venting requirements.

Whirlpool

©1998 Whirlpool Corporation. All rights reserved. 5-16. Form No. WEG745HOF

JK

RC

CU 423 UPCOUNTRY
LOT 4-6
20-2212 ELEV B
THE ROSLYN

32 of 40

Whirlpool® Undercounter Dishwasher

PRODUCT MODEL NUMBERS

WDF110PAB	WDE30DELA	WDF630PSY
WDF111PAB	WDF320PAD	WDF640PAD
WDF120PAF	WDF670PAF	WDF730PAY
WDF121PAF	WDF520PAD	WDT710PAY
WDF310PAA	WDF530PAY	WDT720PAD
WDF310PCA	WDF530PLY	WDT770PAY

Electrical Requirements: 120-volt, 60-Hz, AC only, 15- or 20-amp. fused electrical supply. Copper wire only. A time delay fuse or circuit breaker and separate circuit is recommended.

If direct wiring dishwasher: Use flexible, armored, or nonmetallic, sheathed copper wire with grounding wire that meets the wiring requirements for your home and local codes and ordinances.

Use a UL listed or CSA approved conduit connector.

If connecting dishwasher with a power supply cord:

Use Power Supply Cord Kit (Part No. 4317824) marked for use with dishwashers. Follow the kit instructions for installing the power supply cord.

Power supply cord must plug into a grounded 3 prong, outlet, located in the cabinet next to the dishwasher opening. Outlet must meet all local codes and ordinances.


Water Supply Requirements: A hot water line with 20 to 120 psi (138 to 862 kPa) water pressure. Water temperature must be 120°F (49°C) water at dishwasher. Use 3/8" O.D. copper tubing with compression fitting or flexible braided water supply line (1/2" minimum plastic tubing is not recommended). Use a 90° elbow with 1/4"N.P.T. external pipe threads on one end. Do not solder within 6" (15.2 cm) from water inlet valve.

Drain Requirements: A new drain hose is supplied with your dishwasher. If this is not long enough, use a new drain hose with a maximum length of 12' (3.7 m) (Part No. 3385556) that meets all current AHAM/APMO test standards, is resistant to heat and detergent, and fits the 1" (2.5 cm) drain connector of the dishwasher.

Make sure to connect the drain hose to waste tee or disposer inlet above drain trap in house plumbing and 20" (50.8 cm) minimum above the floor. It is recommended

that the drain hose either be looped up and securely fastened to the underside of the counter or be connected to an air gap.


Make sure to use an air gap if the drain hose is connected to house plumbing lower than 20" (50.8 cm) above subfloor or floor.



Use 1/2" (1.3 cm) minimum I.D. drain line fittings.

If required, the air gap should be installed in accordance with the air gap installation instructions. When connecting the air gap, a rubber hose (not provided) will be needed to connect to the waste tee or disposer inlet.

PRODUCT DIMENSIONS

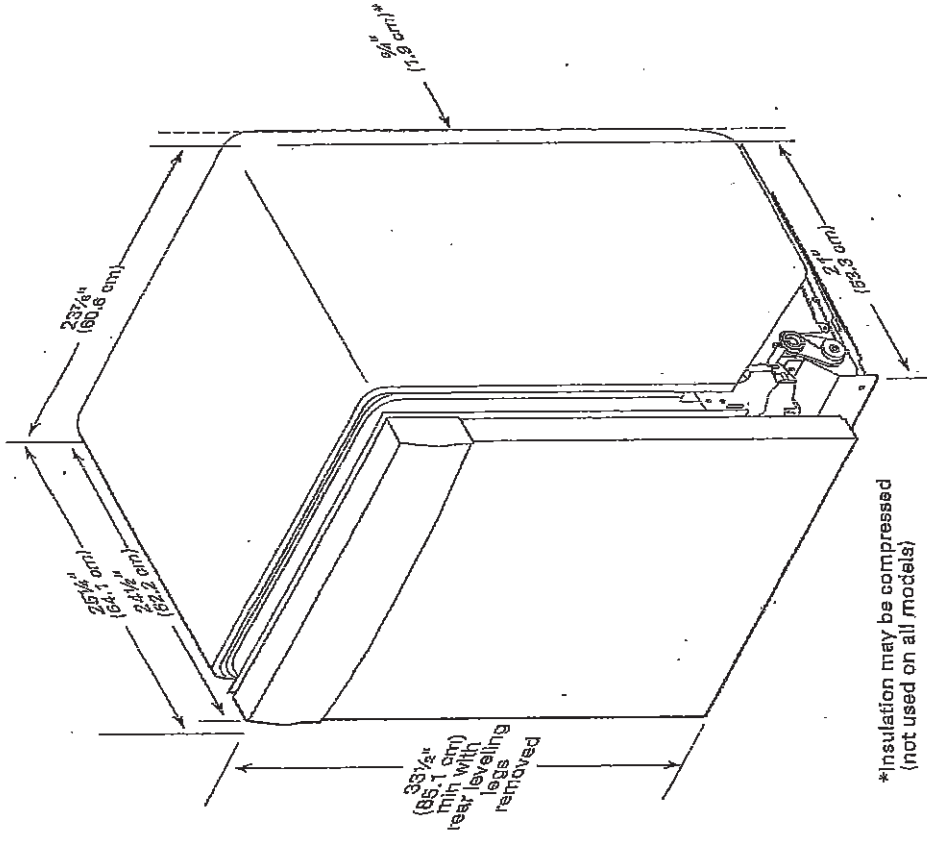


*Insulation may be compressed (not used on all models)

20 inch

CU 423 UPCOUNTRY
LOT 4-6
20-2212 ELEV B
THE ROSLYN

33 of 40



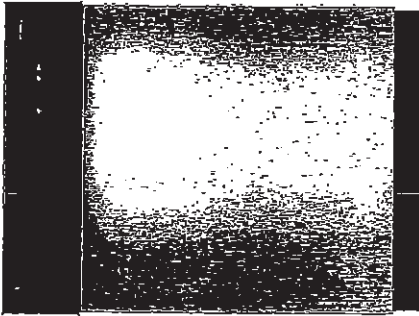

WDF310PAAS

Black-on-Stainless

OTHER AVAILABLE COLORS



Black
Model: WDF310FAAB



Black-on-Brass
Model: WDF310FAAT



White
Model: WDF310FAAW



Universal Silver
Model: WDF310FAAD



DIMENSIONS		KEY FEATURES:
Maximum Height	34 1/2 Inches	ENERGY STAR® Qualified
Minimum Height	33 1/2 Inches	No One Has Fewer Repairs 17 Years In A Row
Height	34 1/2 Inches	Resource - Efficient Wash System
Depth	24 1/2 Inches	CEE Tier 1 qualified
Width	23 7/8 Inches	Tall Tub Design
Dimensions shown are for planning purposes only. For complete information, see installation instructions packaged with product.		White Plastic Interior
		Quiet Partner(TM) Sound Package
		Auto Soil Sensor
		Electronic Controls
ELECTRICAL		3 Automatic Cycles
		1-Hour Wash Cycle
		Heavy Wash Cycle
		Normal Cycle
15 Amps Amps, 60 Hz, 120 V, 15,		4 Options
		High Temperature Wash System
		Heated Dry Option
		4 Hour Delay Wash Option
Before purchasing this appliance, read important information about its estimated annual energy consumption or energy efficiency rating that is available from your dealer.		4-Tier SheetClean® Direct Feed Wash System
		Control Lock
		Vinyl Racks
		In-Rack Silverware Basket

Re Jh

THE ROSLYN

34 of 40


CABINET CUTOUT DIMENSIONS

WFE378DAN

NOTE: Shaded areas of cabinet walls show where utility connections may be installed.

*Measure from the lowest point on the underside of the countertop. May be reduced to 33½" (85.1 cm) by removing the rear leveling legs from dishwasher.

Minimum, measured from narrowest point of opening.

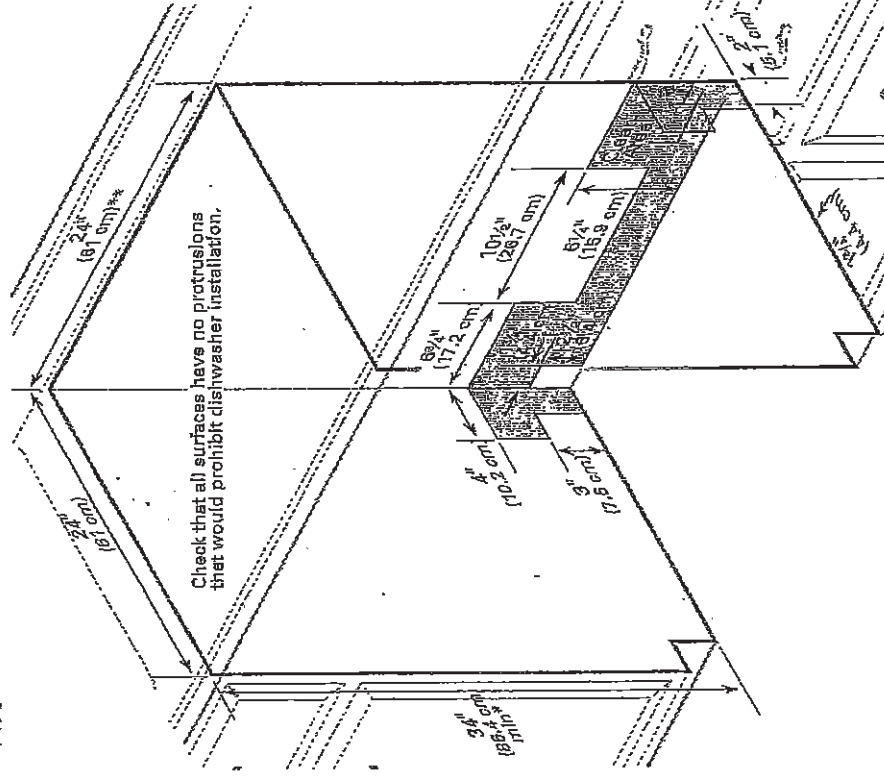


22

CU 423 UPCOUNTRY
LOT 4-6
20-2212 ELEV B
THE ROSLYN

35 of 40

WHIRLPOOL WASHER Model #: WFW5620HW

Whirlpool Brand Canada English | Washtren und Dryera | Washtren | Front Load Washers | WFW5620HW

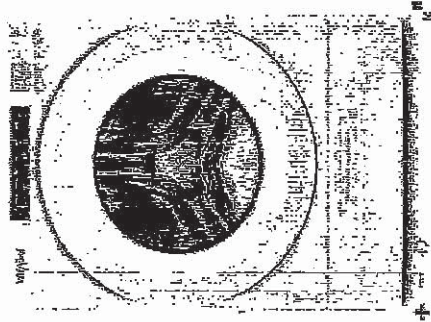

5.2 cu. ft. I.E.C. Closet-Depth
Front Load Washer with
Load & Go™ Dispenser



Whirlpool
5.2 cu. ft. I.E.C. Closet-Depth Front Load Washer with Load & Go™
Dispenser

Model #: WFW5620HW

Dimensions

Depth	66.17 cm, 31-9/16 in.
Depth With Door Open 90 Degree	143.51 cm, 56-1/2 in.
Minimum Height	98.11 cm, 38-5/8 in.
Width	68.58 cm, 27.0 in.

Appearance

LCD Touch Screen	No
Window	Yes

Details

Drum Material	Stainless Steel
---------------	-----------------

Cycles and Options

Number of Wash Cycles	37
-----------------------	----

Electrical

Hz	60
----	----

Power Cord Included Yes

dk
Rc

**CU 423 UPCOUNTRY
LOT 4-6
20-2212 ELEV B
THE ROSLYN**

36 of 40

WHIRLPOOL WASHER Model #: WFW5620HW

LOCATION REQUIREMENTS


Proper installation is your responsibility.

You will need:


- A water heater set to 120°F (49°C).
- A grounded electrical outlet located within 6 ft (1.8 m) of power cord on back of washer.
- Hot and cold water faucets located within 4 ft (1.2 m) of hot and cold water fill valves on washer, and water pressure of 20–100 psi (137.9–689.6 kPa).
- A level floor with maximum slope of 1" (25 mm) under entire washer. Installing on carpet or surfaces with foam backing is not recommended.
- Floor must support washer's total weight (with water and load) of 315 lbs (143 kg).

IMPORTANT: Do not install, store, or operate washer where it will be exposed to weather or in temperatures below 32°F (0°C). Water remaining in washer after use may cause damage in low temperatures. See "Washer Care" in your Use and Care Guide for winterizing information.

Whirlpool Models* ✓

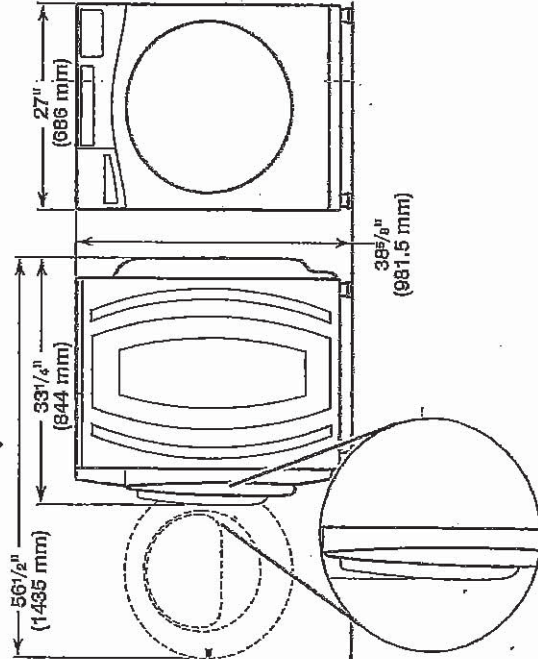


~~Maytag Models~~

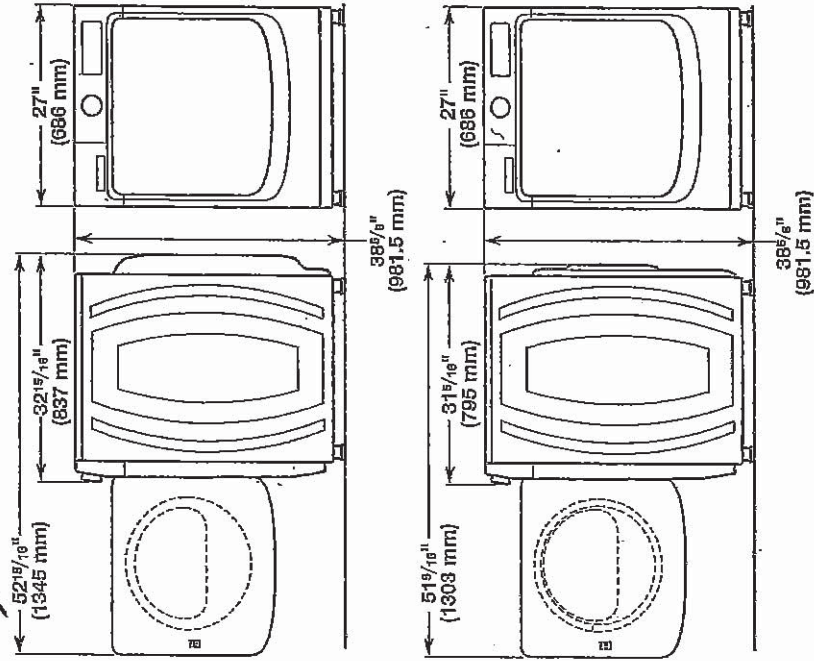

All dimensions show minimum spacing allowed. For each arrangement, consider allowing more space for ease of installation and servicing, and spacing for companion appliances and clearances for walls, doors, and floor moldings.

Space must be large enough to allow door to fully open. Add spacing of 1" (25 mm) on all sides of washer to reduce noise transfer. If a closet door or louvered door is installed, top and bottom air openings in door are required.

Recessed area or closet installation (stacked washer and dryer): X

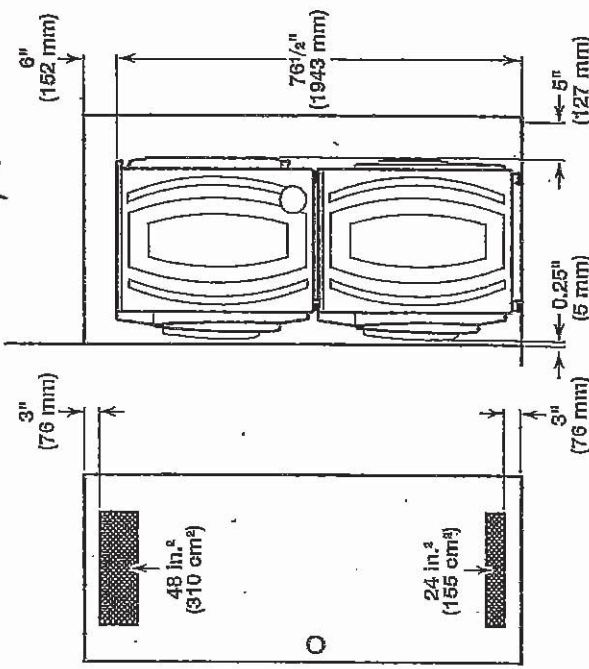

*For additional details (or information) specific to your model, refer to the "Dimensions" listed for your model at www.whirlpool.com.


ch 2c

CU 423 UPCOUNTRY
 LOT 4-6
 20-2212 ELEV B
 THE ROSLYN


37 of 40

WHIRLPOOL WASHER Model #: WFW5620HW


Custom under-counter installation:

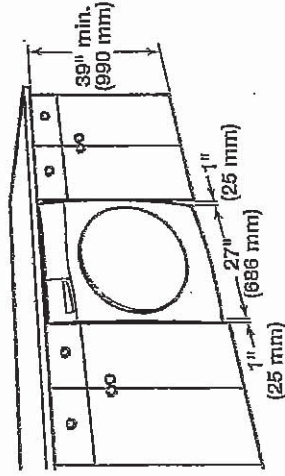

Recessed area or closet installation:

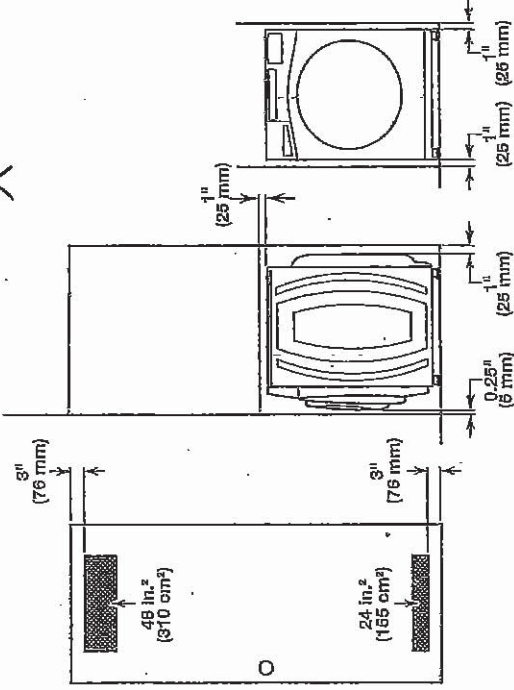

Custom cabinet installation:

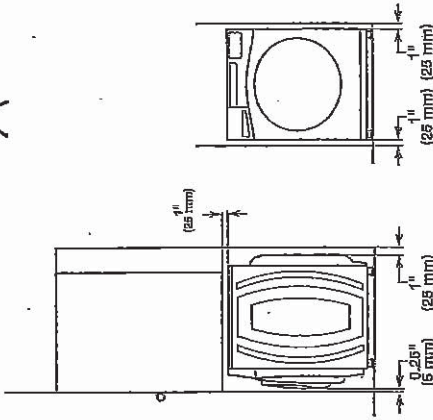


DRAIN SYSTEM

The drain system can be installed using a floor drain, wall standpipe, floor standpipe, or laundry tub. Select the method you need.


IMPORTANT: To avoid siphoning, only 4.5" (114 mm) of drain hose should be inside standpipe. Always secure drain hose with cable tie.

Floor standpipe drain system

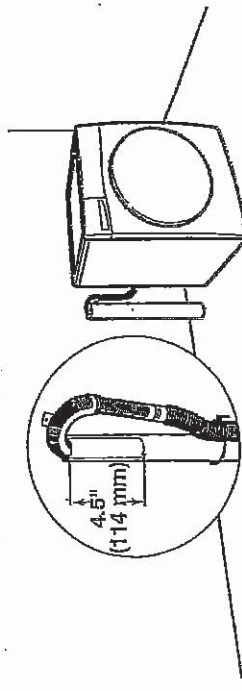


Minimum diameter for a standpipe drain: 2" (51 mm). Minimum carry-away capacity: 17 gal. (64 L) per minute. A 1/4" (6 mm) diameter to 1" (25 mm) diameter Standpipe Adapter Kit is available (Part Number 3363920). Top of standpipe must be at least 30" (762 mm) high; install no higher than 96" (2.44 m) from bottom of washer. If you have an overhead sewer and need to pump higher than 96" (2.44 m), a sump pump and associated hardware are needed. See "Alternate parts."

Wall standpipe drain system

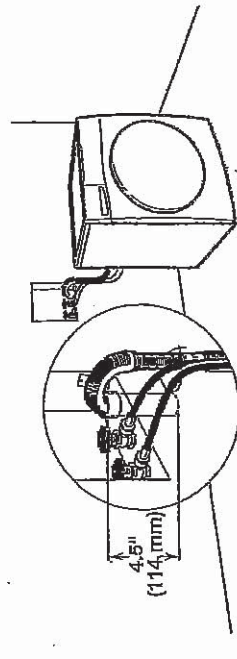

See requirements for floor standpipe drain system.

Laundry tub drain system

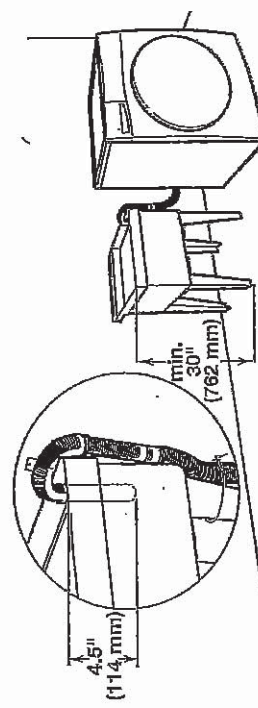

Minimum capacity: 20 gal. (76 L). Top of laundry tub must be at least 30" (762 mm) above floor; install no higher than 96" (2.44 m) from bottom of washer.


WV KC

CU 423 UPCOUNTRY
LOT 4-6
20-2212 ELEV B
THE ROSLYN

38 of 140

WHIRLPOOL DRYER Model #: YWED5620HW

Whirlpool Duro Canada (English) | Washers and Dryers | Dryers | Electric Dryers | YWED5620HW

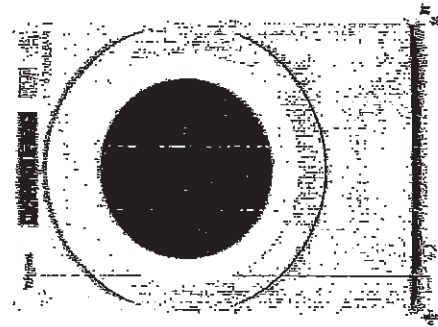

7.4 cu. ft. Front Load Electric
Dryer with Intuitive Touch
Controls



Whirlpool 7.4 cu. ft. Front Load Electric Dryer with Intuitive Touch Controls

Model #: YWED5620HW

Dimensions

Depth	78.74 cm, 31.0 in
Depth With Door Open 90 Degree	138.43 cm, 54-1/2 in
Height	98.42 cm, 38-3/4 in
Width	68.58 cm, 27.0 in

Configuration and Overview

Fuel Type	Electric
Cycles and Options	
Cycle Time Remaining	Yes
Lint Filter Indicator	No
Number of Dryer Cycles	33
Number of Dryness Levels	3

Ventilation System

Lint Vent	No
Maximum Vent Length	64
Venting Direction	Left, Right, Bottom, Rear

Electrical

Hz	60
Power Cord Included	Yes

20
JK

CU 423 UPCOUNTRY

LOT 4-6


20-2212 ELEV B

THE ROSLYN

39 of 40

WHIRLPOOL DRYER Model #: YWED5620HW

Back view:

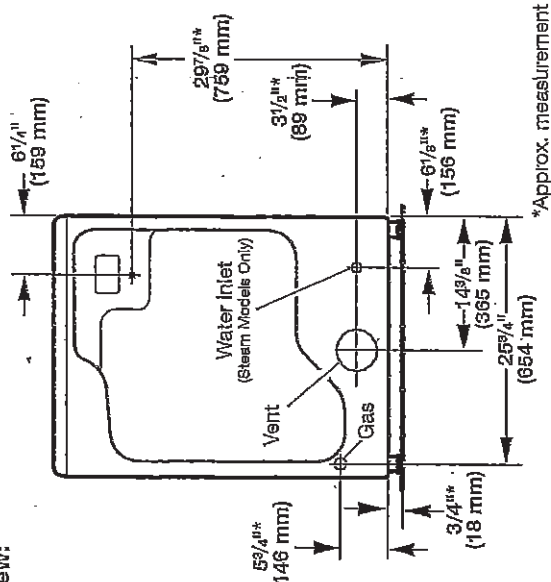

NOTE: Most installations require a minimum of 5" (127 mm) clearance behind dryer for exhaust vent with elbow. See "Venting Requirements."

Installation Clearances

For each arrangement, consider allowing more space for ease of installation and servicing, spacing for companion appliances, and clearances for walls, doors, and floor moldings. Space must be large enough to allow door to fully open. Add spacing on all sides of dryer to reduce noise transfer. If a closet door or louvered door is installed, top and bottom air openings in door are required.

Check code requirements. Some codes limit, or do not permit, installation of the dryer in garages, closets, mobile homes, or sleeping quarters. Contact your local building inspector.


NOTE: No other fuel-burning appliance can be installed in the same closet as a dryer.

Installation spacing for recessed area or closet installation

All dimensions show recommended and minimum spacing allowed.


- Additional spacing should be considered for ease of installation and servicing.
- Additional clearances might be required for wall, door, floor moldings, dryer venting, and gas line.
- Additional spacing should be considered on all sides of the dryer to reduce noise transfer.
- For closet installation with a door, minimum ventilation openings in the top and bottom of the door are required. Louvered doors with equivalent ventilation openings are acceptable.
- Companion appliance spacing should also be considered.

Recommended installation clearances (dryer only):

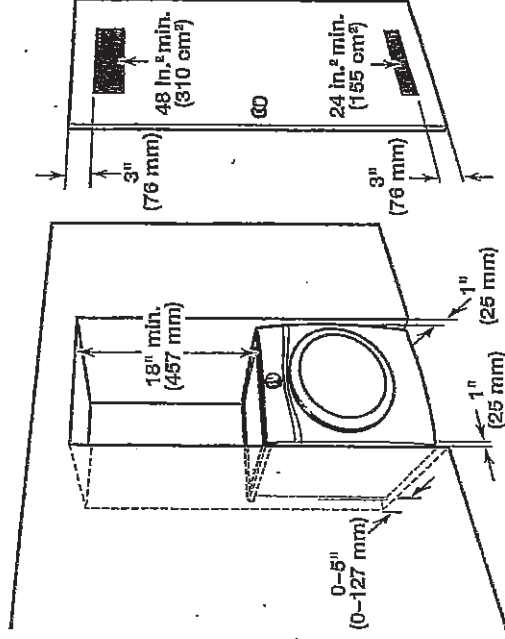

0" (0 mm) rear spacing is allowed for straight back venting only. For steam models only, inlet hose must not be kinked.

Custom under-counter installation: X

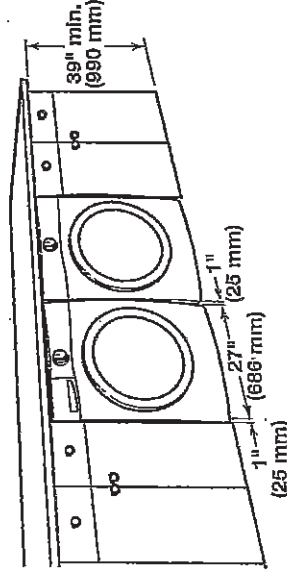

Mobile home - Additional installation requirements:

This dryer is suitable for mobile home installations. The installation must conform to the Manufactured Home Construction and Safety Standard, Title 24 CFR, Part 3280 (formerly the Federal Standard for Mobile Home construction and Safety, Title 24, HUD Part 280) or Standard CAN/CSA-Z240 MH.

Mobile home installations require:

- Metal exhaust system hardware, available for purchase from your dealer. For further information, see "Assistance or Service" in your Use and Care Guide.
- Special provisions must be made in mobile homes to introduce outside air into dryer. Openings (such as a nearby window) should be at least twice as large as dryer exhaust opening.

For mobile home installation of gas dryers:

- Mobile Home Installation Hold-down Kit Part Number 346764 is available to order. For further information, see "Assistance or Service" in your Use and Care Guide.

20
John

CU 423 UPCOUNTRY
LOT 4-6
20-2212 ELEV B
THE ROSLYN

40 of 40

WHIRLPOOL DRYER Model #: YWED5620HW

Additional parts may be required, depending on your installation. Check local codes. Check existing electrical supply and venting. Read "Electrical Requirements" and "Venting Requirements" before purchasing parts.

If using a power supply cord:

Use a UL Listed power supply cord kit marked for use with clothes dryers. The kit should contain:

- A UL Listed 30 amp power supply cord, rated 120/240 volt minimum. The cord should be type SRD or SRDT and be at least 4 ft. (1.22 m) long. The wires that connect to the dryer must end in ring terminals or spade terminals with upturned ends.
- A UL Listed strain relief.

Optional Equipment (not supplied with dryer):

Refer to your Use and Care Guide for Information about accessories available for your dryer.

LOCATION REQUIREMENTS

Check code requirements. Some codes limit, or do not permit, installing dryer in garages, closets, mobile homes, or sleeping quarters. Contact your local building inspector.

⚠ WARNING



Explosion Hazard

Keep flammable materials and vapors, such as gasoline, away from dryer.

Place dryer at least 18 inches (460 mm) above the floor for a garage installation.


Failure to do so can result in death, explosion, or fire.

You will need:

- A location allowing for proper exhaust installation. See "Venting Requirements."
 - A separate 15 or 20 amp circuit for a gas dryer or 30 amp circuit for an electric dryer.
 - If using power supply cord, a grounded electrical outlet located within 2 ft. (610 mm) of either side of dryer. See "Electrical Requirements."
 - Floor must support dryer weight of 200 lbs. (90.7 kg). Also consider weight of companion appliance.
 - Cold water faucets located within 4 ft. (1.2 m) of the water fill valves, and water pressure of 20-120 psi (138-827 kPa). You may use your washer's water supply by purchasing the necessary parts noted in "Parts needed."
 - Level floor with maximum slope of 1" (25 mm) under entire dryer. If slope is greater than 1" (25 mm), install Extended Dryer Feet Kit, Part Number 279810. If not level, clothes may not tumble properly and automatic sensor cycles may not operate correctly.
 - For garage installation, place dryer at least 18" (460 mm) above floor. If using a pedestal, you will need 18" (460 mm) to bottom of dryer.
 - The dryer must not be installed or stored in an area where it will be exposed to water and/or weather.
- IMPORTANT:** Do not operate, install, or store dryer where it will be exposed to water, weather, or at temperatures below 40°F (4°C). Lower temperatures may cause dryer not to shut off at end of automatic sensor cycles, resulting in longer drying times.


DRYER DIMENSIONS

Front view:

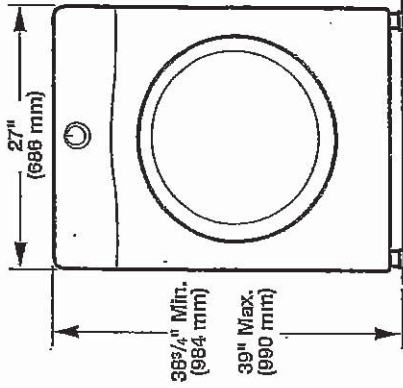


Side view:

Whirlpool Models

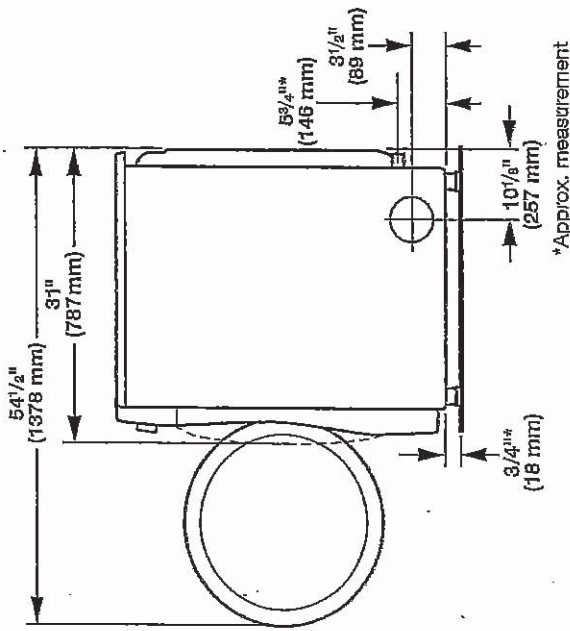

Maytag Models

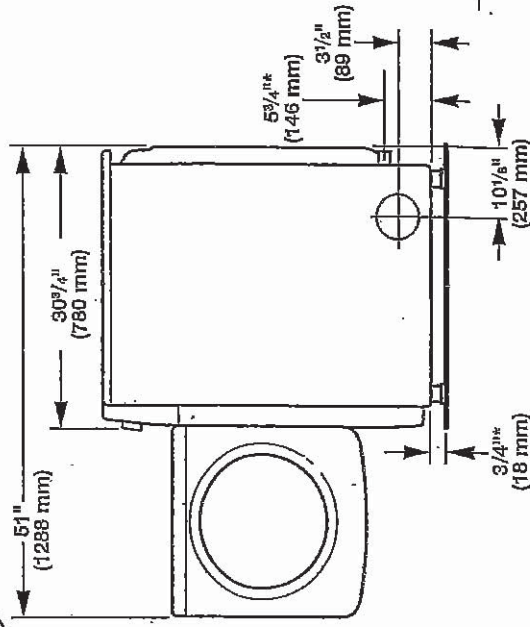

*Approx. measurement.

John RC