



APPLIANCE CHECKLIST

It may seem early to be thinking about appliances, but they are an important part of your kitchen design and may require upgrades to your HVAC, plumbing and electrical plans. It's important that we are provided with your appliance information during the structural and foundation part of the Design Process, so that these upgrades can be included on your invoice, if required.

ITEM	BRAND	MODEL NUMBER
FRIDGE	FRIGIDAIRE	PRFG2383AF
DISHWASHER	WHIRLPOOL	DU1055XTVS5
RANGE	FRIGIDAIRE	CLEH3054UFA
Type: Gas <input type="checkbox"/> Electrical: 20 Amp <input type="checkbox"/>	Electric <input checked="" type="checkbox"/> 40 Amp <input checked="" type="checkbox"/>	Induction <input type="checkbox"/> 50 Amp <input type="checkbox"/>
WALL OVEN	NA	
Type: Gas <input type="checkbox"/> Electrical: 30 Amp <input type="checkbox"/>	Electric <input type="checkbox"/> 40 Amp <input type="checkbox"/>	Waterline Required <input type="checkbox"/>
WARMING DRAWER	NA	
Electrical: 15 Amp <input type="checkbox"/>	Other: Specify	
COOKTOP	NA	
Type: Gas <input type="checkbox"/> Electrical: 15 Amp <input type="checkbox"/>	Electric <input type="checkbox"/> 40 Amp <input type="checkbox"/>	Induction <input type="checkbox"/> 50 Amp <input type="checkbox"/>
MICROWAVE	PANASONIC	NN-SD6715
Electrical: 15 Amp <input checked="" type="checkbox"/>	30Amp <input type="checkbox"/>	240 Volt <input type="checkbox"/>
MICROWAVE TRIM KIT	NA	
OTR MICROWAVE	NA	
WASHING MACHINE	WHIRLPOOL	WTW6157PB
DRYER	WHIRLPOOL	YWED6150PB
Type: Gas <input type="checkbox"/>	Electric <input checked="" type="checkbox"/>	Stacked <input type="checkbox"/>
OTHER: STD HOODFAN	AIRKING	AV1308
OTHER:		
OTHER:		

Hood Fans must be purchased through Phoenix Homes, and will require an upgrade to a make up air system for any hood fans above 300CFM. Standard hood fan vent pipe is 6".


A make up air system is a required upgraded for all gas stoves/cooktops.

Any changes from the standard kitchen plan and/or standard electrical, plumbing and electrical specifications/plans may be subject to additional fees.


Community: DIAMONDDVIEW (3)

Lot #: 116

Purchaser Signature:

Signed by:

 174CF4D52E85463...



Purchaser Signature:

Signed by:

 A9541CCBB8B4472...

DISHWASHER DIMENSIONS

DV3 LOT 116 - DISHWASHER DU1055XTVS5

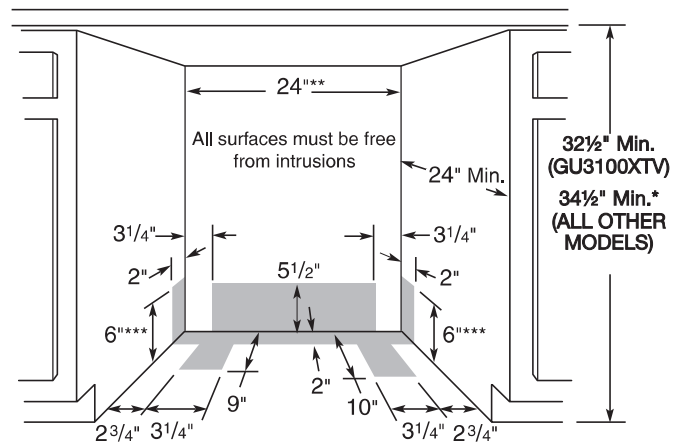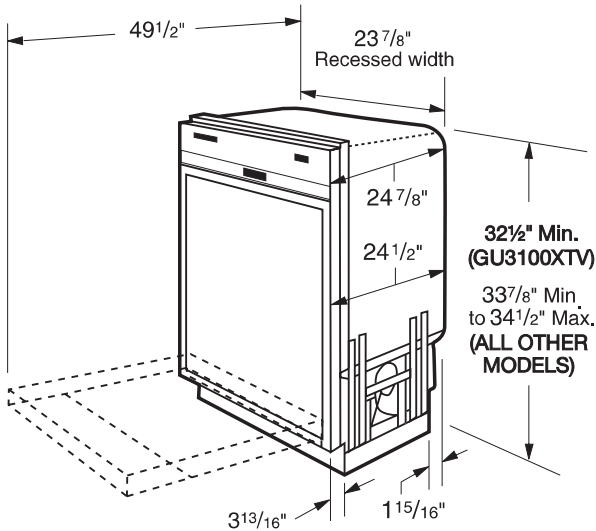Whirlpool® Dishwashers 1000, 2000 and 3000 Series





*Measured from the lowest point on the underside of countertop. May be reduced to 33 7/8" by removing wheels from dishwasher.
 **Minimum, measured from narrowest point of opening.
 ***May be increased to 6 7/8" if height of opening is 34 1/2" at its lowest point.

Cut openings in shaded area of cabinet walls or floor as specified in chart:

OPENING FOR:	DIAMETER:
water line	1/2"
drain line	1 1/2"
direct wire	3/4"
power supply cord	1 1/2"



Whirlpool® Dishwashers 800 and 900 Series

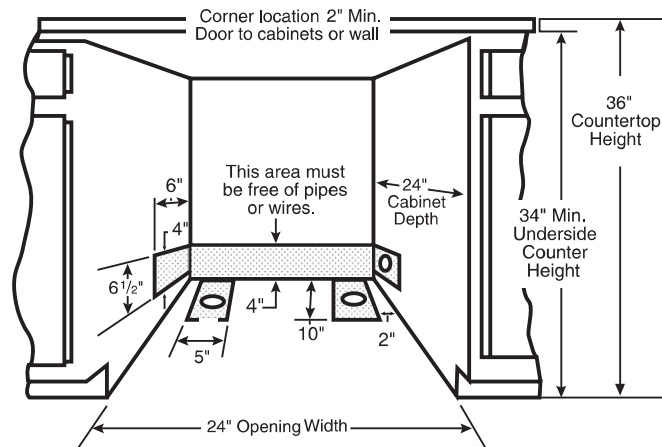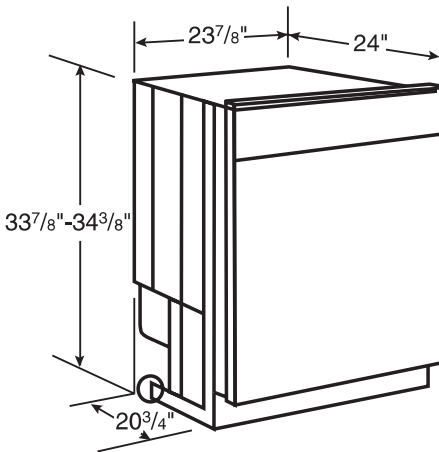

Grommet required for electrical cable hole (metal cabinets)

Cut holes for water line and electrical line in shaded area.

Model DU018DWT

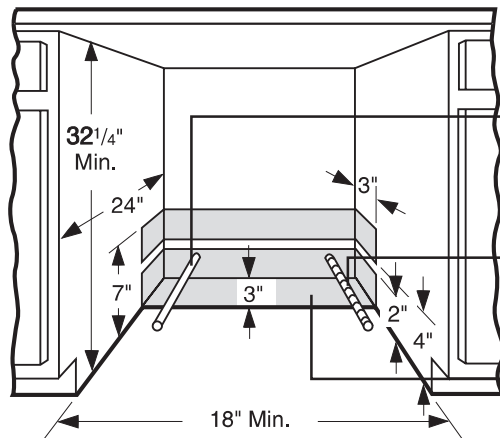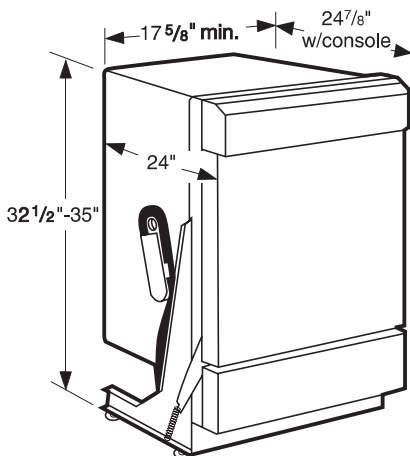

Water inlet size must be one of the following:
 3/8" O.D. copper tubing
 3/8" O.D. iron pipe
 1/2" O.D. plastic tubing

Electrical cable should extend 24" from rear wall.

Electrical, drain and water line entrances must be confined to shaded area.


DISHWASHER CUSTOM PANELS AND OPTIONAL ACCESSORY KITS

	White	Biscuit	Black	Stainless
MODELS: GU3600XTV, GU2800XTV, GU2300XTV, DU1300XTV and DU1055XTV				
4" Console Trim Kit*	4396200	4396201	4396199	—
4" Wrap Around Panel	—	—	—	8171777
Side Panel Kit	8171656	8171658	8171657	8171659
MODELS: DU945PWS, DU915PWS, DU850SWP, DU811SWP and DU810SWP				
Framed Custom Panel Kit	675776	675809	675775	—
Wrap Around Panel Kit	—	—	—	4378989
Side Panel Kit	4378867	675788	4378868	—

*Trim Kit accommodates both a framed and frameless custom panel design.
Floor Mounting Kits for: Stainless Steel Tall Tub Models Part #8171477, Plastic Tall Tub Models Part #4396194, Standard Tub Models Part #4378968. Power Cord (all models) Part #4317824. Side mount kit for plastic tall tub models Part#8212560. Manual clean filter for models GU3600XTV and GU2800XTV part #W10142911.

DISHWASHER CUSTOM PANEL DIMENSIONS


4" Model: GU3600XTV, GU2800XTV, GU2300XTV, DU1300XTV and DU1055XTV

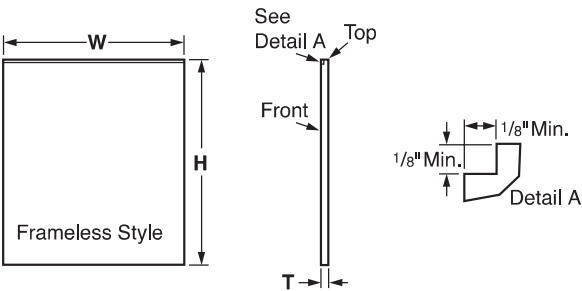

Style	Height (H)	Width (W)	Thickness (T)
Frameless 4"	25 29/32"	23 3/8"	3/4"
Framed 4"	26"	23 1/4"	1/4"

All dimensions are shown in inches.

6" Models: DU945PWS, DU915PWS, DU850SWP, DU811SWP and DU810SWP

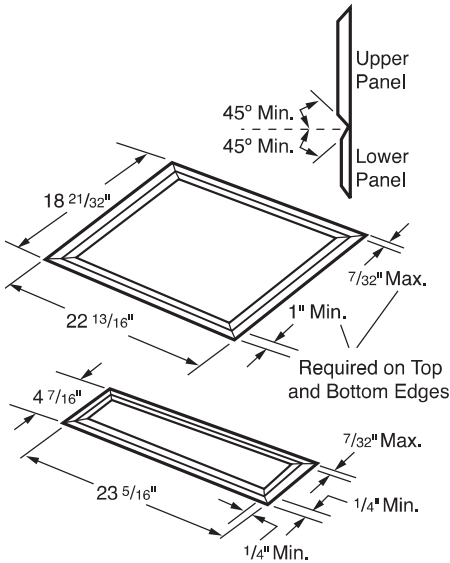


- *Cutting Notes for Custom Panels:
1. Custom panel for door cannot exceed 8 lb. weight.
 2. Upper and lower panels are not the same width.
 3. Match woodgrain direction with that of adjacent cabinets.
 4. Sand panel edges to provide a smooth finish.
 5. Use moisture-resistant sealer on sides and edges of panels to protect from humidity. (Dishwasher is subject to humidity.)

PORTABLE DISHWASHER FEATURES & SPECIFICATIONS

Model No.	DP940PWS	DP840SWS
Capacity	Extra Large	Large
Sound Reduction Package	Quiet Wash	Standard
Tub Size	Standard	Standard
Wash System	Power Clean™	DuraWash™
Cycles	5	5
Pots & Pans	Yes	Yes
Heavy	Yes	Yes
Normal	Yes	Yes
Light	Yes	—
Rinse Only	Yes	Yes
Plate Warmer	—	Yes
Options	4	2
High-Temp Wash†	Yes	—
High-Temp Boost	—	Yes
Drying	Heated Dry	No Heat Dry
Delay Wash	2 1/4/6-Hour	—
Control Lock	Yes	—
Silverware Basket	AnyWare™	Large In-the-Rack
Color Availability*	Q	B

* Q – White, B – Black
† High-Temp Wash maintains 145°F in the main wash when selected, while High-Temp Boost increases the amount of time the heat is on in the wash and rinse cycles.

PORTABLE DISHWASHER DIMENSIONS

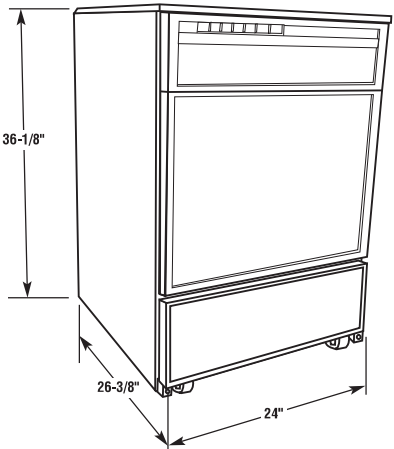


COMPACTOR FEATURES & SPECIFICATIONS

Model No.	Whirlpool Gold®	
	GX900QPP/GC900QPP	TU800SPP
Compacting System		
Two Safety Switches	Yes	Yes
27-Second Cycle Time	Yes	Yes
Compaction Ratio	4 to 1	4 to 1
Convenience		
Clean Touch™ Console	Yes	—
Automatic Anti-Jam	Yes	Yes
Touch-Toe™ Drawer Opener	Yes	Yes
Removable Key/Knob Lock	Yes	Yes
Triple-Action Release Lever/Drop Down Side Drawer	Yes	Yes
Bag Retainer Buttons	Yes	Yes
Quality Construction		
Drawer Dimensions (in.)	14 5⁄8" W x 22 15⁄16" H	14 5⁄8" W x 22" H
1⁄3 HP Motor	Yes	Yes
Twin Power Screws	Yes	Yes
Geared Chain Drive	Yes	Yes
Easy Rollers™ Rear Wheels	Yes	Yes
Under-the-Counter Installation	Yes	Yes
Color Availability*	GX900—Q, T, B, S GC900—Q, B	Q, B

* Q – White-on-White, T – Biscuit-on-Biscuit, B – Black-on-Black and S – Black Console with Stainless Steel Panel

COMPACTOR DIMENSIONS

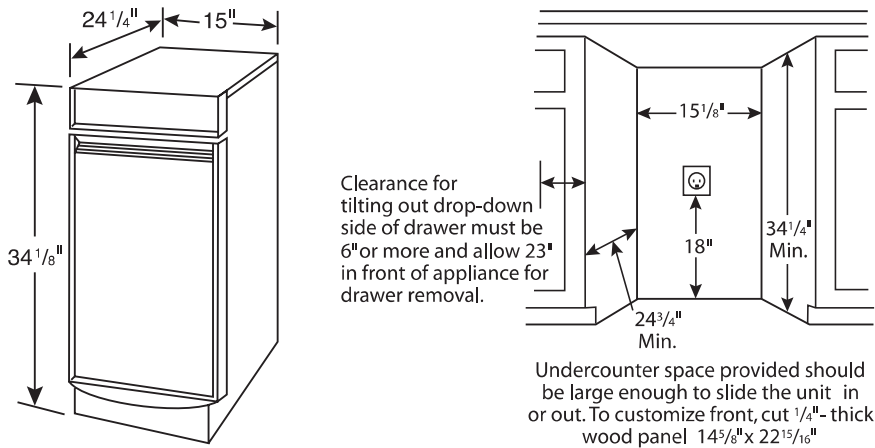




Dimension Guide

DV3 LOT 116 - DRYER


YWED5010LW, WED5050LW, YWED5050LW, WED6150PB, **YWED6150PB**, WED6150PW,
YWED6150PW - Electric
WGD5050LW, WGD6150PW, WGD6150PB - Gas

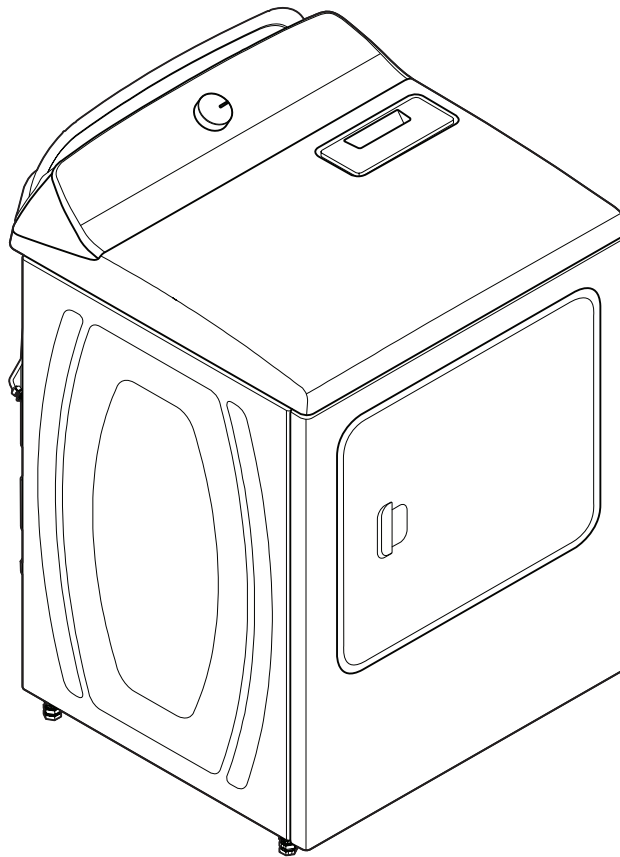

DETAILED PLANNING DIMENSIONS


WARNING: To reduce the risk of fire, electric shock, or injury to persons, read the IMPORTANT SAFETY INSTRUCTIONS and INSTALLATION INSTRUCTIONS, located in your appliance's Owner's Manual, before installing and operating this appliance.

Electrical Requirements		
Fuel Type	Electric	Gas
Minimum Circuit Amperage Rating	30 A	15 A
Maximum AMP Draw	26 A	6 A
Operating Voltage	120/240 V - AC only	120 V - AC only
Current Canada Rating	24 A	N/A
Operating Frequency	60 Hz	

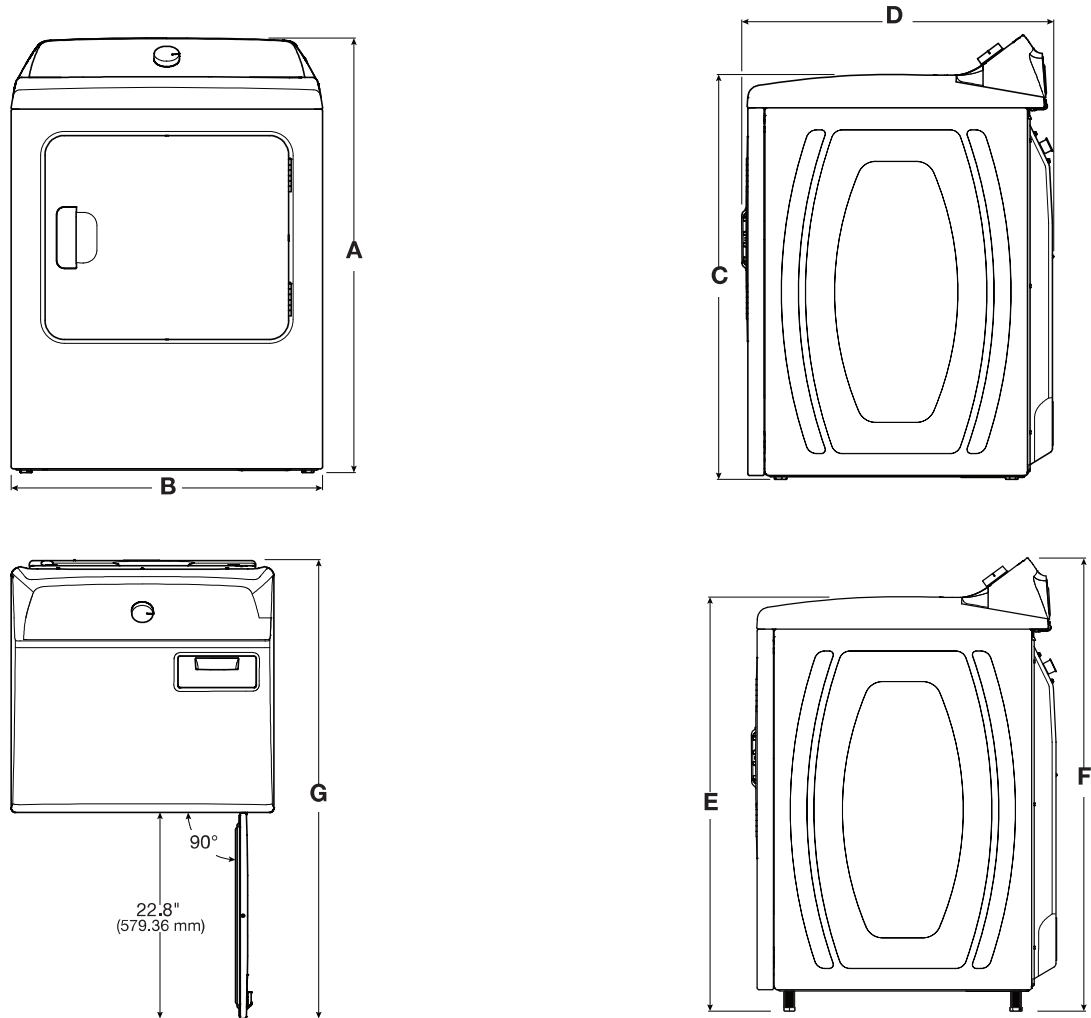

Product Dimensions			
		in	mm
A	Height (With leveling legs not extended)	40½	1028
B	Width	29	737
C	Top Height (with min. feet)	36⅞	937
D	Depth	28⅜	722
E	Top Height (With leveling legs fully extended)	38½	978
F	Height (With leveling legs fully extended)	42⅞	1069
G	Depth with Door Open	50⅞	1288

DETAILED PLANNING DIMENSIONS

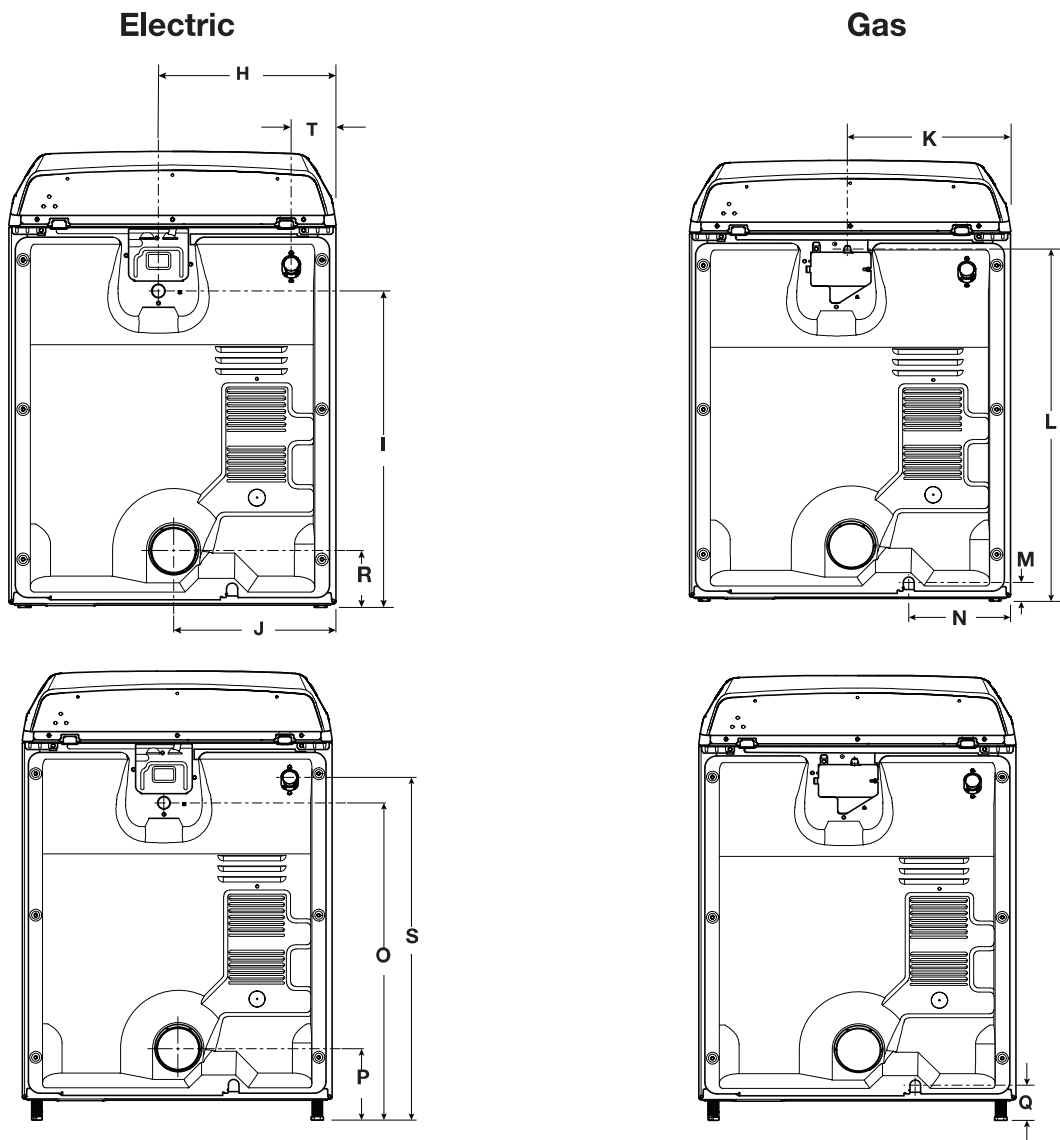


Product Dimensions			
		in	mm
H	Strain Relief from Side (elec)	15¾	400
I	Strain Relief Height (elec) (With leveling legs not extended)	28⅞	714
J	Exhaust Duct from Side	147⁄16	366
K	Power Cord from Side (gas)	14¾	375
L	Power Cord Height (gas)	32⅞	822
M	Gas Connection (With leveling legs not extended)	11¹⁄16	43
N	Gas Connection from Side	9¾	234
O	Strain Relief Height (elec) (With leveling legs fully extended)	29¾	755
P	Exhaust Duct Height (With leveling legs fully extended)	61¹⁄16	170
Q	Gas Connection (With leveling legs fully extended)	3 5⁄16	84
R	Exhaust Duct Height (With leveling legs not extended)	5¹⁄16	128
S	Water Inlet Height (on steam models only)	32⅞	816
T	Water Inlet from Side (on steam models only)	4	101
	Gas Power Cord Length	60	1525
	Power Cord Length (Canadian)	52⅞	1330

DETAILED PLANNING DIMENSIONS

Spacing for recessed area or closet installation

The dimensions shown are for the recommended spacing allowed.

- Additional spacing should be considered for ease of installation and servicing.
- Additional clearances might be required for wall, door, and floor moldings.
- Additional spacing of 1" (25 mm) on all sides of the dryer is recommended to reduce noise transfer.
- For closet installation, with a door, minimum ventilation openings in the top and bottom of the door are required. Louvered doors with equivalent ventilations openings are acceptable.
- Companion appliance spacing should also be considered.

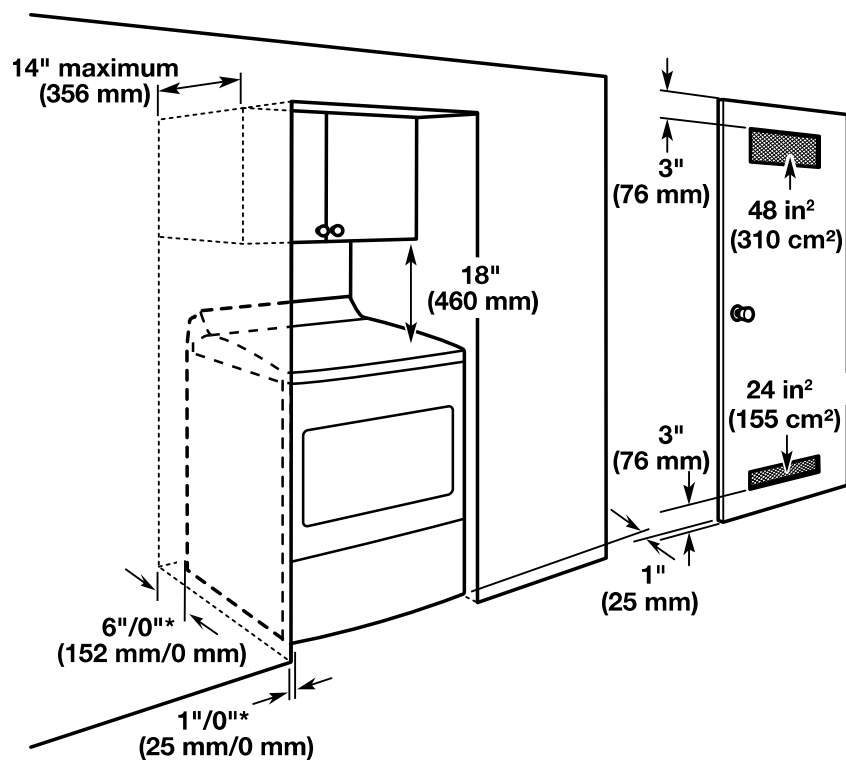

*Recommended/Minimum spacing

Frigidaire Professional

DV3 LOT 116 - FRIDGE



French Door Refrigerator

23.3 Cu. Ft. French Door Counter-Depth Refrigerator

PRFG2383AF

Available Colors : Stainless Steel

Version : 01/22

Refrigerator

Adjustable Temperature Drawer	Yes
Air Filter	Yes
Crisper Color	Smokey
Door Bin Color	Smokey
Humidity Controls	Automatic
Interior Lighting	LED
Produce Keeper Ready	Yes
Produce Keeper Included	Yes
Shelf Material	Glass
Water Filter	Yes
Number of Adjustable Gallon Plus Door Bins	3
Number of Fixed Condiment Door Bins	2
Number of Fixed Gallon Plus Door Bins	3
Total Number of Door Bins	8
Number of Adjustable Shelves	2
Number of Fixed Shelves	1
Number of Crispers	2

Freezer

Auto Close Drawer	Yes
Automatic Defrost	Yes
Basket Divider	Yes
Baskets / Bins Color	White
Interior Lighting	LED
Shelf Material	Glass
Number of Baskets / Bins	1
Number of Pull Out Shelves	1
Total Number of Shelves	1

Ice Maker

Ice Maker	Yes
Ice Maker Location	Frozen Section
Ice Shape	Square

Controls

Air Filter Indicator	Yes
Control Location	Side of Door
Digital Display	Yes
Door Ajar Alarm	Yes
Ice Maker On/Off	Yes
Internal Control Lock	Yes
Mute Sound Control	Yes
On/Off Display	Yes
Power Failure Alarm	Yes
Power On/Off	Yes
Sabbath Mode	Yes
Water Filter Indicator	Yes

Dispenser

Crushed Ice	No
Cube Ice	No
Dispenser	No
Light Control	Yes
Water	Yes

Exterior

Counter-Depth	Yes
Door Finish	Smooth
Door Stops	Yes
Front Rollers	Yes
Rear Rollers	Yes

Dimensions and Volume

Height With Hinge	70"
Height Without Hinge	68 3/10"
Width	36"
Width of Cabinet	35 6/10"
Depth of Cabinet	23 6/10"
Depth With Door	28 1/2"
Depth With Door 90° Open	43 1/2"
Depth With Door and Handle	30 8/10"

Initial
EE RF

Note: For planning purposes only. Always consult local and national electric, gas and plumbing codes.

Refer to Product Installation Guide for detailed installation instructions on the web at frigidaire.com / frigidaire.ca

Specifications subject to change. Accessories information available on the web at frigidaire.com / frigidaire.ca

USA • 10200 David Taylor Drive • Charlotte, NC 28262 • 1-800-FRIGIDAIRE • frigidaire.com

CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4 • 1-800-265-8352 • frigidaire.ca

23.3 Cu. Ft. French Door Counter-Depth
Refrigerator

PRFG2383AF

Version : 01/22

Freezer Capacity	7.1 Cu. Ft.
Fresh Food Capacity	16.2 Cu. Ft.
Total Capacity	23.3 Cu. Ft.

Electrical Specifications

Amps @ 120 Volts	3.3 Amps
Minimum Circuit Required	15 Amps

General Specifications

Condenser Type	Dynamic
Cooling System	Single Evaporator
Leveling Legs	Yes
Refrigerant Type	R-600A
Warranty - Labor	1 Year
Warranty - Parts	1 Year

Performance Certifications and
Approvals

ENERGY STAR Certified	Yes
-----------------------	-----

Safety Certifications and Approvals

CSA Listed	Yes
------------	-----

Note: For planning purposes only. Always consult local and national electric, gas and plumbing codes.

Refer to Product Installation Guide for detailed installation instructions on the web at frigidaire.com / frigidaire.ca

Specifications subject to change. Accessories information available on the web at frigidaire.com / frigidaire.ca


USA • 10200 David Taylor Drive • Charlotte, NC 28262 • 1-800-FRIGIDAIRE • frigidaire.com

CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4 • 1-800-265-8352 • frigidaire.ca

23.3 Cu. Ft. French Door Counter-Depth Refrigerator

PRFG2383AF

Version : 01/22

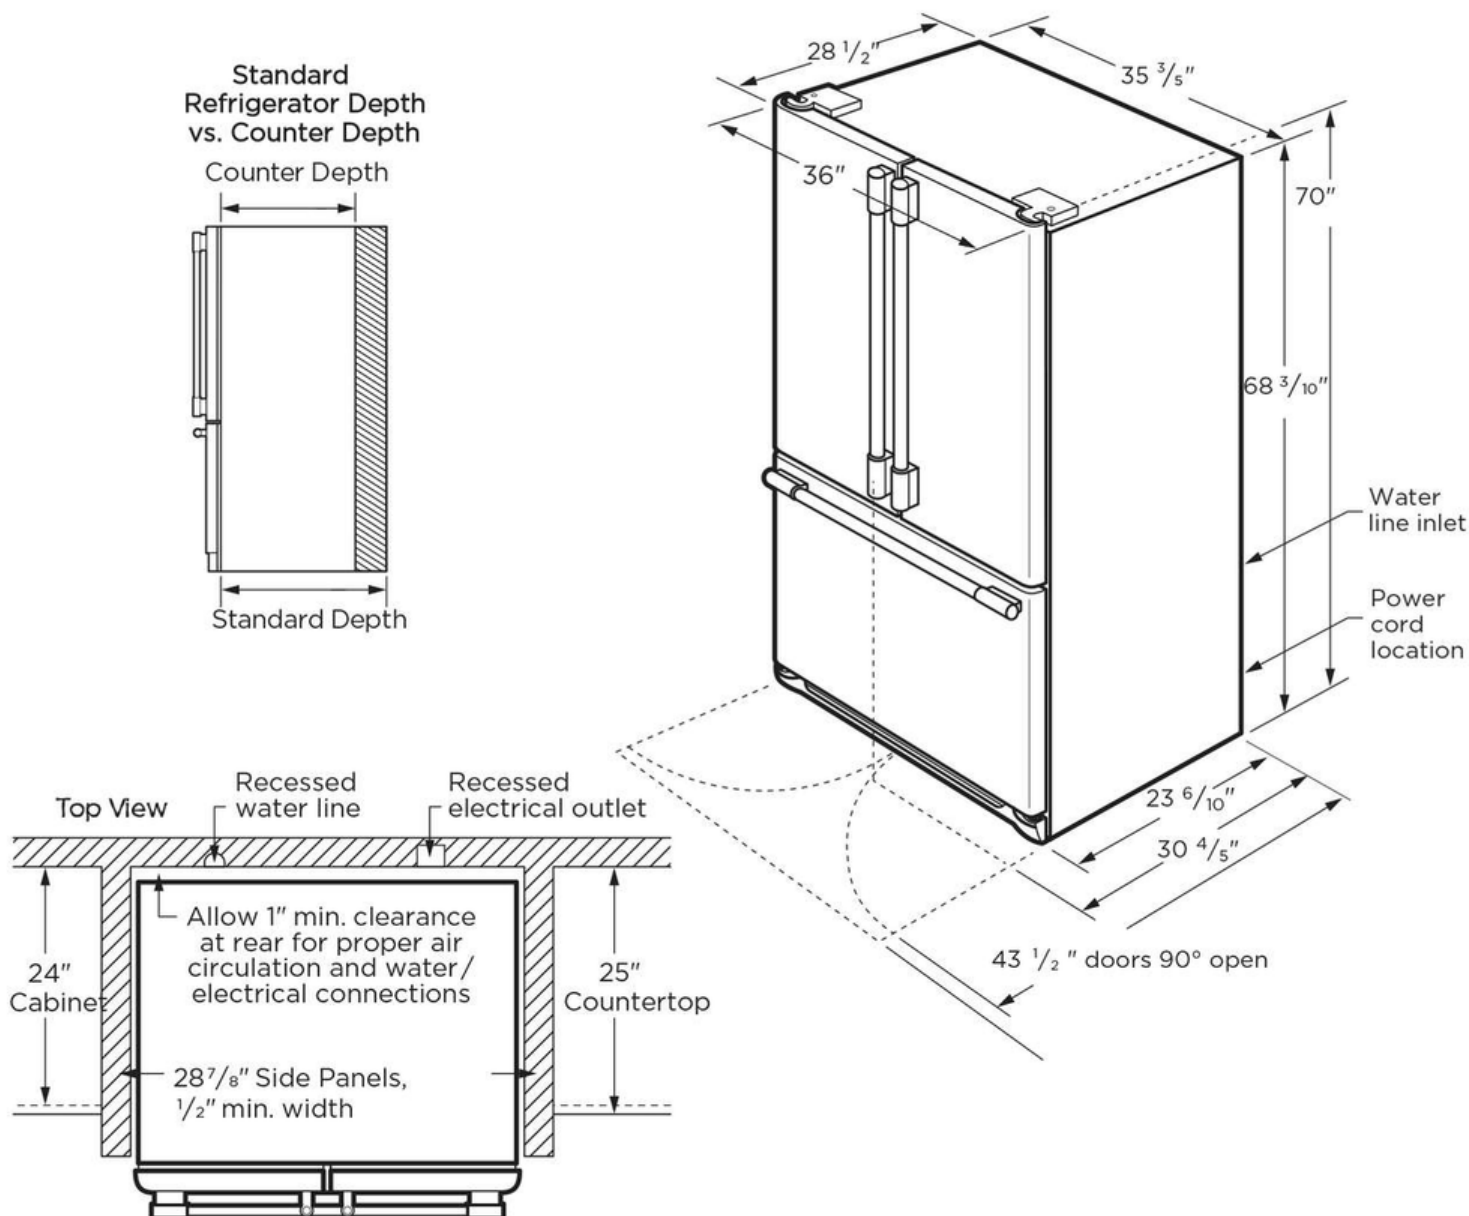

Note: For planning purposes only. Always consult local and national electric, gas and plumbing codes.

Refer to Product Installation Guide for detailed installation instructions on the web at frigidaire.com / frigidaire.ca

Specifications subject to change. Accessories information available on the web at frigidaire.com / frigidaire.ca

USA • 10200 David Taylor Drive • Charlotte, NC 28262 • 1-800-FRIGIDAIRE • frigidaire.com

CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4 • 1-800-265-8352 • frigidaire.ca



Countertop NN-SD671SC

DV3 LOT 116 - MICROWAVE

Model Number		NN-SD671SC
Type		Mid-size
Capacity		1.2 cu.ft.
Technology		Inverter [®]
Power	Microwave	1,200 W
	Grill	NA
	Grill Power Level	NA
	Convection	NA
Combination	Microwave + Grill	NA
	Power Level	NA
Design	Colour	Stainless Steel
	Dial / Button	Silver
	Door Release	Push Open
	Finish	Black
Control Panel	Panel Design	Pop-up Dial + Buttons
Display	Type	4 Digit + Icon
	Colour	Green
	Back Light	yes
Power Level + Other.	Power Level	10
	Delay Start	yes
	Clock	12 Hour
	Child Lock	yes

Initial

EE

Initial

RF

	Stage Cooking	3 Stage
Menu	Sensor	yes
	Turbo Defrost	yes
	Popcorn	yes
	Keep Warm	yes (up to 30 minutes)
	Quick Min	yes (up to 10 minutes)
	Auto Reheat	Sensor Reheat
	# of Auto Cook Categories	14
Turntable Size		340 mm
Accessory		Glass Tray
Trim Kit		NNTK621S
Power Source		120 V / 60 Hz
Power Consumption	Microwave	1,480 W
	Grill	NA
	Combination	NA
Cooking Power	Microwave	1,200 W
	Grill	NA
Dimensions	Outside (W × D × H)	525 × 414 × 310 mm 20.7 x 16.3 x 12.3 inch
	Oven (W × D × H)	355 × 365 × 251 mm 13.9 x 14.4 x 9.9 inch
Weight	Net	12.0 kg
	Shipping	13.5 kg
NOTE		Specifications are subject to change without notice.



30" Front Control Freestanding Electric Range

Electric Range

Available Products: CLEH3054UF

Available Colors: Stainless Steel

Version: 08/22



Product Specifications

Cooktop

Cooking Surface Type	Smooth
Element On Indicator Light	Yes
Hot-Surface Indicator Light	Yes
Keep Warm Zone Light	Yes

Cooking Controls

Bake	Yes
Broil	Yes
Cancel	Yes
Delay Clean	Yes
Keep Warm	Yes
Kitchen Timer	Yes
Lockout	Yes
Off	Yes
Oven Light	Yes
Preheat	Yes
Probe	No
Self Clean	Yes
Temperature Display	Yes
Timed Bake	Yes

Drawer

Drawer Type	Storage
-------------	---------

Display

Display Type	Membrane
Control Location	Front

Electrical Specifications

Minimum Circuit Required	40 Amps
Voltage Rating	240 V

General Specifications

Warranty - Labor	1 Year
Warranty - Parts	1 Year

Safety Certifications and Approvals

CSA Listed	Yes
ETL Listed	No

Cooktop Performance

Right Front Element Burner Size	12"
Right Rear Element Burner Size	6"
Left Rear Element Burner Size	6"
Right Front Element Burner	2,700 Watts
Right Rear Element Burner	1,200 Watts
Left Rear Element Burner	1,200 Watts
Keep Warm Burner Location	Center Rear
Left Front Element Burner (Large)	3,000 Watts
Left Front Element Burner (Small)	1,400 Watts
Left Front Element Burner Size (Large)	9"
Left Front Element Burner Size (Small)	6"

Oven

Bake System	Yes
Bake Element Type	Hidden
Bake Element Pass	8
Bake Element	3,500 Watts
Broil System	Yes
Broil Element Pass	6
Broil Element	3,900 Watts
Rack Position Type	Nickel Ladder
Number of Rack Positions	6
Rack Type 1	Flat
Rack Type 1 Quantity	2
Window Type	Extra Large Visual

Controls

Control Lock	Yes
Sabbath Mode	No

Dimensions and Volume

Height	36 5/8"
Width	29 7/8"
Depth	26 3/4"
Depth With Door 90° Open	47"
Oven Interior Height	18 5/8"
Oven Interior Width	24 3/8"
Oven Interior Depth	19 1/8"
Oven Capacity	5 Cu. Ft.

Installation

Adjustable Leveling Legs	Yes
Power Supply Connection Location	Bottom Center

Available Colors: Stainless Steel

Version: 08/22

ADA Compliant

Yes

[illegible]

Diagram illustrating the height and width dimensions of the oven:

- Height: 36 ⁵/₈" (Adjustable to ±1/4" max.)
- Width: 29 ⁷/₈"




Dimension Guide

Whirlpool® Top Load Washer

DV3 LOT 116 - WASHER



WTW500CMW, WTW6150PB, WTW6150PW, **WTW6157PB**, WTW6157PW

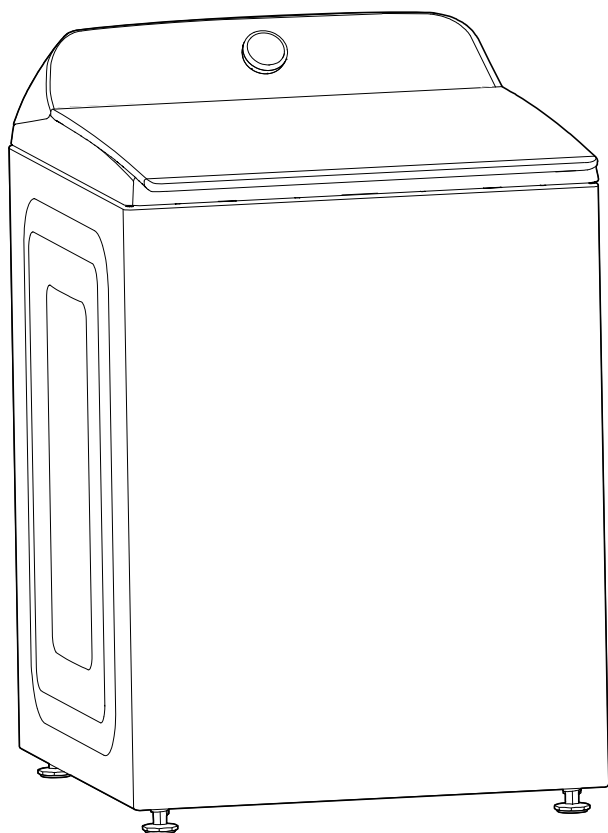

DETAILED PLANNING DIMENSIONS


WARNING: To reduce the risk of fire, electric shock, or injury to persons, read the IMPORTANT SAFETY INSTRUCTIONS and INSTALLATION INSTRUCTIONS, located in your appliance's Owner's Manual, before installing and operating this appliance.

Electrical Requirements	
WTW500CMW, WTW6150PB, WTW6150PW, WTW6157PB, WTW6157PW - 5.3 cu ft DOE (US), 6.1 cu ft IEC (CAN)	
Minimum Circuit Amperage Rating	15 A
Operating Voltage	120 V AC only
Operating Frequency	60 Hz

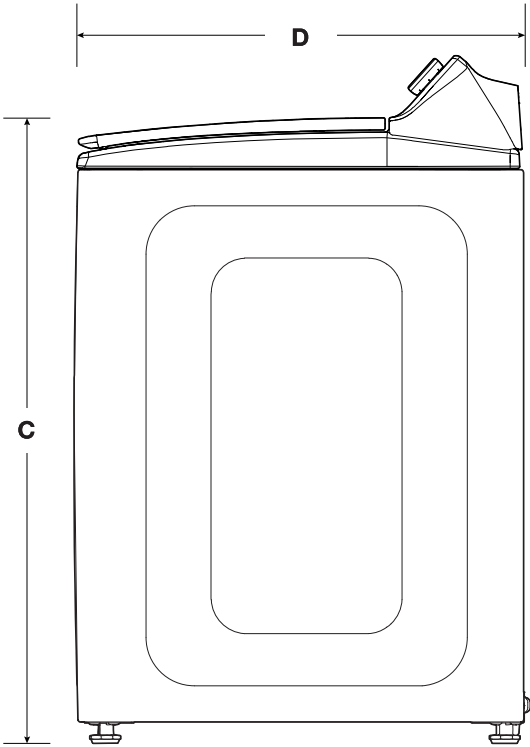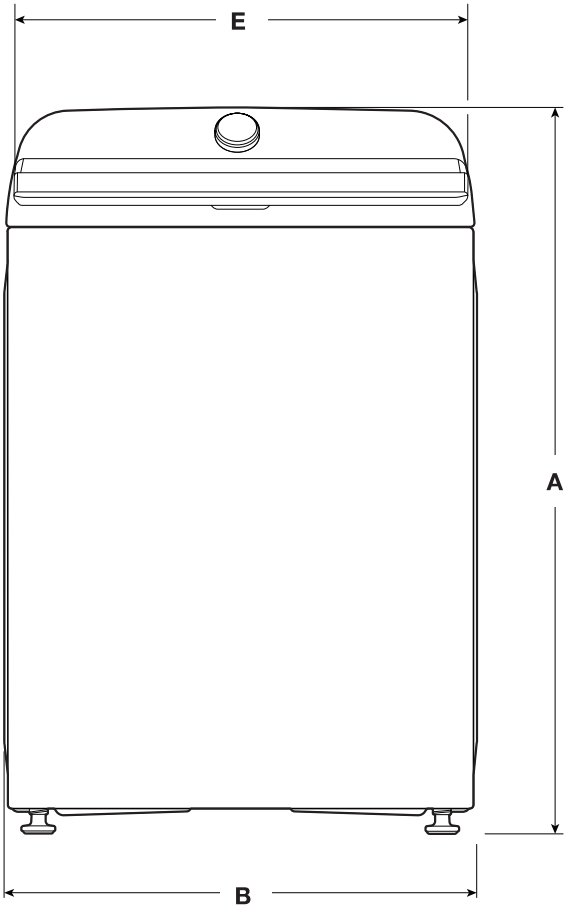

Product Dimensions					
WTW500CMW, WTW6150PB, WTW6150PW, WTW6157PB, WTW6157PW					
		in (minimum)	mm (minimum)	in (maximum)	mm (maximum)
A	Height (with feet)	41 ⁷ / ₈	1064	42 ³ / ₄	1086
B	Width	27 ³ / ₈	695	-	-
C	Top of Lid Height (with feet)	37 ¹ / ₄	946	-	-
D	Depth	28	711	28 ³ / ₄	730
E	Width of Lid	26 ³ / ₈	670	-	-


DETAILED PLANNING DIMENSIONS

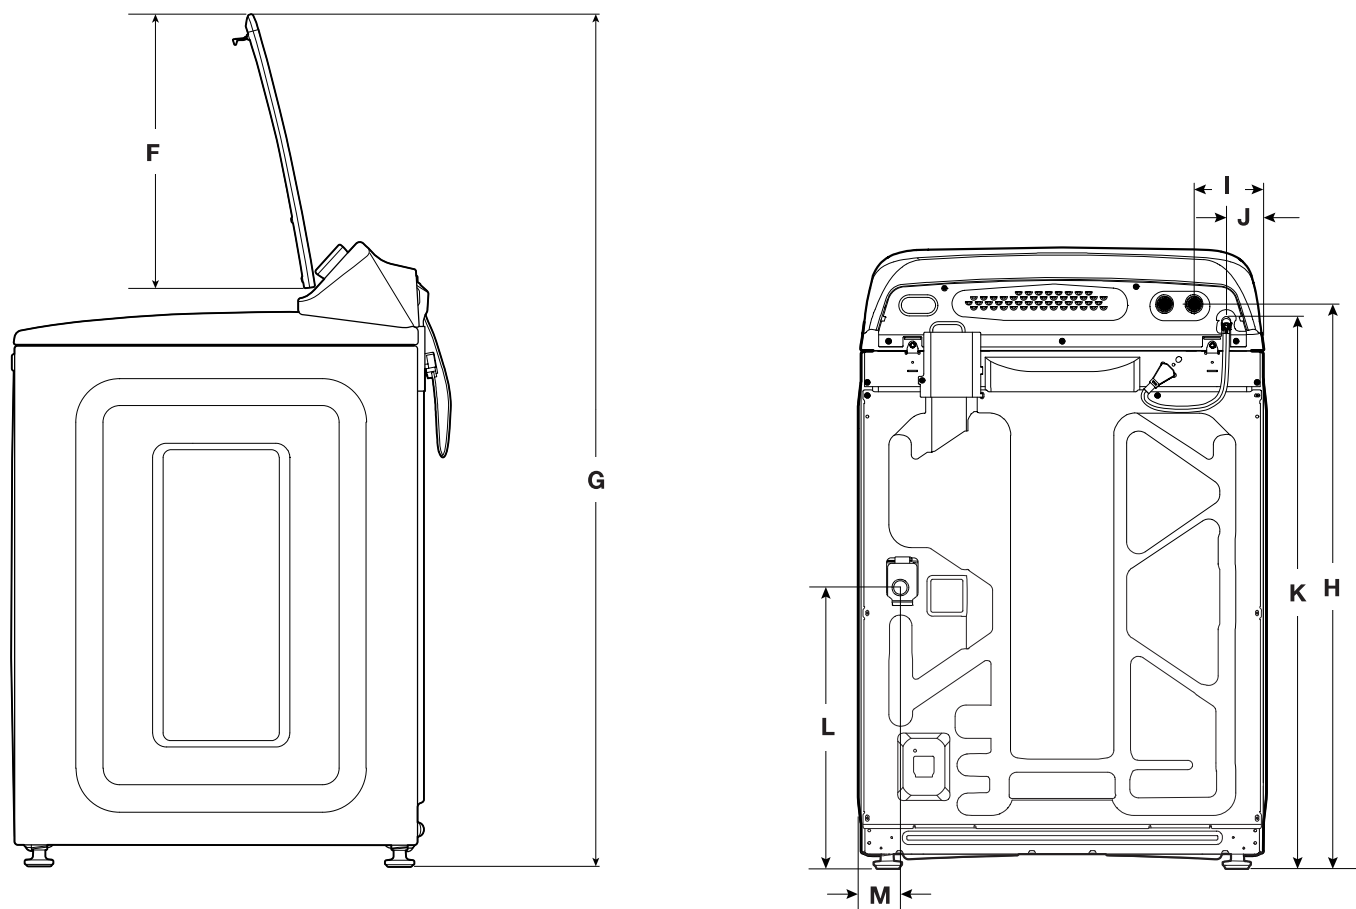

Product Dimensions					
WTW500CMW, WTW6150PB, WTW6150PW, WTW6157PB, WTW6157PW					
		in (minimum)	mm (minimum)	in (maximum)	mm (maximum)
F	Height of Lid	18½	470	-	-
G	Height with Lid Open	57¼	1454	58⅞	1476
H	Water Inlet Valves Height	38¼	972	39⅞	994
I	Water Inlet Valves from Side	4⅞	124	-	-
J	Power Cord from Side	9⅝	244	-	-
K	Power Cord Height	38	965	38¾	984
	Power Cord Length	62	1575	-	-
L	Drain Hose Outlet Height	19¼	489	20⅞	511
M	Drain Hose Outlet from Side	2⅞	73	-	-
	Drain Hose Length	42	1067	-	-
	Diameter of Drain Hose	1	25	-	-

DETAILED PLANNING DIMENSIONS

Minimum closet clearances

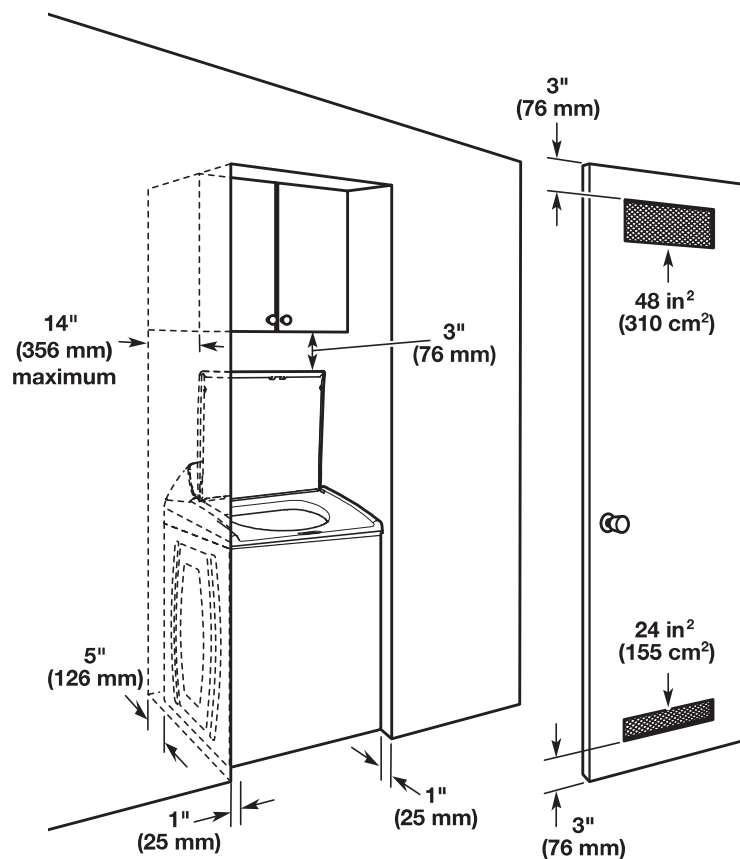

Dimensions show recommended spacing allowed, except for closet door ventilation openings which are minimum required. This washer has been tested for installation with spacing of 0" (0 mm) clearance on the sides. Consider allowing more space for ease of installation and servicing, and spacing for companion appliances and clearances for walls, doors, and floor moldings. Add spacing of 1" (25 mm) on all sides of washer to reduce noise transfer. If a closet door or louvered door is installed, top and bottom air openings in door are required.