



REVISED - 18DEC2024

PW2 LOT 353 - MAIN HOUSE PRIMARY
ENSUITE - FREESTANDING TUB
(MATTE BLACK)

CLIENT
ACCEPTANCE
VIA EMAIL
18DEC2024



see what Delta can do™

BATHROOM FAUCETS

- Portage™ Bath Collection
- Single Handle Roman Tub Faucet with Hand Shower
- Three Hole Installation

STANDARD SPECIFICATIONS:

- Hand Shower maximum flow rate 1.75gpm @ 80psi, 6.6 L/min @ 550kPa
 - Trim only for single handle Roman Tub Faucet with Hand Shower
 - Hand Shower includes double check valves for backflow prevention
 - Temperature only controlled with handle
 - Hot/cold indicator
 - Rough-in Kit must be ordered to complete installation:
 - R3707 for flexible rough-in
 - R3707-MF for flexible PEX cold expansion rough-in
 - R3707-PX for flexible PEX crimp rough-in
 - R3716 for fixed rough-in
 - R3716-MF for fixed PEX cold expansion rough-in
 - R3716-PX for fixed PEX crimp rough-in
- There are separate specification sheets on each rough-in kit, if more detail is required

WARRANTY

- Parts and Finish - Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date of purchase.
- Electronic Parts and Batteries (if applicable) - 5 years from the date of purchase; or for commercial purchasers, 1 year from the date of purchase. No warranty is provided on batteries.




COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
- EPA WaterSense®
- Indicates compliance to ICC/ANSI A117.1

Submitted Model No.: _____

Specific Features: _____

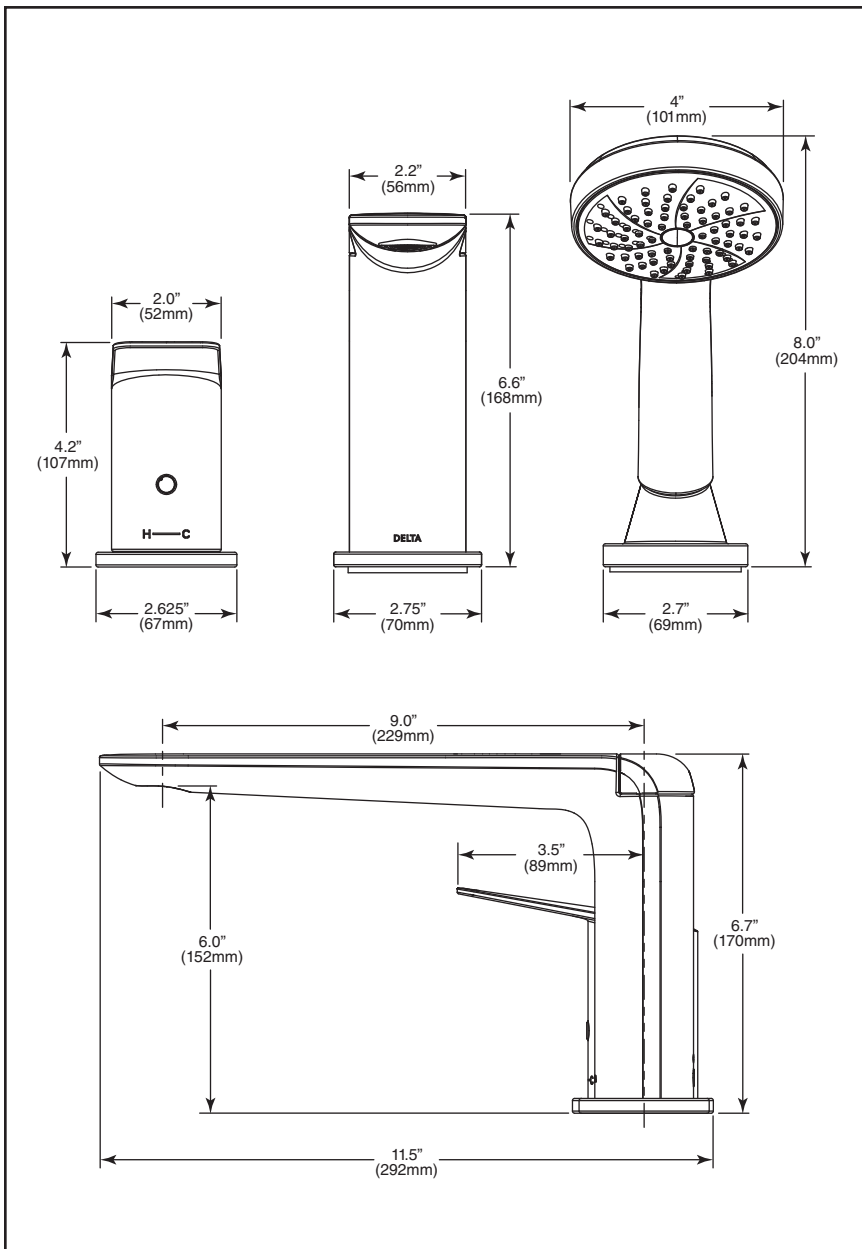

▲ Designate Proper Finish Suffix

Delta Faucet Company reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.deltafaucet.com for finish options and product availability.

DSP-B-T3771, Rev. A

Delta Faucet Company

55 E. 111th Street, Indianapolis, IN 46280
350 South Edgeware Road, St. Thomas, ON N5P 4L1
© 2020 Delta Faucet Company