



30-Aug-21

PRE-Sales Selection Sheet
CHECKLIST

7 of 42

LOT	004-3	* REVISED *	20-2257 ELEV B THE CALVERTON
PURCHASERS: PAUL VIET-PHUONG TRUONG CONTACT NO: 289-388-7078 DANG THI HOA HOANG			
VENDOR: HEATHWOOD HOMES (UPCOUNTRY) LIMITED			

☒ UPGRADED 5 1/4" BASEBOARDS AND 3" INTEGRATED BACKBOARD CASINGS

☐ FINISHED BASEMENT

☐ COLD CELLAR

UPGRADED / MODIFIED ELEVATION

☐ CORNER UPGRADE ☐ WALK OUT DECK

☐ SIDE UPGRADE ☐ WALK OUT BASEMENT

☐ REAR UPGRADE

CEILING UPGRADE - SMOOTH

☒ MAIN FLOOR * ☒ BASEMENT *

☒ SECOND FLOOR *

ADDITIONAL ROUGH-INS

☒ 200 AMP SERVICE ☐ HUMIDIFIER

☐ WET BAR ROUGH IN ☒ AIRCON

GAS ROUGH-IN

☐ STOVE ☐ DRYER

☐ BBQ ☐ ADDITIONAL FIREPLACE

HOODFAN VENTING

☐ 6" ROUND DUCT

☒ 7" ROUND DUCT

FULL BASEMENT STAIRS: PAINT GRADE

UPPER BASEMENT STAIRS: N/A

LOWER BASEMENT STAIRS: N/A

STAIRS TO LOWER LEVEL: ALL OAK

STAIRS TO UPPER LEVEL: N/A

MAIN STAIRS: ALL OAK

MEDIA STAIRS (if applicable): N/A

SEPT. 1/21	Signatures on file	SEPT. 1/21	TINA LE-FUR
Date	Purchaser	Date	Décor Consultant
		- APPROVED -	
Date	Purchaser	M. Rosen	
		Date Approved	HEATHWOOD HOMES (UPCOUNTRY) LIMITED

LOT 004-3

20-2257 ELEV B THE CALVERTON

PURCHASERS: PAUL VIET-PHUONG TRUONG
DANG THI HOA HOANG

CONTACT NO: 289-388-7078

VENDOR: HEATHWOOD HOMES (UPCOUNTRY) LIMITED

Appliances

6-34 Kitchen HoodFan

UPG

☐ Air King Under Cabinet Range Hood STAINLESS STEEL AV1308
STD 30" PAGE 28

Cabinetry

1-9157 Kitchen Cabinet Colour/Style

☐ SIMCOE MOONLIGHT Viking III STD 3DL

3-2086 Kitchen Cabinet Hardware

☐ HARDWARE 9677 STD

25-9157 Main Bathroom Cabinet Colour/Style

☐ SIMCOE MOONLIGHT Viking III STD 3DL

29-2086 Main Bathroom Cabinet Hardware

☐ HARDWARE 9677 STD

28-8796 Main Bathroom Countertop

☐ Countertop PALOMA POLAR ETCHINGS FINISH 6698-46
Formica

20-9157 Master Ensuite Cabinet Colour/Style

☐ SIMCOE MOONLIGHT Viking III STD 3DL

22-2086 Master Ensuite Cabinet Hardware

☐ HARDWARE 9677 STD

21-8796 Master Ensuite Countertop

☐ Countertop PALOMA POLAR ETCHINGS FINISH 6698-46
Formica

44-9157 Powder Room Lower Level Cabinet Colour/Style

☐ SIMCOE MOONLIGHT Viking III STD 3DL

44-2086 Powder Room Lower Level Cabinet Hardware

☐ HARDWARE 9677 STD

44-8796 Powder Room Lower Level Countertop

☐ Countertop PALOMA POLAR ETCHINGS FINISH 6698-46
Formica

Carpet

37-9248 Bedroom 2 Flooring

☐ Dynasty Tex 40 oz Poly BLACK ICE DY 89418 STD

38-9248 Bedroom 3 Flooring

☐ Dynasty Tex 40 oz Poly BLACK ICE DY 89418 STD

14-9248 Family Room Flooring

☐ Dynasty Tex 40 oz Poly BLACK ICE DY 89418 STD

36-9248 Master Bedroom Flooring

☐ Dynasty Tex 40 oz Poly BLACK ICE DY 89418 STD

52-1079 Throughout Underpad

☐ Underpad 500 Series STD

Ceramics

16-9116 Foyer Flooring

☒ Eterna Medium Grey Polished OV.ET.MGR.2424.PL UPG 6 24
x 24

17-2225 Foyer Grout

☐ Grout (27) Silver STD

1. The Purchaser acknowledges these selections are subject to the terms and conditions of the applicable Agreement of Purchase and Sale.
2. The Purchaser acknowledges that the Vendor accepts no responsibility in the event the Vendor is unable to supply a selection. The Purchaser agrees to reselect from the currently available selections immediately upon request.
3. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
4. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
5. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
6. Selections will not be processed unless signed by Heathwood Homes Head Office.
7. The colour selections made on the Colour Chart are final and cannot be changed once submitted.
8. The Purchaser has checked and acknowledges the accuracy of this Colour Chart.

Date

Aug 10, 2021

Purchaser

Paul at my

8/10/21

Date

Aug 10, 2021

Purchaser

my

8/10/21

Décor Consultant

TINA LEFUR

Date Approved

HEATHWOOD HOMES (UPCOUNTRY)
LIMITED



HEATHWOOD

Interior Finishing Selection Sheet

10-AUG-21

LOT 004-3

20-2257/ELEV B THE CALVERTON

PURCHASERS: PAUL VIET-PHUONG TRUONG
DANG THI HOA HOANG

CONTACT NO: 289-388-7078

VENDOR: HEATHWOOD HOMES (UPCOUNTRY) LIMITED

Ceramics

UPG

7-9116 Kitchen/Breakfast Flooring	☒ Eterna Medium Grey Polished OV.ET.MGR.2424.PL UPG 6 24 x 24
8-2225 Kitchen/Breakfast Grout	☐ Grout (27) Silver STD
86-9257 Laundry Room Flooring	☐ CARRARA White / Grey GE.CR.WHIT.1313.MT STD 13 x 13
87-2225 Laundry Room Grout	☐ Grout (27) Silver STD
30-9115 Main Bathroom Flooring	☒ Eterna Medium Grey Polished OV.ET.MGR.1224.PL UPG 5 12 x 24 SEE SKETCH # 9 PAGE 17 FOR 12 X 24 TILE DIRECTION
31-2225 Main Bathroom Grout	☐ Grout (27) Silver STD
27-9022 Main Bathroom Tub Wall Tile	☐ Weave Tender Grey QT.WV.TGR.0810 STD 8 x 10 INSTALL STACKED HORIZONTAL
26-7705 Main Bathroom Tub Wall Tile Grout	☒ Upgrade Grout (01) Alabaster U/G
23-9116 Master Ensuite Floor Tile	☒ Eterna Medium Grey Polished OV.ET.MGR.2424.PL UPG 6 24 x 24
24-2225 Master Ensuite Floor Tile Grout	☐ Grout (27) Silver STD
73-8665 Master Ensuite Shower Floor Tile	☒ Ontario Series Mosaic Taupe Matte OD.ON.TPE.0202.MT.N UPG 1 2 x 2
74-7704 Master Ensuite Shower Floor Tile Grout	☒ Grout (19) Pearl Gray STD
147-8923 Master Ensuite Shower Jamb(s) and Sill(s)	☐ Shower Jamb / Sill Thassos White STD
104-9022 Master Ensuite Shower Wall Tile	☐ Weave Tender Grey QT.WV.TGR.0810 STD 8 x 10 INSTALL STACKED HORIZONTAL
105-7705 Master Ensuite Shower Wall Tile Grout	☒ Upgrade Grout (01) Alabaster U/G
191-9115 Mud Room Flooring	☒ Eterna Medium Grey Polished OV.ET.MGR.1224.PL UPG 5 12 x 24 SEE SKETCH # 6 PAGE 17 FOR 12 X 24 TILE DIRECTION
190-2225 Mud Room Grout	☐ Grout (27) Silver STD
32-9115 Powder Room Flooring	☒ Eterna Medium Grey Polished OV.ET.MGR.1224.PL UPG 5 12 x 24 SEE SKETCH # 7 PAGE 18 FOR 12 X 24 TILE DIRECTION
33-2225 Powder Room Grout	☐ Grout (27) Silver STD

1. The Purchaser acknowledges these selections are subject to the terms and conditions of the applicable Agreement of Purchase and Sale.
2. The Purchaser acknowledges that the Vendor accepts no responsibility in the event the Vendor is unable to supply a selection. The Purchaser agrees to reselect from the currently available selections immediately upon request.
3. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
4. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
5. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
6. Selections will not be processed unless signed by Heathwood Homes Head Office.
7. The colour selections made on the Colour Chart are final and cannot be changed once submitted.
8. The Purchaser has checked and acknowledges the accuracy of this Colour Chart.

Date	Aug 10, 2021	Purchaser	Paul Truong	Date	8/10/2021	Décor Consultant	Tina Lefur
Date	Aug 10, 2021	Purchaser	DMH	Date	8/10/2021	Décor Consultant	MyRosen

Date Approved: HEATHWOOD HOMES (UPCOUNTRY) LIMITED

LOT 004-3

20-2257 ELEV B THE CALVERTON

PURCHASERS: PAUL VIET-PHUONG TRUONG

CONTACT NO: 289-388-7078

DANG THI HOA HOANG

VENDOR: HEATHWOOD HOMES (UPCOUNTRY) LIMITED

UPG

Ceramics

389-9115 Powder Room Lower Level Flooring

☒ Eterna Medium Grey Polished OV.ET.MGR.1224.PL UPG 5 12 x 24 SEE SKETCH # 6
TILE DIRECTION

370-2225 Powder Room Lower Level Grout

☐ Grout (27) Silver STD

53-2232 Throughout Thresholds

☐ Metal Thresholds STD

Electrical

90-5796 Throughout Switches and Plug

☐ Decora White Switches and Plugs STD

Fireplace

136-8891 Great Room Fireplace Mantle

☐ Paint Grade Mantle- Cabinet (Per Plan) WHITE NF-17 STD
PAGE 22

135-8865 Great Room Fireplace Type

☐ Dimplex FP3033HL Electric Fireplace

Granite

2-9121 Kitchen Countertop

☒ MSI Quartz ICED WHITE Group 1 UPG 3/4" with Mitered Edge

Hardwood

11-7502 Great Room Flooring

☐ Vintage Northern Solid Sawn Engineered Select V : Red Oak Pearl PEWTER Red Oak Pearl 3/4" x 3 1/4"

387-7502 Lower Level Hall Flooring

☐ Vintage Northern Solid Sawn Engineered Select V : Red Oak Pearl PEWTER Red Oak Pearl 3/4" x 3 1/4"

100-7502 Main Stairs Landing(s) Flooring

☐ Vintage Northern Solid Sawn Engineered Select V : Red Oak Pearl PEWTER Red Oak Pearl 3/4" x 3 1/4"

78-7502 Stair Landing to Lower Level Flooring

☐ Vintage Northern Solid Sawn Engineered Select V : Red Oak Pearl PEWTER Red Oak Pearl 3/4" x 3 1/4"

35-7502 Upper Hall Flooring

☐ Vintage Northern Solid Sawn Engineered Select V : Red Oak Pearl PEWTER Red Oak Pearl 3/4" x 3 1/4"

Interior Railings

145-8148 Main Stairs Handrail/Pickets/Posts Type

☐ Single Collar Alt. Plain w/ Shoes with 3 1/2" Square/Cap Post(s) BLACK METAL STD

49-8148 Stairs to Lower Level Handrail/Pickets/Posts Type

☐ Single Collar Alt. Plain w/ Shoes with 3 1/2" Square/Cap Post(s) BLACK METAL STD

Interior Stairs

- The Purchaser acknowledges these selections are subject to the terms and conditions of the applicable Agreement of Purchase and Sale.
- The Purchaser acknowledges that the Vendor accepts no responsibility in the event the Vendor is unable to supply a selection. The Purchaser agrees to reselect from the currently available selections immediately upon request.
- The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
- Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
- The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
- Selections will not be processed unless signed by Heathwood Homes Head Office.
- The colour selections made on the Colour Chart are final and cannot be changed once submitted.
- The Purchaser has checked and acknowledges the accuracy of this Colour Chart.

Date Aug 10, 2021

Purchaser

Date

Date 8/10/21

Décor Consultant

Date Aug 10, 2021

Purchaser

Date Approved HEATHWOOD HOMES (UPCOUNTRY) LIMITED



10-Aug-21

HEATHWOOD

Interior Finishing Selection Sheet

LOT 004-3

20-2257 ELEV B THE CALVERTON

PURCHASERS: PAUL VIET-PHUONG TRUONG
DANG THI HOA HOANG

CONTACT NO: 289-388-7078

VENDOR: HEATHWOOD HOMES (UPCOUNTRY) LIMITED

Interior Stairs

116-1713 Basement Stairs Type

142-1712 Main Stairs Type

45-1712 Stairs to Lower Level Type

Interior Trim

51-8704 Throughout Trim Size

Painting

143-7761 Main Stairs Colour

46-7761 Stairs to Lower Level Colour

240-1716 Throughout Trim - Paint Colour

51-1717 Throughout Walls - Paint Colour

Plumbing

266-1737 Main Bathroom Plumbing Fixture (Colour)

149-1737 Master Ensuite Plumbing Fixture (colour)

34-1737 Powder Room Plumbing Fixture (Colour)

371-1737 Powder Room Lower Level Plumbing Fixture (Colour)

UPG

☐ Paint Grade Stairs STD

☐ Oak Stairs UPG_1

☐ Oak Stairs UPG_1

☒ 5 1/4" Baseboards and 3" Integrated Backbend Casings STD-Singles UPGRADING BOTH TRIMS - SEE SSS

☐ Stain handrail, stringers, treads, risers, nosing & posts. (Metal pickets) STAIRS TO BE STAINED TO COMPLEMENT PEWTER HARDWOOD. STAIRS WILL VARY FROM FLOORS

☐ Stain handrail, stringers, treads, risers, nosing & posts. (Metal pickets) STAIRS TO BE TSINED TO COMPLEMENT PEWTER HARDWOOD. STAIRS WILLVARY FROM FLOORS

☐ Trim WHITE STD

☐ Wall WARM GREY 22 STD

☐ Plumbing Fixtures WHITE STD

☐ Plumbing Fixtures WHITE STD

☐ Plumbing Fixtures WHITE STD

☐ Plumbing Fixtures WHITE STD

1. The Purchaser acknowledges these selections are subject to the terms and conditions of the applicable Agreement of Purchase and Sale.
2. The Purchaser acknowledges that the Vendor accepts no responsibility in the event the Vendor is unable to supply a selection. The Purchaser agrees to reselect from the currently available selections immediately upon request.
3. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
4. The Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
5. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
6. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
7. Selections will not be processed unless signed by Heathwood Homes Head Office.
8. The colour selections made on the Colour Chart are final and cannot be changed once submitted.
9. The Purchaser has checked and acknowledges the accuracy of this Colour Chart.

Date Aug 10, 2021

Purchaser

Date

APPROVED: Décor Consultant

Date Aug 10 2021

Purchaser

Date Approved HEATHWOOD HOMES (UPCOUNTRY)

LIMITED--

PURCHASERS: PAUL VIET-PHUONG TRUONG CONTACT NO: 289-388-7078
DANG THI HOA HOANG

VENDOR: HEATHWOOD HOMES (UPCOUNTRY) LIMITED

HST #

is herein understood and agreed between the undersigned parties hereto that the following changes shall be made to the above mentioned Agreement of Purchase and Sale in accordance with the agreement and except for such changes noted below, all other terms and conditions in the Agreement of Purchase and Sale shall remain as stated herein: It is further understood that and agreed that all changes and additions shall be installed as per builder's specifications, and available selections. The Purchaser hereby agrees to purchase the following extras:

AMOUNT:

Cabinetry

992 Optional Upgrade

Classic Kitchen
Optional Classic Kitchen (Top Drawers in lieu of Bank of Drawers, Crown Moulding, Deep Fridge Uppers, Soft Close Doors and Soft Close Drawers) VIKING I/II/III

Sketch # 8 PAGE 19

Qty: 1

Ceramics

1001 Upgrade 6 Tile

Foyer Floor

Qty: 1

1006 Upgrade 6 Tile

Kit/Brk Floor

Qty: 1

1003 Upgrade 5 Tile
SEE SKETCH # 6

L Flr.Pow Floor

Qty: 1

1007 Upgrade 6 Tile

PAGE 17 FOR 12 X 24 TILE DIRECTION

M. Ensuite Floor

Qty: 1

1000 Upgrade 1 Tile

M. Ensuite Shower
Floor

Qty: 1

1000 Upgrade Grout

M. Ensuite Shower
Floor

Qty: 1

998 Upgrade Grout

M. Ensuite Wall

Qty: 1

- This Sales Selection Sheet when properly executed forms part of our Agreement of Purchase and Sale.
- All extras and upgrades listed above are subject to Construction Progress and Architectural and Municipal requirements.
- In the event the Vendor is unable to incorporate the work approved above in the construction of the house for any reason whatsoever, the Vendor will not be liable to the Purchaser in any way. The monies paid for any changes or optional extras not proceeded with shall be returned to the Purchaser, without interest. The cost of options or extras is non-refundable in all other circumstances. If for any reason whatsoever the Agreement of Purchase and Sale is not completed, the total cost of work approved above will be retained by the Vendor.
- The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
- The Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
- The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
- Selections will not be processed unless signed by Heathwood Homes Head Office.
- The selections made on this schedule are final and cannot be changed once submitted.
- The Purchaser has checked and acknowledges the accuracy of this schedule.

Date Aug 10, 2021

Purchaser

Date

Date Aug 10, 2021

Purchaser

Date

Date: 8/10/21 Décor Consultant

Date Approved: HEATHWOOD HOMES (UPCOUNTRY) LIMITED



10-Aug-21

Sales Selection Sheet

LOT 004-3

20-2257 ELEV B THE CALVERTON

PURCHASERS: PAUL VIET-PHUONG TRUONG

CONTACT NO: 289-388-7078

DANG THI HOA HOANG

VENDOR: HEATHWOOD HOMES (UPCOUNTRY) LIMITED

HST #

is herein understood and agreed between the undersigned parties hereto that the following changes shall be made to the above mentioned Agreement of purchase and Sale in accordance with the agreement and except for such changes noted below, all other terms and conditions in the Agreement of Purchase and Sale shall remain as stated herein: It is further understood that and agreed that all changes and additions shall be installed as per builder's specifications, location and available selections. The Purchaser hereby agrees to purchase the following extras:

AMOUNT:

1002 Upgrade 5 Tile SEE SKETCH # 7 M.Flr.Pow Floor Qty: 1

PAGE 18 FOR 12 X 24 TILE DIRECTION

1008 Main Bth Floor Qty: 1

PAGE 20 FOR 12 X 24 TILE DIRECTION

399 Main Bth Wall Qty: 1

1004 Mud Room Qty: 1

PAGE 17 FOR 12 X 24 TILE DIRECTION

1013 Ceiling Upgrades Smooth Ceilings Basement Qty: 1

1013 Ceiling Upgrades Smooth Ceilings Main Floor Qty: 1

1013 Ceiling Upgrades Smooth Ceilings Second Floor Qty: 1

Electrical GREAT ROOM Qty: 1

284 Optional Extras Extra wall interior outlet on Existing Circuit (does not include kitchen outlets) TO BE CENTERED +/- ABOVE FIREPLACE 70" +/- FROM THE FLOOR

SKETCH # 7 PAGE 18

1. This Sales Selection Sheet when properly executed forms part of our Agreement of Purchase and Sale.
2. All extras and upgrades listed above are subject to Construction Progress and Architectural and Municipal requirements.
3. In the event the Vendor is unable to incorporate the work approved above in the construction of the house for any reason whatsoever, the Vendor will not be liable to the Purchaser in any way. The monies paid for any changes or optional extras not proceeded with shall be returned to the Purchaser, without interest. The cost of options or extras is non-refundable in all other circumstances. If for any reason whatsoever the Agreement of Purchase and Sale is not completed, the total cost of work approved above will be retained by the Vendor.
4. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
5. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
6. The Vendor reserves the right to select Grout & Thresholds that best suits the tile selected.
7. The Vendor reserves the right to select Grout & Thresholds that best suits the tile selected.
8. The Vendor reserves the right to select Grout & Thresholds that best suits the tile selected.
9. The Vendor reserves the right to select Grout & Thresholds that best suits the tile selected.
10. The Vendor reserves the right to select Grout & Thresholds that best suits the tile selected.
11. The Vendor reserves the right to select Grout & Thresholds that best suits the tile selected.
12. The Vendor reserves the right to select Grout & Thresholds that best suits the tile selected.
13. The Vendor reserves the right to select Grout & Thresholds that best suits the tile selected.
14. The Vendor reserves the right to select Grout & Thresholds that best suits the tile selected.
15. The Vendor reserves the right to select Grout & Thresholds that best suits the tile selected.
16. The Vendor reserves the right to select Grout & Thresholds that best suits the tile selected.
17. The Vendor reserves the right to select Grout & Thresholds that best suits the tile selected.
18. The Vendor reserves the right to select Grout & Thresholds that best suits the tile selected.
19. The Vendor reserves the right to select Grout & Thresholds that best suits the tile selected.
20. The Vendor reserves the right to select Grout & Thresholds that best suits the tile selected.

Date Aug 10, 2021

Purchaser

Date 8/10/21

Décór Consultant

Date Aug 10 2021

Purchaser

Date Approved

HEATHWOOD HOMES (UPCOUNTRY) LIMITED

LOT 004-3

20-2257 ELEV B THE CALVERTON

PURCHASERS: PAUL VIET-PHUONG TRUONG

CONTACT NO: 289-388-7078

DANG THI HOA HOANG

VENDOR: HEATHWOOD HOMES (UPCOUNTRY) LIMITED

HST #

is herein understood and agreed between the undersigned parties hereto that the following changes shall be made to the above mentioned Agreement of purchase and Sale in accordance with the agreement and except for such changes noted below, all other terms and conditions in the Agreement of Purchase and Sale shall remain as stated herein: It is further understood that and agreed that all changes and additions shall be installed as per builder's specifications, location and available selections. The Purchaser hereby agrees to purchase the following extras:

AMOUNT:

Qty: 1

Optional Extras
GREAT ROOM

Ceiling rough-in (Capped)

TO BE CENTERED +/- IN GREAT ROOM CEILING

USE EXISTING SWITCH FOR
SWITCHED PLUG SKETCH # 7 PAGE 18

Fireplace

14

Qty: 1

Purchasers have been advised: heat from the FP can damage TV above a FP and items placed on mantle. Purchasers acknowledge: Heathwood Homes and its contractors will not be liable for any damage on items placed/installed above a FP after closing

Granite

1014

Qty: 1

Optional Upgrade

Countertop 3/4" GROUP 1 with double edge

Kitchen
Interior Trim

1198

Qty: 1

Optional Upgrade

Upgrade Trim and Baseboard

Plumbing

226

Qty: 1

STANDARD Kitchen Sink Option

KINDRED Kitchen Sink Collection - Reginox NS1930U/9 Stainless Kitchen Single

Bowl Undermount Sink (or equivalent)

KITCHEN

PAGE 23

1. This Sales Selection Sheet when properly executed forms part of our Agreement of Purchase and Sale.

2. All extras and upgrades listed above are subject to Construction Progress and Architectural and Municipal requirements.

3. In the event the Vendor is unable to incorporate the work approved above in the construction of the house for any reason whatsoever, the Vendor will not be liable to the Purchaser in any way. The monies paid for any changes or optional extras not proceeded with shall be returned to the Purchaser, without interest. The cost of options or extras is non-refundable in all other circumstances. If for any reason whatsoever the Agreement of Purchase and Sale is not completed, the total cost of work approved above will be retained by the Vendor. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.

4. The Vendor acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.

5. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.

6. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.

7. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.

8. The selections made on this schedule are final and cannot be changed once submitted.

9. The Purchaser has checked and acknowledges the accuracy of this schedule.

Date Aug 10, 2021

Purchaser

TINA LEFOR

Date Aug 10 2021

Purchaser

Date: Aug 10, 2021 - Décor Consultant



Date-Approved HEATHWOOD HOMES (UPCOUNTRY)
LIMITED



Sales Selection Sheet
5 of 2

10-Aug-21

LOT 004-3

20-2257 ELEV B THE CALVERTON

PURCHASERS: PAUL VIET-PHUONG TRUONG

CONTACT NO: 289-388-7078

DANG THI HOA HOANG

VENDOR: HEATHWOOD HOMES (UPCOUNTRY) LIMITED

HST #

is herein understood and agreed between the undersigned parties hereto that the following changes shall be made to the above mentioned Agreement of Purchase and Sale in accordance with the agreement and except for such changes noted below, all other terms and conditions in the Agreement of Purchase and Sale shall remain as stated herein. It is further understood that and agreed that all changes and additions shall be installed as per builder's specifications, location and available selections. The Purchaser hereby agrees to purchase the following extras:

AMOUNT:

- This Sales Selection Sheet when properly executed forms part of our Agreement of Purchase and Sale.
1. All extras and upgrades listed above are subject to Construction Progress and Architectural and Municipal requirements.
 2. In the event the Vendor is unable to incorporate the work approved above in the construction of the house for any reason whatsoever, the Vendor will not be liable to the Purchaser in any way. The monies paid for any changes or optional extras not proceeded with shall be returned to the Purchaser, without interest. The cost of options or extras is non-refundable in all other circumstances. If for any reason whatsoever the Agreement of Purchase and Sale is not completed, the total cost of work approved above will be retained by the Vendor.
 3. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
 4. The Vendor acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
 5. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
 6. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
 7. Selections will not be processed unless signed by Heathwood Homes Head Office.
 8. The selections made on this schedule are final and cannot be changed once submitted.
 9. The Purchaser has checked and acknowledges the accuracy of this schedule.

Date Aug 10 2021

Purchaser

TINA LEFUR

Date

Aug 10 2021

Purchaser

Date: 8/10/21

Décor Consultant

Date Approved: HEATHWOOD HOMES (UPCOUNTRY) LIMITED

CU-COUNTRY LANE /UPCOUNTR
LOT 4-3
20-2257 ELEV B
THE CALVERTON


16.042

The Calverton

20-2257 ELEV. B

ELEVATION B:
2,217 SQ FT

Sketch # 5

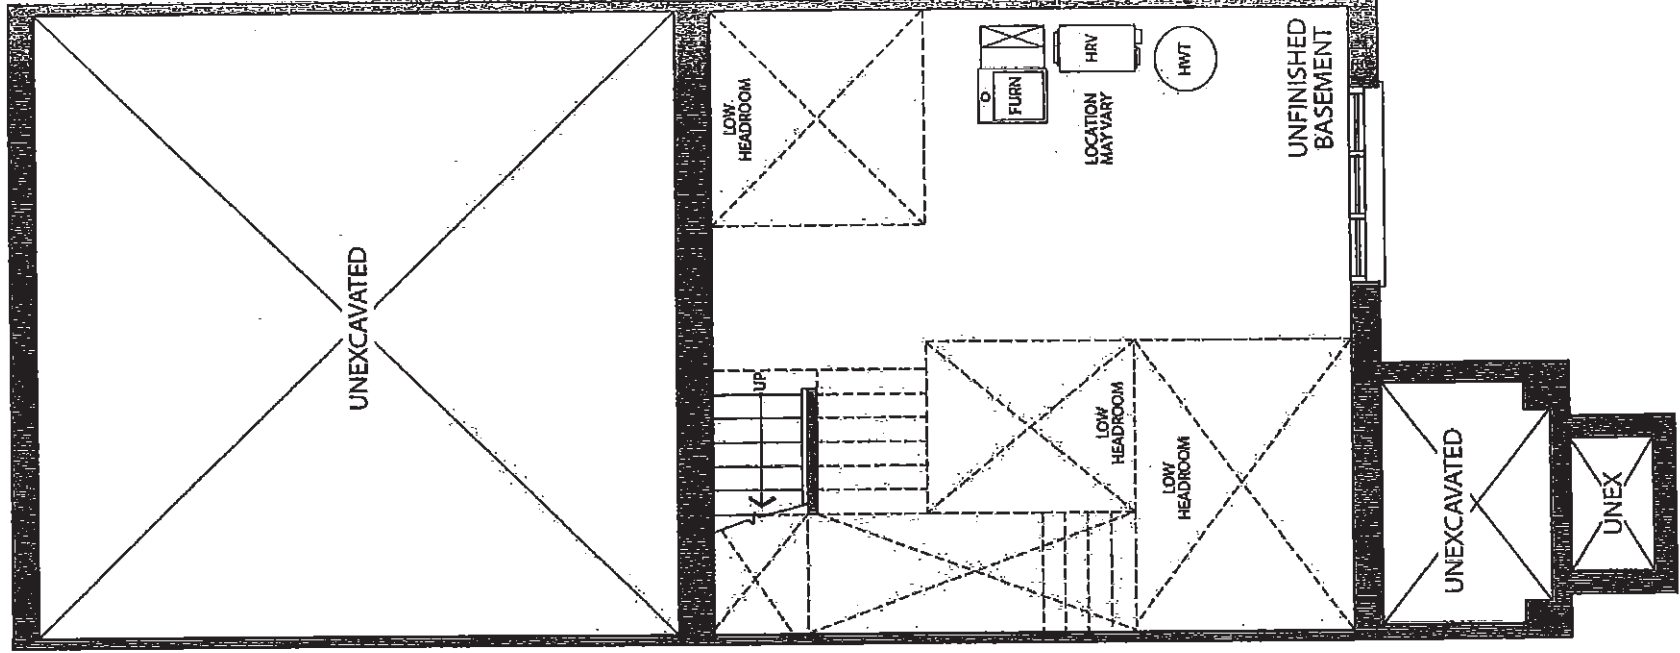

BASEMENT
ELEVATION B


CU-COUNTRY LANE/OPCOUNTRY
LOT 4-3
20-2257 ELEV B
THE CALVERTON

17.0.42
The Calverton

20-2257 ELEV. B

ELEVATION B:
2,217 SQ FT

Sketch #6

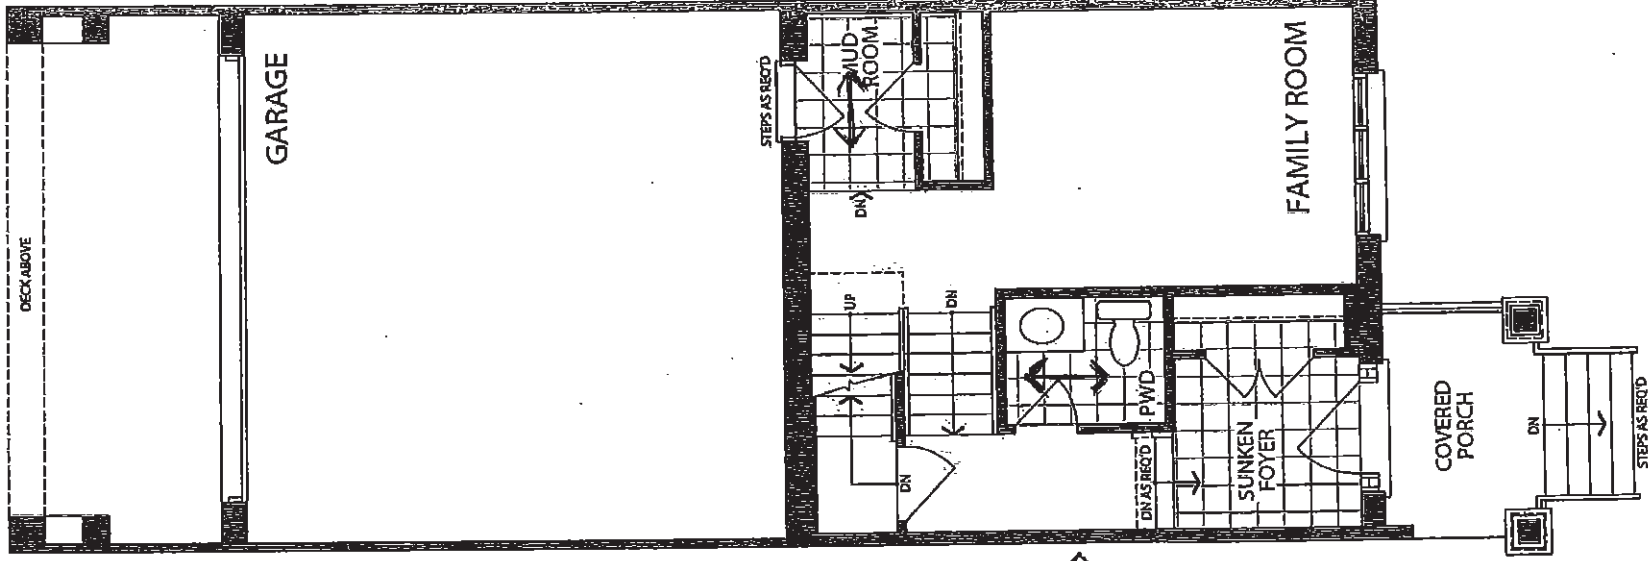

LOWER LEVEL
ELEVATION B


CU-COUNTRY LANE / UP COUNTRY
LOT 4-3
20-2257 ELEV B
THE CALVERTON

18 of 42
The Calverton

20-2257 ELEV. B

ELEVATION B:
2,217 SQ FT

Sketch #7

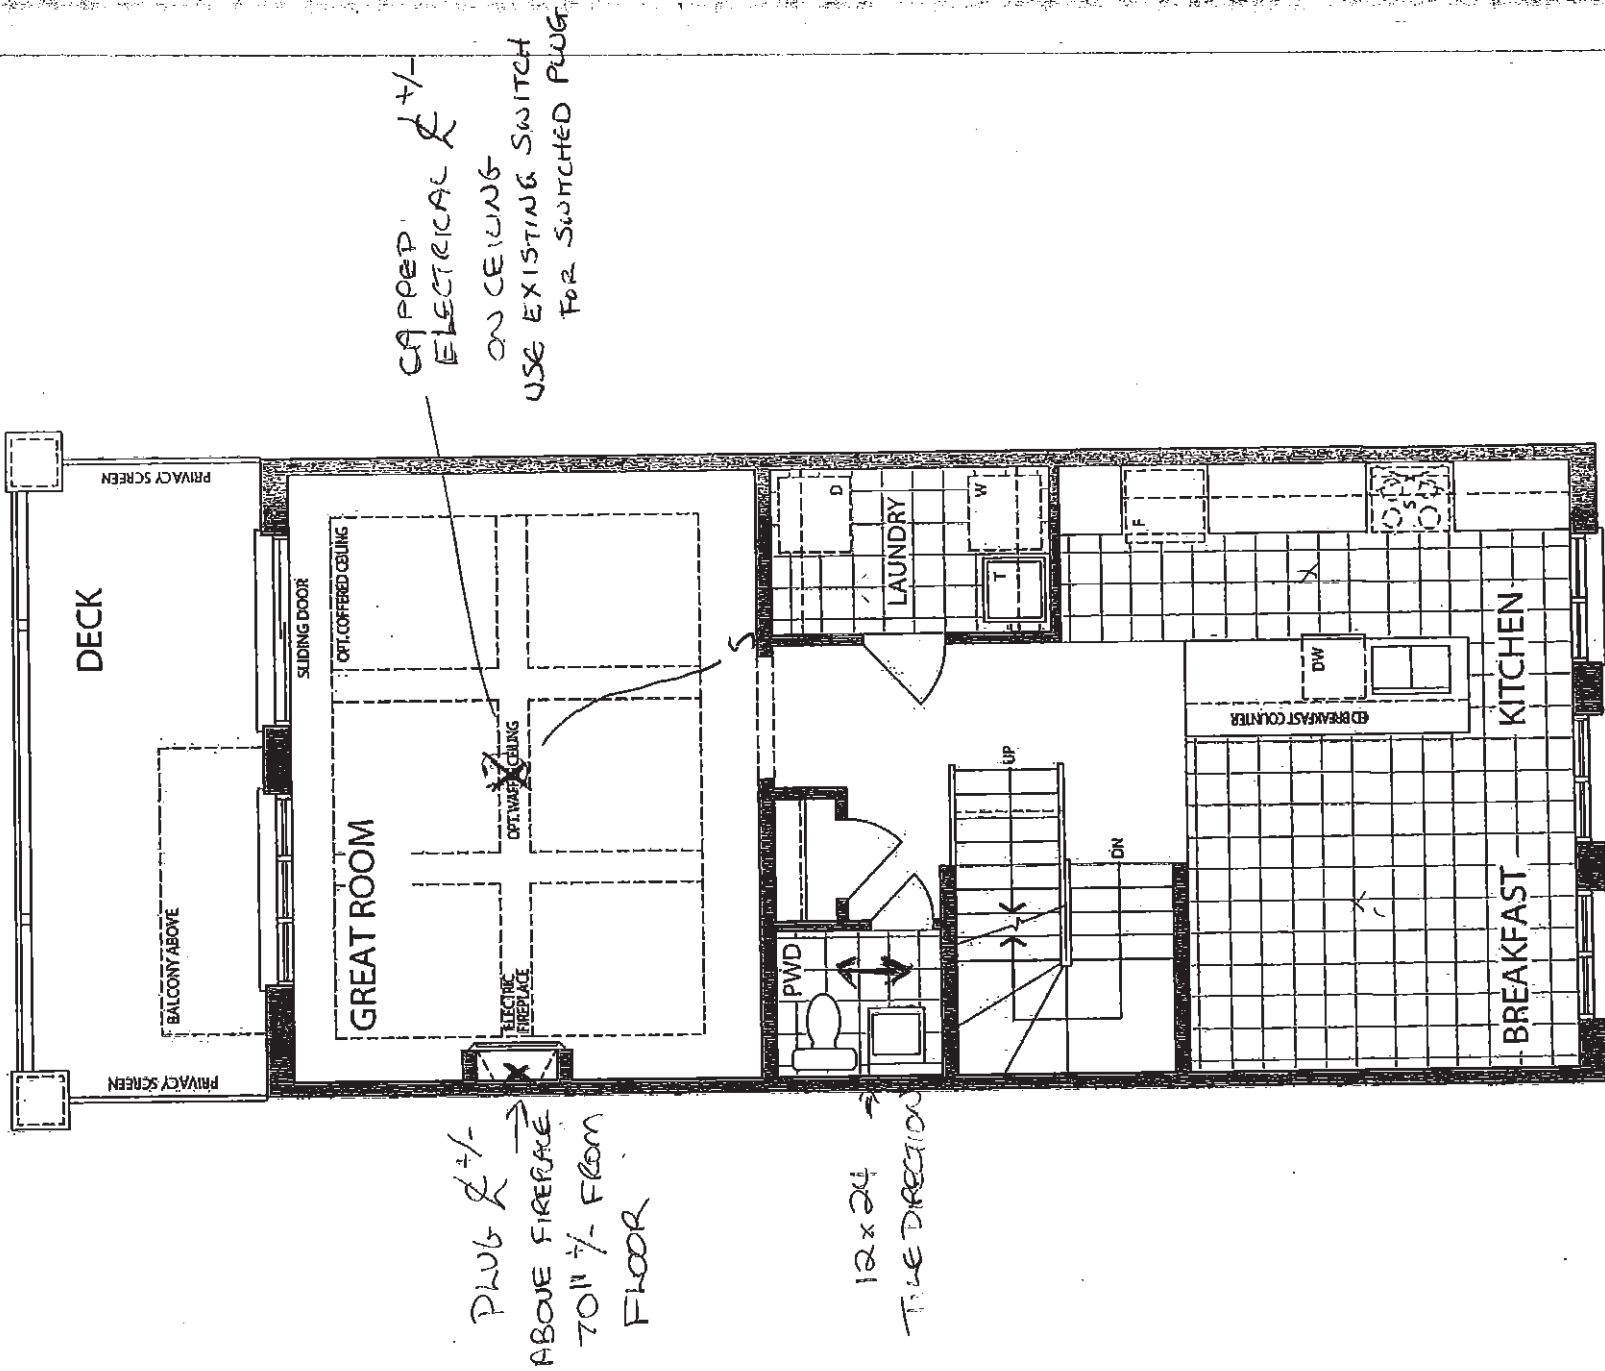

MAIN LEVEL
ELEVATION B

041



HEATHWOOD HOME

COUNTRY LANE, WHITE

MODEL: 20-2257 (2007)

STANDARD CONTRACT INCLUDES:

- Appliance Openings**
- Hood Opening: 30" W builder ho
 - Fridge Opening: 37 3/8" W X 73.3
 - Fridge cabinet: 30cm deep
 - Stove Opening: 30" Freestanding
 - Dishwasher Opening: 24"

Standard Kitchen Scope:

- 100cm H wall cabinets
- Std. Blum Hinges - not soft close
- Std. Metabox Drawers - not soft close
- Min 40cm W drawer
- Backing on all cabinets
- Countertop by others
- Upgrade applied paneled fridge & dishwashers supply only (appliance hardware by others)

Classic Collection



- Top Drawer Construction (in lieu of Standard bank of drawers)
- Tandem Box Soft Close Drawers
- Blumotion Soft Close Hinges for Doors
- Crown Moulding
- Deep Fridge Upper w/ Deep Panel
- Tall upper Cabinets

THIS DRAWING IS FOR DESIGN PURPOSES ONLY. IT IS NOT AN EXACT REPRESENTATION.

6/28/2021

Sketch #8

CLASSIC KITCHEN UPGRADE

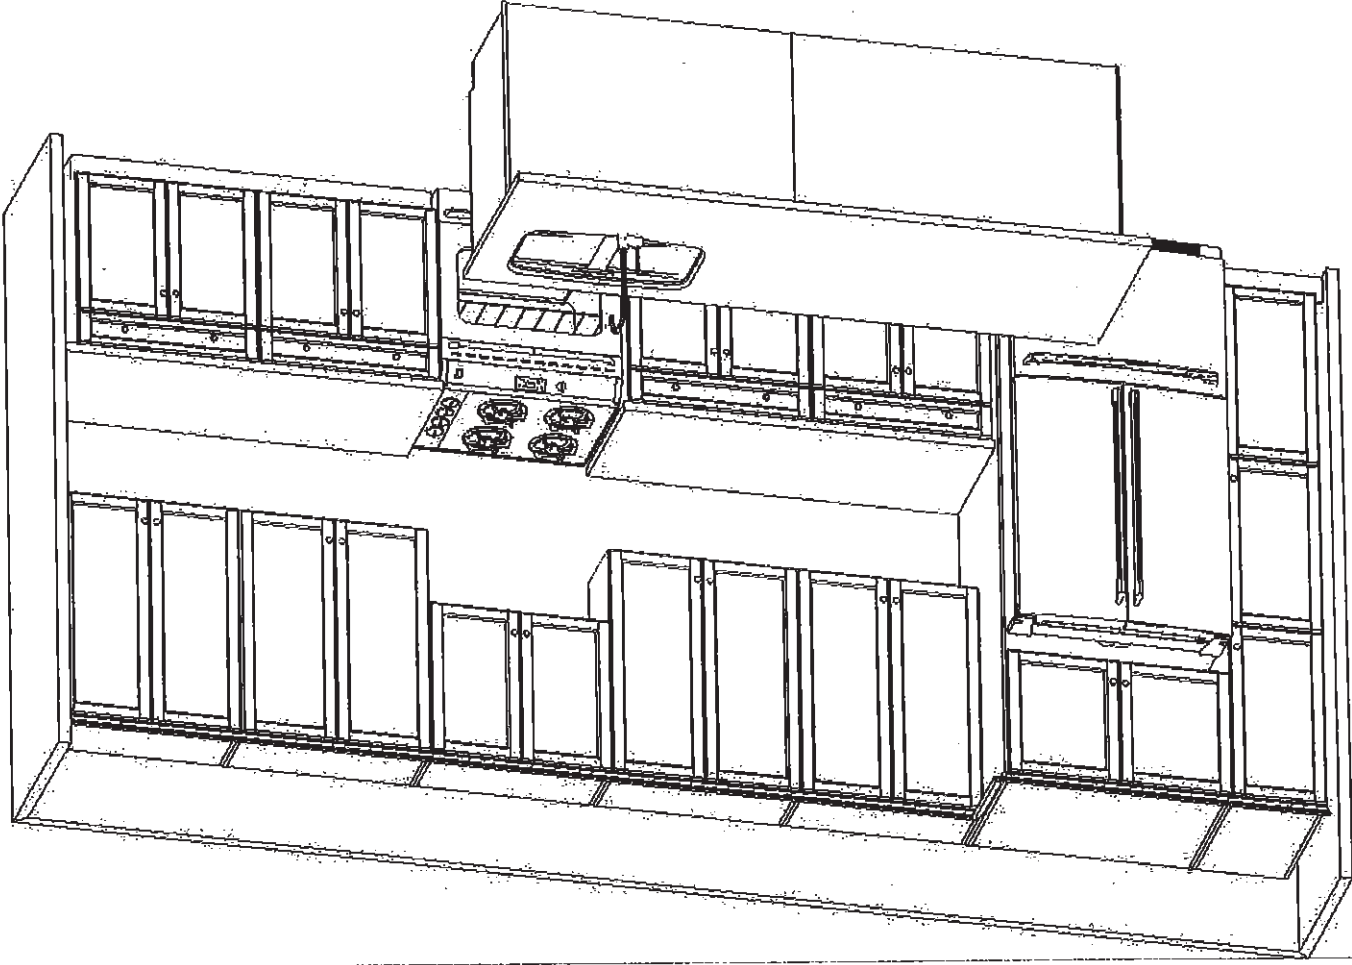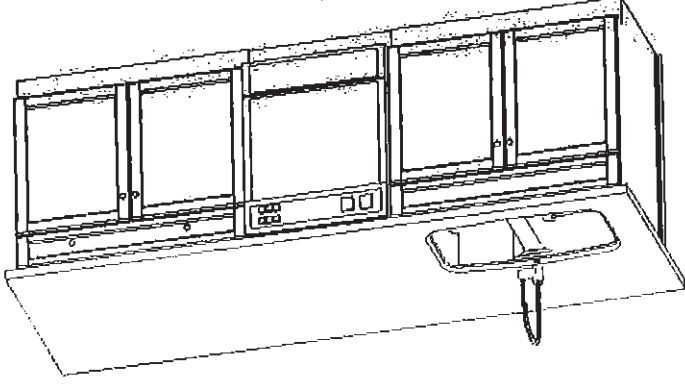

CU-COUNTRY LANE / UPCOUNTRY
LOT 4-3
20-2257 ELEV B
THE CALVERTON

19.172


CU-COUNTRY LANE / UP COUNTRY
LOT 4-3
20-2257 ELEV B
THE CALVERTON

20 of 42
The Calverton

20-2257 ELEV. B

ELEVATION B:
2,217 SQ FT

Sketch #9

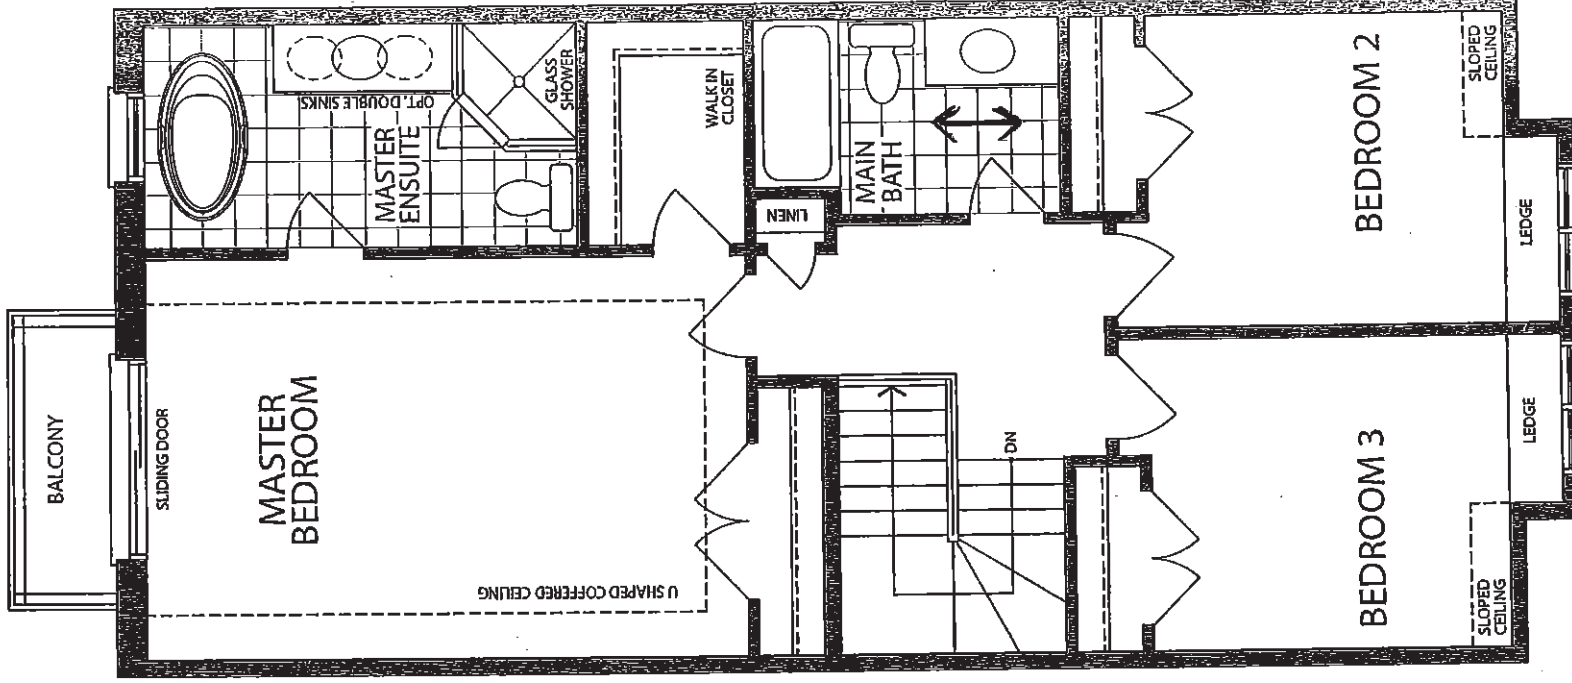

UPPER LEVEL
ELEVATION B

CU-COUNTRY LANE / upcountry
 LOT 4-3
 20-2257 ELEV B
 THE CALVERTON

F R E N D I
 KITCHENS L.J.M. LLC
 1350 Showson Drive, Mississippi, ON L4



HEATHWOOD HOM
 COUNTRY LANE, WHITE
 MODEL: 20-2257 (200

STANDARD CONTRACT INCLUDES:

Standard Vanity & Laundry Scope



- Powder by others, pedestal
- All vanities include laminate to
- Std. Blum Hinges - **not soft close**
- Std. Tandem Box Drawers - **Soft**
- Master Ens: (x1) Top drawer
- Mains: Full height doors (top dr
- added if Masters can't accom
- Optional laundry base & wall cabinets

Sketch # 10


21 of 42

THIS DRAWING IS FOR DESIGN PURPOSES ONLY
 IT IS NOT AN EXACT REPRESENTATION


OPT. LAUNDRY UPPERS
 (MAIN FLR)

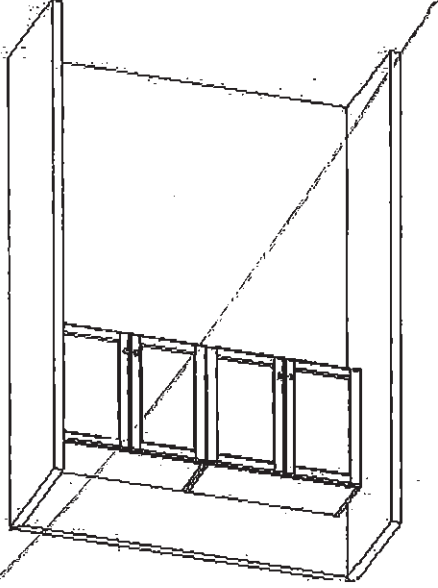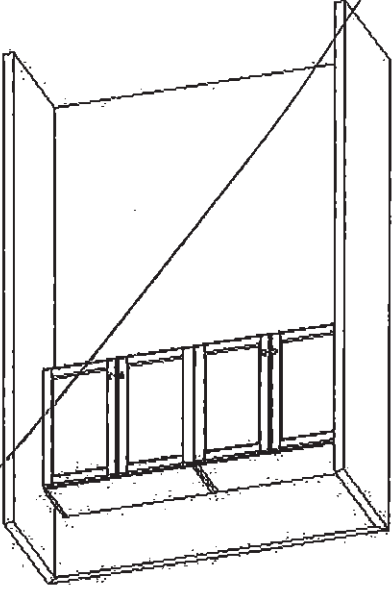


MASTER ENSUITE
 (2ND FLR)

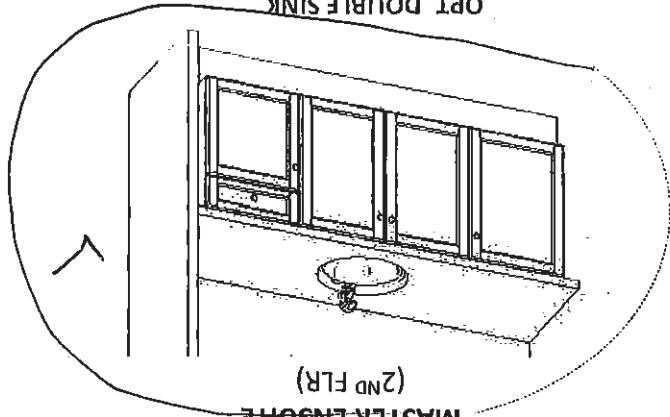


OPT. DOUBLE SINK

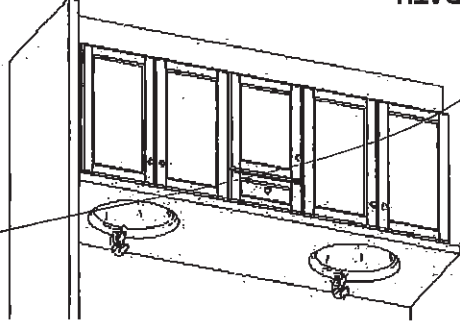

MAIN BATH
 (2ND FLR)

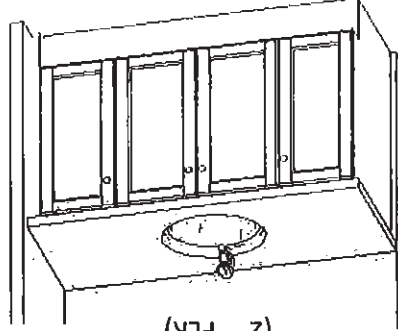

POWDER
 (LOWER FLR)




6/28/2021

PT

CU-COUNTRY LANE/USCOUNTRY
LOT 4-3
20-2257 ELEV B
THE CALVERTON

22 of 42

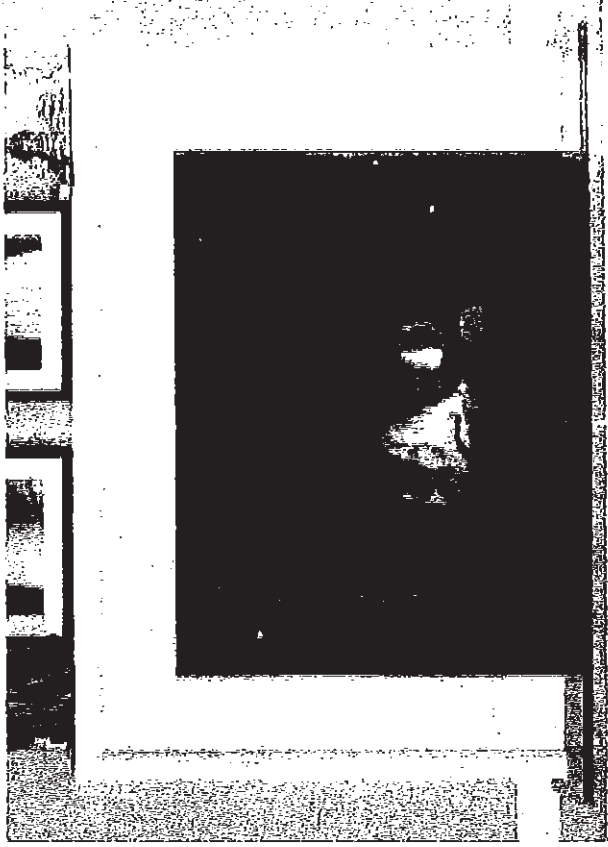

' CABINET'

NEAS NF17 Mantel



15

CU-COUNTRY LANE/UPCOUNTRY
LOT 4-3
20-2257 ELEV B
THE CALVERTON

23 of 22

Stainless Steel | 122.0264.716

FAMILY : Sinks | SERIES : Reginox | MODEL : NS1930U/9 | FINISH : Stainless Steel | INSTALLATION TYPE : Undermount

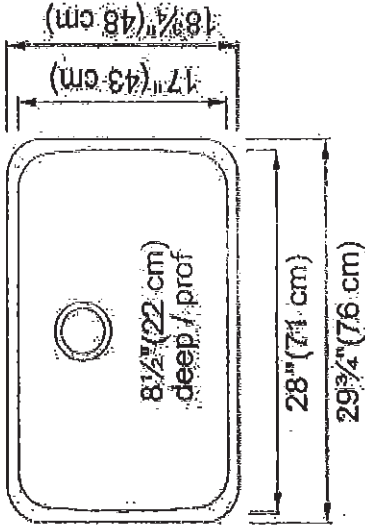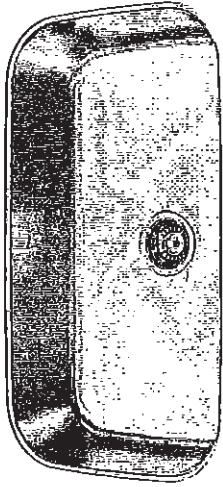

TECHNICAL DATA	
Width overall	18 3/4"
Length overall	29 3/4"
Width of large bowl	17"
Length of large bowl	28"
Depth of large bowl	8 1/2"
Cabinet Size	36"
Number of Bowls	1
Waste Outlet Diameter	3 1/2"
Cut-Out Template	Yes
Faucet Hole	None
Type of Material	18 Gauge Stainless Steel
Surface Finish	SILK
Special feature	Rear Drain Waste Hole Location
Waste Kit Included	YES

PT 05


CU-COUNTRY LANE / UPCOUNTRY
LOT 4-3
20-2257 ELEV B
THE CALVERTON

24 of 42

STANDARD KITCHEN FAUCET

Align

Modern

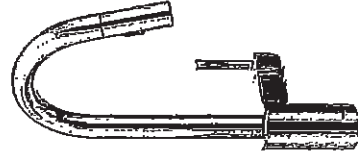

Single Handle Pull-Down Kitchen
Faucet*

Model 7565†

DT-DH

CU-COUNTRY LANE / UP COUNTRY
LOT 4-3
20-2257 ELEV B
THE CALVERTON

25 of 42

*American
Standard*

**BOULEVARD®
PEDESTAL SINK**
VITREOUS CHINA

BOULEVARD® PEDESTAL SINK

- ☐ 0641.800 Faucet holes on 8" (203mm) centers (illustrated).
- ☒ 0641.400 Faucet holes on 4" (102mm) centers
- ☐ 0641.100 Center hole only
 - Classic styled rectangular pedestal lavatory
 - Vitreous china
 - Rear overflow
 - Supplied with mounting kit
 - Right Height® for greater comfort during use
 - Faucet ledge with large deck area (faucet not included)
 - Design coordinates with Boulevard® Toilet
 - Basin has flat bottom to also allow use as an above counter sink or a drop-in sink (with u-shaped cut out)

Nominal Dimensions:

24" x 19" x 35-1/2"
(610 x 483 x 902mm)

- ☐ 0641.008 Pedestal top-8" (203mm) centers
- ☐ 0641.004 Pedestal top-4" (102mm) centers
- ☐ 0641.001 Pedestal top-center hole only
- ☐ 0010.000 Pedestal only

Bowl sizes:

17" (432mm) wide,
12-1/2" (318mm) front to back,
5" (127mm) deep

Compliance Certifications -

Meets or Exceeds the Following Specifications:

- ASME A112.19.2 - 2008/CSA B45.1-08

To Be Specified:

☐ Color: ☐ White ☐ Linen


☐ Faucet Finish:

☐ Supplies:

☐ 1-1/4" Trap:

☐ Nipple:

* See faucet section for additional models available

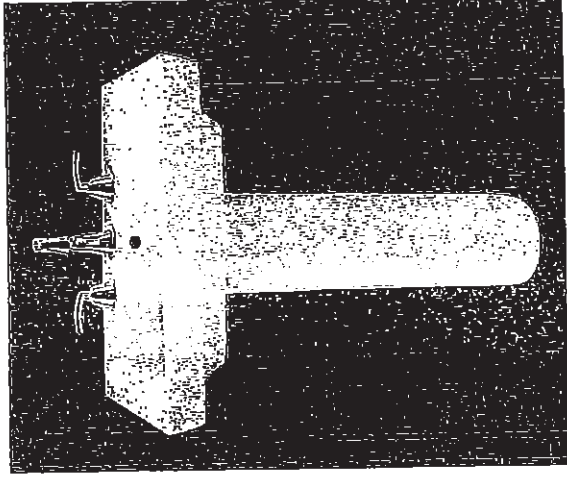


SEE REVERSE FOR ROUGHING-IN DIMENSIONS

PT 4

CU-COUNTRY LANE / UPCOUNTRY
LOT 4-3
20-2257 ELEV B
THE CALVERTON

26 of 42

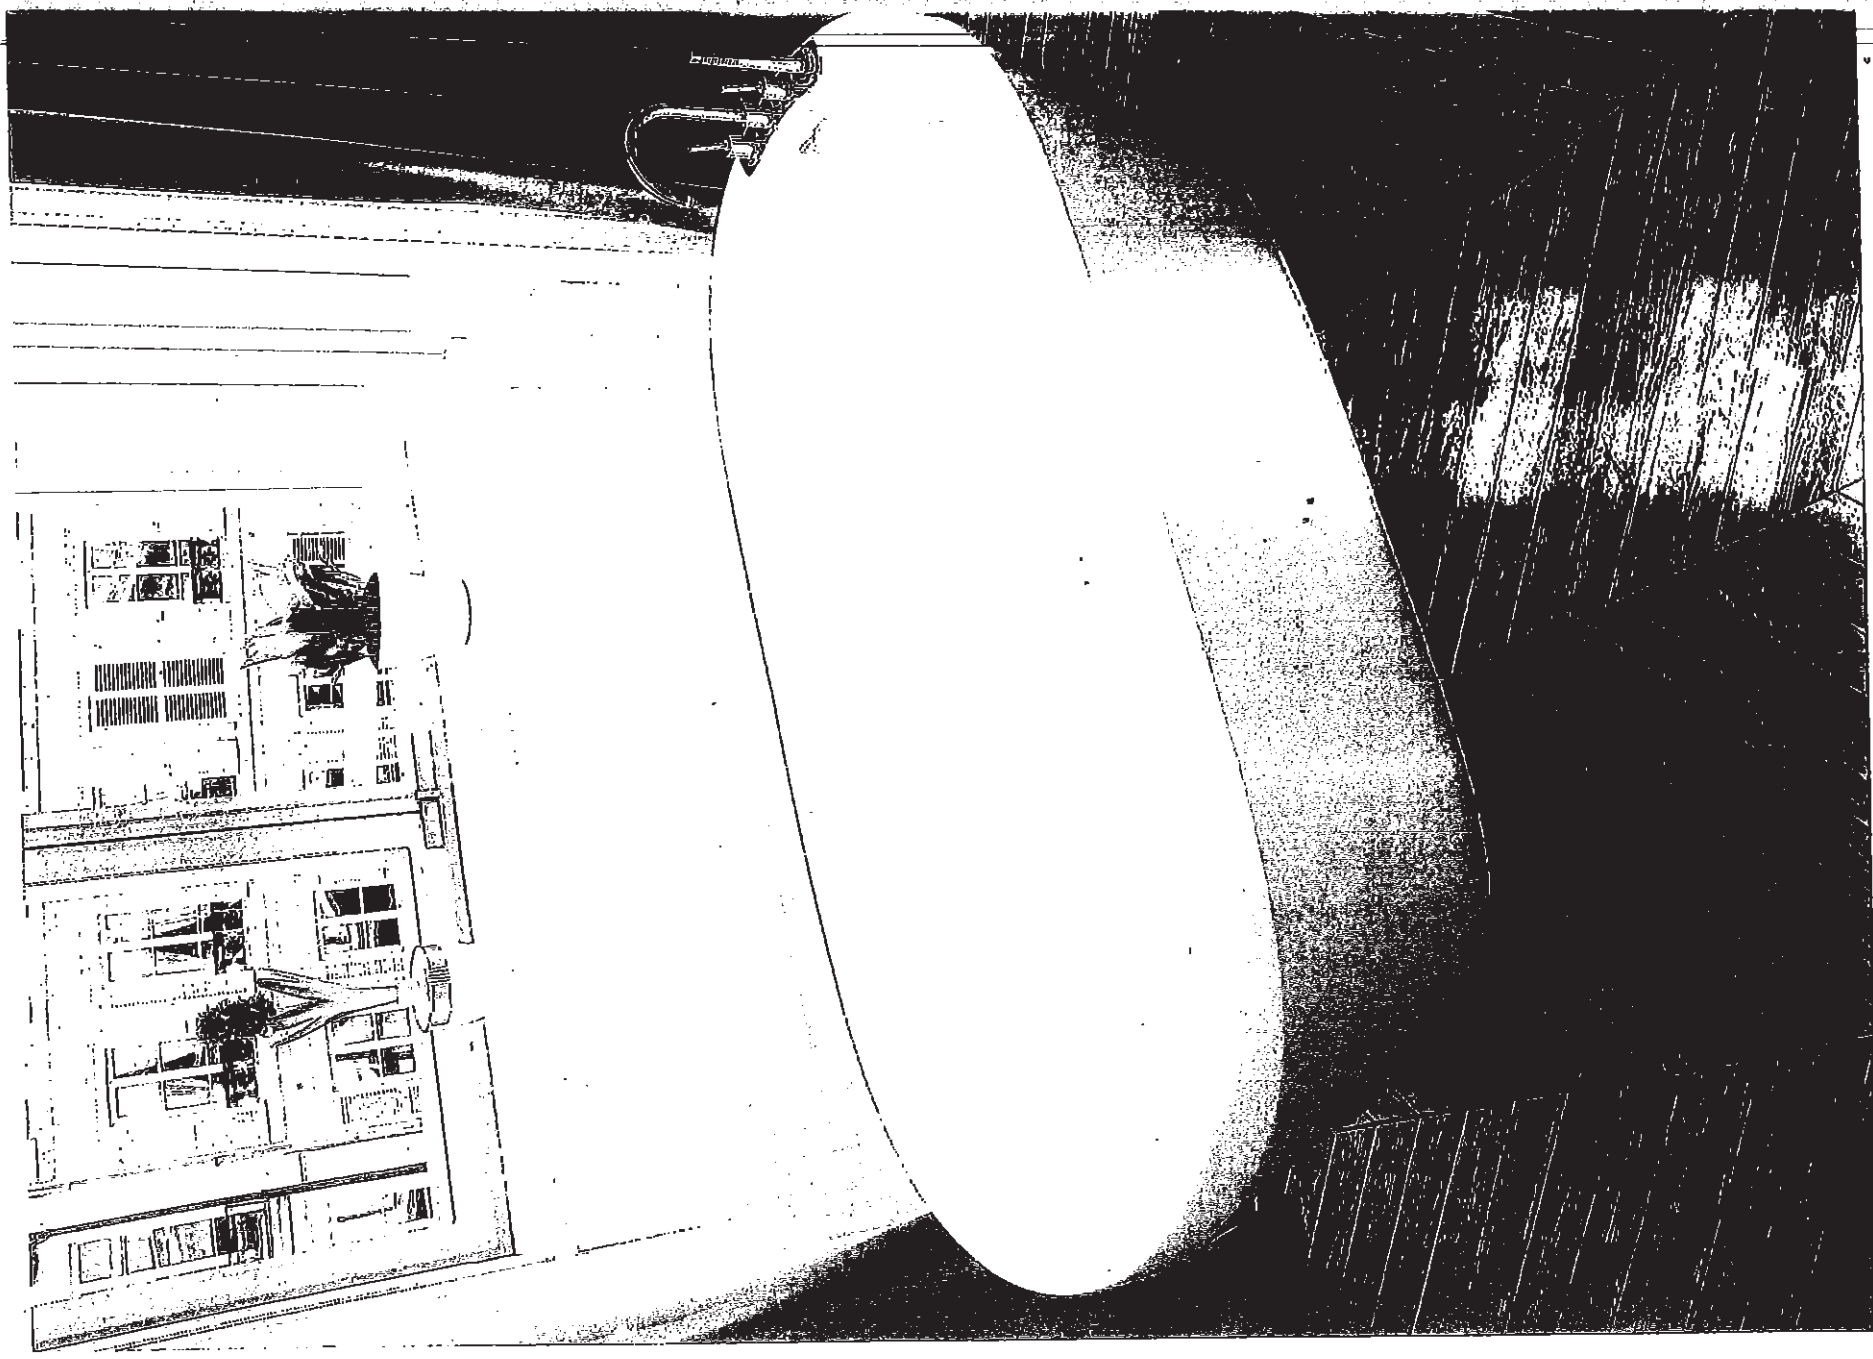

Demi CF2007


IT

CU-COUNTRY LANE / UP COUNTRY
LOT 4-3
20-2257 ELEV B
THE CALVERTON

27 of 42


Chateau

Transitional



Lavatory Faucet with Pop-Up Drain
Model L4621†

VANITY SINKS AND PEDESTAL



Posi-Temp® Pressure Balancing Tub/Shower
Model 62320 / TL183†

OR

Posi-Temp Valve and Tub/Shower Trim
with Eco-Performance Easy Clean® XL

Model 62320 / TL183EP†
(TL183EP not available in BC)

SHOWER AND 5' TUB FAUCETS



2 Handle Roman Tub with 9" Spout
Model 4796 / T990†

FREESTANDING TUB FAUCETS

PT 07

CU-COUNTRY LANE / DPCOUNTRY
LOT 4-3
20-2257 ELEV B
THE CALVERTON


28.r.1+2




SPECIFICATIONS
AV SERIES
RANGE HOODS

HVI ²¹⁰⁰
CERTIFIED
180 CFM/7.0 Sones @ 0.10" SP. Horizontal
180 CFM/7.5 Sones @ 0.10" SP. Vertical

- Dimensions**
Overall bottom projection - 18 3/8"
Overall top projection - 12"
Height - 6"
Available widths: 21", 24", 30", 36" & 42"
- Hood Body**
Stainless Steel: 24 gauge, grade 430 stainless steel.
Painted: 23 gauge cold rolled commercial grade (CRCC) steel, auto welded, coated with a baked enamel finish.
- Motor**
2 speed, single coil, thermally protected, permanently lubricated.
Rated 120 volts, 60 Hz. Complete with 200°C lead wires.
- Lighting**
Single 60 watt cook light capacity (bulb not included).
- Ducting Options**
Horizontal ducting: 3 1/4"x10" (duct adapter and damper included).
Vertical ducting: 3 1/4"x10" (duct adapter and damper included).
Vertical ducting: 7" round (duct adapter and damper not included).
Ductless: removable front vent (charcoal filter not included).
- Fan Blade**
One piece polymeric, electronically balanced blade. 6 5/8" diameter with 5 paddles.
- Electrical connection**
Hood top - 7/8" knockout hole for use with 1/2" cable clamp
Hood back - 7/8" knockout hole for use with 1/2" cable clamp

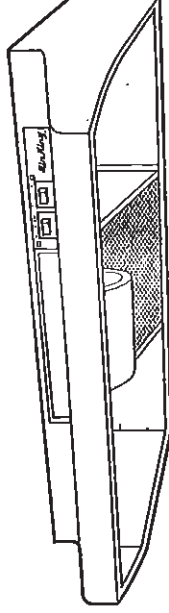

AV SERIES

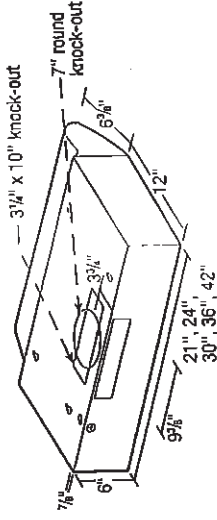

- Filters**
UL rated, class 2 filter.
Grease Filter: RF35 - 8 7/8"x10 3/8" (included).
Charcoal Filter: RF34 (not included).
Combo Grease/Charcoal: RF55 (not included).
- Available Finishes**
White, Biscuit, Almond, Black & Stainless Steel.

EXPANDED PERFORMANCE									
Air Flow - CFM	Static Pressure (inches of w.g.)			Sones		Fan Speed RPM	Power		
	0	0.05	0.1	0.15	0.2		@ .1 SP	Watts	Apms
Vertical Ducting High	246	232	218	203	181	147	7.5	2973	87.0
Horizontal Ducting High	225	210	180	175	155	120	7.0	3024	87.0

PROJECT	ARCHITECT									
LOCATION	ENGINEER									
CONTRACTOR	SUBMITTED BY									
	DATE									
FAN NUMBER	MODEL NUMBER	CFM	IN W.C.	RPM	WATTS	AMPS	SONES	QTY	OPTIONAL EQUIPMENT & REMARKS	



Air King: 820 Lincoln Avenue
West Chester, Pennsylvania 19380-4466
Tel: (610) 692-7400 • 877-304-3785
Fax: (610) 696-8048

Canada:
Brampton, Ontario
Tel: 905-456-2033
Fax: (905) 456-1015

Specifications subject to change without notice.

Updated 2-18

PT 04

CU-COUNTRY LANE/COUNTRY
LOT 4-3
20-2257 ELEV B
THE CALLIGRION

29.42

Whirlpool® Top Mount Refrigerator

PRODUCT MODEL NUMBERS

WRT311FZD
WRT511SZD

WRT541SZD

Electrical: A 115-volt, 60-Hz, AC-only, 15- or 20-amp fused, grounded electrical supply is required. It is recommended that a separate circuit serving only your refrigerator be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.


NOTE: Before performing any type of installation, cleaning, or removing a light bulb, turn the control (Thermostat, Refrigerator or Freezer Control depending on the model) to OFF and then disconnect the refrigerator from the electrical source. When you are finished, reconnect the refrigerator to the electrical source and reset the control (Thermostat, Refrigerator or Freezer Control depending on the model) to the desired setting. See "Using the Controls."

Water: A cold water supply with water pressure between 30 and 120 psi (207 and 827 kPa) is required to operate ice maker and water dispenser. If you have questions about your water pressure, call a licensed, qualified plumber.

IMPORTANT: The pressure of the water coming out of a reverse osmosis system going to the water inlet valve of the refrigerator needs to be between 30 and 120 psi (207 and 827 kPa).


Reverse Osmosis Water Supply: If a reverse osmosis water filtration system is connected to your cold water supply, the water pressure to the reverse osmosis system needs to be a minimum of 40 to 60 psi (276 to 414 kPa).

PRODUCT DIMENSIONS

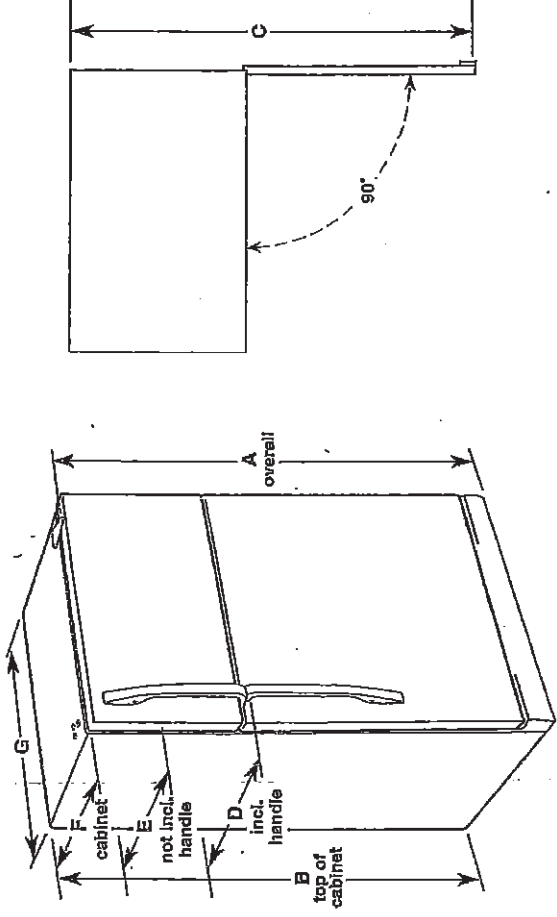

Model Number	Model Size	Reversible Door	Height - Overall "A"	Height - Top of Cabinet "B"	Depth - Door Open 90° "C"	Depth - With Handles "D"	Depth - Without Handles "E"	Depth - Cabinet Only "F"	Width - Cabinet "G"
WRT311FZD	20.5 cu. ft.	Yes	66 1/2" (168.3 cm)	65 1/2" (166.4 cm)	62 1/4" (158.1 cm)	32 1/4" (83.5 cm)	30 5/8" (77.8 cm)	28 1/2" (72.4 cm)	32 3/4" (83.2 cm)
WRT511SZD WRT541SZD	24.3 cu. ft.	Yes	66 1/2" (168.3 cm)	65 1/2" (166.4 cm)	62 1/4" (158.1 cm)	34" (86.4 cm)	32 1/2" (82.3 cm)	28 1/2" (72.4 cm)	32 3/4" (83.2 cm)

LOCATION REQUIREMENTS

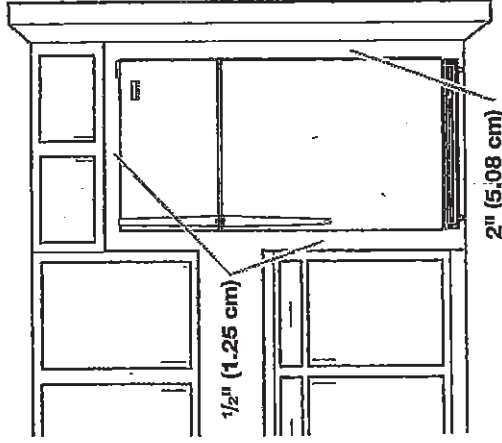

To ensure proper ventilation for your refrigerator, allow for a 1/2" (1.25 cm) space on each and between overhead cabinets and refrigerator top. Allow at least 1" (2.5 cm) between back of cabinet and the wall. If your refrigerator has an ice maker, make sure you leave some extra space at the back for the water line connections.

If you are installing your refrigerator next to a fixed wall, leave 2" (5 cm) minimum on the hinge side (depending on your model) to allow for the door to swing open.

NOTE: This refrigerator is intended for use in a location where the temperature ranges from a minimum of 55°F (13°C) to a maximum of 110°F (43°C). The preferred room temperature range for optimum performance, which reduces electricity usage and provides superior cooling, is between 60°F (15°C) and 90°F (32°C). It is recommended that you do not install the refrigerator near a heat source, such as an oven or radiator.

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

Ref. W10974106
10/29/14





P.T.

40

CU-COUNTRY LANE /UPCOUNTRY
LOT 4-3
20-2257 ELEV B
THE CALVERTON

30 of 42

Refrigerator Door Swing Verification

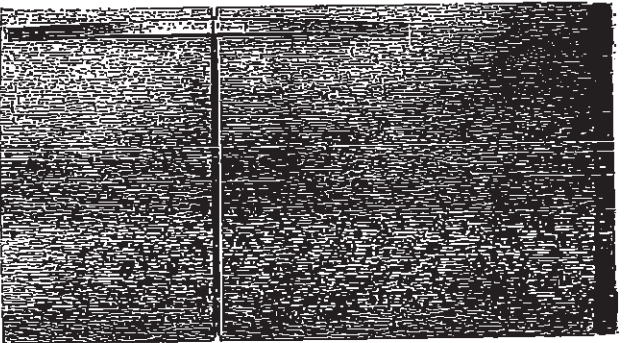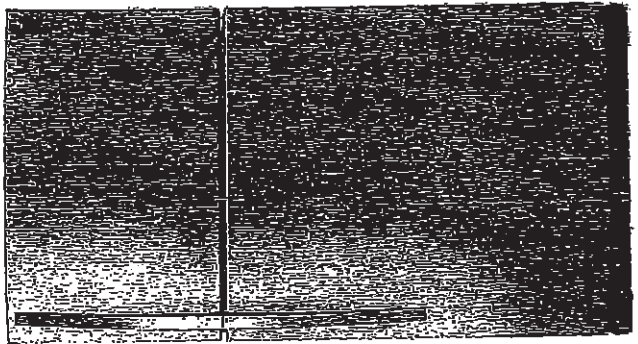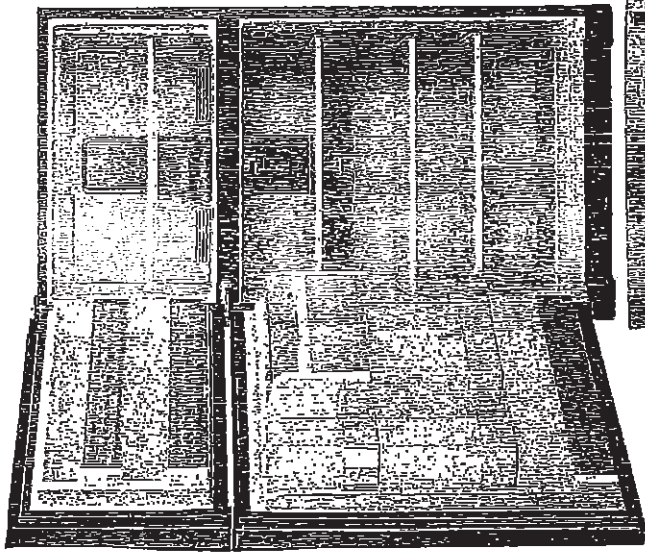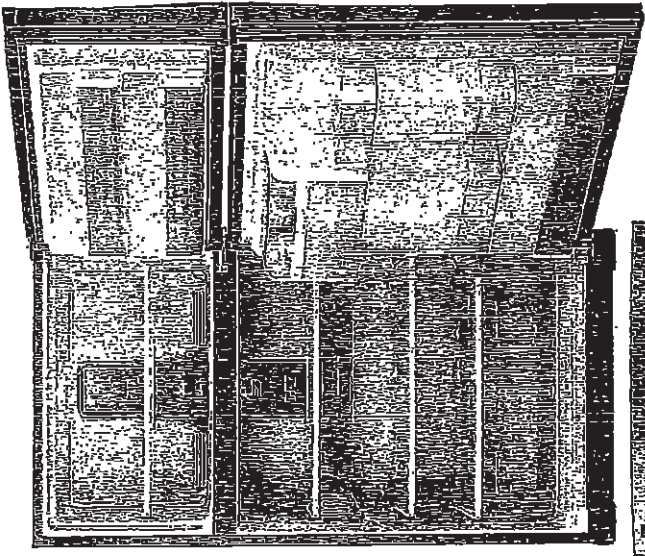

When facing the refrigerator

☒ RIGHT HAND
DOOR OPENING

- Hinges on right
- Handle on left

mk
INITIAL

☐ LEFT HAND
DOOR OPENING

- Hinges on left
- Handle on right

PT
INITIAL

POUCH RIGHT

Please check and INITIAL your door swing selection.

CU-COUNTRY LANE / UPcountry
LOT 4-3
20-2257 ELEV B
THE CALVERTON


31 of 42

WHIRLPOOL 30" (76.0 CM) FREESTANDING ELECTRIC RANGES
Model YWFE515S0JS

5.3 cu. ft. Whirlpool® electric range with Frozen
Bake™ technology
YWFE515S0JS

Whirlpool®

Home > Kitchen Appliances > Cooking Appliances > Ranges > Single Oven Ranges > YWFE515S0JS

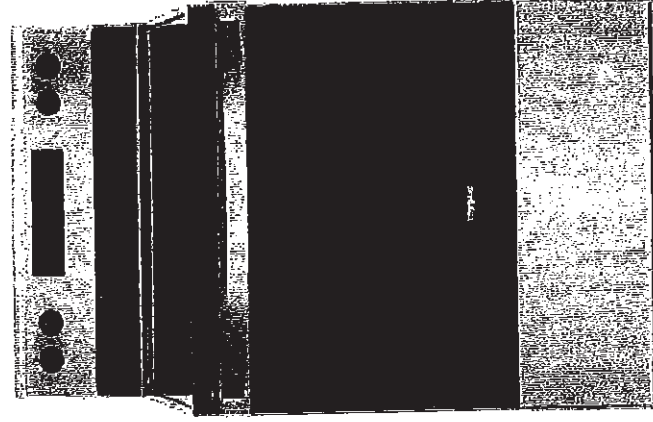

12




PT
10

CU-COUNTRY LANE /UPcountry
LOT 4-3
20-2257 ELEV B
THE CALVERTON

32 of 42

WHIRLPOOL 30" (76.0 CM) FREESTANDING ELECTRIC RANGES Model YWFE515S0JS

Product Dimensions

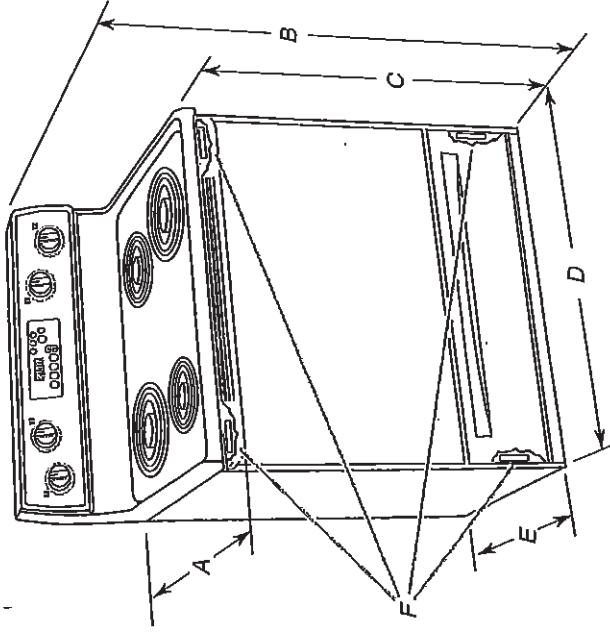

- A. 27¹/₄" (70.5 cm) max. depth with handle
- B. 46⁷/₁₆" (119.1 cm) overall height (max.) with leveling legs screwed all the way in*
- C. 36" (91.4 cm) cooktop height (max.) with leveling legs screwed all the way in*
- D. 29⁷/₁₆" (75.9 cm) width
- E. 25⁵/₁₆" (64.3 cm) depth - back of range to front of cooktop**
- F. Model/serial/rating plate (located on the frame behind a top corner of the door or either side of the drawer)

IMPORTANT: Range must be level after installation. Follow the instructions in the "Level Range" section. Using the cooktop as a reference for leveling the range is not recommended.

*Range can be raised approximately 1" (2.5 cm) by adjusting the leveling legs.


**Front of door and drawer may extend further forward depending on styling.

Cabinet Dimensions

Cabinet opening dimensions shown are for 25" (64.0 cm) countertop depth, 24" (61.0 cm) base cabinet depth and 36" (91.4 cm) countertop height.

IMPORTANT: If installing a range hood or microwave hood combination above the cooking surface, follow the range hood or microwave hood combination installation instructions for dimensional clearances above the cooktop surface.

A freestanding range may be installed next to combustible walls with zero clearance.

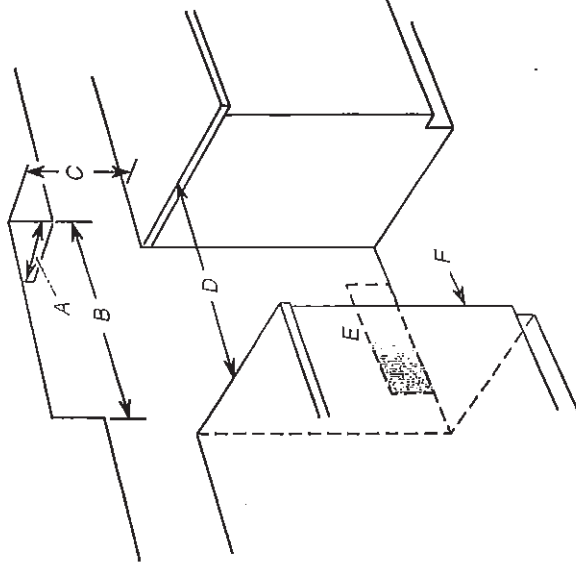

- A. 13" (33.0 cm) max. upper cabinet depth
- B. 30" (76.2 cm) min. opening width
- C. For minimum clearance to top of cooktop, see NOTE*
- D. 30" (76.2 cm) min. opening width
- E. Outlet - 8" (20.3 cm) to 22" (55.9 cm) from either cabinet, 7" (17.8 cm) max. from floor.
- F. Cabinet door or hinges should not extend into the cutout.

***NOTE:** 24" (61.0 cm) minimum when bottom of wood or metal cabinet is covered by not less than 1/4" (6.4 mm) flame retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015" (0.4 mm) stainless steel, 0.024" (0.6 mm) aluminum or 0.020" (0.5 mm) copper.

30" (76.2 cm) minimum clearance between the top of the cooking platform and the bottom of an uncovered wood or metal cabinet.

T
JAN 28/20

CU-COUNTRY LANE /UPCOUNTRY
LOT 4-3
20-2257 ELEV B
THE CALVERTON

33 of 42

WHIRLPOOL 30" (76.0 CM) FREESTANDING ELECTRIC RANGES Model YWFE515S0JS

Install Anti-Tip Bracket

! WARNING



Tip Over Hazard

A child or adult can tip the range and be killed.

Install anti-tip bracket to floor or wall per installation instructions.


Slide range back so rear range foot is engaged in the slot of the anti-tip bracket.

Re-engage anti-tip bracket if range is moved.

Do not operate range without anti-tip bracket installed and engaged.

Failure to follow these instructions can result in death or serious burns to children and adults.


1. Remove the anti-tip bracket from where it is taped inside the storage drawer or warning drawer.
2. Determine which mounting method to use: floor or wall.
If you have a stone or masonry floor, you can use the wall mounting method. If you are installing the range in a mobile home, you must secure the range to the floor.
3. Determine and mark centerline of the cutout space. The mounting can be installed on either the left-side or right-side of the cutout. Position mounting bracket against the wall in the cutout so that the V-notch of the bracket is 12⁹/₁₆" (31.9 cm) from centerline as shown.

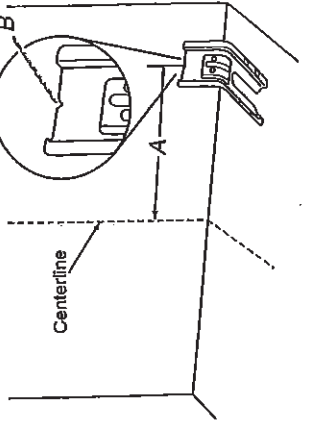


A. 12⁹/₁₆" (31.9 cm)
B. Bracket V-notch

4. Drill two 1/8" (3 mm) holes that correspond to the bracket holes of the determined mounting method. See the following illustrations.


Floor Mounting



Rear position




Front position




Diagonal (2 options)

Wall Mounting



5. Using the Phillips screwdriver, mount anti-tip bracket to the wall or floor with the two #12 x 1⁹/₈" (4.1 cm) screws provided.
6. Move range close enough to opening to allow for final electrical connections. Remove shipping base, cardboard or hardboard from under range.
7. Move range into its final location, making sure rear leveling leg slides into anti-tip bracket.



8. Move range forward onto shipping base, cardboard or hardboard to continue installing the range using the following installation instructions.

PT

34.42



OTHER AVAILABLE COLORS

	Black Model: WDF310PAAAB
	Biscuit-on-Biscuit Model: WDF310PAAAT
	White Model: WDF310PAAAW
	Universal Silver Model: WDF310PAAAD



DIMENSIONS		KEY FEATURES
Maximum Height	34 1/2 Inches	ENERGY STAR® Qualified No One Has Fewer Repairs 17 Years In A Row Resource - Efficient Wash System CEE Tier 1 qualified Tail Tub Design White Plastic Interior Quiet Partner(TM) Sound Package Auto Soil Sensor Electronic Controls 3 Automatic Cycles 1-Hour Wash Cycle Heavy Wash Cycle Normal Cycle 4 Options High Temperature Wash System Heated Dry Option 4 Hour Delay Wash Option 4-Tier SheerClean Direct Feed Wash System Control Lock Vinyl Racks In-Rack Silverware Basket
Minimum Height	33 1/2 Inches	
Height	34 1/2 Inches	
Depth	24 1/2 Inches	
Width	23 7/8 Inches	
Dimensions shown are for planning purposes only. For complete information, see Installation Instructions packaged with product.		
ELECTRICAL		
15 Amps Amps, 60 Hz, 120 V, 15,		
Before purchasing this appliance, read important information about its estimated annual energy consumption or energy efficiency rating that is available from your dealer.		

CU-COUNTRY LANE / UPCOUNTRY
LOT 4-3
20-2257 ELEV B
THE CALVERTON

35 of 42

Whirlpool® Undercounter Dishwasher

PRODUCT MODEL NUMBERS

WDF110PAB WDE310B1A WDF530PSY
WDF111PAB WDF320PAD WDF540PAD
WDF120PAF WDF570PAY WDF730PAY
WDF121PAF WDF520PAD WDT710PAY
WDF310PAA WDF530PAY WDT720PAD
WDF310PCA WDF530PLY WDT770PAY

Electrical Requirements: 120-volt, 60-Hz, AC only, 15- or 20-amp. fused electrical supply. Copper wire only. A time delay fuse or circuit breaker and separate circuit is recommended.

If direct wiring dishwasher: Use flexible, armored, or nonmetallic, sheathed copper wire with grounding wire that meets the wiring requirements for your home and local codes and ordinances.

Use a UL listed or CSA approved conduit connector.

If connecting dishwasher with a power supply cord:

Use Power Supply Cord Kit (Part No. 4317824) marked for use with dishwashers. Follow the kit instructions for installing the power supply cord.

Power supply cord must plug into a grounded 3 prong, outlet, located in the cabinet next to the dishwasher opening. Outlet must meet all local codes and ordinances.




Water Supply Requirements: A hot water line with 20 to 120 psi (138 to 862 kPa) water pressure. Water temperature must be 120°F (49°C) water at dishwasher. Use 3/8" O.D. copper tubing with compression fitting or flexible braided water supply line (1/2" minimum plastic tubing is not recommended). Use a 90° elbow with 3/4" NPT, external pipe threads on one end. Do not solder within 6" (15.2 cm) from water inlet valve.

Drain Requirements: A new drain hose is supplied with your dishwasher. If this is not long enough, use a new drain hose with a maximum length of 12' (3.7 m) (Part No. 3385556) that meets all current AHAM/IAPMO test standards, is resistant to heat and detergent, and fits the 1" (2.5 cm) drain connector of the dishwasher.

Make sure to connect the drain hose to waste tee or disposer inlet above drain trap in house plumbing and 20" (50.8 cm) minimum above the floor. It is recommended

that the drain hose either be looped up and securely fastened to the underside of the counter or be connected to an air gap.


Make sure to use an air gap if the drain hose is connected to house plumbing lower than 20" (50.8 cm) above subfloor or floor.



Use 1/2" (1.3 cm) minimum I.D. drain line fittings.

If required, the air gap should be installed in accordance with the air gap installation instructions. When connecting the air gap, a rubber hose (not provided) will be needed to connect to the waste tee or disposer inlet.

PRODUCT DIMENSIONS

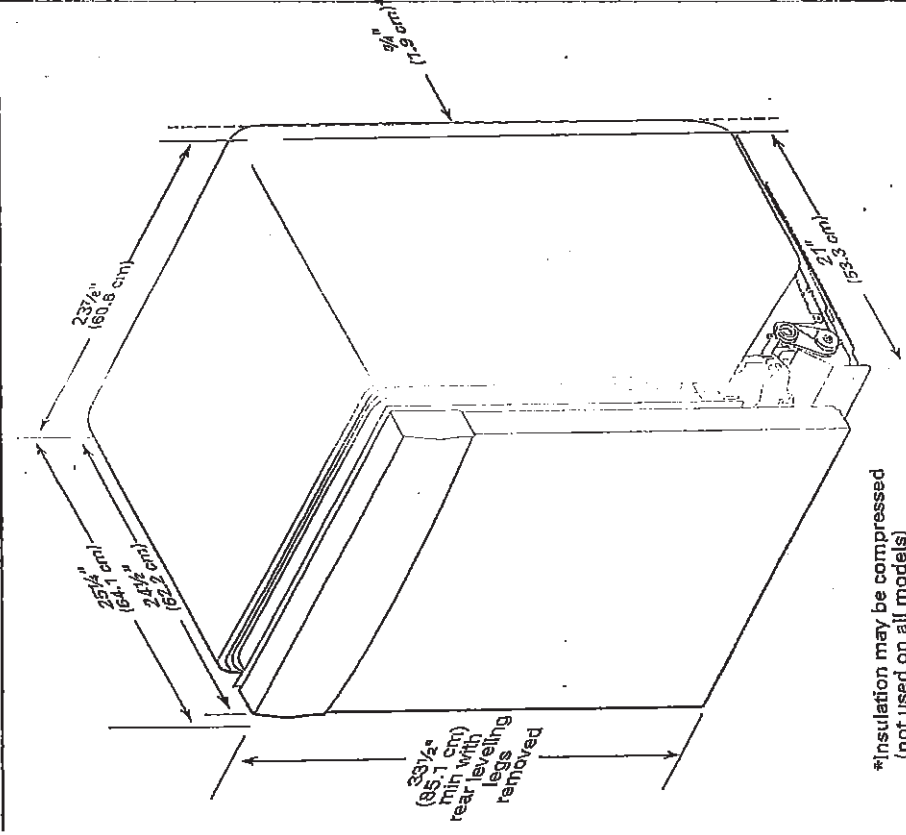

*Insulation may be compressed (not used on all models)

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

Dimensions are for planning purposes only. For complete details, see installation instructions packed with product. Specifications subject to change without notice.

CU-COUNTRY LANE / upcountry
LOT 4-3
20-2257 ELEV B
THE CALVERTON

36 of 42


CABINET CUTOUT DIMENSIONS

WDF 320 PAD

NOTE: Shaded areas of cabinet walls show where utility connections may be installed.

*Measure from the lowest point on the underside of the countertop. May be reduced to 33½" (85.1 cm) by removing the rear leveling legs from dishwasher.

**Minimum, measured from narrowest point of opening.

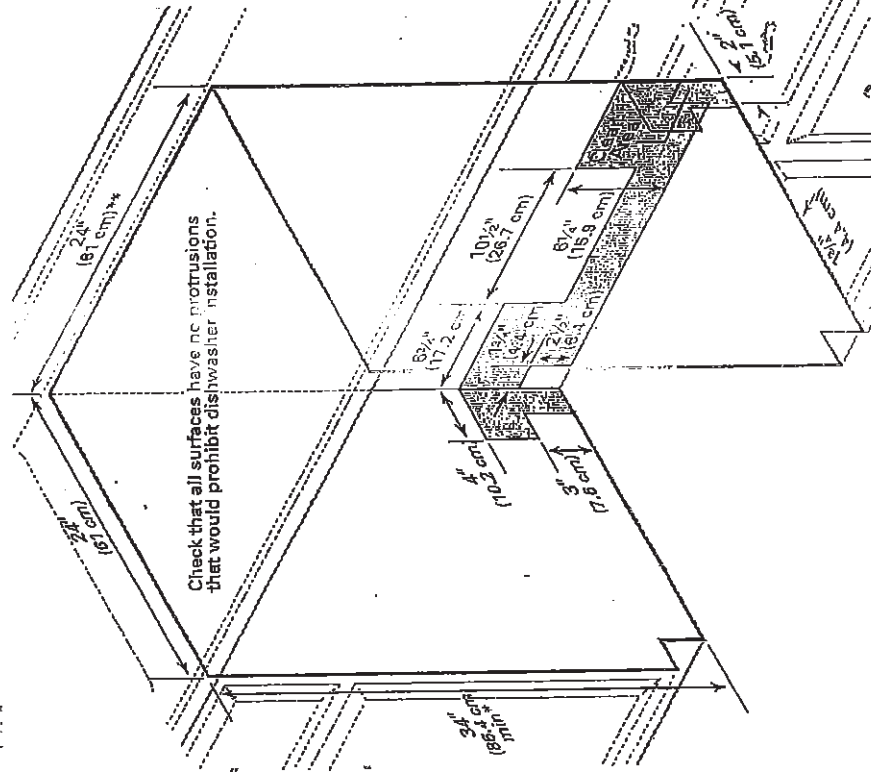

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.


42

CU-COUNTRY LANE / UPcountry
LOT 4-3
20-2257 ELEV B
THE CALVERTON

37^{or} 42

WHIRLPOOL WASHER Model #: WFW5620HW

Whirlpool Brand Canada English | Washers and Dryers | Washers | Front Load Washers | WFW5620HW

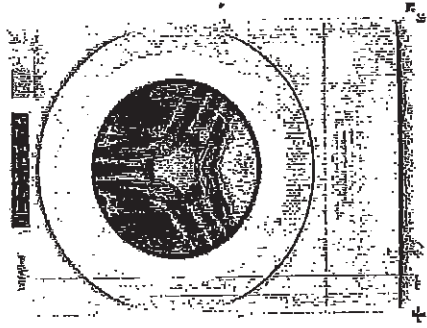

5.2 cu. ft. I.E.C. Closet-Depth
Front Load Washer with
Load & Go™ Dispenser



Whirlpool 5.2 cu. ft. I.E.C. Closet-Depth Front Load Washer with Load & Go™
Dispenser

Model #: WFW5620HW

Dimensions

Depth	80.17 cm, 31-9/16 in
Depth With Door Open 90 Degree	143.51 cm, 56-1/2 in
Minimum Height	98.11 cm, 38-5/8 in
Width	68.58 cm, 27.0 in

Appearance

LCD Touch Screen	No
------------------	----

Window

Yes

Details

Drum Material	Stainless Steel
---------------	-----------------

Cycles and Options

Number of Wash Cycles	37
-----------------------	----

Electrical

Hz	60
----	----

Power Cord Included

Yes

T

42

CU-COUNTRY LANE / UP COUNTRY
 LOT 4-3
 20-2257 ELEV B
 THE CALVERTON

38 of 42

WHIRLPOOL WASHER Model #: WFW5620HW

LOCATION REQUIREMENTS



Proper installation is your responsibility.

You will need:

- A water heater set to 120°F (49°C).
- A grounded electrical outlet located within 6 ft (1.8 m) of power cord on back of washer.
- Hot and cold water faucets located within 4 ft (1.2 m) of hot and cold water fill valves on washer, and water pressure of 20–100 psi (137.9–689.6 kPa).
- A level floor with maximum slope of 1" (25 mm) under entire washer. Installing on carpet or surfaces with foam backing is not recommended.
- Floor must support washer's total weight (with water and load) of 315 lbs (143 kgs).


IMPORTANT: Do not install, store, or operate washer where it will be exposed to weather or in temperatures below 32°F (0°C). Water remaining in washer after use may cause damage in low temperatures. See "Washer Care" in your Use and Care Guide for winterizing information.

Whirlpool Models* ✓

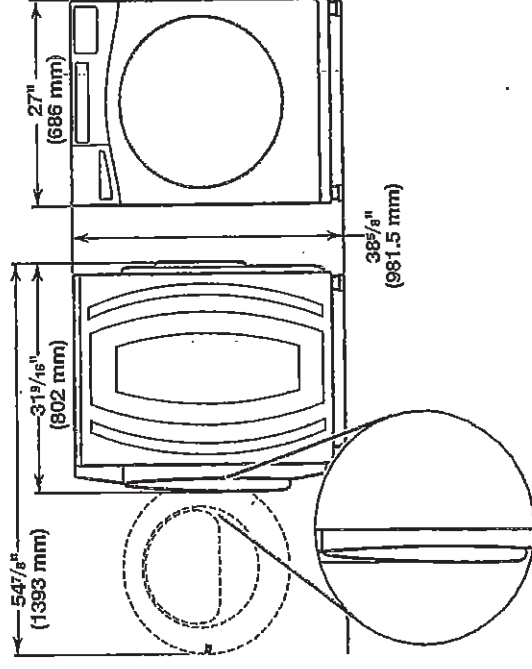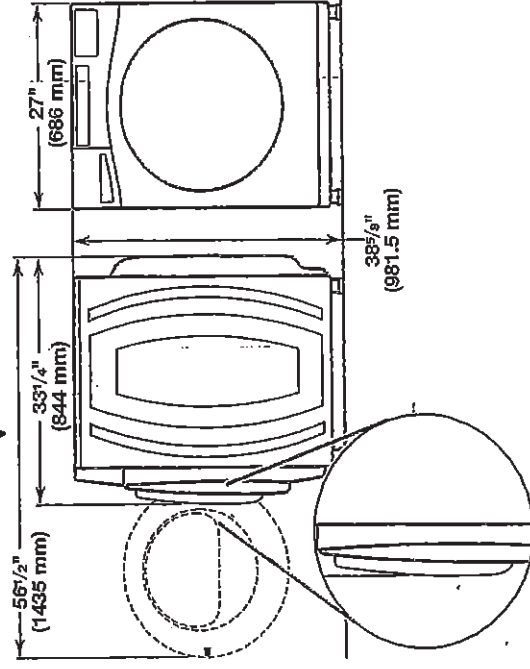

*For additional details (or information) specific to your model, refer to the "Dimensions" listed for your model at www.whirlpool.com.


~~Maytag Models~~

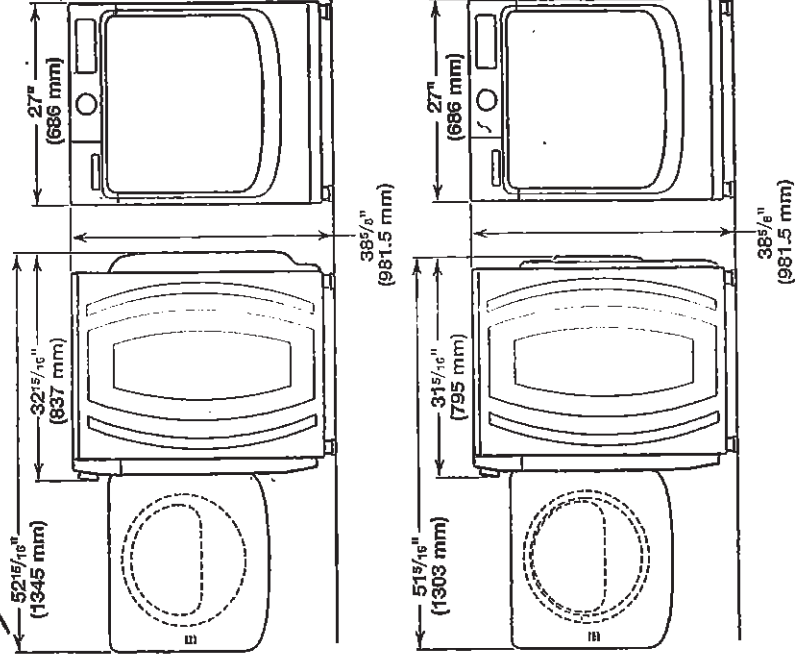

All dimensions show minimum spacing allowed. For each arrangement, consider allowing more space for ease of installation and servicing, and spacing for companion appliances and clearances for walls, doors, and floor moldings.

Space must be large enough to allow door to fully open. Add spacing of 1" (25 mm) on all sides of washer to reduce noise transfer. If a closet door or louvered door is installed, top and bottom air openings in door are required.

Recessed area or closet installation (stacked washer and dryer):

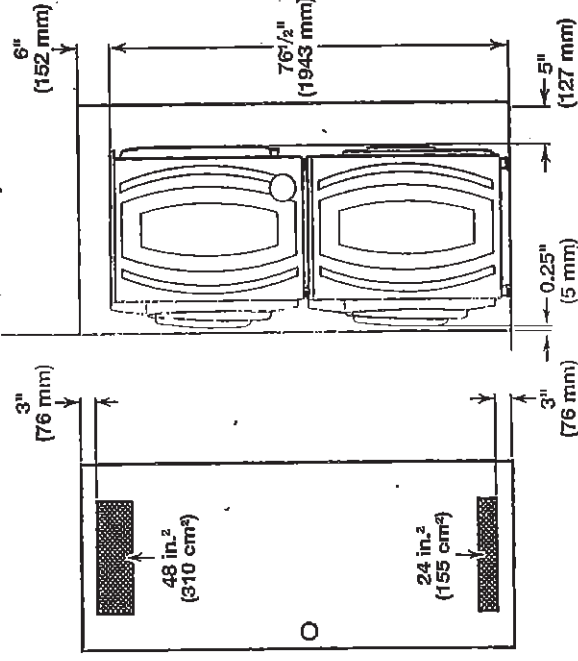


PT.

CU-COUNTRY LANE /UPCOUNTRY
LOT 4-3
20-2257 ELEV B
THE CALVERTON


39 of 42

WHIRLPOOL WASHER Model #: WFW5620HW


Custom under-counter installation: X

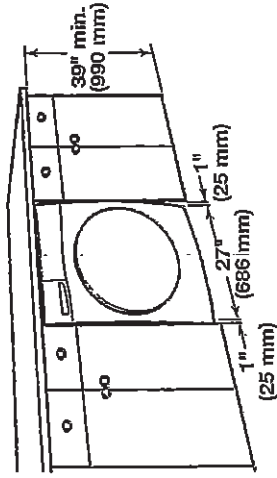

Recessed area or closet installation: X

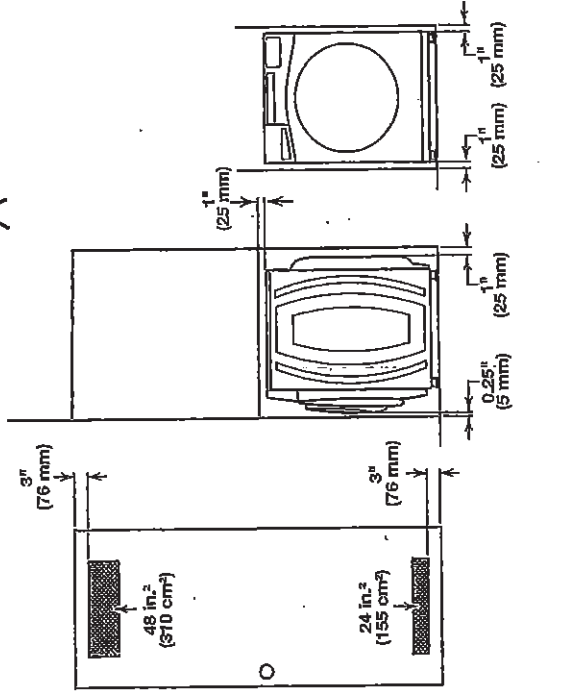

Custom cabinet installation: X

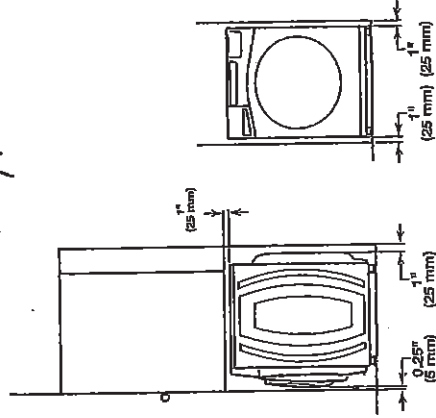


DRAIN SYSTEM

The drain system can be installed using a floor drain, wall standpipe, floor standpipe, or laundry tub. Select the method you need.


IMPORTANT: To avoid siphoning, only 4.5" (114 mm) of drain hose should be inside standpipe. Always secure drain hose with cable tie.

Floor standpipe drain system:

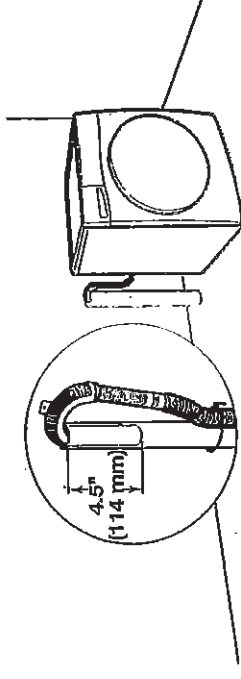


Minimum diameter for a standpipe drain: 2" (51 mm). Minimum carry-away capacity: 17 gal. (64 L) per minute. A 1/4" (6 mm) diameter to 1" (25 mm) diameter Standpipe Adapter Kit is available (Part Number 3363920). Top of standpipe must be at least 30" (762 mm) high; install no higher than 96" (2.44 m) from bottom of washer. If you have an overhead sewer and need to pump higher than 96" (2.44 m), a sump pump and associated hardware are needed. See "Alternate parts."

Wall standpipe drain system

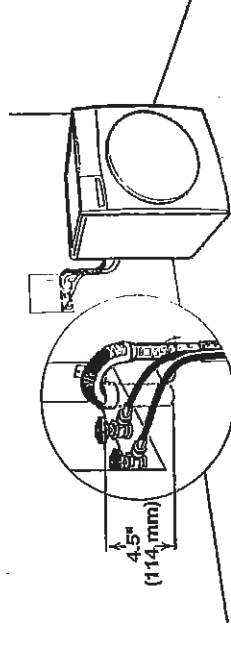

See requirements for floor standpipe drain system.

Laundry tub drain system

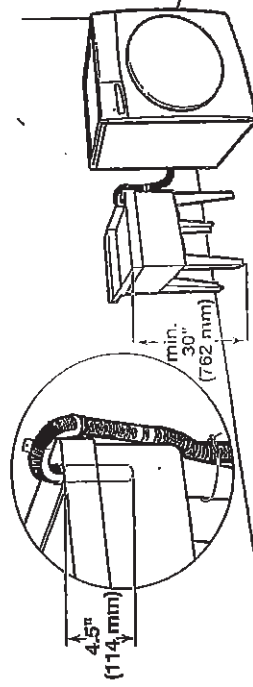

Minimum capacity: 20 gal. (76 L). Top of laundry tub must be at least 30" (762 mm) above floor; install no higher than 96" (2.44 m) from bottom of washer.


PT

CU-COUNTRY LANE /UPCOUNTRY
LOT 4-3
20-2257 ELEV B
THE CALVERTON

40.42

WHIRLPOOL DRYER Model #: YWED5620HW

Whirlpool Brand Control Panel | Washer and Dryer | Dryer | Electric Dryer | YWED5620HW

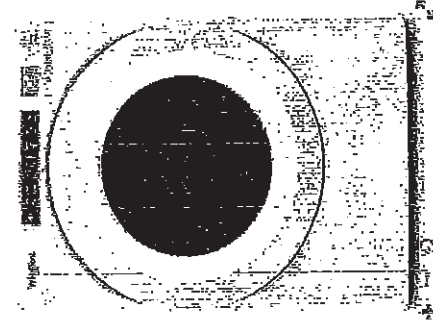

7.4 cu. ft. Front Load Electric
Dryer with Intuitive Touch
Controls



Whirlpool

7.4 cu. ft. Front Load Electric Dryer with Intuitive Touch Controls

Model #: YWED5620HW

Dimensions

Depth	78.74 cm, 31.0 in
Depth With Door Open 90 Degree	138.43 cm, 54-1/2 in
Height	98.42 cm, 38-3/4 in
Width	68.58 cm, 27.0 in

Configuration and Overview

Fuel Type	Electric
Cycles and Options	
Cycle Time Remaining	Yes
Last Filter Indicator	No
Number of Dryer Cycles	36
Number of Dryness Levels	3
Ventilation System	
Long Vent	No
Maximum Vent Length	64
Venting Direction	Left, Right, Bottom, Rear
Electrical	
Hz	60
Power Cord Included	Yes


PT

CU-COUNTRY LANE/UPCOUNTRY
LOT 4-3
20-2257 ELEV B
THE CALVERTON

41 of 42

WHIRLPOOL DRYER Model #: YWED5620HW

Back view:

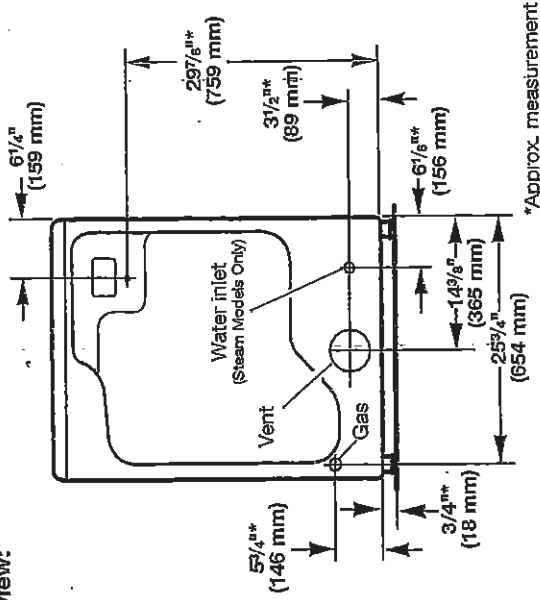

NOTE: Most installations require a minimum of 5" (127 mm) clearance behind dryer for exhaust vent with elbow. See "Venting Requirements."

Installation Clearances

For each arrangement, consider allowing more space for ease of installation and servicing, spacing for companion appliances, and clearances for walls, doors, and floor moldings. Space must be large enough to allow door to fully open. Add spacing on all sides of dryer to reduce noise transfer. If a closet door or louvered door is installed, top and bottom air openings in door are required.

Check code requirements. Some codes limit, or do not permit, installation of the dryer in garages, closets, mobile homes, or sleeping quarters. Contact your local building inspector.


NOTE: No other fuel-burning appliance can be installed in the same closet as a dryer.

Installation spacing for recessed area or closet installation

All dimensions show recommended and minimum spacing allowed.


- Additional spacing should be considered for ease of installation and servicing.
- Additional clearances might be required for wall, door, floor moldings, dryer venting, and gas line.
- Additional spacing should be considered on all sides of the dryer to reduce noise transfer.
- For closet installation with a door, minimum ventilation openings in the top and bottom of the door are required. Louvered doors with equivalent ventilation openings are acceptable.
- Companion appliance spacing should also be considered.

Recommended installation clearances (dryer only):

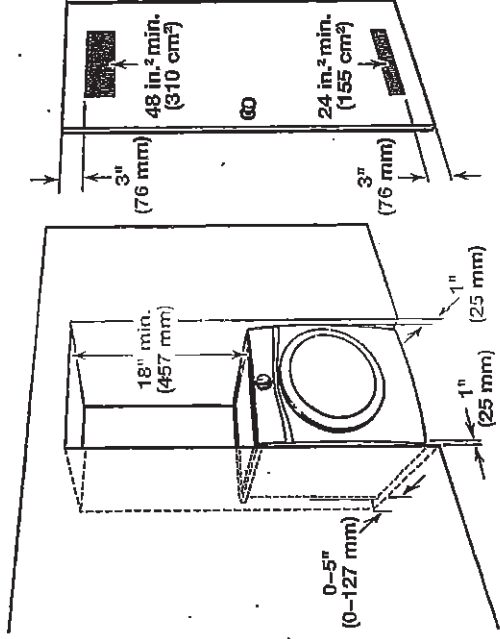

0" (0 mm) rear spacing is allowed for straight back venting only. For steam models only, inlet hose must not be kinked.

Custom under-counter installation:

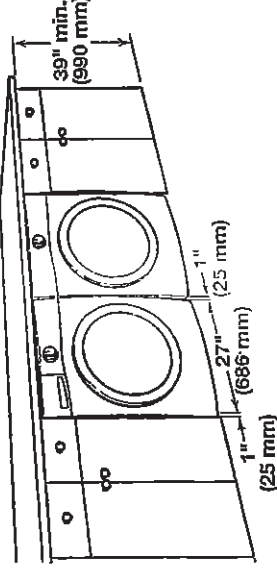

Mobile home - Additional installation requirements:

This dryer is suitable for mobile home installations. The installation must conform to the Manufactured Home Construction and Safety Standard, Title 24 CFR, Part 3280 (formerly the Federal Standard for Mobile home construction and Safety, Title 24 HUD Part 280) or Standard CAN/CSA-Z240 MH.

Mobile home installations require:

- Metal exhaust system hardware: available for purchase from your dealer. For further information, see "Assistance or Service" in your Use and Care Guide.
- Special provisions must be made in mobile homes to introduce outside air into dryer. Openings (such as a nearby window) should be at least twice as large as dryer exhaust opening.

For mobile home installation of gas dryers:

- Mobile Home Installation Hold-down Kit Part Number 346764 is available to order. For further information, see "Assistance or Service" in your Use and Care Guide.

PT

CU-COUNTRY LANE / spcountry
LOT 4-3
20-2257 ELEV B
THE CALVERTON

42 of 42

WHIRLPOOL DRYER Model #: YWED5620HW

Additional parts may be required, depending on your installation. Check local codes. Check existing electrical supply and venting. Read "Electrical Requirements" and "Venting Requirements" before purchasing parts.

If using a power supply cord:

Use a UL Listed power supply cord kit marked for use with clothes dryers. The kit should contain:

- A UL Listed 30 amp power supply cord, rated 120/240 volt minimum. The cord should be type SRD or SRDT and be at least 4 ft. (1.22 m) long. The wires that connect to the dryer must end in ring terminals or spade terminals with upturned ends.
- A UL Listed strain relief.

Optional Equipment (not supplied with dryer):

Refer to your Use and Care Guide for information about accessories available for your dryer.

LOCATION REQUIREMENTS

Check code requirements. Some codes limit, or do not permit, installing dryer in garages, closets, mobile homes, or sleeping quarters. Contact your local building inspector.

!WARNING



Explosion Hazard

Keep flammable materials and vapors, such as gasoline, away from dryer.

Place dryer at least 18 inches (460 mm) above the floor for a garage installation.


Failure to do so can result in death, explosion, or fire.

You will need:


- A location allowing for proper exhaust installation. See "Venting Requirements."
- A separate 15 or 20 amp circuit for a gas dryer or 30 amp circuit for an electric dryer.
- If using power supply cord, a grounded electrical outlet located within 2 ft. (610 mm) of either side of dryer. See "Electrical Requirements."
- Floor must support dryer weight of 200 lbs. (90.7 kg). Also consider weight of companion appliance.
- Cold water faucets located within 4 ft. (1.2 m) of the water fill valves, and water pressure of 20-120 psi (138-827 kPa). You may use your washer's water supply by purchasing the necessary parts noted in "Parts needed."
- Level floor with maximum slope of 1" (25 mm) under entire dryer. If slope is greater than 1" (25 mm), install Extended Dryer Feet Kit, Part Number 279810. If not level, clothes may not tumble properly and automatic sensor cycles may not operate correctly.
- For garage installation, place dryer at least 18" (460 mm) above floor. If using a pedestal, you will need 18" (460 mm) to bottom of dryer.
- The dryer must not be installed or stored in an area where it will be exposed to water and/or weather.

IMPORTANT: Do not operate, install, or store dryer where it will be exposed to water, weather, or at temperatures below 40°F (4°C). Lower temperatures may cause dryer not to shut off at end of automatic sensor cycles, resulting in longer drying times.


DRYER DIMENSIONS
Front view:

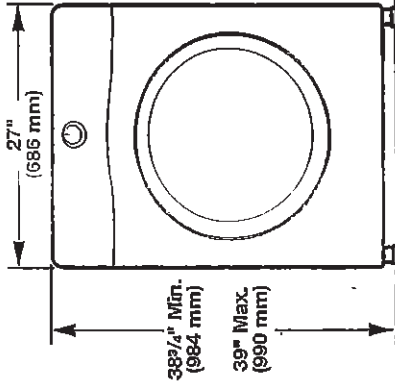

Side view:
Whirlpool Models

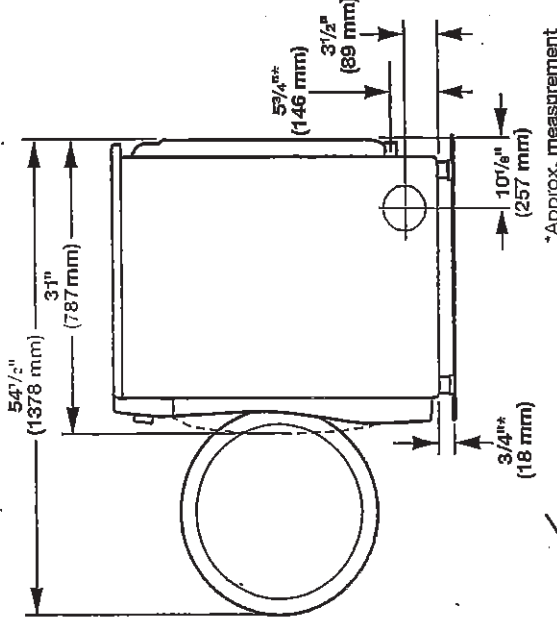

Maytag Models

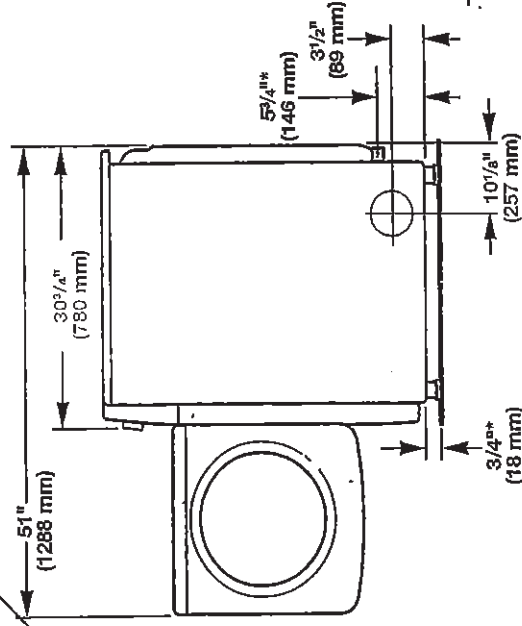

BT