



08-Jul-21

PRE-Sales Selection Sheet
CHECKLIST

1 of 34

LOT	055-1	20-2447-EN ELEV B, THE BARRINGTON
PURCHASERS: KELLI DIANE NAUMOVSKI CONTACT NO: 416-419-0350		
DIMITAR NAUMOVSKI 905-259-7994		
VENDOR: HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4		

COFFERED CEILING GREAT ROOM

- ☐ FINISHED BASEMENT
- ☐ COLD CELLAR

UPGRADED / MODIFIED ELEVATION

- ☐ CORNER UPGRADE
- ☐ SIDE UPGRADE
- ☐ REAR UPGRADE

CEILING UPGRADE - SMOOTH

- ☒ MAIN FLOOR
- ☐ SECOND FLOOR

ADDITIONAL ROUGH-INS

- ☒ 200 AMP SERVICE
- ☐ WET BAR ROUGH IN

GAS ROUGH-IN

- ☐ STOVE
- ☐ BBQ

HOODFAN VENTING

- ☐ 6" ROUND DUCT
- ☒ 7" ROUND DUCT

- ☐ WALK OUT DECK
- ☐ WALK OUT BASEMENT

- ☐ BASEMENT

- ☐ HUMIDIFIER
- ☒ AIRCON

- ☐ DRYER
- ☐ ADDITIONAL FIREPLACE

FULL BASEMENT STAIRS:

PAINT GRADE

UPPER BASEMENT STAIRS:

N/A

LOWER BASEMENT STAIRS:

N/A

STAIRS TO LOWER LEVEL:

ALL OAK

STAIRS TO UPPER LEVEL:

ALL OAK

MAIN STAIRS:

N/A

MEDIA STAIRS (if applicable):

N/A

Date	July 4/21	Signatures
	Purchased	on file

Date	July 4/21	IRIT, SALEM
	APPROVED	Décor Consultant

Date		Purchaser
		MR. ROSEN

Date Approved: HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4



02-Jul-21

SCHEDULE "E"

2 & 34

Addendum forms part of, and is to be read with the attached offer to Purchase for:

LOT	055-1	20-2447-EN ELEV B THE BARRINGTON
PURCHASERS:	KELLI DIANE NAUMOVSKI DIMITAR NAUMOVSKI	CONTACT NO: 416-419-0350 905-259-7994
VENDOR:	HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4	

The following items are included in the Agreement of Purchase and Sales, and are from Vendors standard samples:

Appliances			
2	FIVE APPLIANCE: SS FRIDGE, STOVE, DISHWASHER, WHITE FRONT LOADER WASHER / DRYER- TOWNHOMES	Qty:	1
X_Credits			
38	TEN THOUSAND (\$10,000.00) IN UPGRADES AT DÉCOR (NO CASH VALUE)	Qty:	1

Prinida Jimenez
Purchaser
Date *July 9/21*

[Signature]
Purchaser
Date *July 9/21*

July 4, 2021
Date
APPROVED -
[Signature]
DÉCOR Consultant

July 9/21
Date
APPROVED -
[Signature]
HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4



02-Jul-21

Interior Finishing Selection Sheet

LOT 053-1

20-2447-EN ELEV B THE BARRINGTON

PURCHASERS: KELLI DIANE NAUMOVSKI
DIMITAR NAUMOVSKI

CONTACT NO: 416-419-0350
905-259-7994

VENDOR: HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4

Appliances

6-34 Kitchen HoodFan

Cabinetry

1-9203 Kitchen Cabinet Colour/Style

3-2086 Kitchen Cabinet Hardware

25-9111 Main Bathroom Cabinet Colour/Style

29-7672 Main Bathroom Cabinet Hardware

28-8800 Main Bathroom Countertop

20-9111 Master Ensuite Cabinet Colour/Style

22-7672 Master Ensuite Cabinet Hardware

21-8806 Master Ensuite Countertop

414-9111 Powder Room Lower Level Cabinet Colour/Style

416-7672 Powder Room Lower Level Cabinet Hardware

415-8799 Powder Room Lower Level Countertop

Carpet

37-9252 Bedroom 2 Flooring

38-9252 Bedroom 3 Flooring

14-9252 Family Room Flooring

367-9252 Lower Level Hall Flooring

36-9252 Master Bedroom Flooring

52-1079 Throughout Underpad

Ceramics

16-9106 Foyer Flooring

17-2225 Foyer Grout

UPG

☐ Air King Under Cabinet Range Hood (Standard for Towns Only)
STAINLESS STEEL AV1308 STD 30" PAGE 20

☒ MANCHESTER ORCHID Classic II UPG MDF PAINTED

☐ HARDWARE 9677 STD

☐ SIMCOE ORCHID VIKING III STD 3DL

☐ HARDWARE 135 STD

☐ Countertop INUKSHUK TAUPE P-345 LM Arborite

☐ SIMCOE ORCHID VIKING III STD 3DL

☐ HARDWARE 135 STD

☐ Countertop LECHE VESTA 4987K-07 Wilsonart

☐ SIMCOE ORCHID VIKING III STD 3DL

☐ HARDWARE 135 STD

☐ Countertop INUKSHUK CARBON P-346 LM Arborite

☐ Dynasty Tex 40 oz Poly MYSTIC BEIGE DY 16787 STD

☐ Dynasty Tex 40 oz Poly MYSTIC BEIGE DY 16787 STD

☐ Dynasty Tex 40 oz Poly MYSTIC BEIGE DY 16787 STD

☐ Dynasty Tex 40 oz Poly MYSTIC BEIGE DY 16787 STD





☐ Dynasty Tex 40 oz Poly MYSTIC BEIGE DY 16787 STD

☐ Underpad 500 Series STD

☒ Madison Series White Matte GE.MD.WHT.1818.MT UPG 1
18" X 18" Matte

☐ Grout (27) Silver STD

1. The Purchaser acknowledges these selections are subject to the terms and conditions of the applicable Agreement of Purchase and Sale.
2. The Purchaser acknowledges that the Vendor accepts no responsibility in the event the Vendor is unable to supply a selection. The Purchaser agrees to reselect from the currently available selections immediately upon request.
3. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
4. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
5. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
6. Selections will not be processed unless signed by Heathwood Homes Head Office.
7. The colour selections made on the Colour Chart are final and cannot be changed once submitted.
8. The Purchaser has checked and acknowledges the accuracy of this Colour Chart.

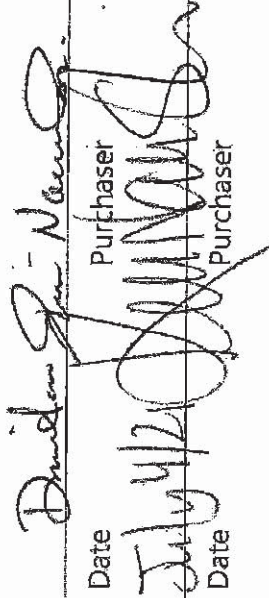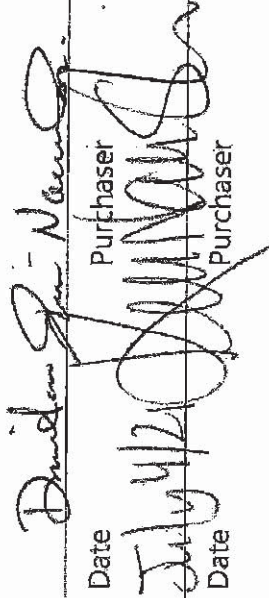Date	<u>July 4, 2021</u>	Date	<u>July 4, 2021</u>
	Purchaser		Décor Consultant
Date	<u>July 4, 2021</u>	Date	<u>July 4, 2021</u>
	Purchaser		Décor Consultant

Date Approved HEATHWOOD HOMES (WHITBY)
LIMITED - PHASE 4



02-Jul-21

Interior Finishing Selection Sheet

LOT 055-1

20-2447-EN ELEV B THE BARRINGTON

PURCHASERS: KELLI DIANE NAUMOVSKI
DIMITAR NAUMOVSKI

CONTACT NO: 416-419-0350
905-259-7994

VENDOR: HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4

Ceramics

UPG

7-9106 Kitchen/Breakfast Flooring

☒ Madison Series White Matte GE.MD.WHT.1818.MT UPG 1
18" X 18" Matte

8-2225 Kitchen/Breakfast Grout

☐ Grout (27) Silver STD

348-9257 Laundry Mud Room Flooring

☐ CARRARA White / Grey GE.CR.WHIT.1313.MT STD 13 x 13

349-2225 Laundry Mud Room Grout

☐ Grout (27) Silver STD

30-9257 Main Bathroom Flooring

☐ CARRARA White / Grey GE.CR.WHIT.1313.MT STD 13 x 13

31-2225 Main Bathroom Grout

☐ Grout (27) Silver STD

112-8833 Main Bathroom Tub Wall Tile

☐ Uniwall White QT.UW.WHT.0810 STD 8 x 10 TO BE INSTALLED
VERTICALLY

113-2226 Main Bathroom Tub Wall Tile Grout

☐ Grout (00) White STD

23-9106 Master Ensuite Floor Tile

☒ Madison Series White Matte GE.MD.WHT.1818.MT UPG 1
18" X 18" Matte

24-2225 Master Ensuite Floor Tile Grout

☐ Grout (27) Silver STD

73-8661 Master Ensuite Shower Floor Tile

☐ Ontario Series Mosaic Snow White Matte
OD.ON.SWT.0202.MT.N STD 2 x 2

74-2226 Master Ensuite Shower Floor Tile Grout

☐ Grout (00) White STD

147-8923 Master Ensuite Shower Jamb(s) and Sill(s)

☐ Shower Jamb / Sill Thassos White STD

104-9020 Master Ensuite Shower Wall Tile

☐ Weave White QT.WV.WHT.0810 STD 8 x 10 TO BE INSTALLED
VERTICALLY

105-2226 Master Ensuite Shower Wall Tile Grout

☐ Grout (00) White STD

32-9257 Powder Room Flooring

☐ CARRARA White / Grey GE.CR.WHIT.1313.MT STD 13 x 13

33-2225 Powder Room Grout

☐ Grout (27) Silver STD

369-9257 Powder Room Lower Level Flooring

☐ CARRARA White / Grey GE.CR.WHIT.1313.MT STD 13 x 13

370-2225 Powder Room Lower Level Grout

☐ Grout (27) Silver STD

53-2232 Throughout Thresholds

☐ Metal Thresholds STD

Electrical

90-5796 Throughout Switches and Plug

☐ Decora White Switches and Plugs STD

1. The Purchaser acknowledges these selections are subject to the terms and conditions of the applicable Agreement of Purchase and Sale.
2. The Purchaser acknowledges that the Vendor accepts no responsibility in the event the Vendor is unable to supply a selection. The Purchaser agrees to reselect from the currently available selections immediately upon request.
3. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
4. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
5. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
6. Selections will not be processed unless signed by Heathwood Homes Head Office.
7. The colour selections made on the Colour Chart are final and cannot be changed once submitted.
8. The Purchaser has checked and acknowledges the accuracy of this Colour Chart.

Date July 4/21 Purchaser

Purchaser

Date

July 4/21 Purchaser

Purchaser

Date

Date July 4, 2021

Date

Décor Consultant

Date Approved HEATHWOOD HOMES (WHITBY)

LIMITED - PHASE 4



Interior Finishing Selection Sheet

02-Jul-21

LOT 055-1 20-2447-EN ELEV B THE BARRINGTON

PURCHASERS: KELLI DIANE NAUMOVSKI CONTACT NO: 416-419-0350

DIMITAR NAUMOVSKI 905-259-7994

VENDOR: HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4

UPG

Fireplace

136-8891 Great Room Fireplace Mantle

135-8865 Great Room Fireplace Type

Granite

2-9069 Kitchen Countertop

Hardwood

11-7498 Great Room Flooring

12-7498 Living Room Flooring

98-7498 Main Hall Flooring

78-7498 Stair Landing to Lower Level Flooring

77-7498 Stair Landing to Upper Level Flooring

35-7498 Upper Hall Flooring

Interior Railings

49-7655 Stairs to Lower Level Handrail/Pickets/Posts Type

43-7655 Stairs to Upper Level Handrail/Pickets/Posts Type

Interior Stairs

116-1713 Basement Stairs Type

45-1712 Stairs to Lower Level Type

39-1712 Stairs to Upper Level Type

Interior Trim

91-9374 Throughout Trim Size

Painting

- ☐ Paint Grade Mantle- Cabinet (Per Plan) WHITE NF-17 STD
PAGE 14
☐ Dimplex FP3033HL Electric Fireplace

☐ MSI Quartz ICED WHITE Group 1 STD 3/4"

☐ Vintage Northern Solid Sawn Engineered Select V : Red Oak Pearl GRYPHON Red Oak Pearl 3/4" x 3 1/4"

☐ Vintage Northern Solid Sawn Engineered Select V : Red Oak Pearl GRYPHON Red Oak Pearl 3/4" x 3 1/4"

☐ Vintage Northern Solid Sawn Engineered Select V : Red Oak Pearl GRYPHON Red Oak Pearl 3/4" x 3 1/4"

☐ Vintage Northern Solid Sawn Engineered Select V : Red Oak Pearl GRYPHON Red Oak Pearl 3/4" x 3 1/4"

☐ Vintage Northern Solid Sawn Engineered Select V : Red Oak Pearl GRYPHON Red Oak Pearl 3/4" x 3 1/4"

☐ Vintage Northern Solid Sawn Engineered Select V : Red Oak Pearl GRYPHON Red Oak Pearl 3/4" x 3 1/4"

☐ Single Collar Alt. Plain w/ Shoes with 3 1/2" Square/Cap Post(s) OAK/METAL UPG

☐ Single Collar Alt. Plain w/ Shoes with 3 1/2" Square/Cap Post(s) OAK/METAL UPG

☐ Paint Grade Stairs STD

☐ Oak Stairs UPG_1

☐ Oak Stairs UPG_1

☐ 4 1/4" Baseboards and 2 3/4" Integrated Backband Casings STD

1. The Purchaser acknowledges these selections are subject to the terms and conditions of the applicable Agreement of Purchase and Sale.
2. The Purchaser acknowledges that the Vendor accepts no responsibility in the event the Vendor is unable to supply a selection. The Purchaser agrees to reselect from the currently available selections immediately upon request.
3. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
4. The Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
5. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
6. Selections will not be processed unless signed by Heathwood Homes Head Office.
7. The colour selections made on the Colour Chart are final and cannot be changed once submitted.
8. The Purchaser has checked and acknowledges the accuracy of this Colour Chart.

Date July 4/2021 Purchaser [Signature]
Date July 4/2021 Purchaser [Signature]

Date July 4/2021 Décor Consultant [Signature]
Date July 4/2021 Décor Consultant [Signature]

Date Approved HEATHWOOD HOMES (WHITBY)
LIMITED - PHASE 4



Interior Finishing Selection Sheet

02-Jul-21

LOT 055-1

20-2447-EN ELEV B THE BARRINGTON

PURCHASERS: KELLI DIANE NAUMOVSKI
DIMITAR NAUMOVSKI

CONTACT NO: 416-419-0350
905-259-7994

VENDOR: HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4

Painting

46-7761 Stairs to Lower Level Colour

UPG

☐ Stain handrail, stringers, treads, risers, nosing & posts. (Metal pickets) STAIN TO COMPLIMENT Red Oak Pearl GRYPHON SHADE WILL VARY

50-7761 Stairs to Lower Level Handrail/Pickets/Posts Colour

☐ Stain handrail, stringers, treads, risers, nosing & posts. (Metal pickets) STAIN TO COMPLIMENT Red Oak Pearl GRYPHON SHADE WILL VARY

40-7761 Stairs to Upper Level Colour

☐ Stain handrail, stringers, treads, risers, nosing & posts. (Metal pickets) STAIN TO COMPLIMENT Red Oak Pearl GRYPHON SHADE WILL VARY

44-7761 Stairs to Upper Level Handrail/Pickets/Posts Colour

☐ Stain handrail, stringers, treads, risers, nosing & posts. (Metal pickets) STAIN TO COMPLIMENT Red Oak Pearl GRYPHON SHADE WILL VARY

240-1716 Throughout Trim - Paint Colour

☐ Trim WHITE STD

51-1717 Throughout Walls - Paint Colour

☐ Wall WARM GREY 22 STD

Plumbing

266-1737 Main Bathroom Plumbing Fixture (Colour)

☐ Plumbing Fixtures WHITE STD

149-1737 Master Ensuite Plumbing Fixture (colour)

☐ Plumbing Fixtures WHITE STD

34-1737 Powder Room Plumbing Fixture (Colour)

☐ Plumbing Fixtures WHITE STD

371-1737 Powder Room Lower Level Plumbing Fixture (Colour)

☐ Plumbing Fixtures WHITE STD

1. The Purchaser acknowledges these selections are subject to the terms and conditions of the applicable Agreement of Purchase and Sale.
2. The Purchaser acknowledges that the Vendor accepts no responsibility in the event the Vendor is unable to supply a selection. The Purchaser agrees to reselect from the currently available selections immediately upon request.
3. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
4. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
5. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
6. Selections will not be processed unless signed by Heathwood Homes Head Office.
7. The colour selections made on the Colour Chart are final and cannot be changed once submitted.
8. The Purchaser has checked and acknowledges the accuracy of this Colour Chart.

Dimitar Naumovski
Date July 4/21
Purchaser

July 4, 2021
Date APPROVED
Dekor Consultant
M. Ford
Date Approved HEATHWOOD HOMES (WHITBY)
LIMITED - PHASE 4



02-Jul-21

7 Sales Selection Sheet
of 3

LOT	055-1	20-2447-EN ELEV B THE BARRINGTON
PURCHASERS: KELLI DIANE NAUMOVSKI CONTACT NO: 416-419-0350		
DIMITAR NAUMOVSKI 905-259-7994		
VENDOR:	HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4	
HST #		

It is herein understood and agreed between the undersigned parties hereto that the following changes shall be made to the above mentioned Agreement of Purchase and Sale in accordance with the agreement and except for such changes noted below, all other terms and conditions in the Agreement of Purchase and Sale shall remain as stated herein; It is further understood that and agreed that all changes and additions shall be installed as per builder's specifications, location and available selections. The Purchaser hereby agrees to purchase the following extras:

AMOUNT:

Cabinetry

1538	Optional Upgrade CLASSIC II	Kitchen	Qty: 1
1330	Optional Extras 03H- 66cm deep fridge cabinet (counter depth)(66cm fridge gable(s) sold separately) Classic SKETCH # 3 PAGE 12	KITCHEN	Qty: 1
1544	Optional Upgrade Optional Valance (Trim Only) VIKING I/II/III	Valance	Qty: 1

Ceramics

1907	Upgrade 1 Tile	Foyer Floor	Qty: 1
1911	Upgrade 1 Tile	Kit/Brk Floor	Qty: 1
1912	Upgrade 1 Tile	M. Ensuite Floor	Qty: 1

Coffered Ceiling

63	Optional Upgrade	GREAT ROOM	Qty: 1
----	------------------	------------	--------

Drywall

1. This Sales Selection Sheet when properly executed forms part of our Agreement of Purchase and Sale.
2. All extras and upgrades listed above are subject to Construction Progress and Architectural and Municipal requirements.
3. In the event the Vendor is unable to incorporate the work approved above in the construction of the house for any reason whatsoever, the Vendor will not be liable to the Purchaser in any way. The monies paid for any changes or optional extras not proceeded with shall be returned to the Purchaser, without interest. The cost of options or extras is not-refundable in all other circumstances. If for any reason whatsoever the Agreement of Purchase and Sale is not completed, the total cost of work approved above will be retained by the Vendor.
4. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
5. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
6. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
7. Selections will not be processed unless signed by Heathwood Homes Head Office.
8. The selections made on this schedule are final and cannot be changed once submitted.
9. The Purchaser has checked and acknowledges the accuracy of this schedule.

Date July 12, 2021 Purchaser [Signature]
Date July 4, 2021 Purchaser [Signature]

Date July 4, 2021 Decor Consultant [Signature]
Date 07-09-2021 Decor Consultant [Signature]

Date Approved HEATHWOOD HOMES (WHITBY)
LIMITED - PHASE 4



02-Jul-21

Sales Selection Sheet
0 of 3

LOT 055-1

20-2447-EN ELEV B THE BARRINGTON

PURCHASERS: KELLI DIANE NAUMOVSKI CONTACT NO: 416-419-0350

DIMITAR NAUMOVSKI 905-259-7994

VENDOR: HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4

HST #

It is herein understood and agreed between the undersigned parties hereto that the following changes shall be made to the above mentioned Agreement of Purchase and Sale in accordance with the agreement and except for such changes noted below, all other terms and conditions in the Agreement of Purchase and Sale shall remain as stated herein. It is further understood that and agreed that all changes and additions shall be installed as per builder's specifications, location and available selections. The Purchaser hereby agrees to purchase the following extras:

AMOUNT:

454 Ceiling Upgrades Qty: 1
Smooth Ceilings Main Floor

Electrical

342 Optional Extras Qty: 1
BASEMENT
Extra wall interior outlet on Existing Circuit (does not include kitchen outlets)
SEE SKETCH # 1 PAGE 10

342 Optional Extras Qty: 1
GREAT ROOM
Extra wall interior outlet on Existing Circuit (does not include kitchen outlets)
TO BE INSTALLED ABOVE THE FIRE PLACE 70" FROM FLOOR
SEE SKETCH # 3 PAGE# 12

351 Optional Extras Qty: 1
GREAT ROOM
Interior Ceiling Outlet (rough-in and completion including light fixture as room)
TO BE INSTALL IN THE CENTRE OF THE ROOM SKETCH # 3 PAGE 12

352 Potlights (NON-INSULATED) Qty: 4
T477GR-W 4" line voltage trim with flush adjustable gimbal ring (with LED Bulb)
USE EXISTING SWITCH PLUG
SEE SKETCH # 3 PAGE# 12

351 Optional Extras Qty: 1
KITCHEN
Interior Ceiling Outlet (rough-in and completion including light fixture as room)
TO BE INSTALL IN THE ABOVE THE BREAKFAST BAR - USE WITH KITCHEN SWITCH
SEE SKETCH # 3 PAGE# 12

344 Optional Extras Qty: 1
UPPER HALL
Ceiling rough-in (Capped)
TO BE INSTALLED ABOVE OPEN TO BELOW STAIRCASE ON EXISTING
3 WAY SWITCH

1. This Sales Selection Sheet when properly executed forms part of our Agreement of Purchase and Sale.
2. All extras and upgrades listed above are subject to Construction Progress and Architectural and Municipal requirements.
3. In the event the Vendor is unable to incorporate the work approved above in the construction of the house for any reason whatsoever, the Vendor will not be liable to the Purchaser in any way. The monies paid for any changes or optional extras not proceeded with shall be returned to the Purchaser, without interest. The cost of options or extras is non-refundable in all other circumstances. If for any reason whatsoever the Agreement of Purchase and Sale is not completed, the total cost of work approved above will be retained by the Vendor.
4. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
5. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
6. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
7. Selections will not be processed unless signed by Heathwood Homes Head Office.
8. The selections made on this schedule are final and cannot be changed once submitted.
9. The Purchaser has checked and acknowledges the accuracy of this schedule.

Date

Purchaser

Date APPROVED -

Décor Consultant

Date

Purchaser

Date Approved HEALTHWOOD HOMES (WHITBY)
LIMITED - PHASE 4



02-Jul-21

Sales Selection Sheet
6F 3

LOT	055-1	20-2447-EN ELEV B THE BARRINGTON
PURCHASERS:	KELLI DIANE NAUMOVSKI DIMITAR NAUMOVSKI	CONTACT NO: 416-419-0350 905-259-7994
VENDOR:	HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4	
		HST #

It is herein understood and agreed between the undersigned parties hereto that the following changes shall be made to the above mentioned Agreement of Purchase and Sale in accordance with the agreement and except for such changes noted below, all other terms and conditions in the Agreement of Purchase and Sale shall remain as stated herein: It is further understood that and agreed that all changes and additions shall be installed as per builder's specifications, location and available selections. The Purchaser hereby agrees to purchase the following extras:

Plumbing

AMOUNT:

279	STANDARD Kitchen Sink Option	KITCHEN	Qty: 1
	KINDRED Kitchen Sink Collection - Reginox ND1827RU/9 Stainless Kitchen Double (Large bowl/ Full Bowl) Undermount Sink (or equivalent)	PAGE 15	

1. This Sales Selection Sheet when properly executed forms part of our Agreement of Purchase and Sale.
2. All extras and upgrades listed above are subject to Construction Progress and Architectural and Municipal requirements.
3. In the event the Vendor is unable to incorporate the work approved above in the construction of the house for any reason whatsoever, the Vendor will not be liable to the Purchaser in any way. The monies paid for any changes or optional extras not proceeded with shall be returned to the Purchaser, without interest. The cost of options or extras is non-refundable in all other circumstances. If for any reason whatsoever the Agreement of Purchase and Sale is not completed, the total cost of work approved above will be retained by the Vendor.
4. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
5. The Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
6. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
7. Selections will not be processed unless signed by Heathwood Homes Head Office.
8. The selections made on this schedule are final and cannot be changed once submitted.
9. The Purchaser has checked and acknowledges the accuracy of this schedule.

Date July 4/21 Purchaser
[Signature]
Date July 4/21 Purchaser
[Signature]

Date July 4, 2021 Décor Consultant
[Signature]
Date 07-07-2021 [Signature]


Date Approved HEATHWOOD HOMES (WHITBY)
LIMITED - PHASE 4

C-2 COUNTRY LANE
LOT 55-1
20-2447 EN ELEV. B
THE BARRINGTON

10 of 34
The Barrington

20-2447 END ELEV. B Sketch# | ELEVATION A & B END:
2,504 SQ FT

ELECTRICAL
STD. HEIGHT

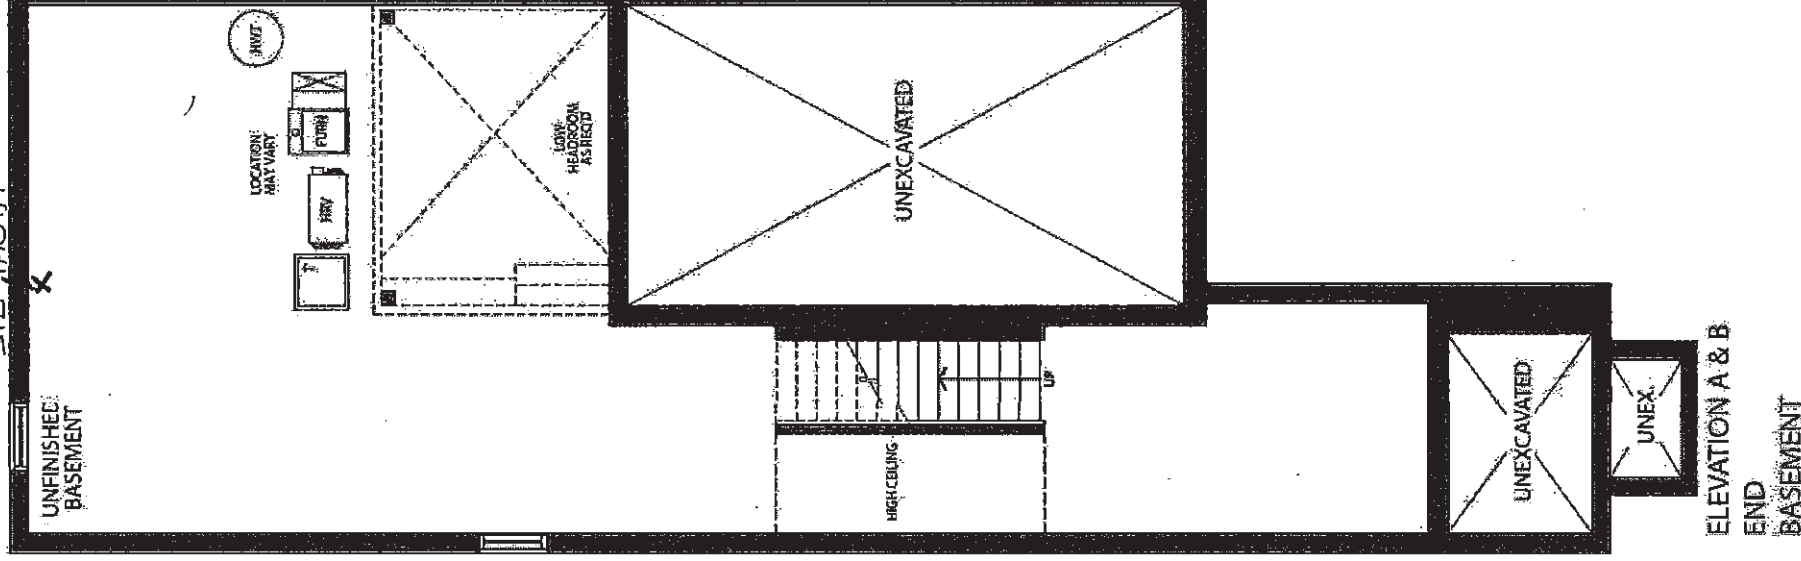

C-2 COUNTRY LANE
LOT 55-1
20-2447 EN ELEV. B
THE BARRINGTON


11 or 34

The Barrington

20-2447 END ELEV. B

ELEVATION A & B END:
2,504 SQ FT

Sketch #2

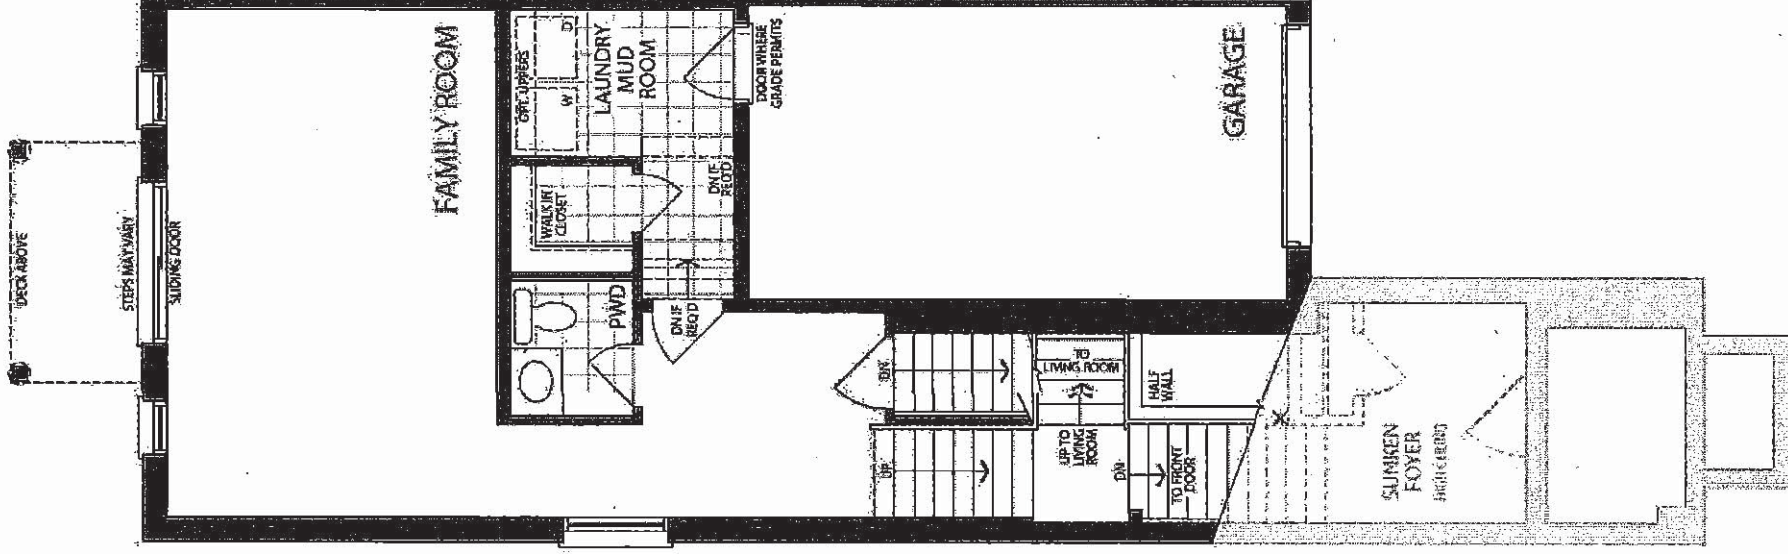

LOWER LEVEL
ELEVATION B END


KZ
D-N

C-2 COUNTRY LANE
LOT 55-1
20-2447 EN ELEV. B
THE BARRINGTON

12 of 34 The Barrington

20-2447 END ELEV. B

Sketch #3
ELEVATION A & B END:
2,504 SQ FT

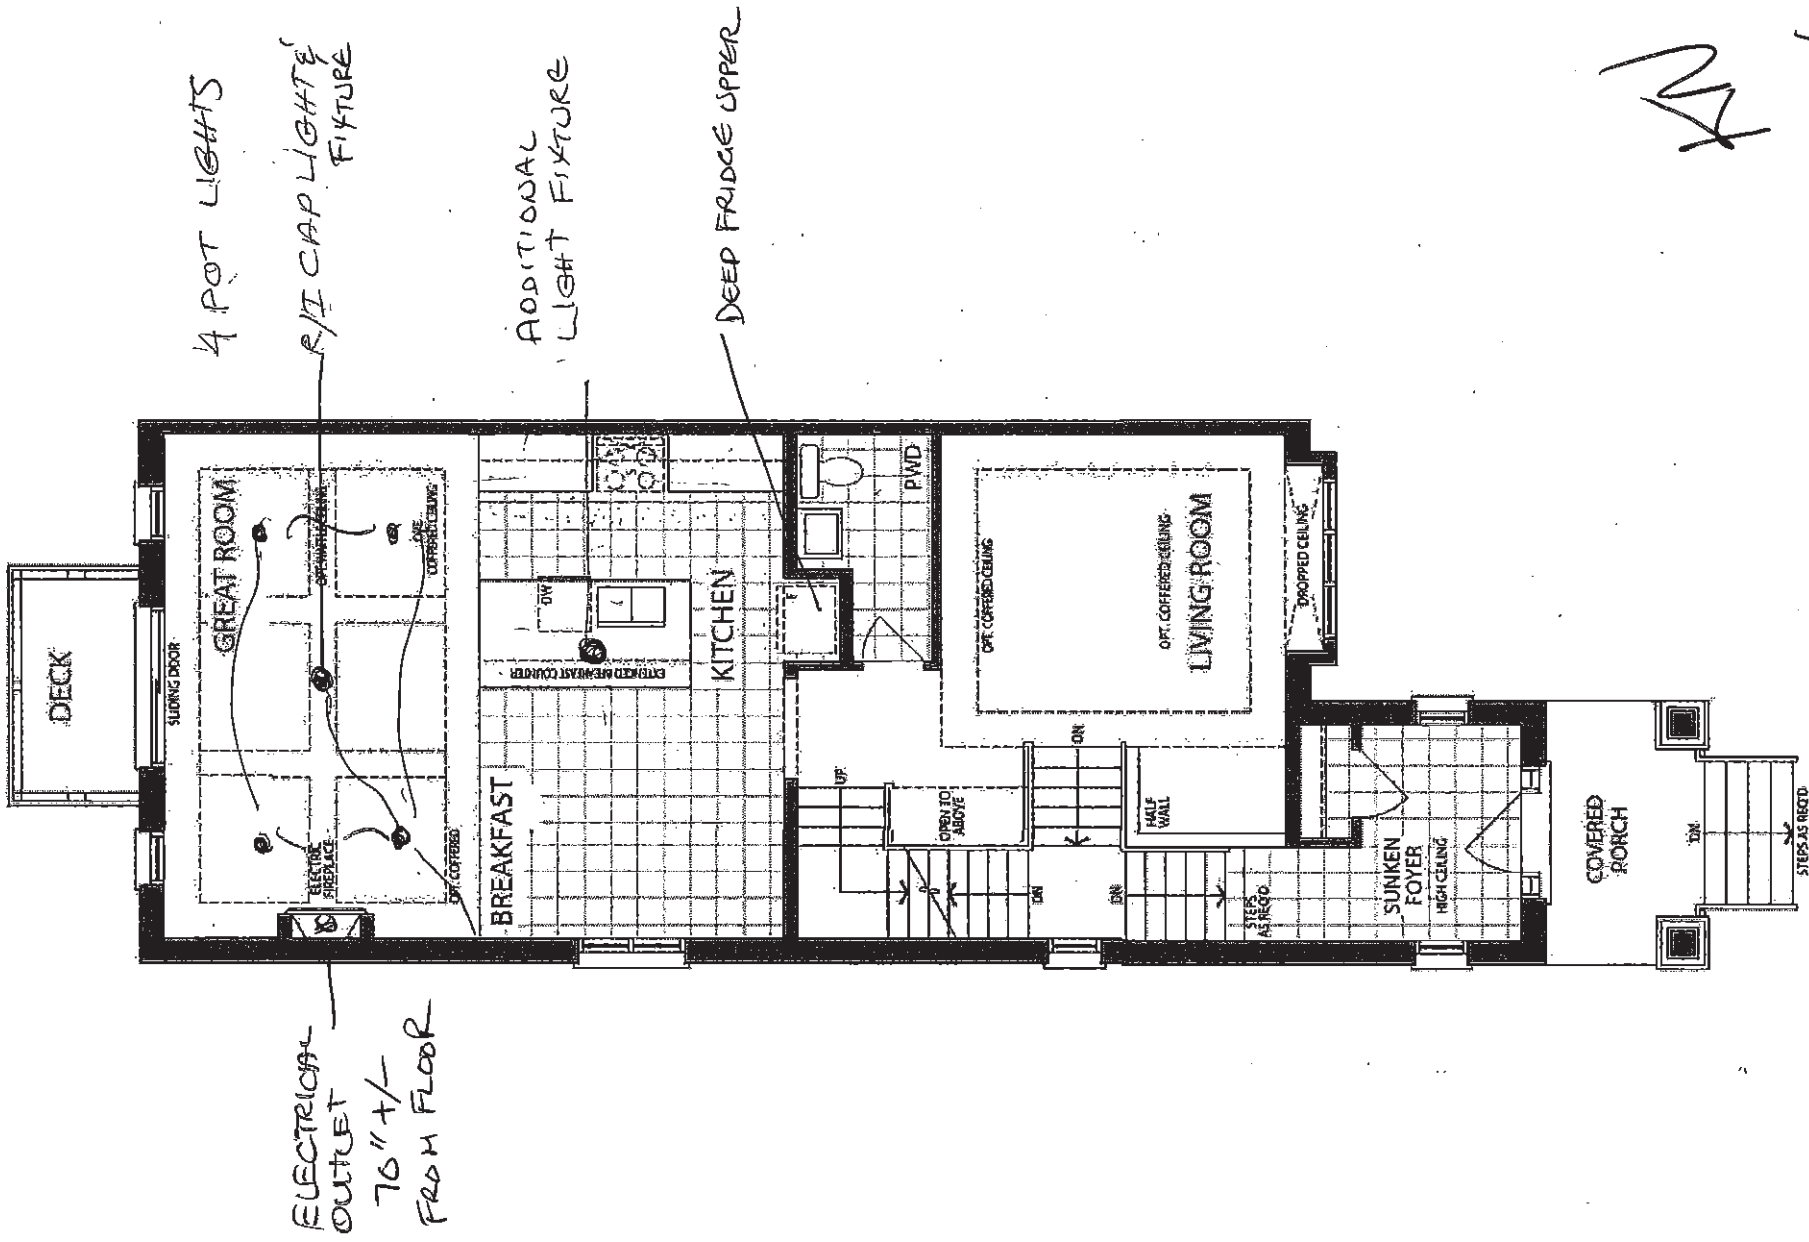

MAIN LEVEL
ELEVATION B END

AN
D.W


C-2 COUNTRY LANE
LOT 55-1
20-2447 EN ELEV. B
THE BARRINGTON

13 of 34 The Barrington

20-2447 END ELEV. B

ELEVATION A & B END:
2,504 SQ. FT.

Sketch # 4

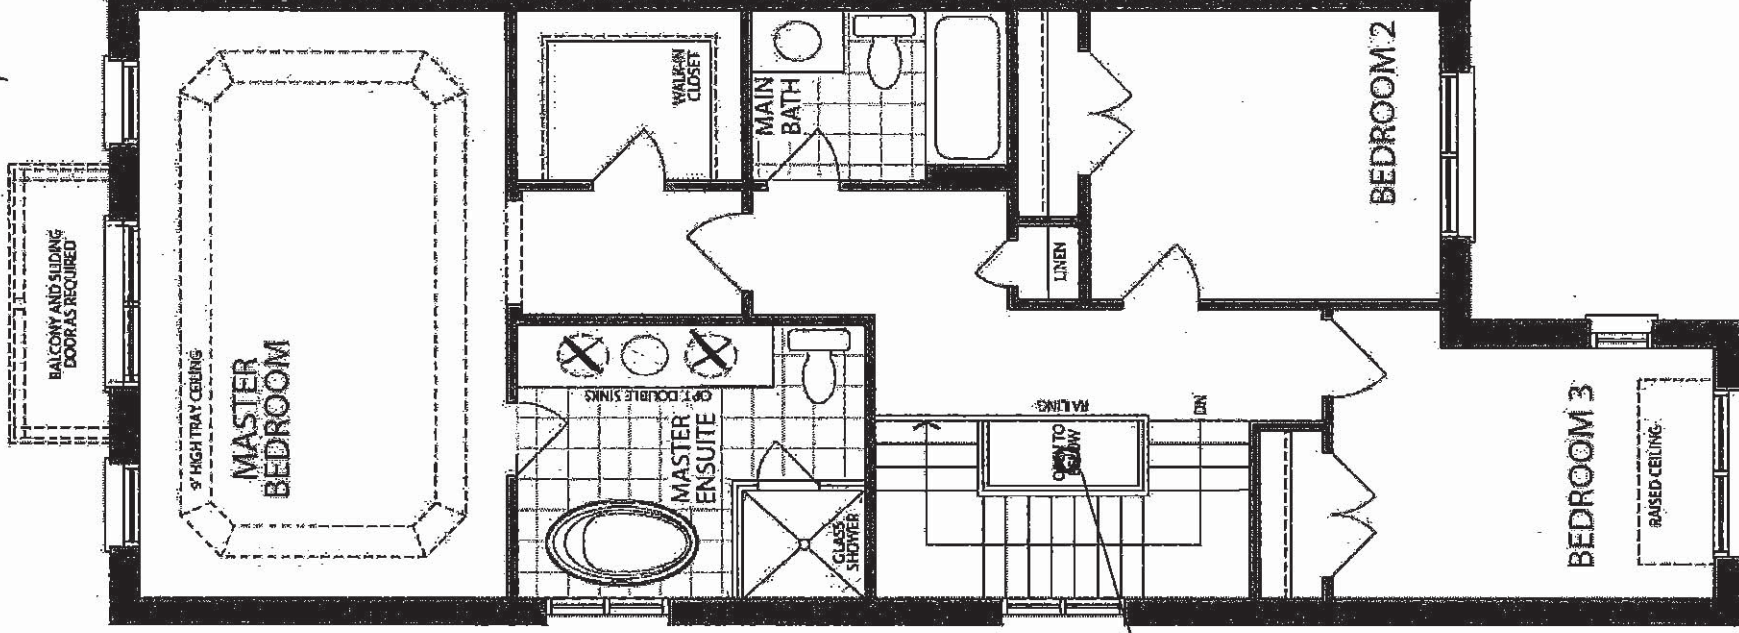


CAPPED
CEILING
ON EXISTING
3 WAY SWITCH

UPPER LEVEL
ELEVATION B END

C-2 COUNTRY LANE
LOT 55-1
20-2447 EN ELEV. B
THE BARRINGTON


4 of 34

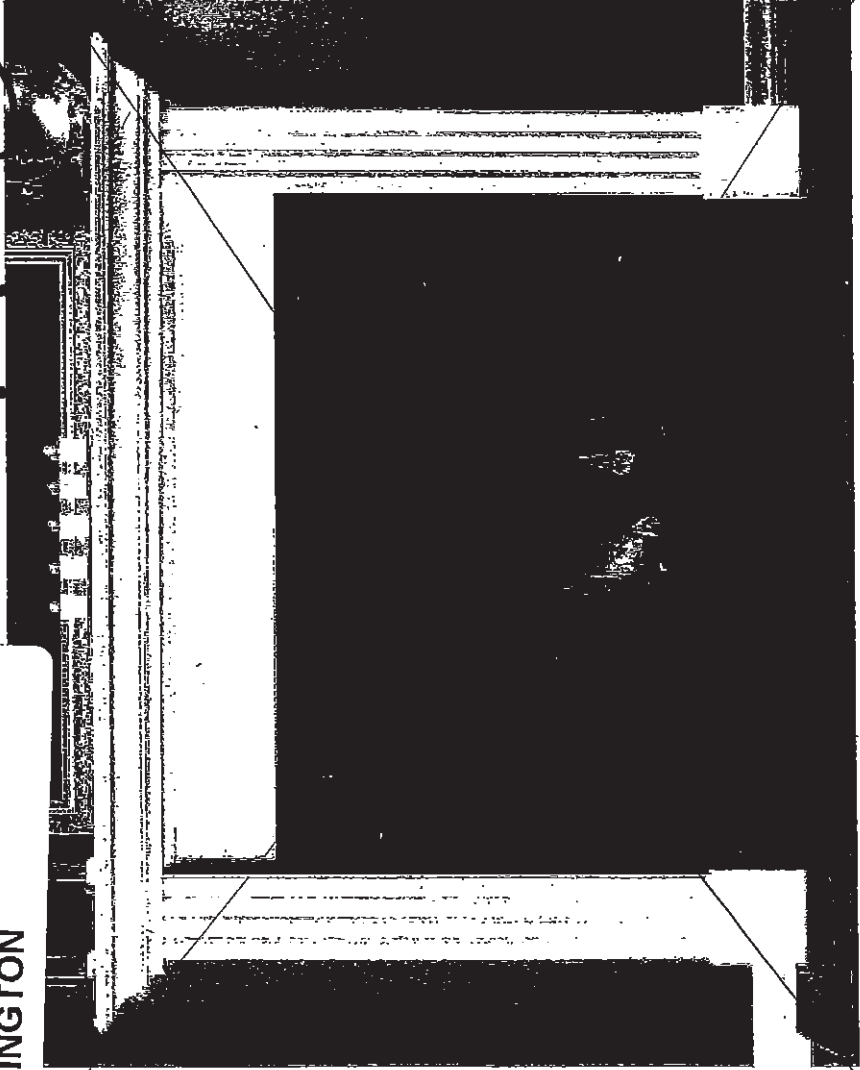

STANDARD NF 15 Mantel

Clean apron finish with fluted legs
WHITE PAINT GRADE FINISH

(PICTURE SHOWN WITH UPGRADE SURROUND AND HEARTH -PRICED SEPARATELY)

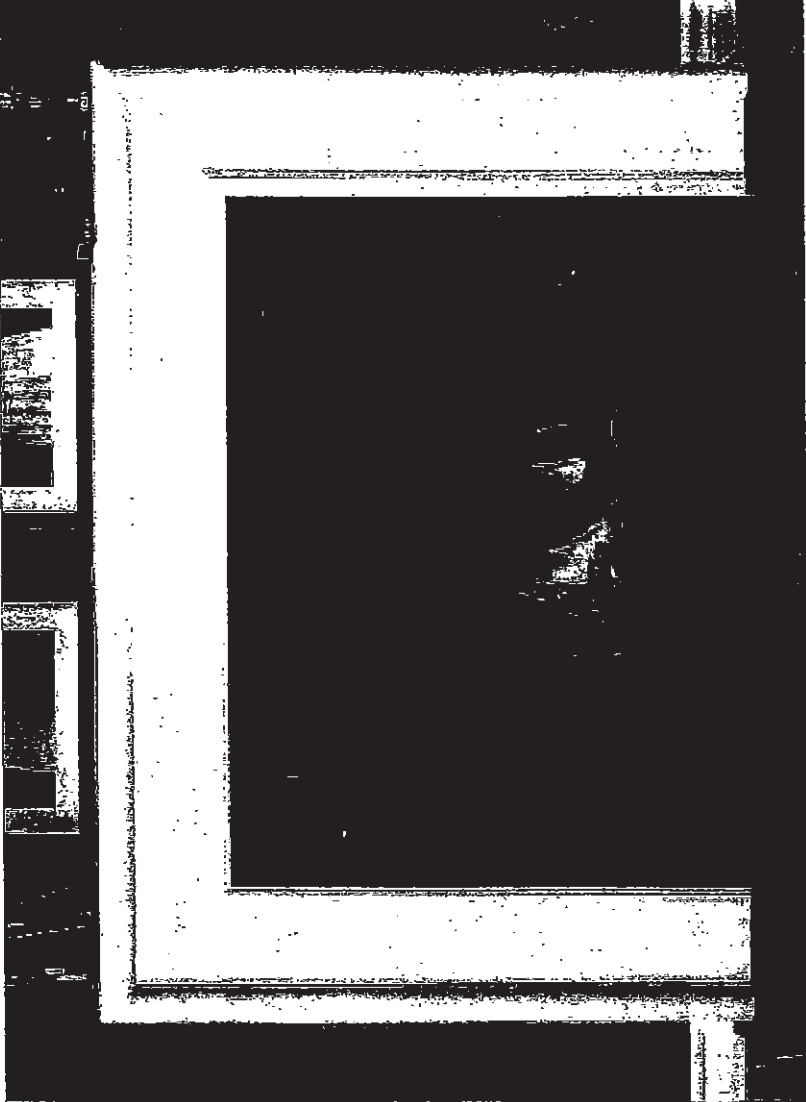

CABINET

STANDARD NF 17 Mantel

WHITE PAINT GRADE FINISH

(PICTURE SHOWN WITH UPGRADE SURROUND AND HEARTH -PRICED SEPARATELY)



DF

C-2 COUNTRY LANE
LOT 55-1
20-2447 EN ELEV. B
THE BARRINGTON

15 of 34

Stainless Steel | 122.0264.711

FAMILY : Sinks | SERIES : Reginox | MODEL : NDC1932RUJ9 | FINISH : Stainless Steel | INSTALLATION TYPE : Undermount

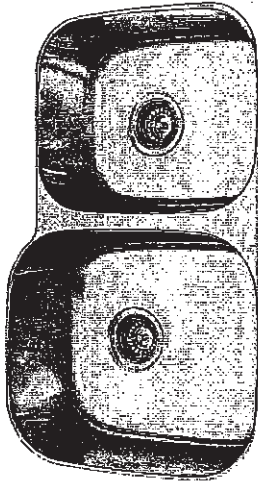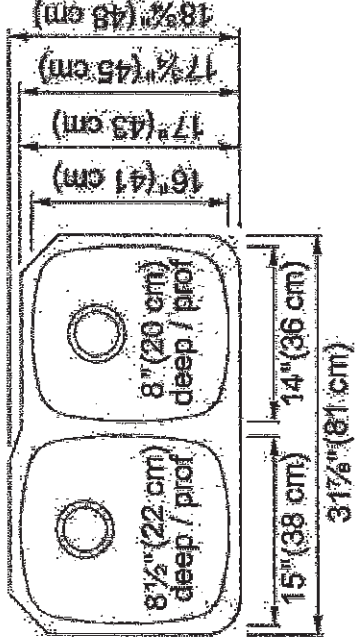

TECHNICAL DATA	
Width overall	18 3/4"
Length overall	37 13/16"
Width of large bowl	17"
Length of large bowl	15"
Depth of large bowl	8 1/2"
Width of small bowl	16"
Length of small bowl	14"
Depth of small bowl	8"
Cabinet Size	36"
Number of Bowls	2
Waste Outlet Diameter	3 1/2"
Cut-Out Template	Yes
Faucet Hole	None
Type of Material	18 Gauge Stainless Steel
Surface Finish	SILK

D.W.


C-2 COUNTRY LANE
LOT 55-1
20-2447 EN ELEV. B
THE BARRINGTON

16" 34

STANDARD KITCHEN FAUCET

Align

Modern

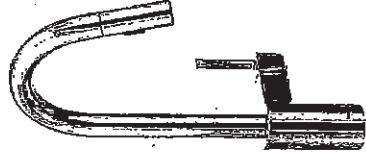

Single Handle Pull-Down Kitchen
Faucet*

Model 7565†

KN

D.W.



BARRIER FREE

COLONY COUNTERTOP SINK

- Vitreous china
 - Self-rimming
 - Front overflow
 - Supplied with template
 - Faucet deck
- (Faucet shown not included)

☒ 0346 803

Faucet holes on 203mm (8") centres

☐ 0346 403 (Illustrated)

Faucet holes on 102mm (4") centres

☐ 0346 001

Centre hole only

Nominal Dimensions:

521 x 448mm (20-1/2" x 17-5/8")

Bowl sizes:

422mm (16-5/8") wide, 279mm (11") front to back, 143mm (5-5/8") deep

COMPLIANCE CERTIFICATIONS –

Meets or exceeds the following Specifications:

- ASME A112.19.2M for Vitreous China Fixtures.
- CAN/CSA B45 Series.

To Be Specified





- ☐ Colour: ☒ White ☐ Bone ☐ Silver Gray
- ☐ Linen
- ☐ Faucet*:
- ☐ Faucet Finish:
- ☐ Supplies & Stops:
- ☐ Trap 1-1/4" (32 mm):

* See faucet section for additional models available

BAS-198

© 2000 American Standard Inc.

01/07

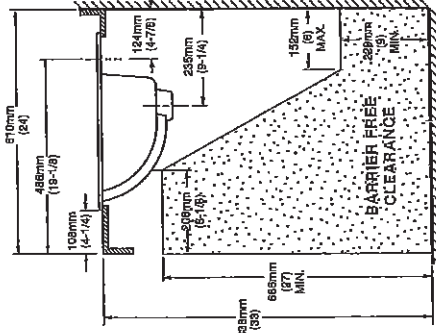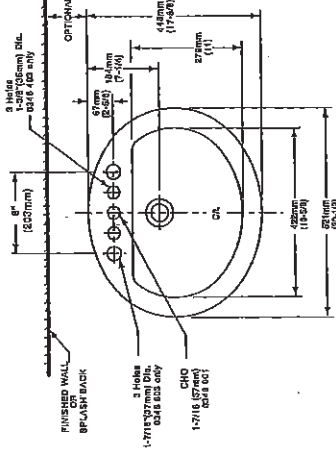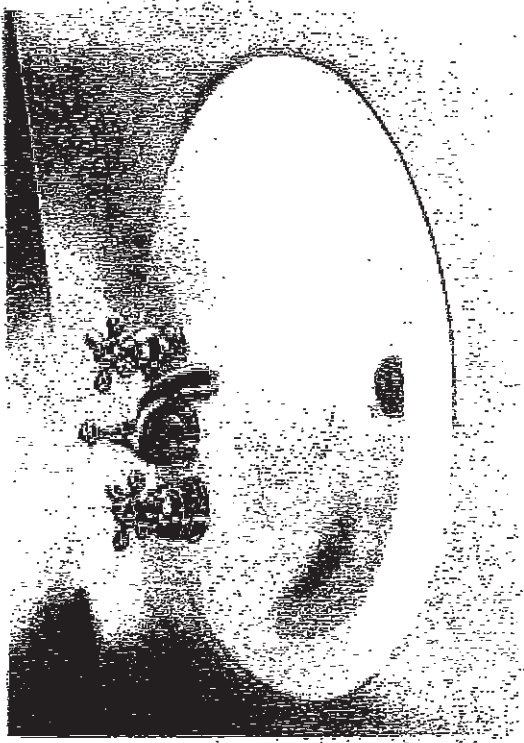


NOTES:
* DIMENSIONS SHOWN FOR LOCATION OF SUPPLIES AND "P" TRAP ARE SUGGESTED. FOR COUNTERTOP CUTOUT AND INSTALLATION INSTRUCTIONS USE TEMPLATE SUPPLIED WITH SINK.
FAUCETS NOT INCLUDED AND MUST BE ORDERED SEPARATELY.
IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard A112.19.2. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

D.N

M

C-2 COUNTRY LANE
LOT 55-1
20-2447 EN ELEV. B
THE BARRINGTON

18 of 34

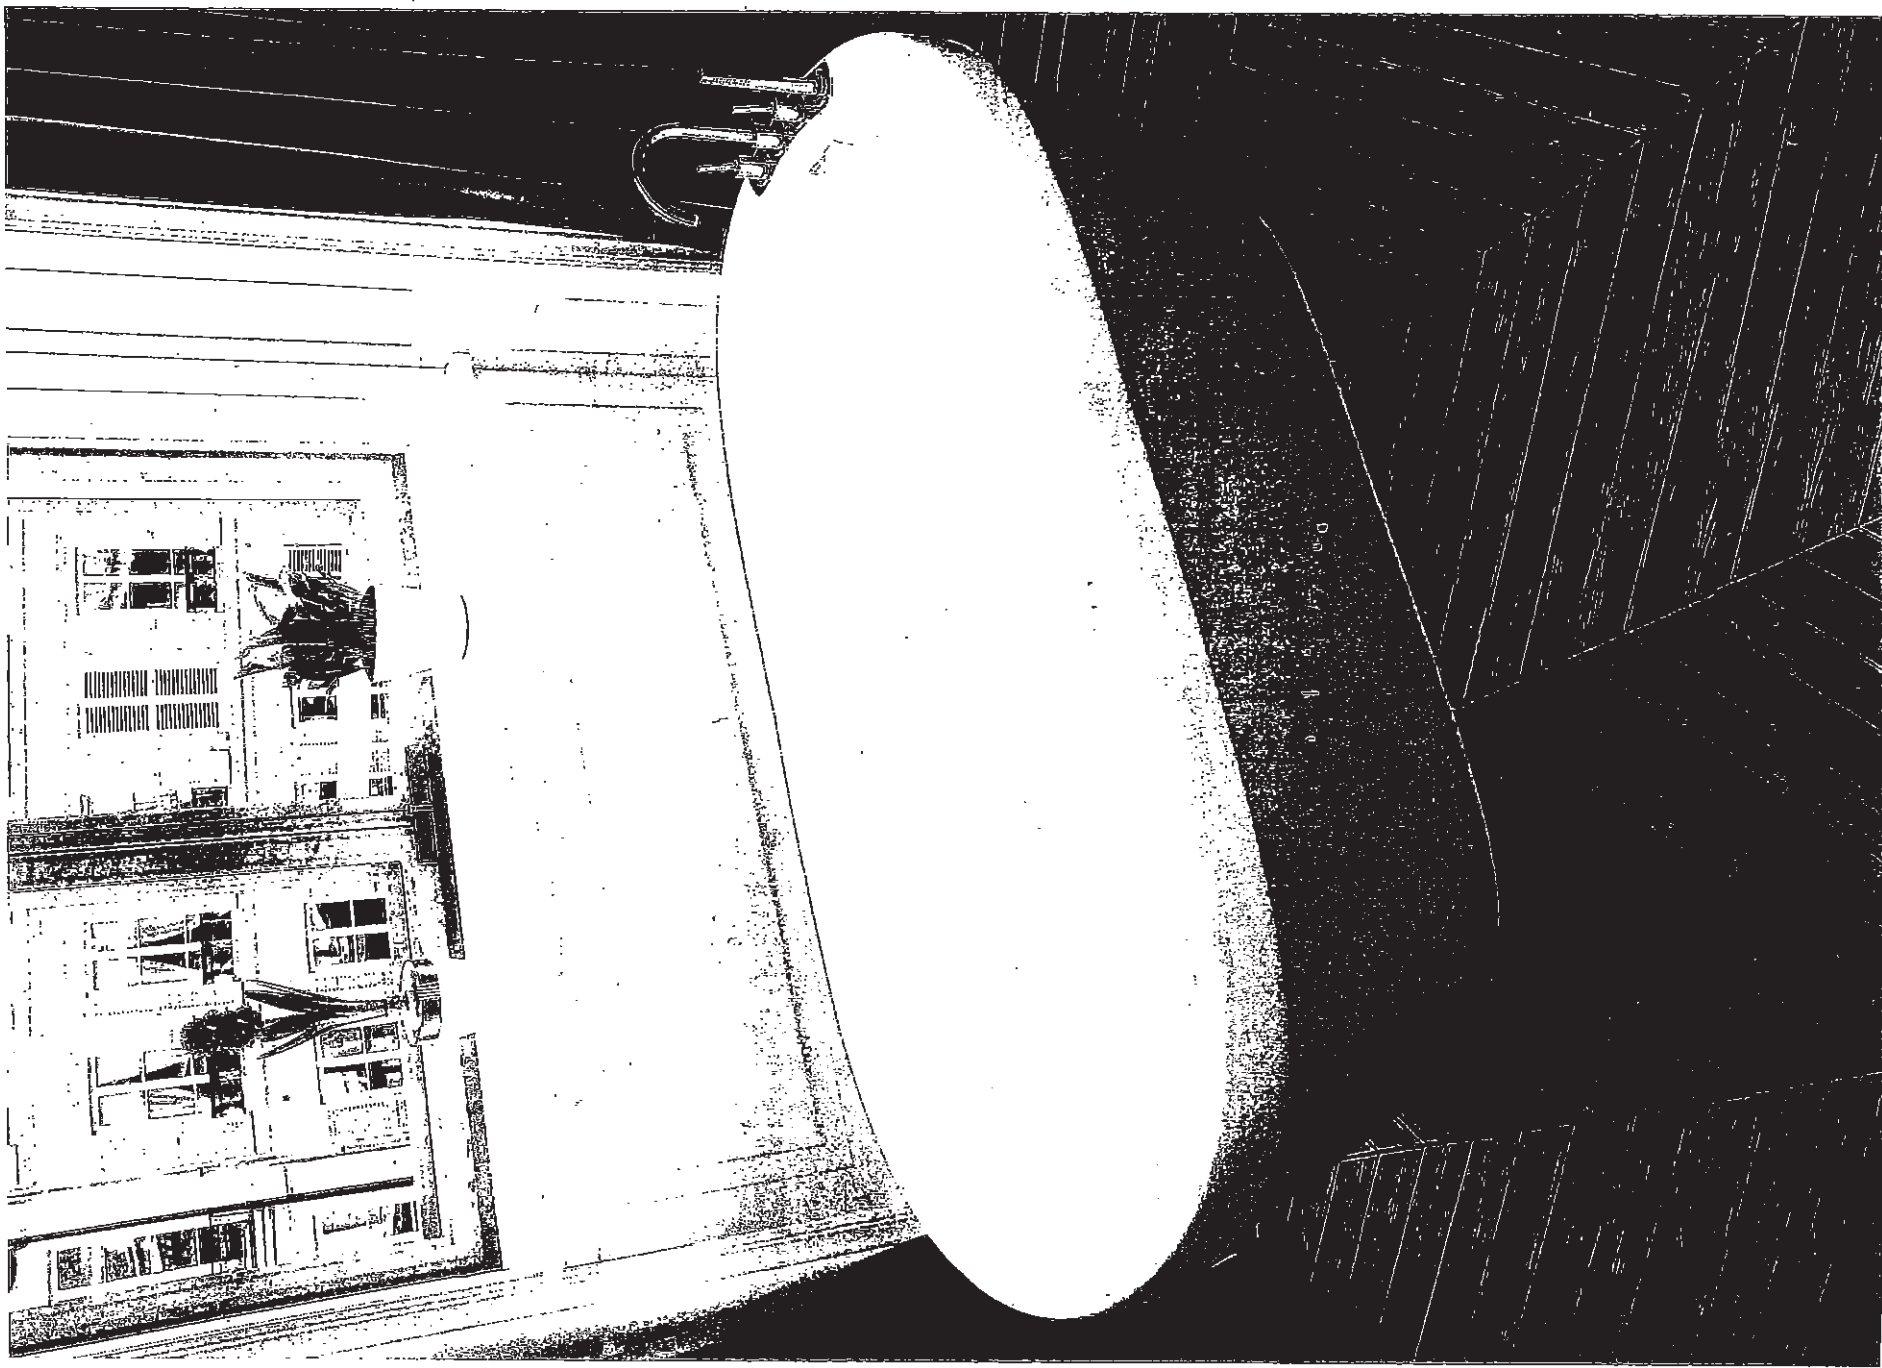

Demt CP2007

D.N


W

C-2 COUNTRY LANE
LOT 55-1
20-2447 EN ELEV. B
THE BARRINGTON

19.34


Chateau

Transitional



Lavatory Faucet with Pop-Up Drain
Model L4621+

VANITY SINKS AND PEDESTAL



Posi-Temp® Pressure Balancing Tub/Shower
Model 62320 / TL183+

OR

Posi-Temp Valve and Tub/Shower Trim
with Eco-Performance Easy Clean® XL
Model 62320 / TL183EP+

(TL183EP not available in BC)

SHOWER AND 5' TUB FAUCETS



2 Handle Roman Tub with 9" Spout
Model 4796 / T990+

FREESTANDING TUB FAUCETS

D.W. M

C-2 COUNTRY LANE
LOT 55-1
20-2447 EN ELEV. B
THE BARRINGTON

20 of 34



SPECIFICATIONS

AV SERIES

RANGE HOODS

HVI 2100 **180 CFM/7.0 Sones @ 0.10" SP. Horizontal**
CERTIFIED **180 CFM/7.5 Sones @ 0.10" SP. Vertical**

Dimensions

Overall bottom projection - 18 3/8"
Overall top projection - 12"
Height - 6"
Available widths: 21", 24", 30", 36" & 42"

Hood Body

Stainless Steel: 24 gauge, grade 430 stainless steel.
Painted: 23 gauge cold rolled commercial grade (CRCC) steel, auto welded, coated with a baked enamel finish.

Motor

2 speed, single coil, thermally protected, permanently lubricated.
Rated 120 volts, 60 hz. Complete with 200°C lead wires.

Lighting

Single 60 watt cook light capacity (bulb not included).

Ducting Options

Horizontal ducting: 3 1/4"x10" (duct adapter and damper included).
Vertical ducting: 3 1/4"x10" (duct adapter and damper included).
Vertical ducting: 7" round (duct adapter and damper not included).
Ductless: removable front vent (charcoal filter not included).

Fan Blade

One piece polymeric, electronically balanced blade. 65/8" diameter with 5 paddles.

Electrical connection


Hood top - 7/8" knockout hole for use with 1/2" cable clamp
Hood back - 7/8" knockout hole for use with 1/2" cable clamp

Filters


UL rated, class 2 filter
Grease Filter: RF35 - 87/8"x103/8" (included).
Charcoal Filter: RF34 (not included).
Combo Grease/Charcoal: RF55 (not included).

Available Finishes

White, Biscuit, Almond, Black & Stainless Steel.

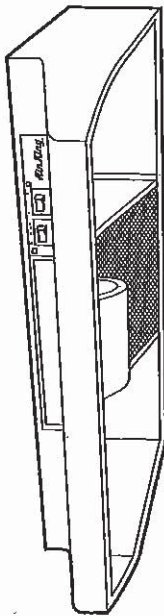

AV SERIES

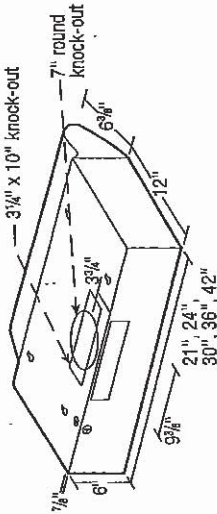

EXPANDED PERFORMANCE									
Air Flow - CFM		Static Pressure (inches of w.g.)		Sones @ .1 SP		Fan Speed RPM		Power Watts	
Vertical Ducting High	0	0.05	0.1	0.15	0.2	0.25	0.2	0.25	0.2
	246	232	218	203	181	147	7.5	2973	87.0
	225	210	180	175	155	120	7.0	3024	87.0

PROJECT		ARCHITECT	
LOCATION		ENGINEER	
CONTRACTOR		SUBMITTED BY	
DATE		DATE	
FAN NUMBER	MODEL	CFM	IN W.G.
NUMBER	NUMBER	WATTS	AMPS
SONES		QTY	
OPTIONAL EQUIPMENT & REMARKS		OPTIONAL EQUIPMENT & REMARKS	



Air King: 820 Lincoln Avenue
West Chester, Pennsylvania 19380-4466
Tel: (610) 692-7400 • 877-304-3785
Fax: (610) 696-8048

Canada:
Brampton, Ontario
Tel: 905-456-2033
Fax: (905) 456-1015

C-2 COUNTRY LANE
LOT 55-1
20-2447 EN ELEV. B
THE BARRINGTON

21.0" 34

Whirlpool® Top Mount Refrigerator

PRODUCT MODEL NUMBERS

WRT311FZD

WRT511SZD

WRT541SZD

Electrical: A 115-volt, 60-Hz, AC-only, 15- or 20-amp fused, grounded electrical supply is required. It is recommended that a separate circuit serving only your refrigerator be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.


NOTE: Before performing any type of installation, cleaning, or removing a light bulb, turn the control (Thermostat, Refrigerator or Freezer Control depending on the model) to OFF and then disconnect the refrigerator from the electrical source. When you are finished, reconnect the refrigerator to the electrical source and reset the control (Thermostat, Refrigerator or Freezer Control depending on the model) to the desired setting. See "Using the Controls."

Water: A cold water supply with water pressure between 80 and 120 psi (207 and 827 kPa) is required to operate ice maker and water dispenser. If you have questions about your water pressure, call a licensed, qualified plumber.

IMPORTANT: The pressure of the water coming out of a reverse osmosis system going to the water inlet valve of the refrigerator needs to be between 30 and 120 psi (207 and 827 kPa).


Reverse Osmosis Water Supply: If a reverse osmosis water filtration system is connected to your cold water supply, the water pressure to the reverse osmosis system needs to be a minimum of 40 to 60 psi (278 to 414 kPa).

PRODUCT DIMENSIONS

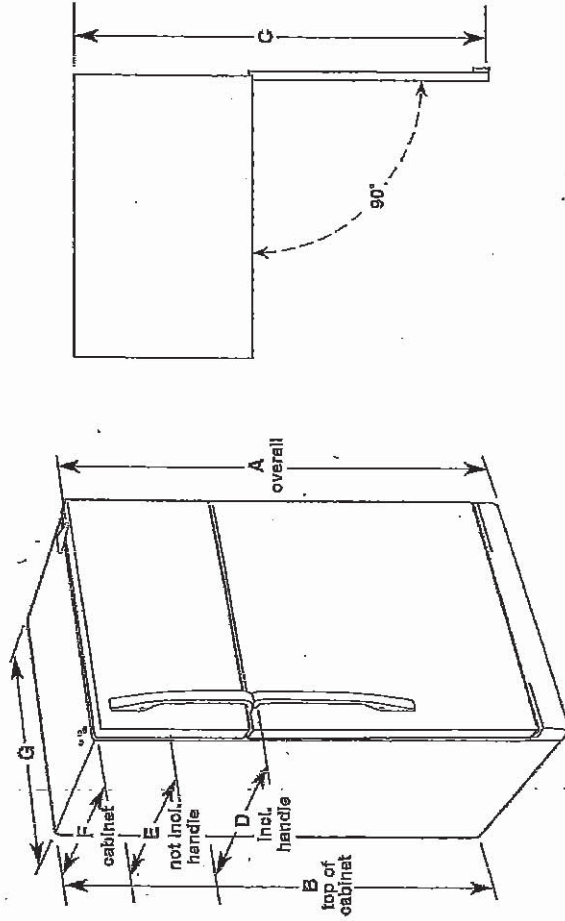

Model Number	Model Size	Reversible Door	Height - Overall "A"	Height - Top of Cabinet "B"	Depth - Door Open 90° "C"	Depth - With Handles "D"	Depth - Without Handles "E"	Depth - Cabinet Only "F"	Width - Cabinet "G"
WRT311FZD	20.5 cu. ft.	Yes	66 1/4" (168.3 cm)	65 1/2" (166.4 cm)	82 1/4" (158.1 cm)	32 1/4" (83.5 cm)	30 3/8" (77.8 cm)	28 1/2" (72.4 cm)	32 3/4" (83.2 cm)
WRT511SZD WRT541SZD	21.3 cu. ft.	Yes	66 1/4" (168.3 cm)	65 1/2" (166.4 cm)	82 1/4" (158.1 cm)	34" (86.4 cm)	32 1/4" (82.3 cm)	28 1/2" (72.4 cm)	32 3/4" (83.2 cm)

LOCATION REQUIREMENTS

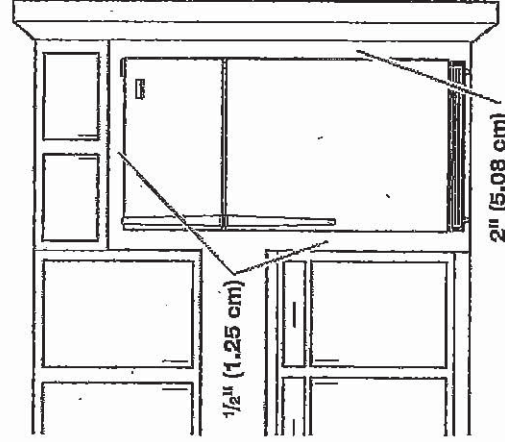

To ensure proper ventilation for your refrigerator, allow for a 1/2" (1.25 cm) space on each and between overhead cabinets and refrigerator top. Allow at least 1" (2.5 cm) between back of cabinet and the wall. If your refrigerator has an ice maker, make sure you leave some extra space at the back for the water line connections.

If you are installing your refrigerator next to a fixed wall, leave 2" (5 cm) minimum on the hinge side (depending on your model) to allow for the door to swing open.

NOTE: This refrigerator is intended for use in a location where the temperature ranges from a minimum of 55°F (13°C) to a maximum of 110°F (43°C). The preferred room temperature range for optimum performance, which reduces electricity usage and provides superior cooling, is between 60°F (15°C) and 90°F (32°C). It is recommended that you do not install the refrigerator near a heat source, such as an oven or radiator.

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

Dimensions are for planning purposes only. For complete details, see installation instructions packed with product. Specifications subject to change without notice.

Ref. W10674106
10/29/14

DN 34





C2 COUNTRY LANE

LOT 55-1

20-2447 EN ELEV B
THE BARRINGTON

22 of 34

Refrigerator Door Swing Verification

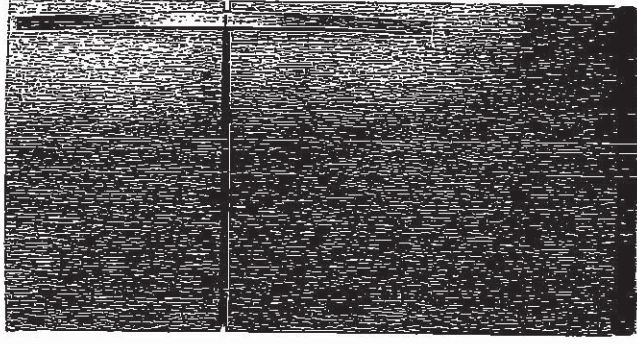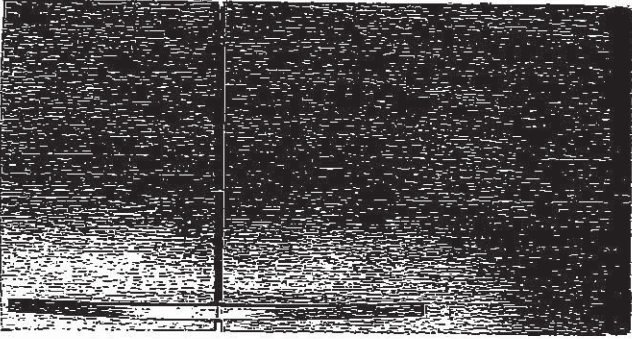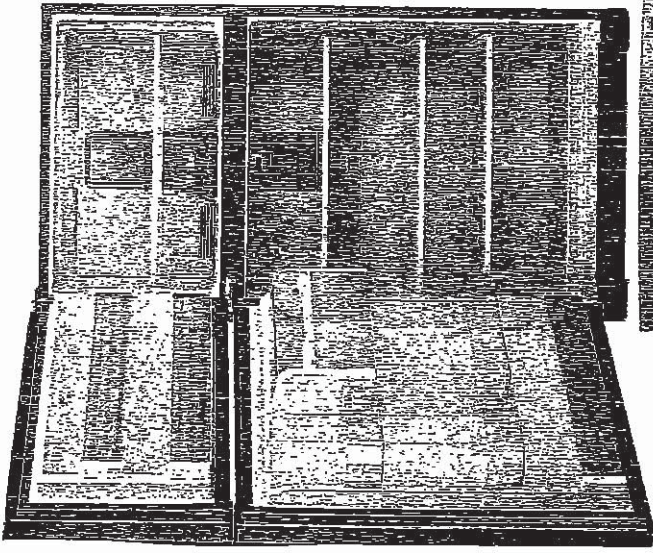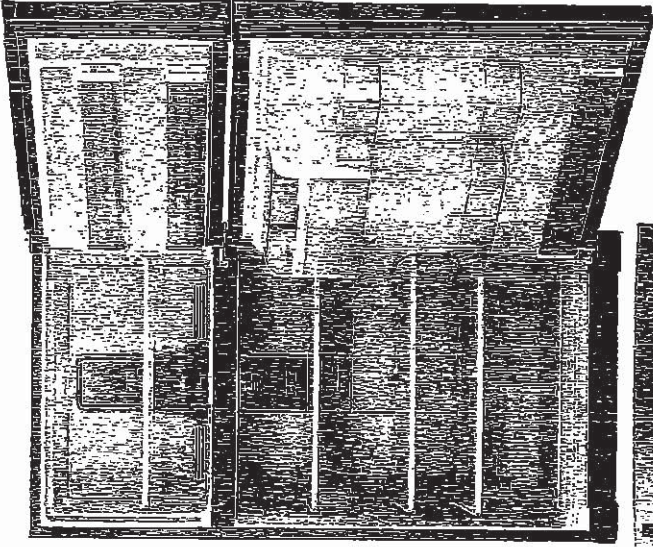

When facing the refrigerator

☒

RIGHT HAND

DOOR OPENING

- Hinges on right
- Handle on left

INITIAL

mg

☐

LEFT HAND

DOOR OPENING

- Hinges on left
- Handle on right

INITIAL

Please check and INITIAL your door swing selection.

C-2 COUNTRY LANE
LOT 55-1
20-2447 EN ELEV. B
THE BARRINGTON

23 of 34

WHIRLPOOL 30" (76.0 CM) FREESTANDING ELECTRIC RANGES
Model YWFE515S0JS



5.3 cu. ft. Whirlpool® electric range with Frozen

Bake™ technology

YWFE515S0JS

Whirlpool®

[Home](#) > [Kitchen Appliances](#) > [Cooking Appliances](#) > [Ranges](#) > [Single Oven Ranges](#) > [YWFE515S0JS](#)

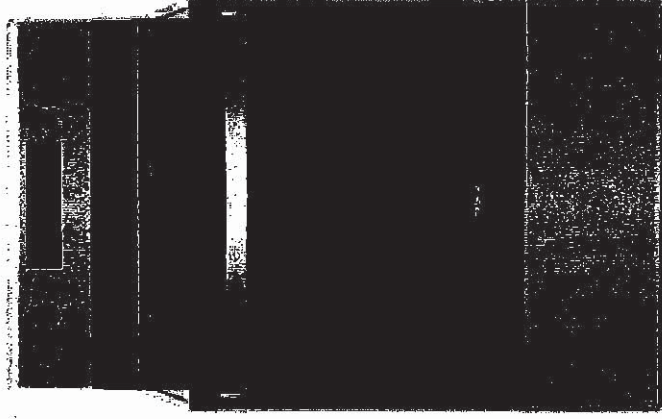


D.N. 2/2

C-2 COUNTRY LANE
LOT 55-1
20-2447 EN ELEV. B
THE BARRINGTON

WHIRLPOOL 30" (76.0 CM) FREESTANDING ELECTRIC RANGES

Model YWFE515S0JS

Product Dimensions

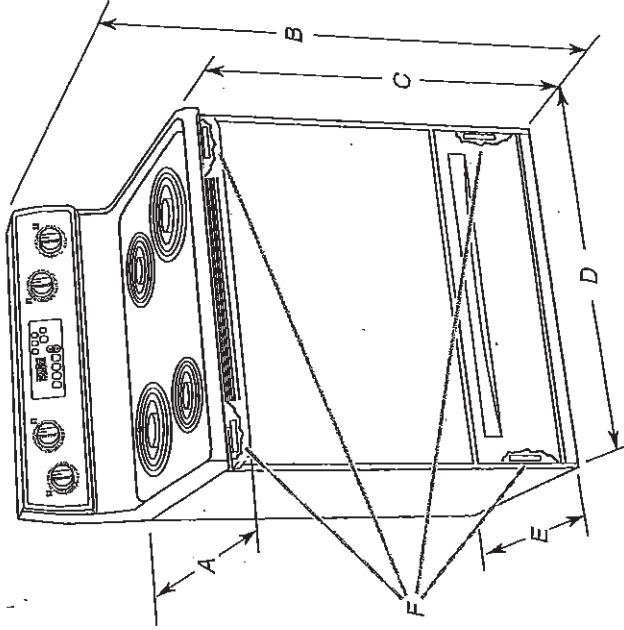

- A. 27¹/₄" (70.5 cm) max. depth with handle
- B. 46⁷/₈" (119.1 cm) overall height (max.) with leveling legs
screwed all the way in*
- C. 36" (91.4 cm) cooktop height (max.) with leveling legs screwed
all the way in*
- D. 29⁷/₈" (75.9 cm) width
- E. 25⁵/₁₆" (64.3 cm) depth - back of range to front of cooktop**
- F. Model/serial/rating plate (located on the frame behind a top
corner of the door or either side of the drawer)

IMPORTANT: Range must be level after installation. Follow the instructions in the "Level Range" section. Using the cooktop as a reference for leveling the range is not recommended.

*Range can be raised approximately 1" (2.5 cm) by adjusting the leveling legs.


**Front of door and drawer may extend further forward depending on styling.

Cabinet Dimensions

Cabinet opening dimensions shown are for 25" (64.0 cm) countertop depth, 24" (61.0 cm) base cabinet depth and 36" (91.4 cm) countertop height.

IMPORTANT: If installing a range hood or microwave hood combination above the cooking surface, follow the range hood or microwave hood combination installation instructions for dimensional clearances above the cooktop surface.

A freestanding range may be installed next to combustible walls with zero clearance.

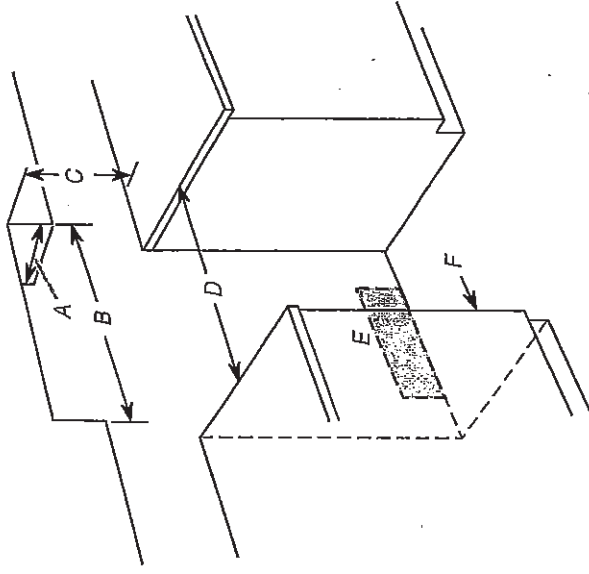

- A. 13" (33.0 cm) max. upper cabinet depth
- B. 30" (76.2 cm) min. opening width
- C. For minimum clearance to top of cooktop, see NOTE*
- D. 30" (76.2 cm) min. opening width
- E. Outlet - 8" (20.3 cm) to 22" (55.9 cm) from either cabinet,
7" (17.8 cm) max. from floor.
- F. Cabinet door or hinges should not extend into the cutout.

***NOTE:** 24" (61.0 cm) minimum when bottom of wood or metal cabinet is covered by not less than 1/4" (6.4 mm) flame retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015" (0.4 mm) stainless steel, 0.024" (0.6 mm) aluminum or 0.020" (0.5 mm) copper.

30" (76.2 cm) minimum clearance between the top of the cooking platform and the bottom of an uncovered wood or metal cabinet.

D.N. V.N.

JAN 28/20

C-2 COUNTRY LANE
LOT 55-1
20-2447 EN ELEV. B
THE BARRINGTON

25 of 34

WHIRLPOOL 30" (76.0 CM) FREESTANDING ELECTRIC RANGES
Model YWFE515S0JS

Install Anti-Tip Bracket


A WARNING



Tip Over Hazard

A child or adult can tip the range and be killed.
Install anti-tip bracket to floor or wall per installation instructions.
Slide range back so rear range foot is engaged in the slot of the anti-tip bracket.
Re-engage anti-tip bracket if range is moved.
Do not operate range without anti-tip bracket installed and engaged.
Failure to follow these instructions can result in death or serious burns to children and adults.


1. Remove the anti-tip bracket from where it is taped inside the storage drawer or warning drawer.
2. Determine which mounting method to use: floor or wall.
If you have a stone or masonry floor, you can use the wall mounting method. If you are installing the range in a mobile home, you must secure the range to the floor.
3. Determine and mark centerline of the cutout space. The mounting can be installed on either the left-side or right-side of the cutout. Position mounting bracket against the wall in the cutout so that the V-notch of the bracket is $12\frac{9}{16}$ " (31.9 cm) from centerline as shown.

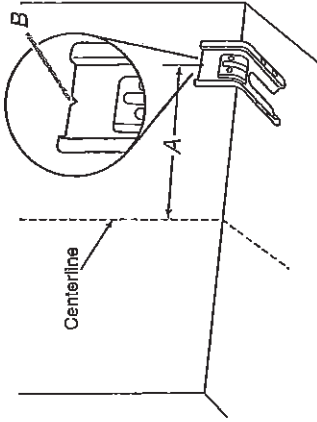


A. $12\frac{9}{16}$ " (31.9 cm)
B. Bracket V-notch

4. Drill two $1/8$ " (3 mm) holes that correspond to the bracket holes of the determined mounting method. See the following illustrations.


Floor Mounting

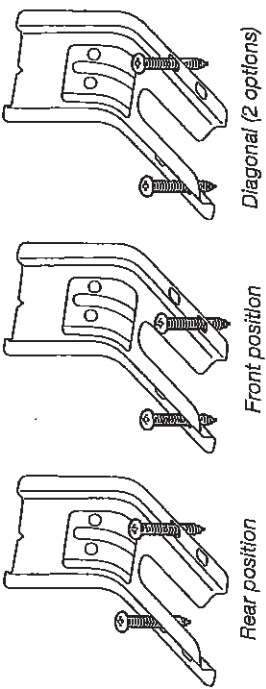

Wall Mounting




5. Using the Phillips screwdriver, mount anti-tip bracket to the wall or floor with the two $\#12 \times 1\frac{3}{8}$ " (4.1 cm) screws provided.
6. Move range close enough to opening to allow for final electrical connections. Remove shipping base, cardboard or hardboard from under range.
7. Move range into its final location, making sure rear leveling leg slides into anti-tip bracket.
8. Move range forward onto shipping base, cardboard or hardboard to continue installing the range using the following installation instructions.



D.N. 7

2603

2603

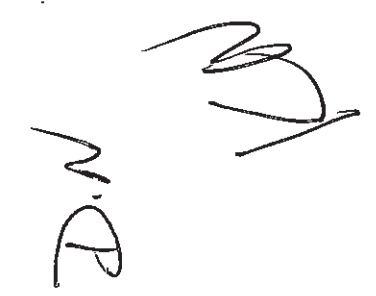

C-2 COUNTRY LANE
LOT 55-1
20-2447 EN ELEV. B
THE BARRINGTON

27 of 34

Whirlpool® Undercounter Dishwasher

PRODUCT MODEL NUMBERS

WDF110PAB	WDF310PCA
WDF111PAB	WDF320PAD
WDF120PAF	WDF330PLY
WDF121PAF	WDF530PSY
WDF310PAA	WDF540PAD
	WDF730PAY
	WDT710PAY
	WDT720PAD
	WDT770PAY

Electrical Requirements: 120-volt, 60-Hz, AC only, 15- or 20-amp, fused electrical supply. Copper wire only. A time delay fuse or circuit breaker and separate circuit is recommended.

If direct wiring dishwasher: Use flexible, armored, or nonmetallic, sheathed copper wire with grounding wire that meets the wiring requirements for your home and local codes and ordinances.

Use a UL listed or CSA approved conduit connector.

If connecting dishwasher with a power supply cord:


Use Power Supply Cord Kit (Part No. 4317824) marked for use



with dishwashers. Follow the kit

instructions for installing the power supply cord.

Power supply cord must plug into a grounded 3 prong, outlet, located in the cabinet next to the dishwasher opening. Outlet must meet all local codes and ordinances.




Water Supply Requirements: A hot water line with 20 to 120 psi (138 to 862 kPa) water pressure. Water temperature must be 120°F (49°C) water at dishwasher. Use 3/8" O.D. copper tubing with compression fitting or flexible braided water supply line (1/2" minimum plastic tubing is not recommended). Use a 90° elbow with 3/4"N.P.T. external pipe threads on one end. Do not solder within 6" (15.2 cm) from water inlet valve.

Drain Requirements: A new drain hose is supplied with your dishwasher. If this is not long enough, use a new drain hose with a maximum length of 12' (3.7 m) (Part No. 3385556) that meets all current AHAM/IAPMO test standards, is resistant to heat and detergent, and fits the 1" (2.5 cm) drain connector of the dishwasher.

Make sure to connect the drain hose to waste tee or disposer inlet above drain trap in house plumbing and 20" (50.8 cm) minimum above the floor. It is recommended

that the drain hose either be looped up and securely fastened to the underside of the counter or be connected to an air gap.


Make sure to use an air gap if the drain hose is connected to house plumbing lower than 20" (50.8 cm) above subfloor or floor.



Use 1/2" (1.3 cm) minimum I.D. drain line fittings.

If required, the air gap should be installed in accordance with the air gap installation instructions. When connecting the air gap, a rubber hose (not provided) will be needed to connect to the waste tee or disposer inlet.

PRODUCT DIMENSIONS

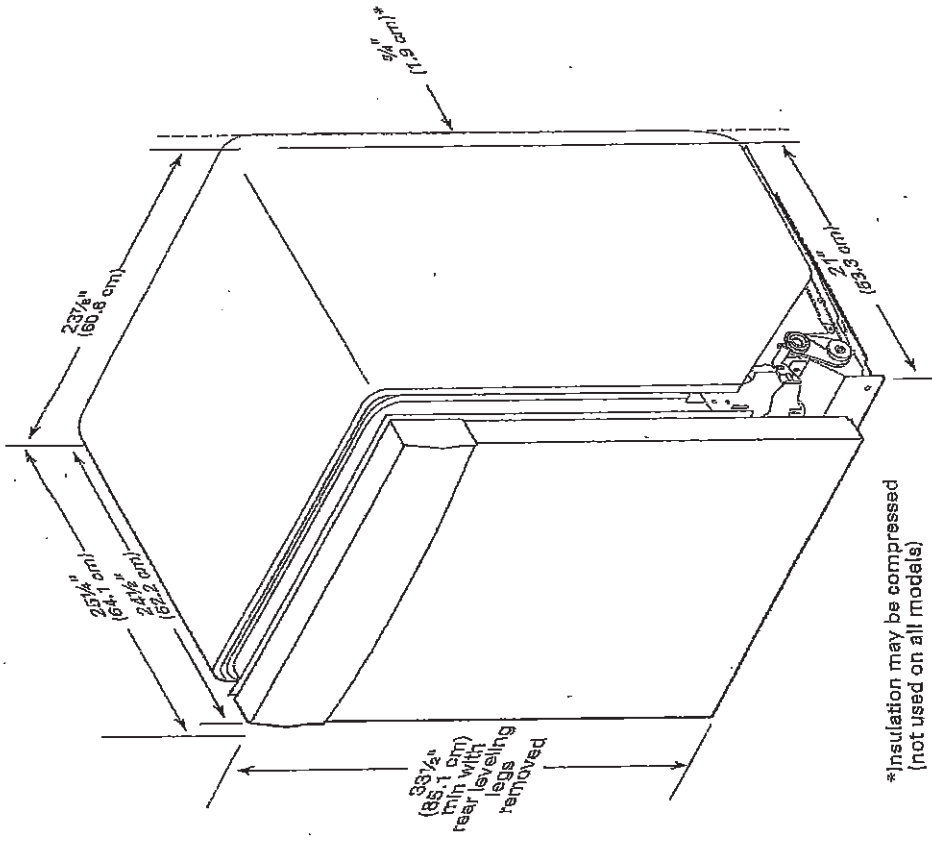

*Insulation may be compressed (not used on all models)

Handwritten signature/initials.

C-2 COUNTRY LANE
LOT 55-1
20-2447 EN ELEV. B
THE BARRINGTON

28th 34


CABINET CUTOUT DIMENSIONS

WIDE320PAB

NOTE: Shaded areas of cabinet walls show where utility connections may be installed.

*Measure from the lowest point on the underside of the countertop. May be reduced to 33 1/2" (85.1 cm) by removing the rear leveling legs from dishwasher.

**Minimum, measured from narrowest point of opening.

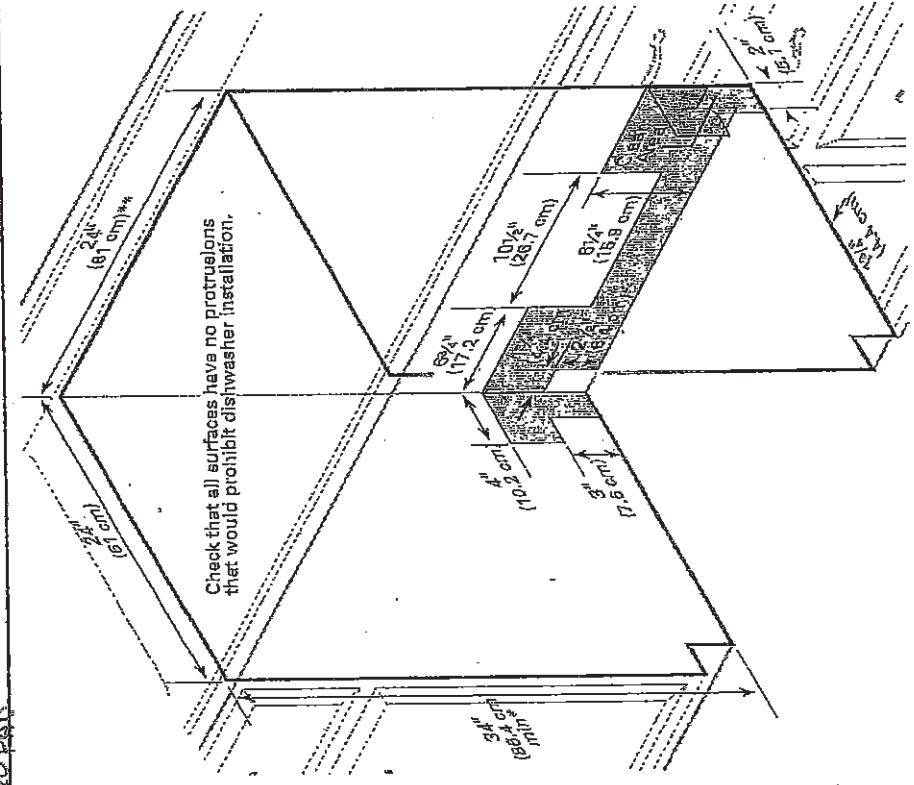

D.N


17

C-2 COUNTRY LANE
LOT 55-1
20-2447 EN ELEV. B
THE BARRINGTON

29 of 34

WHIRLPOOL WASHER Model #: WFW5620HW

Whirlpool Brand Canada English (Washer and Dryer) | Washers | Front Load Washers | WFW5620HW

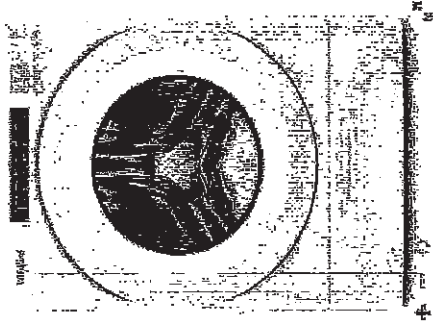

5.2 cu. ft. I.E.C. Closet-Depth
Front Load Washer with
Load & Go™ Dispenser



Whirlpool

5.2 cu. ft. I.E.C. Closet-Depth Front Load Washer with Load & Go™
Dispenser

Model #: WFW5620HW

Dimensions

Depth	80.17 cm; 31-9/16 in.
Depth With Door Open 80 Degree	143.51 cm; 56-1/2 in.
Minimum Height	98.11 cm; 38-5/8 in.
Width	68.58 cm; 27.0 in.

Appearance

LCD Touch Screen	No
Window	Yes

Details

Drum Material	Stainless Steel
---------------	-----------------

Cycles and Options

Number of Wash Cycles	87
-----------------------	----

Electrical

Hz	60
Power Cord Included	Yes

29 of 34

C-2 COUNTRY LANE
LOT 55-1
20-2447 EN ELEV. B
THE BARRINGTON

30 of 34

WHIRLPOOL WASHER Model #: WFW5620HW

LOCATION REQUIREMENTS


Proper installation is your responsibility.

You will need:

- A water heater set to 120°F (49°C).
- A grounded electrical outlet located within 6 ft (1.8 m) of power cord on back of washer.
- Hot and cold water faucets located within 4 ft (1.2 m) of hot and cold water fill valves on washer, and water pressure of 20–100 psi (137.9–689.6 kPa).
- A level floor with maximum slope of 1" (25 mm) under entire washer. Installing on carpet or surfaces with foam backing is not recommended.
- Floor must support washer's total weight (with water and load) of 315 lbs (143 kgs).





IMPORTANT: Do not install, store, or operate washer where it will be exposed to weather or in temperatures below 32°F (0°C). Water remaining in washer after use may cause damage in low temperatures. See "Washer Care" in your Use and Care Guide for winterizing information.

Whirlpool Models*

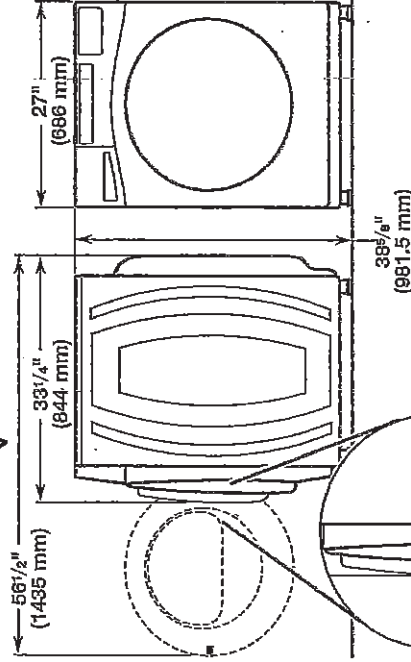

All dimensions show minimum spacing allowed. For each arrangement, consider allowing more space for ease of installation and servicing, and spacing for companion appliances and clearances for walls, doors, and floor moldings. Space must be large enough to allow door to fully open. Add spacing of 1" (25 mm) on all sides of washer to reduce noise transfer. If a closet door or louvered door is installed, top and bottom air openings in door are required.

Recessed area or closet installation (stacked washer and dryer):

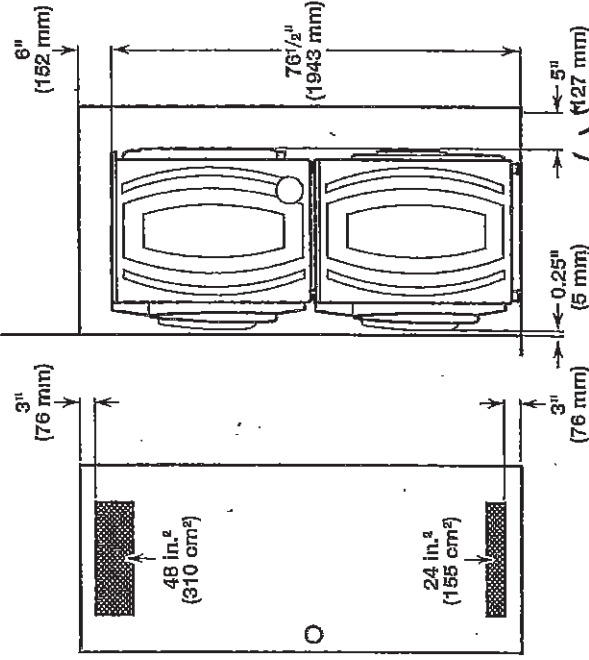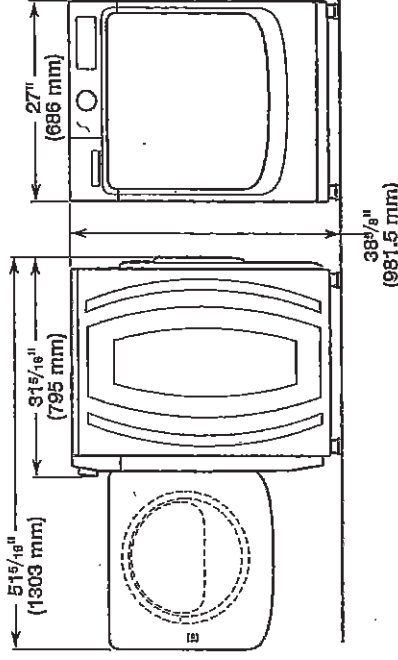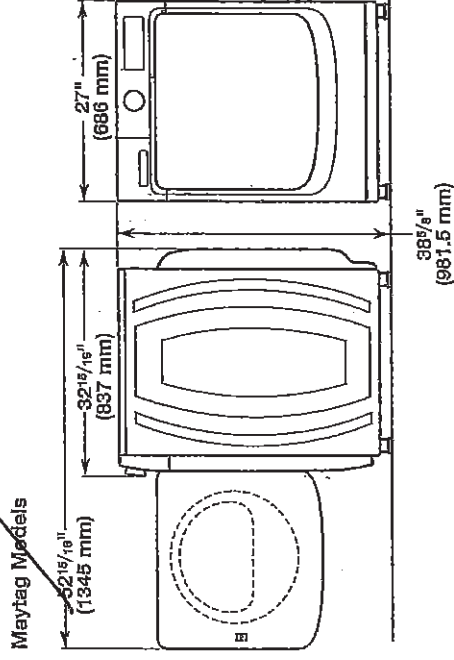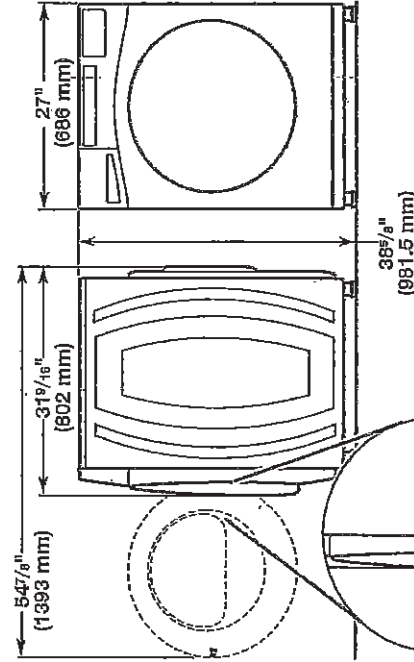


*For additional details (or information) specific to your model, refer to the 'Dimensions' listed for your model at www.whirlpool.com.

C-2 COUNTRY LANE
LOT 55-1
20-2447 EN ELEV. B
THE BARRINGTON


31 of 34

WHIRLPOOL WASHER Model #: WFW5620HW


Custom under-counter installation: X

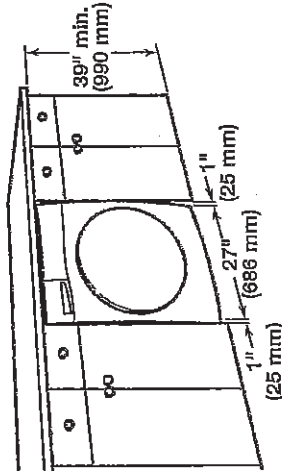

Recessed area or closet installation: X

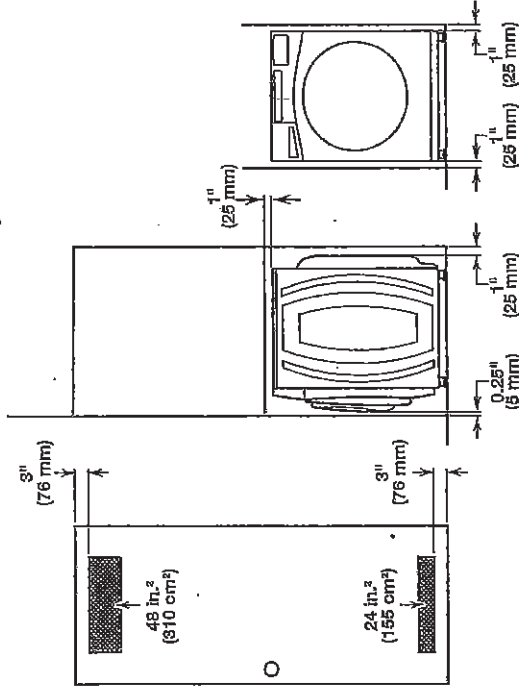

Custom cabinet installation: X

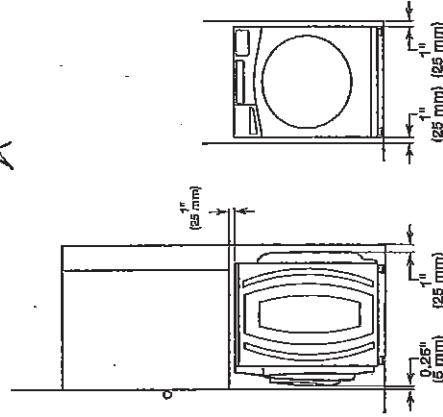


DRAIN SYSTEM

The drain system can be installed using a floor drain, wall standpipe, floor standpipe, or laundry tub. Select the method you need.


IMPORTANT: To avoid siphoning, only 4.5" (114 mm) of drain hose should be inside standpipe. Always secure drain hose with cable tie.

Floor standpipe drain system

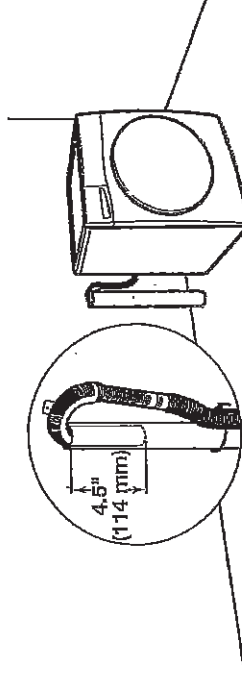


Minimum diameter for a standpipe drain: 2" (51 mm). Minimum carry-away capacity: 17 gal. (64 L) per minute. A 1/4" (6 mm) diameter to 1" (25 mm) diameter Standpipe Adapter Kit is available (Part Number 3363920). Top of standpipe must be at least 30" (762 mm) high; Install no higher than 96" (2.44 m) from bottom of washer. If you have an overhead sewer and need to pump higher than 96" (2.44 m), a sump pump and associated hardware are needed. See "Alternate parts."

Wall standpipe drain system

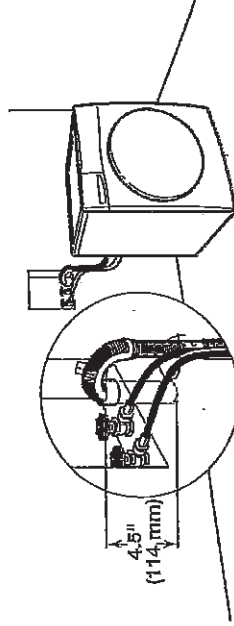

See requirements for floor standpipe drain system.

Laundry tub drain system

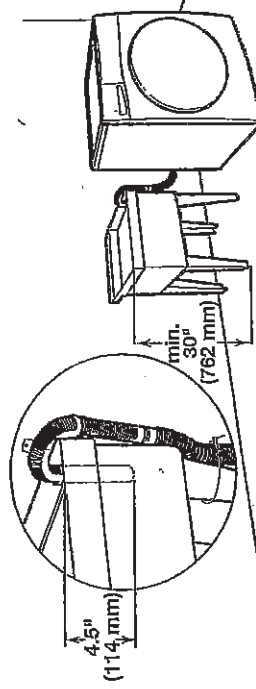

Minimum capacity: 20 gal. (76 L). Top of laundry tub must be at least 30" (762 mm) above floor; Install no higher than 96" (2.44 m) from bottom of washer.


D.W.

C-2 COUNTRY LANE
LOT 55-1
20-2447 EN ELEV. B
THE BARRINGTON

32 of 34

WHIRLPOOL DRYER Model #: YWED5620HW

Whirlpool Brand Canada English | Weather and Dryers | Dryers | Electric Dryers | YWED5620HW

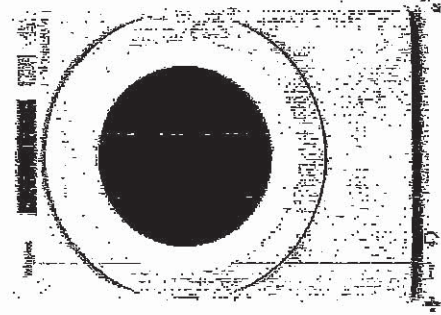

7.4 cu. ft. Front Load Electric
Dryer with Intuitive Touch
Controls



Whirlpool

7.4 cu. ft. Front Load Electric Dryer with Intuitive Touch Controls

Model #: YWED5620HW

Dimensions

Depth	78.74 cm, 31.0 in
Depth With Door Open 90 Degree	136.43 cm, 54-1/2 in
Height	99.42 cm, 39-3/4 in
Width	68.58 cm, 27.0 in

Configuration and Overview

Fuel Type	Electric
Cycles and Options	
Cycle Time Remaining	Yes
Lint Filter Indicator	No
Number of Dryer Cycles	36
Number of Dryness Levels	3

Ventilation System

Lint Vent	No
Maximum Vent Length	64
Venting Direction	Left, Right, Bottom, Rear

Electrical

Hz	60
Power Cord Included	Yes


DN

C-2 COUNTRY LANE
LOT 55-1
20-2447 EN ELEV. B
THE BARRINGTON

33 of 34

WHIRLPOOL DRYER Model #: YWED5620HW

Back view:

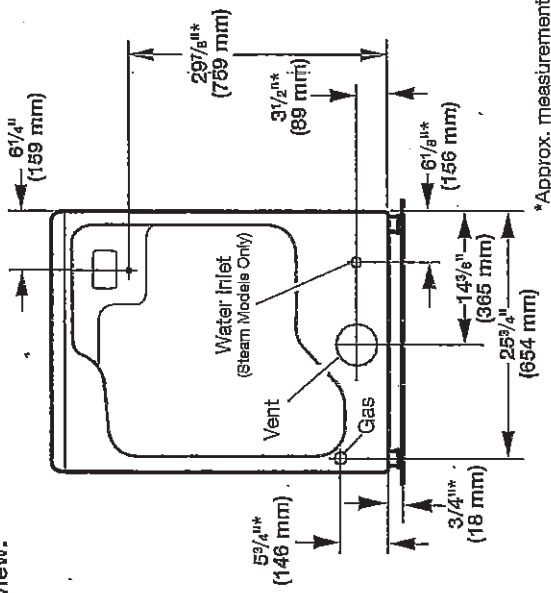

*Approx. measurement

NOTE: Most installations require a minimum of 5" (127 mm) clearance behind dryer for exhaust vent with elbow. See "Venting Requirements."

Installation Clearances

For each arrangement, consider allowing more space for ease of installation and servicing, spacing for companion appliances, and clearances for walls, doors, and floor moldings. Space must be large enough to allow door to fully open. Add spacing on all sides of dryer to reduce noise transfer. If a closet door or louvered door is installed, top and bottom air openings in door are required.

Check code requirements. Some codes limit, or do not permit, installation of the dryer in garages, closets, mobile homes, or sleeping quarters. Contact your local building inspector.


NOTE: No other fuel-burning appliance can be installed in the same closet as a dryer.

Installation spacing for recessed area or closet installation

All dimensions show recommended and minimum spacing allowed.


- Additional spacing should be considered for ease of installation and servicing.
- Additional clearances might be required for wall, door, floor moldings, dryer venting, and gas line.
- Additional spacing should be considered on all sides of the dryer to reduce noise transfer.
- For closet installation with a door, minimum ventilation openings in the top and bottom of the door are required. Louvered doors with equivalent ventilation openings are acceptable.
- Companion appliance spacing should also be considered.

Recommended installation clearances (dryer only):

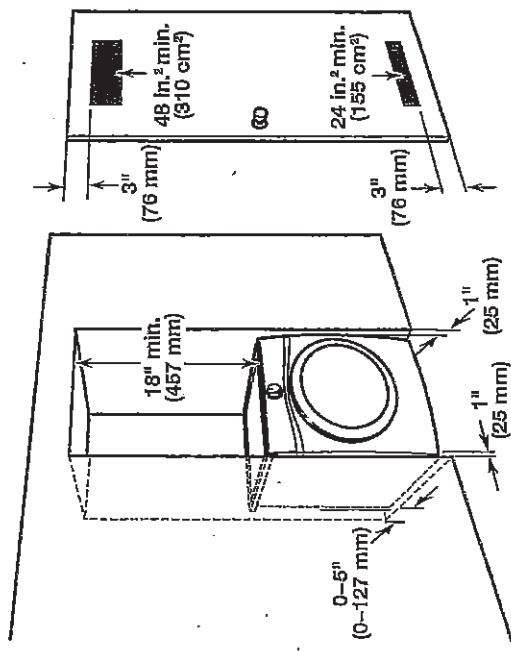

0" (0 mm) rear spacing is allowed for straight back venting only. For steam models only, inlet hose must not be kinked.

Custom under-counter installation:

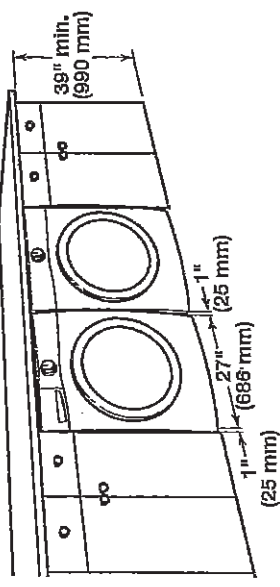

Mobile home - Additional installation requirements:

This dryer is suitable for mobile home installations. The installation must conform to the Manufactured Home Construction and Safety Standard, Title 24 CFR, Part 3280 (formerly the Federal Standard for Mobile home construction and Safety, Title 24, HUD Part 280) or Standard CAN/CSA-Z240 MH.

Mobile home installations require:

- Metal exhaust system hardware, available for purchase from your dealer. For further information, see "Assistance or Service" in your Use and Care Guide.
- Special provisions must be made in mobile homes to introduce outside air into dryer. Openings (such as a nearby window) should be at least twice as large as dryer exhaust opening.

For mobile home installation of gas dryers:

- Mobile Home Installation Hold-down Kit Part Number 346764 is available to order. For further information, see "Assistance or Service" in your Use and Care Guide.

NA
D.N

C-2 COUNTRY LANE
LOT 55-1
20-2447 EN ELEV. B
THE BARRINGTON

34 of 34

WHIRLPOOL DRYER Model #: YWED562QHW

Additional parts may be required, depending on your installation. Check local codes. Check existing electrical supply and venting. Read "Electrical Requirements" and "Venting Requirements" before purchasing parts.

If using a power supply cord:

Use a UL Listed power supply cord kit marked for use with clothes dryers. The kit should contain:

- A UL Listed 30 amp power supply cord, rated 120/240 volt minimum. The cord should be type SRD or SRDT and be at least 4 ft. (1.22 m) long. The wires that connect to the dryer must end in ring terminals or spade terminals with upturned ends.
- A UL Listed strain relief.

Optional Equipment (not supplied with dryer):

Refer to your Use and Care Guide for information about accessories available for your dryer.

LOCATION REQUIREMENTS

Check code requirements. Some codes limit, or do not permit, installing dryer in garages, closets, mobile homes, or sleeping quarters. Contact your local building inspector.

⚠ WARNING



Explosion Hazard

- Keep flammable materials and vapors, such as gasoline, away from dryer.
- Place dryer at least 18 inches (460 mm) above the floor for a garage installation.
- Failure to do so can result in death, explosion, or fire.


You will need:

- A location allowing for proper exhaust installation. See "Venting Requirements."
- A separate 15 or 20 amp circuit for a gas dryer or 30 amp circuit for an electric dryer.
- If using power supply cord, a grounded electrical outlet located within 2 ft. (610 mm) of either side of dryer. See "Electrical Requirements."
- Floor must support dryer weight of 200 lbs. (90.7 kg). Also consider weight of companion appliance.
- Cold water faucets located within 4 ft. (1.2 m) of the water fill valves, and water pressure of 20–120 psi (138–827 kPa). You may use your washer's water supply by purchasing the necessary parts noted in "Parts needed."
- Level floor with maximum slope of 1" (25 mm) under entire dryer. If slope is greater than 1" (25 mm), install Extended Dryer Feet Kit, Part Number 279810. If not level, clothes may not tumble properly and automatic sensor cycles may not operate correctly.
- For garage installation, place dryer at least 18" (460 mm) above floor. If using a pedestal, you will need 18" (460 mm) to bottom of dryer.
- The dryer must not be installed or stored in an area where it will be exposed to water and/or weather.

IMPORTANT: Do not operate, install, or store dryer where it will be exposed to water, weather, or at temperatures below 40°F (4°C). Lower temperatures may cause dryer not to shut off at end of automatic sensor cycles, resulting in longer drying times.


DRYER DIMENSIONS

Front view:

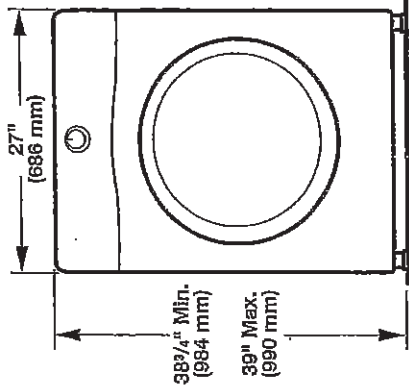


Side view:

Whirlpool Models

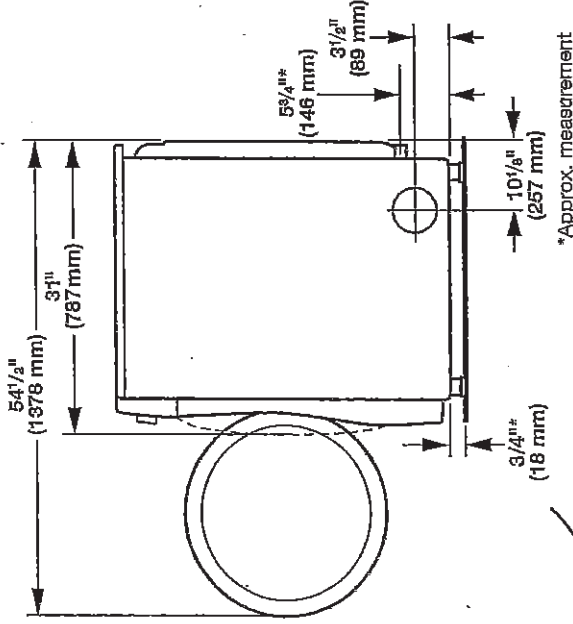

Maytag Models

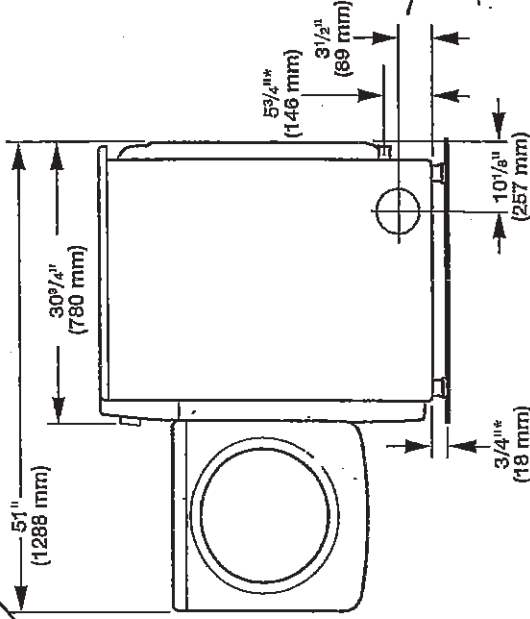

D.N