



02-Sep-21

PRE-Sales Selection Sheet
CHECKLIST

of 40

LOT	055-5	20-2329 ELEV B THE ENGLEWOOD
PURCHASERS:	IRIT SALEM	CONTACT NO: 416-566-0402
VENDOR:	HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4	

BUILD UP DRYWALL TO CEILING ABOVE FIREPLACE

3RD FLOOR BALCONY

OPTIONAL LOWER LEVE WITH BEDROOM 4 AND BATH

- ☐ FINISHED BASEMENT
- ☐ COLD CELLAR
- UPGRADED / MODIFIED ELEVATION
- ☐ CORNER UPGRADE
- ☐ SIDE UPGRADE
- ☐ REAR UPGRADE
- CEILING UPGRADE - SMOOTH
- ☒ MAIN FLOOR
- ☐ SECOND FLOOR
- ADDITIONAL ROUGH-INS
- ☒ 200 AMP SERVICE
- ☐ WET BAR ROUGH IN
- GAS ROUGH-IN
- ☐ STOVE
- ☐ BBQ
- HOODFAN VENTING
- ☒ 6" ROUND DUCT
- ☐ 7" ROUND DUCT
- ☐ WALK OUT DECK
- ☐ WALK OUT BASEMENT

☐ BASEMENT

☐ HUMIDIFIER
☒ AIRCON

☐ DRYER
☐ ADDITIONAL FIREPLACE

PAINT GRADE

FULL BASEMENT STAIRS:

UPPER BASEMENT STAIRS:

LOWER BASEMENT STAIRS:

STAIRS TO LOWER LEVEL:

STAIRS TO UPPER LEVEL:

MAIN STAIRS:

MEDIA STAIRS (if applicable):

N/A
N/A
ALL OAK
N/A
ALL OAK
N/A

Date	Aug 30/21	Purchaser	IRIT SALEM	Date	Aug 30/21	Décor Consultant	IRIT SALEM
Date		Purchaser		- 1 APPROVED -			
				-09- 02 2021			

Date Approved
HEATHWOOD HOMES (WHITBY)
LIMITED - PHASE 4



02-Sep-21

SCHEDULE "E"

2 of 40

Addendum forms part of, and is to be read with the attached offer to Purchase for:

LOT	055-5	20-2329 ELEV B THE ENGLEWOOD
PURCHASERS:	IRIT SALEM	CONTACT NO: 416-566-0402
VENDOR:	HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4	

The following items are included in the Agreement of Purchase and Sales, and are from Vendors standard samples:

Appliances		
2	- FIVE APPLIANCES: SS FRIDGE, STOVE, DISHWASHER; WHITE FRONT LOADER WASHER/DRYER- TOWNHOMES	Qty: 1
Modifications		
40	- OPTIONAL 4 LOWER LEVEL PLAN WITH BEDROOM 4 AND BATH AS PER AMENDMENT TO AGREEMENT OF PURCHASE AND SALE DATED AUGUST 31, 2020	Qty: 1
X_Credits		
38	- TEN THOUSAND DOLLARS (\$10,000) AT DÉCOR (NO CASH VALUE) - TOWNHOMES	Qty: 1

Sep 2/24	IRIT Salem	Sep 2/24	IRIT Salem
Date	Purchaser	Date	Décor Consultant
		r. APPROVED	
Date	Purchaser	-09- 02 2021	



30-Aug-21

Interior Finishing Selection Sheet

LOT 055-5

20-2329 ELEV B THE ENGLEWOOD

PURCHASERS: IRIT SALEM

CONTACT NO: 416-566-0402

VENDOR: HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4

UPG

Appliances

6-9380 Kitchen HoodFan

- ☒ LG 2.2 CU.FT. Over-The-Range Microwave Hood Combination
STAINLESS STEEL LMV2257ST 30" PAGES 26-27

Cabinetry

1-9111 Kitchen Cabinet Colour/Style

- ☐ SIMCOE ORCHID VIKING III STD 3DL

3-2086 Kitchen Cabinet Hardware

- ☐ HARDWARE 9677 STD

25-9156 Main Bathroom Cabinet Colour/Style

- ☐ SIMCOE RAIN CLOUD VIKING III STD 3DL

29-7672 Main Bathroom Cabinet Hardware

- ☐ HARDWARE 135 STD

28-8822 Main Bathroom Countertop

- ☐ Countertop WHITE CARRARA 4924-38 Wilsonart

20-9157 Master Ensuite Cabinet Colour/Style

- ☐ SIMCOE MOONLIGHT VIKING III STD 3DL

22-7672 Master Ensuite Cabinet Hardware

- ☐ HARDWARE 135 STD

359-9111 Optional Lower Level Bath Cabinet Colour/Style

- ☐ SIMCOE ORCHID VIKING III STD 3DL

360-7672 Optional Lower Level Bath Cabinet Hardware

- ☐ HARDWARE 135 STD

361-8822 Optional Lower Level Bath Countertop

- ☐ Countertop WHITE CARRARA 4924-38 Wilsonart

Carpet

37-9248 Bedroom 2 Flooring

- ☐ Dynasty Tex 40 oz Poly BLACK ICE DY 89418 STD

38-9248 Bedroom 3 Flooring

- ☐ Dynasty Tex 40 oz Poly BLACK ICE DY 89418 STD

36-9248 Master Bedroom Flooring

- ☐ Dynasty Tex 40 oz Poly BLACK ICE DY 89418 STD

52-1079 Throughout Underpad

- ☐ Underpad 500 Series STD

Ceramics

16-8913 Foyer Flooring

- ☒ Biel Bianco (White) UN.BL.BIA.1224 UPG_2 12 x 24 TO BE
INSTALLED IN A SUBWAY DESIGN SIDE TO SIDE 1/3 x 2/3
SKETCH # 3 PAGE 14 OFFSET BRICK
☐ Grout (27) Silver STD

17-2225 Foyer Grout

4-5721 Kitchen Backsplash

- ☒ Colour and Dimension Bright Arctic White
QT.CD.ARW.0306.BR UPG_1 3 x 6 TO BE INSTALLED IN A
HERRING BONE

5-2226 Kitchen Backsplash Grout

- ☐ Grout (00) White STD

- The Purchaser acknowledges these selections are subject to the terms and conditions of the applicable Agreement of Purchase and Sale.
- The Purchaser acknowledges that the Vendor accepts no responsibility in the event the Vendor is unable to supply a selection. The Purchaser agrees to reselect from the currently available selections immediately upon request.
- The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
- Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
- The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
- Selections will not be processed unless signed by Heathwood Homes Head Office.
- The colour selections made on the Colour Chart are final and cannot be changed once submitted.
- The Purchaser has checked and acknowledges the accuracy of this Colour Chart.

Date

Purchaser

Date

Décor Consultant

-09-02-2021

Date

Purchaser

Date Approved

HEATHWOOD HOMES (WHITBY)

LIMITED - PHASE 4



30-Aug-21

Interior Finishing Selection Sheet

LOT 055-5

20-2329 ELEV B THE ENGLEWOOD

PURCHASERS: IRIT SALEM

CONTACT NO: 416-566-0402

VENDOR: HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4

UPG

Ceramics

66-9257 Laundry Room Flooring	☐ CARRARA White / Grey GE.CR.WHIT.1313.MT STD 13 x 13
67-7705 Laundry Room Grout	☒ Upgrade Grout (01) Alabaster U/G
30-9106 Main Bathroom Flooring	☒ Madison Series White Matte GE.MD.WHT.1818.MT UPG 1 18" X 18" Matte
31-7705 Main Bathroom Grout	☒ Upgrade Grout (01) Alabaster U/G
112-9020 Main Bathroom Tub Wall Tile	☐ Weave White QT.WV.WHT.0810 STD 8 x 10 TO BE INSTALLED HORIZONTALLY
113-2226 Main Bathroom Tub Wall Tile Grout	☐ Grout (00) White STD
23-9106 Master Ensuite Floor Tile	☒ Madison Series White Matte GE.MD.WHT.1818.MT UPG 1 18" X 18" Matte
24-7705 Master Ensuite Floor Tile Grout	☒ Upgrade Grout (01) Alabaster U/G
73-8666 Master Ensuite Shower Floor Tile	☒ Ontario Series Mosaic Dark Grey OD.ON.DGR.0202.MT.N UPG 1 2 x 2
74-7704 Master Ensuite Shower Floor Tile Grout	☐ Grout (19) Pearl Gray STD
147-8923 Master Ensuite Shower Jamb(s) and Sill(s)	☐ Shower Jamb / Sill Thassos White STD
104-9020 Master Ensuite Shower Wall Tile	☐ Weave White QT.WV.WHT.0810 STD 8 x 10 TO BE INSTALLED VERTICALLY
105-2226 Master Ensuite Shower Wall Tile Grout	☐ Grout (00) White STD
350-9106 Optional Lower Level Bath Flooring	☒ Madison Series White Matte GE.MD.WHT.1818.MT UPG 1 18" X 18" Matte
351-7705 Optional Lower Level Bath Grout	☒ Upgrade Grout (01) Alabaster U/G
352-9020 Optional Lower Level Bath Tub Wall Tile	☐ Weave White QT.WV.WHT.0810 STD 8 x 10 TO BE INSTALLED HORIZONTALLY
353-2226 Optional Lower Level Bath Tub Wall Tile Grout	☐ Grout (00) White STD
32-8913 Powder Room Flooring	☒ Biel Bianco (White) UN.BL.BIA.1224 UPG_2 12 x 24 TO BE INSTALLED FRONT TO BACK SKETCH #3 PAGE 14
33-2225 Powder Room Grout	☐ Grout (27) Silver STD
53-2232 Throughout Thresholds	☐ Metal Thresholds STD

Electrical

1. The Purchaser acknowledges these selections are subject to the terms and conditions of the applicable Agreement of Purchase and Sale.
2. The Purchaser acknowledges that the Vendor accepts no responsibility in the event the Vendor is unable to supply a selection. The Purchaser agrees to reselect from the currently available selections immediately upon request.
3. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
4. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
5. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
6. Selections will not be processed unless signed by Heathwood Homes Head Office.
7. The colour selections made on the Colour Chart are final and cannot be changed once submitted.
8. The Purchaser has checked and acknowledges the accuracy of this Colour Chart.

Aug 30, 21 H. Salem

Aug 30, 21 H. Salem

Date Purchaser

Date Décor Consultant

Date Purchaser

Date Approved -09-02-2021
Date Approved HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4

LOT 055-5

20-2329 ELEV B THE ENGLEWOOD

PURCHASERS: IRIT SALEM

CONTACT NO: 416-566-0402

VENDOR: HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4

UPG

Electrical

90-5796 Throughout Switches and Plug

☐ Decora White Switches and Plugs STD

Fireplace

136-8881 Great Room Fireplace Mantle

☐ Paint Grade Mantle- Cabinet (Per Plan) WHITE NF-17 STD
BUILT UP DRY WALL ^{6"} Floor to Ceiling RA-46 17

135-8865 Great Room Fireplace Type

☐ Dimplex FP3033HL Electric Fireplace

Granite

2-9122 Kitchen Countertop

☒ MSI Quartz ICED GREY Group 1 UPG 3/4" with Mitred Edge

21-9069 Master Ensuite Countertop

☒ MSI Quartz ICED WHITE Group 1 STD 3/4"

Hardwood

363-9381 Bedroom 4 (Optional Lower Level) Flooring

☒ Torly's Rigidwood Firm Premier Meadowland RW-FMP479
5/32"x 7"x 47-3/4"

99-9359 Dining Room Flooring

☐ Vintage Pioneer Solid Collection Select V : Red Oak Pearl
BARISTA Red Oak Pearl 3/4" X 3 1/4"

419-9359 Foyer Landing Flooring

☐ Vintage Pioneer Solid Collection Select V : Red Oak Pearl
BARISTA Red Oak Pearl 3/4" X 3 1/4"

11-9359 Great Room Flooring

☐ Vintage Pioneer Solid Collection Select V : Red Oak Pearl
BARISTA Red Oak Pearl 3/4" X 3 1/4"

338-9359 Kitchen Flooring

☒ Vintage Pioneer Solid Collection Select V : Red Oak Pearl
BARISTA Red Oak Pearl 3/4" X 3 1/4"

366-9381 Optional Lower Level Hall Flooring

☒ Torly's Rigidwood Firm Premier Meadowland RW-FMP479
5/32"x 7"x 47-3/4"

77-9359 Stair Landing to Upper Level Flooring

☐ Vintage Pioneer Solid Collection Select V : Red Oak Pearl
BARISTA Red Oak Pearl 3/4" X 3 1/4"

35-9359 Upper Hall Flooring

☐ Vintage Pioneer Solid Collection Select V : Red Oak Pearl
BARISTA Red Oak Pearl 3/4" X 3 1/4"

Interior Railings

49-8148 Stairs to Lower Level Handrail/Pickets/Posts Type


☐ Single Collar Alt. Plain w/ Shoes with 3 1/2" Square/Cap Post(s)
BLACK METAL STD

43-8148 Stairs to Upper Level Handrail/Pickets/Posts Type

☐ Single Collar Alt. Plain w/ Shoes with 3 1/2" Square/Cap Post(s)
BLACK METAL STD

Interior Stairs

1. The Purchaser acknowledges these selections are subject to the terms and conditions of the applicable Agreement of Purchase and Sale.
2. The Purchaser acknowledges that the Vendor accepts no responsibility in the event the Vendor is unable to supply a selection. The Purchaser agrees to reselect from the currently available selections immediately upon request.
3. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
4. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
5. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
6. Selections will not be processed unless signed by Heathwood Homes Head Office.
7. The colour selections made on the Colour Chart are final and cannot be changed once submitted.
8. The Purchaser has checked and acknowledges the accuracy of this Colour Chart.

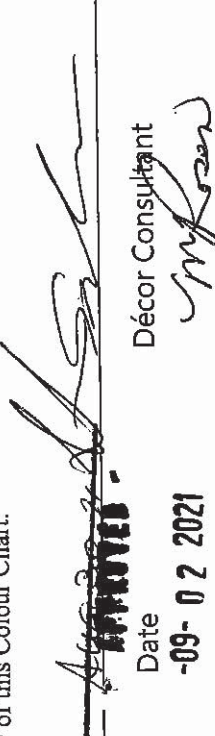	
Date	Décor Consultant
Purchaser	
Date	-09-02-2021

Date	Date Approved	HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4
Purchaser		



Interior Finishing Selection Sheet

30-Aug-21

LOT 055-5

20-2329 ELEV B THE ENGLEWOOD

PURCHASERS: IRIT SALEM

CONTACT NO: 416-566-0402

VENDOR: HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4

UPG

Interior Stairs

116-1713 Basement Stairs Type

☐ Paint Grade Stairs STD

~~50-1713 Stairs to Lower Level Handrail/Pickets/Posts Colour~~

~~☐ Paint Grade Stairs STD~~

45-1712 Stairs to Lower Level Type

☐ Oak Stairs UPG_1

39-1712 Stairs to Upper Level Type

☐ Oak Stairs UPG_1

Interior Trim

91-9374 Throughout Trim Size

☐ 4 1/4" Baseboards and 2 3/4" Integrated Backband Casings STD-Towns

Painting

46-7761 Stairs to Lower Level Colour

☐ Stain handrail, stringers, treads, risers, nosing & posts. (Metal pickets) STAIN HE SAME AS Oak Pearl BARISTA SHADE WILL VARY

40-7761 Stairs to Upper Level Colour

☐ Stain handrail, stringers, treads, risers, nosing & posts. (Metal pickets) STAIN THE SAME AS Oak Pearl BARISTA SHADE WILL VARY

240-1716 Throughout Trim - Paint Colour

☐ Trim WHITE STD

Plumbing

266-1737 Main Bathroom Plumbing Fixture (Colour)

☐ Plumbing Fixtures WHITE STD

149-1737 Master Ensuite Plumbing Fixture (colour)

☐ Plumbing Fixtures WHITE STD

362-1737 Optional Lower Level Bath Plumbing Fixture (Colour)

☐ Plumbing Fixtures WHITE STD

34-1737 Powder Room Plumbing Fixture (Colour)

☐ Plumbing Fixtures WHITE STD

1. The Purchaser acknowledges these selections are subject to the terms and conditions of the applicable Agreement of Purchase and Sale.
2. The Purchaser acknowledges that the Vendor accepts no responsibility in the event the Vendor is unable to supply a selection. The Purchaser agrees to reselect from the currently available selections immediately upon request.
3. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
4. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
5. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
6. Selections will not be processed unless signed by Heathwood Homes Head Office.
7. The colour selections made on the Colour Chart are final and cannot be changed once submitted.
8. The Purchaser has checked and acknowledges the accuracy of this Colour Chart.

Dec 30 21

Date Purchaser

Date Décor Consultant

-09- 02 2021

Date Purchaser

Date Approved ~~HEATHWOOD HOMES (WHITBY)~~
LIMITED - PHASE 4



30-Aug-21

Sales Selection Sheet
of 7

LOT	055-5	20-2329 ELEV B THE ENGLEWOOD
PURCHASERS:	IRIT SALEM	CONTACT NO: 416-566-0402
VENDOR:	HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4	HST #

It is herein understood and agreed between the undersigned parties hereto that the following changes shall be made to the above mentioned Agreement of Purchase and Sale in accordance with the agreement and except for such changes noted below, all other terms and conditions in the Agreement of Purchase and Sale shall remain as stated herein: It is further understood that and agreed that all changes and additions shall be installed as per builder's specifications, location and available selections. The Purchaser hereby agrees to purchase the following extras:

AMOUNT:

Appliances

2486	WHIRLPOOL OTR SS LMV2257ST with installation INCL. INSTALLATION	KITCHEN	Qty: 1
PAGES 26-27			

Cabinetry

1367	Optional Extras 04H- 66cm deep fridge enclosure (counter depth) includes [1] 66cm deep cabinet and [1] 66cm deep gable(1-wall beside fridge) (note: this is not a zero clearance enclosure. Standard heights and widths will be used)	KITCHEN	Qty: 1
SKETCH # 4 PAGE 15			

1505	Optional Upgrade Optional Pantry VIKING I/II/III	Pantry	Qty: 1
SKETCH # 4 PAGE 15			

1506	Optional Upgrade Optional Valance (Trim Only) VIKING I/II/III	Valance	Qty: 1
------	--	---------	--------

Ceramics

1841	Upgrade 2 Tile	Foyer Floor	Qty: 1
------	----------------	-------------	--------

1841	Install in Specified Pattern	Foyer Floor	Qty: 1
------	------------------------------	-------------	--------

1/3 x 2/3 OFFSET BRICK PATTERN SKETCH # 3 PAGE 14

1850	Upgrade 1 Tile	Kitchen Optional Backsplash	Qty: 1
------	----------------	-----------------------------	--------

1. This Sales Selection Sheet when properly executed forms part of our Agreement of Purchase and Sale.
2. All extras and upgrades listed above are subject to Construction Progress and Architectural and Municipal requirements.
3. In the event the Vendor is unable to incorporate the work approved above in the construction of the house for any reason whatsoever, the Vendor will not be liable to the Purchaser in any way. The monies paid for any changes or optional extras not proceeded with shall be returned to the Purchaser, without interest. The cost of options or extras is non-refundable in all other circumstances. If for any reason whatsoever the Agreement of Purchase and Sale is not completed, the total cost of work approved above will be retained by the Vendor.
4. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
5. The Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
6. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
7. Selections will not be processed unless signed by Heathwood Homes Head Office.
8. The selections made on this schedule are final and cannot be changed once submitted.
9. The Purchaser has checked and acknowledges the accuracy of this schedule.

Aug. 30. 21 Aug 30 21
Date Purchaser Date Décor Consultant

~~DATE APPROVED~~

-09- 0 2 2021
Date Purchaser

Date Approved HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4



30-Aug-21

Sales Selection Sheet
8 of 10

LOT 055-5

20-2329 ELEV B THE ENGLEWOOD

PURCHASERS: IRIT SALEM

CONTACT NO: 416-566-0402

VENDOR: HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4

HST #

It is herein understood and agreed between the undersigned parties hereto that the following changes shall be made to the above mentioned Agreement of Purchase and Sale in accordance with the agreement and except for such changes noted below, all other terms and conditions in the Agreement of Purchase and Sale shall remain as stated herein: It is further understood that and agreed that all changes and additions shall be installed as per builder's specifications, location and available selections. The Purchaser hereby agrees to purchase the following extras:

AMOUNT:

Qty: 1

Kitchen Optional
Backsplash

1850

Install in Specified Pattern
TO BE INSTALL IN A HERRINGBONE DESIGN

Qty: 1

Laundry Floor

1845

Upgrade Grout

Qty: 1

M. Ensuite Floor

1847

Upgrade 1 Tile

Qty: 1

M. Ensuite Floor

1847

Upgrade Grout

Qty: 1

M. Ensuite Shower
Floor

1840

Upgrade 1 Tile

Qty: 1

M.Flr.Pow Floor

1842

Upgrade 2 Tile

Qty: 1

Main Bth Floor

1848

Upgrade Grout

Qty: 1

Main Bth Floor

1848

Upgrade 1 Tile

Qty: 1

Opt Bed4 Bth Floor

1849

Upgrade Grout

Qty: 1

Opt Bed4 Bth Floor

1849

Upgrade 1 Tile

1. This Sales Selection Sheet when properly executed forms part of our Agreement of Purchase and Sale.
2. All extras and upgrades listed above are subject to Construction Progress and Architectural and Municipal requirements.
3. In the event the Vendor is unable to incorporate the work approved above in the construction of the house for any reason whatsoever, the Vendor will not be liable to the Purchaser in any way. The monies paid for any changes or optional extras not proceeded with shall be returned to the Purchaser, without interest. The cost of options or extras is non-refundable in all other circumstances. If for any reason whatsoever the Agreement of Purchase and Sale is not completed, the total cost of work approved above will be retained by the Vendor.
4. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
5. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
6. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
7. Selections will not be processed unless signed by Heathwood Homes Head Office.
8. The selections made on this schedule are final and cannot be changed once submitted.
9. The Purchaser has checked and acknowledges the accuracy of this schedule.

Aug 30 21

Date Purchaser

Aug 30 21

Date ~~APPROVED~~ - Décor Consultant

Aug 30 21

Date Purchaser

-09- 02 2021

Date Approved HEATHWOOD HOMES (WHITBY)
LIMITED - PHASE 4



30-Aug-21

Sales Selection Sheet
1 of 10

LOT	055-5	20-2329 ELEV B THE ENGLEWOOD
PURCHASERS: IRIT SALEM		
CONTACT NO: 416-566-0402		
VENDOR:	HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4	
	HST #	

It is herein understood and agreed between the undersigned parties hereto that the following changes shall be made to the above mentioned Agreement of Purchase and Sale in accordance with the agreement and except for such changes noted below, all other terms and conditions in the Agreement of Purchase and Sale shall remain as stated herein: It is further understood that and agreed that all changes and additions shall be installed as per builder's specifications, location and available selections. The Purchaser hereby agrees to purchase the following extras:

AMOUNT:

Drywall

449	Ceiling Upgrades	Qty: 1
	Smooth Ceilings Main Floor	

Electrical

342	Optional Extras	Qty: 1
	Extra wall interior outlet on Existing Circuit (does not include kitchen outlets) TO BE INSTALLED 70" FROM FLOOR ABOVE THE FIRE PLACE SEE SKETCH # 3 PAGE# 14	

344	Optional Extras	Qty: 1
	Ceiling rough-in (Capped) USE EXISTING SWITCH PLUG SEE SKETCH # 3 PAGE# 14	

344	Optional Extras	Qty: 1
	Ceiling rough-in (Capped) CENTERED ABOVE ISLAND SKETCH # 3 PAGE 14	

347	Optional Extras	Qty: 1
	Additional switch TO BE USED FOR THE CAP LIGHT SEE SKETCH # 3 PAGE 14	

Granite

844	Optional Upgrade	Qty: 1
	Countertop 3/4" GROUP 1 with double edge	

763	Optional Extras	Qty: 2
	Granite cutout w/ straight edge polish to accommodate under mount vanity sink SINK SPEC PAGE 22	

1. This Sales Selection Sheet when properly executed forms part of our Agreement of Purchase and Sale;
2. All extras and upgrades listed above are subject to Construction Progress and Architectural and Municipal requirements.
3. In the event the Vendor is unable to incorporate the work approved above in the construction of the house for any reason whatsoever, the Vendor will not be liable to the Purchaser in any way. The monies paid for any changes or optional extras not proceeded with shall be returned to the Purchaser, without interest. The cost of options or extras is non-refundable in all other circumstances. If for any reason whatsoever the Agreement of Purchase and Sale is not completed, the total cost of work approved above will be retained by the Vendor.
4. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
5. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
6. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
7. Selections will not be processed unless signed by Heathwood Homes Head Office.
8. The selections made on this schedule are final and cannot be changed once submitted.
9. The Purchaser has checked and acknowledges the accuracy of this schedule.

Date	Aug 30 21	Purchaser	HSR
Date	Aug 30 21	Décor Consultant	HSR
Date	-09-02-2021	Date Approved	MyRosen
	HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4		



30-Aug-21

Sales Selection Sheet

0 of 10

LOT	055-5	20-2329 ELEV B THE ENGLEWOOD
PURCHASERS: IRIT SALEM		
CONTACT NO: 416-566-0402		
VENDOR:	HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4	
HST #		

It is herein understood and agreed between the undersigned parties hereto that the following changes shall be made to the above mentioned Agreement of Purchase and Sale in accordance with the agreement and except for such changes noted below, all other terms and conditions in the Agreement of Purchase and Sale shall remain as stated herein: It is further understood that and agreed that all changes and additions shall be installed as per builder's specifications, location and available selections. The Purchaser hereby agrees to purchase the following extras:

AMOUNT:

845 Optional Upgrade Master Ensuite Qty: 1
Countertop upgrade with 4" backsplash 3/4" GROUP 1 with single edge

Hardwood

2487 Torly's BEDROOM 4 Qty: 1
OPT BED4

1103 Vintage KITCHEN Qty: 1
3-1/4" Red Oak Select-V

2487 Torly's Optional BREAK Qty: 1
OPT BED4 HALL OPTIONAL LOWER HALL

Mirrors/Glass Products

544 Shower Upgrade Master Ensuite MASTER Qty: 1
Upgrade to Frameless clear glass with D-Ring Handle in chrome BATHROOM e

Modifications

40 GREAT ROOM Qty: 1
DRY WALL BUILT UP ABOVE FIRE PLACE FLOORCEILING WITH 6" NF-17 MANTLE

Plumbing

277 STANDARD Kitchen Sink Option KITCHEN Qty: 1
KINDRED Kitchen Sink Collection - Reginox NS1930U/9 Stainless Kitchen Single Bowl Undermount Sink (or equivalent) PAGE 18

1. This Sales Selection Sheet when properly executed forms part of our Agreement of Purchase and Sale.
2. All extras and upgrades listed above are subject to Construction Progress and Architectural and Municipal requirements.
3. In the event the Vendor is unable to incorporate the work approved above in the construction of the house for any reason whatsoever, the Vendor will not be liable to the Purchaser in any way. The monies paid for any changes or optional extras not proceeded with shall be returned to the Purchaser, without interest. The cost of options or extras is non-refundable in all other circumstances. If for any reason whatsoever the Agreement of Purchase and Sale is not completed, the total cost of work approved above will be retained by the Vendor.
4. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
5. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
6. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
7. Selections will not be processed unless signed by Heathwood Homes Head Office.
8. The selections made on this schedule are final and cannot be changed once submitted.
9. The Purchaser has checked and acknowledges the accuracy of this schedule.

Aug 30 21 Aug 30 21 Aug 30 21

Date Purchaser

Date Décor Consultant

Date Purchaser -09- 02 2021 Date Approved HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4



30-Aug-21

Sales Selection Sheet
of

LOT 055-5

20-2329 ELEV B THE ENGLEWOOD

PURCHASERS: IRIT SALEM

CONTACT NO: 416-566-0402

VENDOR: HEATHWOOD HOMES (WHITBY) LIMITED - PHASE 4

HST #

It is herein understood and agreed between the undersigned parties hereto that the following changes shall be made to the above mentioned Agreement of Purchase and Sale in accordance with the agreement and except for such changes noted below, all other terms and conditions in the Agreement of Purchase and Sale shall remain as stated herein: It is further understood that and agreed that all changes and additions shall be installed as per builder's specifications, location and available selections. The Purchaser hereby agrees to purchase the following extras:

AMOUNT:

Qty: 2

110 AMERICAN STANDARD - SINK OPTIONS - MASTER BATHROOM
Undermount Sink

BOXE - White - Model 0315-000 020 PAGE 22

Qty: 2

161 Moen -CHATEAU MASTER BATHROOM
2 Handle Widespread Lavatory Chrome Faucet with Pop-Up Drain (Model#4945) in lieu of standard single lever PAGE 23

1. This Sales Selection Sheet when properly executed forms part of our Agreement of Purchase and Sale.
2. All extras and upgrades listed above are subject to Construction Progress and Architectural and Municipal requirements.
3. In the event the Vendor is unable to incorporate the work approved above in the construction of the house for any reason whatsoever, the Vendor will not be liable to the Purchaser in any way. The monies paid for any changes or optional extras not proceeded with shall be returned to the Purchaser, without interest. The cost of options or extras is non-refundable in all other circumstances. If for any reason whatsoever the Agreement of Purchase and Sale is not completed, the total cost of work approved above will be retained by the Vendor.
4. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
5. The Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
6. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
7. Selections will not be processed unless signed by Heathwood Homes Head Office.
8. The selections made on this schedule are final and cannot be changed once submitted.
9. The Purchaser has checked and acknowledges the accuracy of this schedule.

Date Aug 30.21 [Signature] Aug 30.21 [Signature]
Purchaser Purchaser
Date APPROVED - Décor Consultant

Date -09-02-2021 [Signature]
Purchaser
Date Approved HEATHWOOD HOMES (WHITBY)
LIMITED - PHASE 4

C2 COUNTRY LANE
LOT 55-5
20-2329 ELEV B
THE ENGLEWOOD


12 of 40
The Englewood

20-2329 ELEV. B

ELEVATION B: 2,339 SQ FT

Sketch #1

Opt. Lower Level with 4 Bedroom

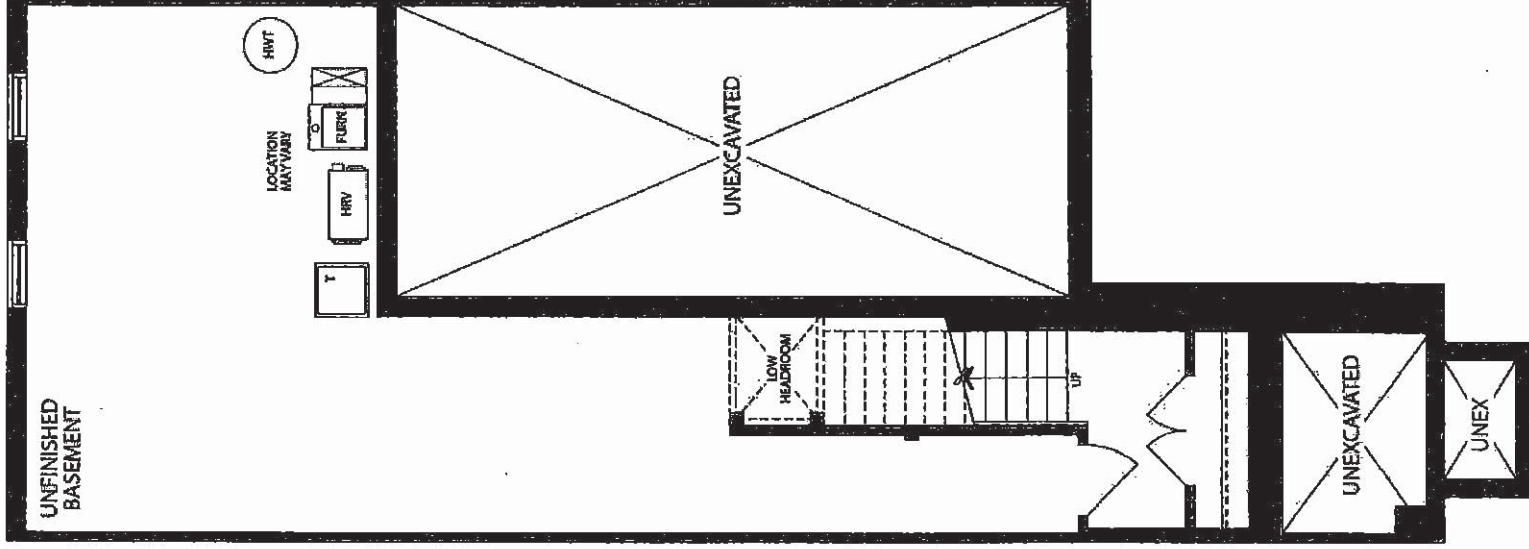

BASEMENT
ELEVATION A & B

[Signature]

Legal Plan July 22, 2020

C-2 COUNTRY LANE
LOT 55-5
20-2329 ELEV. B
THE ENGLEWOOD


13 of 40
The Englewood

20-2329 ELEV. B

ELEVATION B: 2,339 SQ FT

Sketch #2

Opt. Lower Level with 4 Bedroom

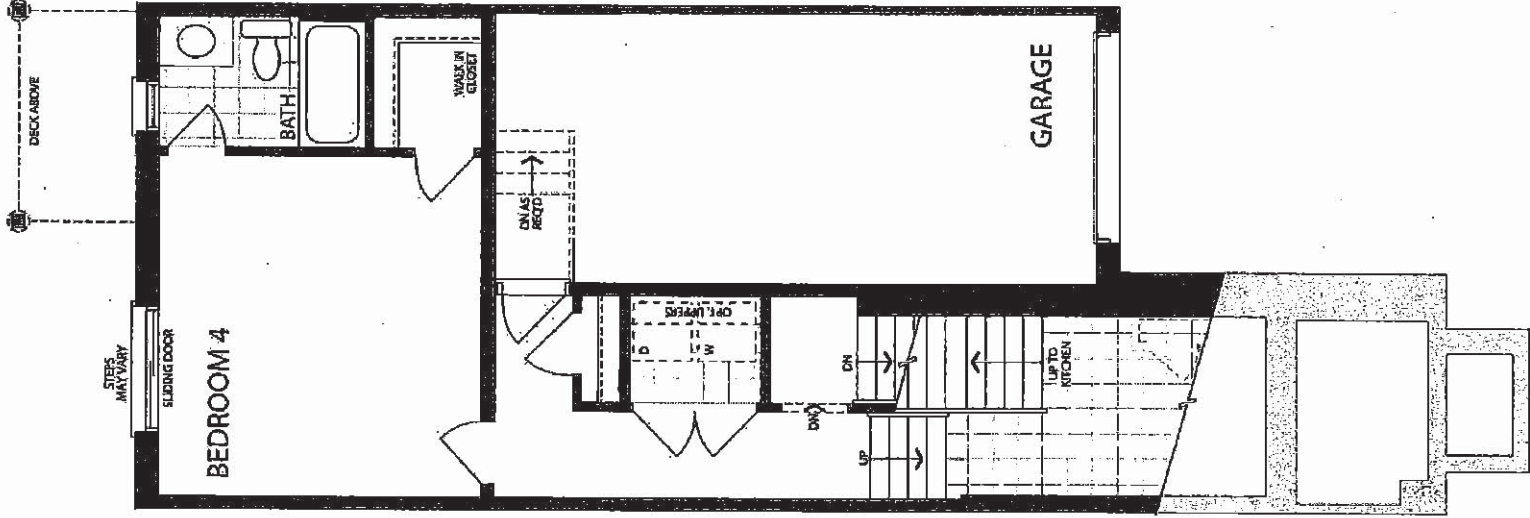

LOWER LEVEL WITH
OPTIONAL BEDROOM AND BATH
ELEVATION 'B'

Legal Plan July 22, 2020

C-2 COUNTRY LANE
LOT 55-5
20-2329 ELEV. B
THE ENGLEWOOD


4 of 40
The Englewood

20-2329 ELEV. B

ELEVATION B: 2,339 SQ FT

Sketch #3

Opt. Lower Level with 4 Bedroom

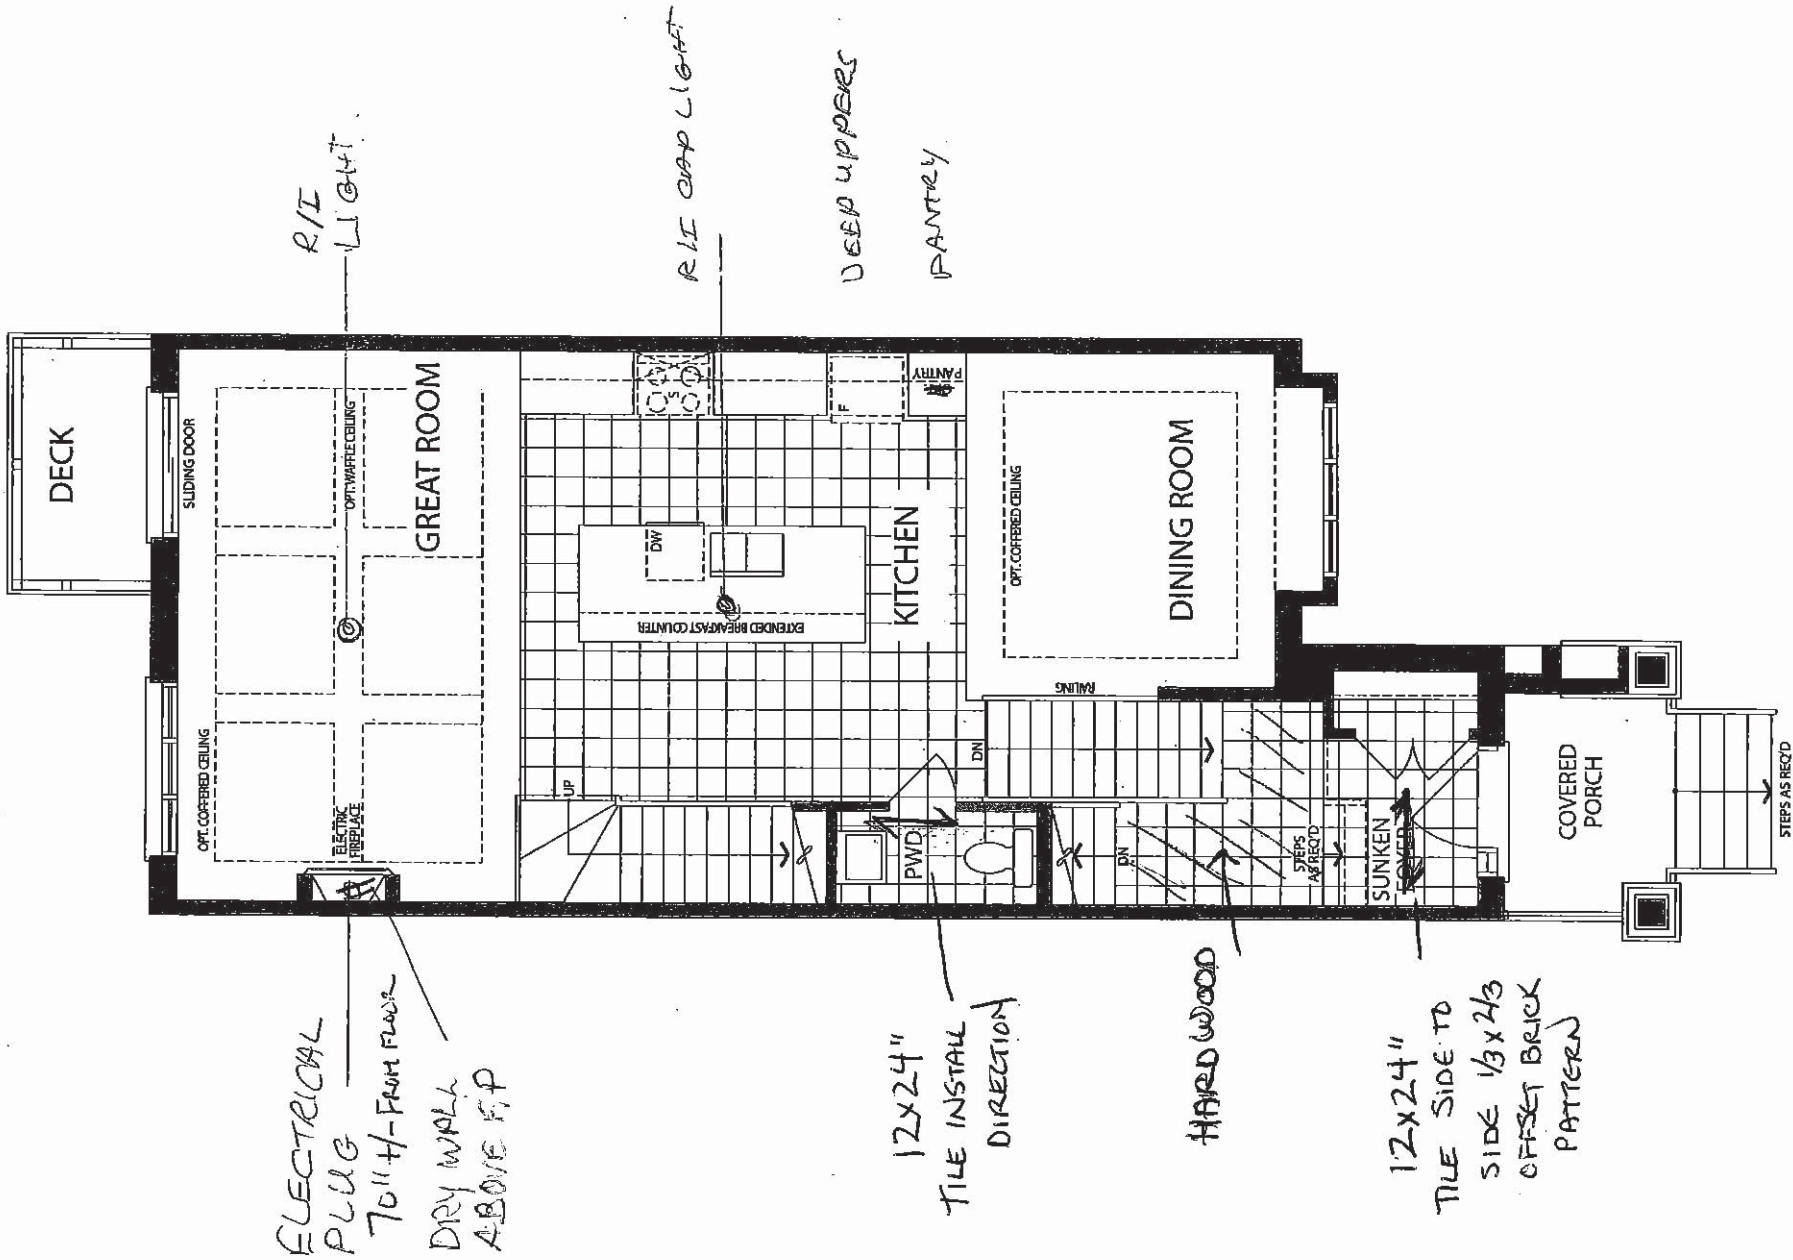

MAIN LEVEL
ELEVATION B

[Signature]
Legal Plan July 22, 2020

C-2 COUNTRY LANE
 LOT 55-5
 20-2329 ELEV. B
 THE ENGLEWOOD

F R E N D
 K I T C H E N S L I M
 1350 Shawson Drive, Mississauga, ON



HEATHWOOD HON
 COUNTRY LANE, WH
 MODEL: 20-2329 (201

STANDARD CONTRACT INCLUDES:

Appliance Openings

- Hood Opening: 30"W builder
- Fridge Opening: 37 3/8 "W X 7
- Fridge cabinet: 30cm deep
- Stove Opening: 30" Freestand
- Dishwasher Opening: 24"

Standard Kitchens Scope:


- 100cm H wall cabinets
- Std. Blum Hinges- **not soft close**
- Std. Metabox Drawers- **not soft close**
- Min 40cm W drawer
- Backing on all cabinets
- Countertop by others
- Upgrade applied paneled fridge & dishwashers supply only (appliance hardware by others)

Classic Collection
Optional Upgrade to Includes:


- Top Drawer Construction (In lieu of Standard bank of drawers)
- Tandem Box **Soft Close** Drawers
- Blumotion **Soft Close** Hinges for Doors
- Crown Moulding
- Deep Fridge Upper w/Deep Panel
- Tall upper Cabinets

THIS DRAWING IS FOR DESIGN PURPOSES ONLY.
 IT IS NOT AN EXACT RENDITION.

Sketch #4

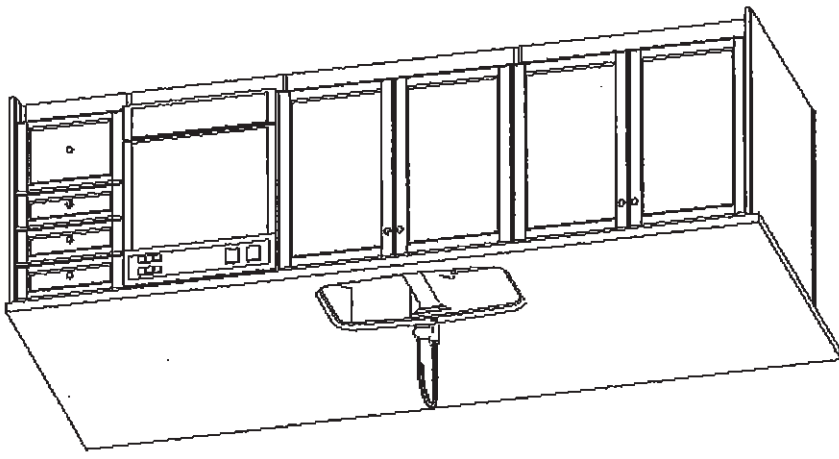

DEEP FRIDGE UPPER
 PANTRY

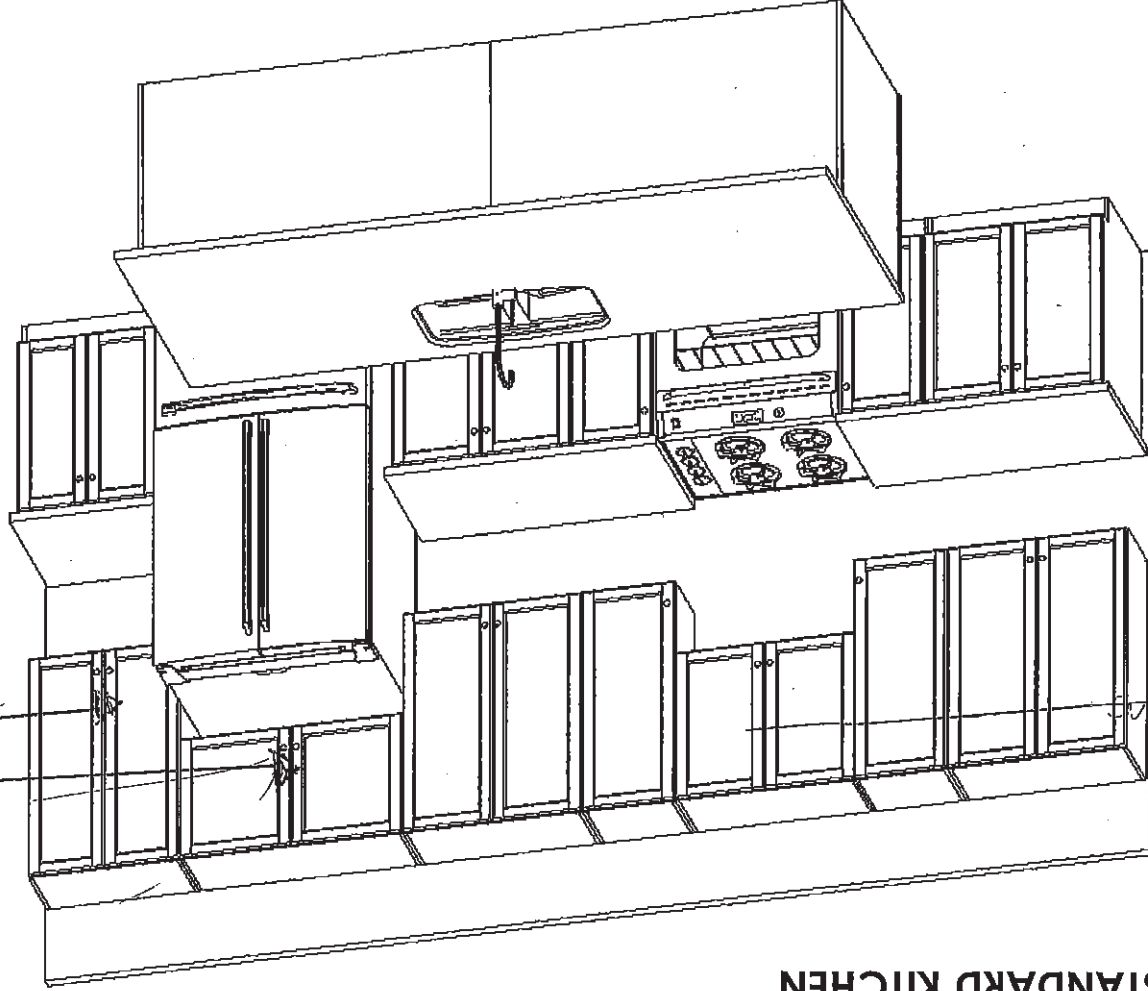

ALCOVE
 HOOD

STANDARD KITCHEN

6/28/2021

Handwritten signature or initials.

C-2 COUNTRY LANE
LOT 55-5
20-2329 ELEV. B
THE ENGLEWOOD

16' 40


The Englewood

20-2329 ELEV. B

ELEVATION B: 2,339 SQ FT

Sketch #5

Opt. Lower Level with 4 Bedroom

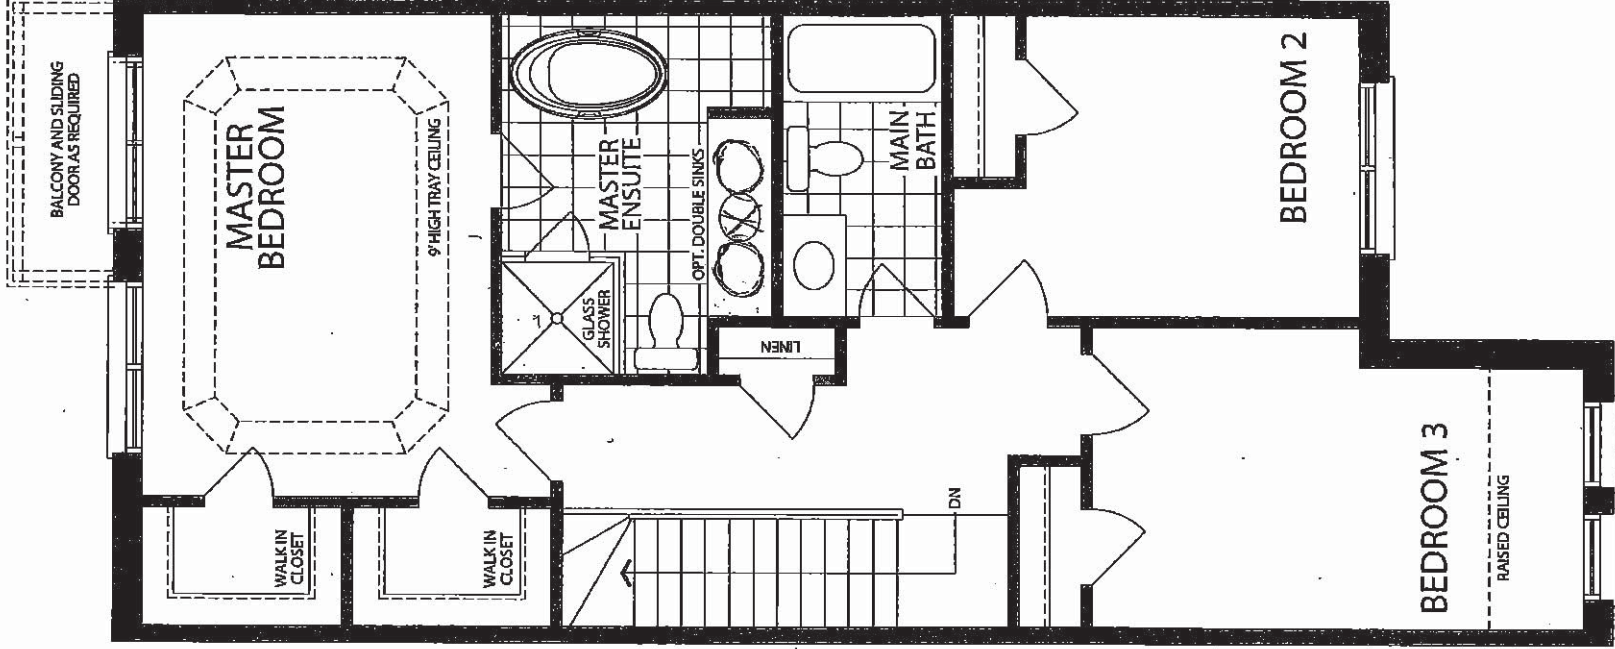


OPTIONAL DOUBLE
(2) SINKS

UPPER LEVEL
ELEVATION B

Legal Plan July 22, 2020

C-2 COUNTRY LANE
LOT 55-5
20-2329 ELEV. B
THE ENGLEWOOD


170640

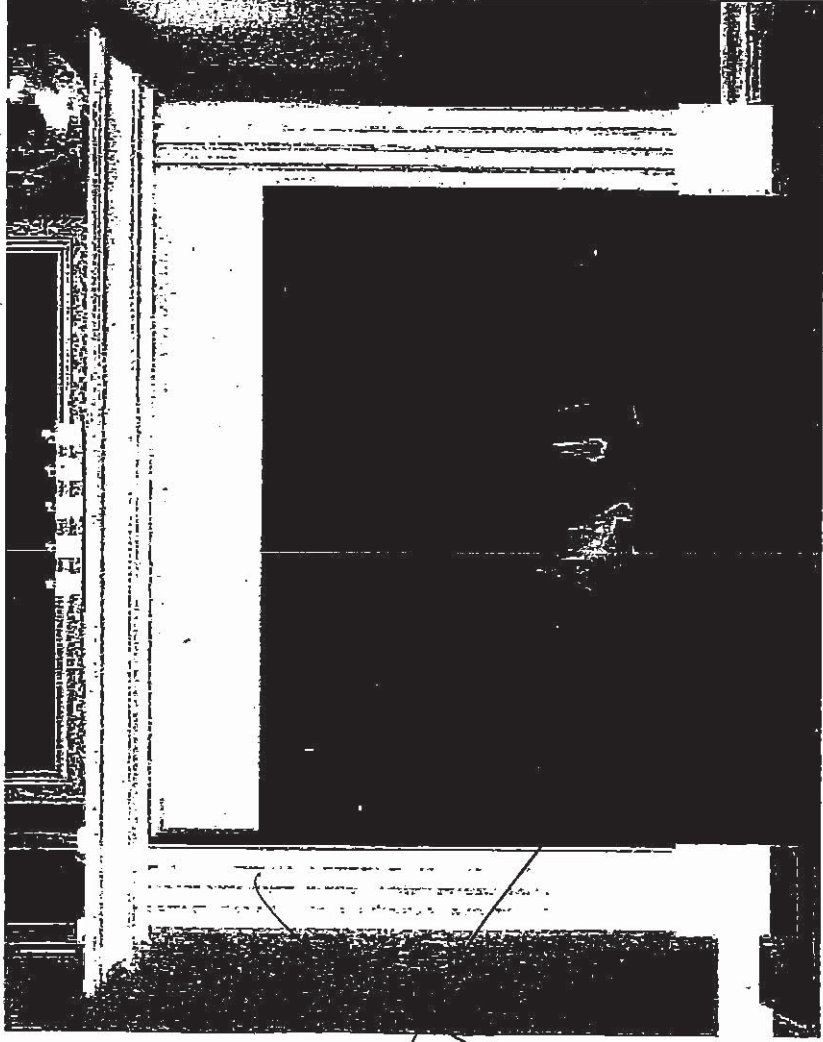

STANDARD NF 15 Mantel

Clean apron finish with fluted legs
WHITE PAINT GRADE FINISH

(PICTURE SHOWN WITH UPGRADE SURROUND AND HEARTH -PRICED SEPARATELY)

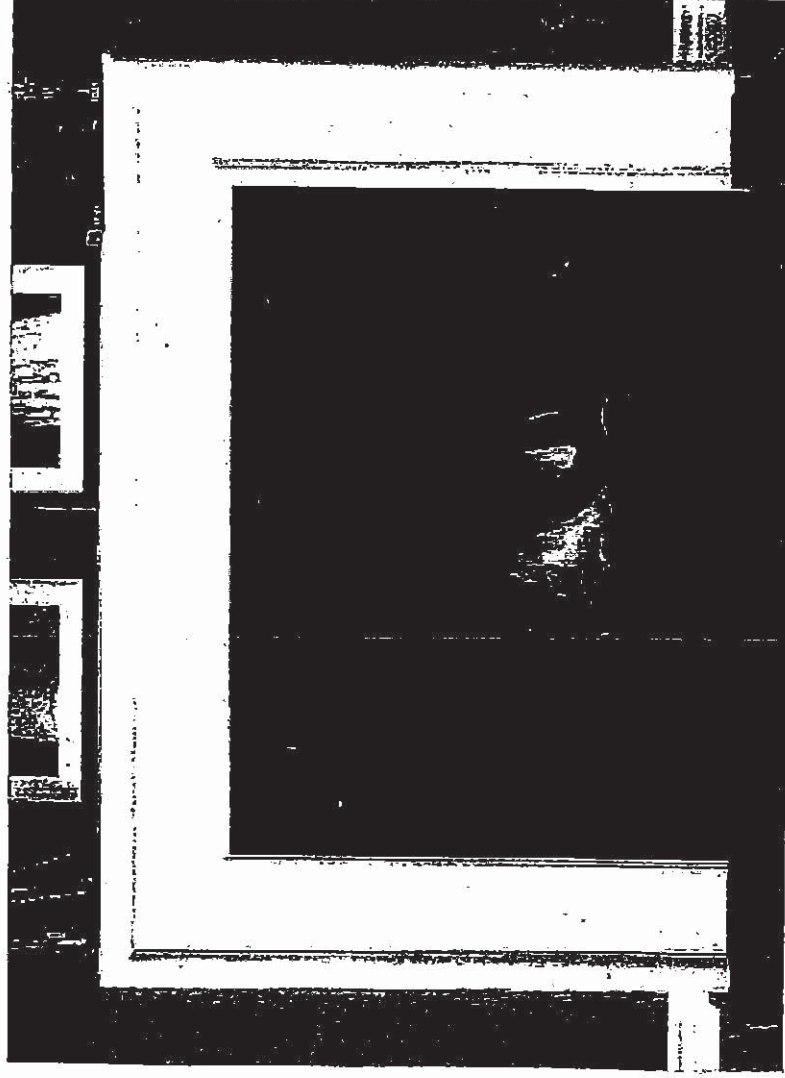



STANDARD NF 17 Mantel ✓

C-2 COUNTRY LANE
LOT 55-5
20-2329 ELEV. B
THE ENGLEWOOD

18 of 40

Stainless Steel | 122.0264.716

FAMILY: Sinks | SERIES: Reginox | MODEL: NS1930U/9 | FINISH: Stainless Steel | INSTALLATION TYPE: Undermount

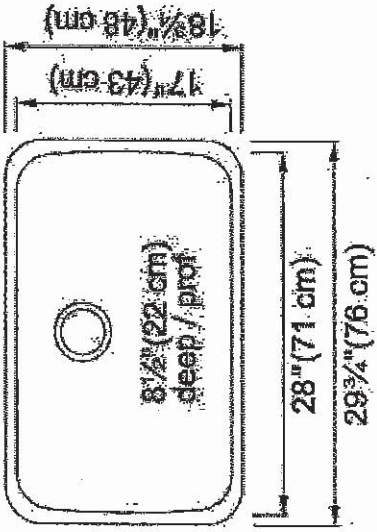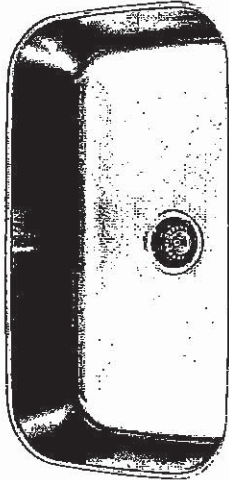

TECHNICAL DATA

Width overall	18 3/4"
Length overall	29 3/4"
Width of large bowl	17"
Length of large bowl	28"
Depth of large bowl	8 1/2"
Cabinet Size	36"
Number of Bowls	1
Waste Outlet Diameter	3 1/2"
Cut-Out Template	Yes
Faucet Hole	None
Type of Material	18 Gauge Stainless Steel
Surface Finish	SILK
Special feature	Rear Drain Waste Hole Location
Waste Kit Included	YES

Handwritten signature or initials.


C-2 COUNTRY LANE
LOT 55-5
20-2329 ELEV. B
THE ENGLEWOOD

19 of 40

STANDARD KITCHEN FAUCET

Align

Modern

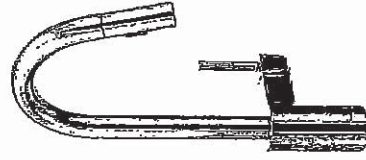


Single Handle Pull-Down Kitchen
Faucet*

Model 7565+

dt

C-2 COUNTRY LANE
LOT 55-5
20-2329 ELEV. B
THE ENGLEWOOD

20.40



BOULEVARD®
PEDESTAL SINK
VITREOUS CHINA

BOULEVARD® PEDESTAL SINK

- ☐ 0641.800 Faucet holes on 8" (203mm) centers (illustrated).
- ☒ 0641.400 Faucet holes on 4" (102mm) centers
- ☐ 0641.100 Center hole only
 - Classic styled rectangular pedestal lavatory
 - Vitreous china
 - Rear overflow
 - Supplied with mounting kit
 - Right Height® for greater comfort during use
 - Faucet ledge with large deck area (faucet not included)
 - **Design coordinates with Boulevard® Toilet**
 - Basin has flat bottom to also allow use as an above counter sink or a drop-in sink (with u-shaped cut out)

Nominal Dimensions:
24" x 19" x 35-1/2"
(610 x 483 x 902mm)

- ☐ 0641.008 Pedestal top-8" (203mm) centers
- ☐ 0641.004 Pedestal top-4" (102mm) centers
- ☐ 0641.001 Pedestal top-center hole only
- ☐ 0010.000 Pedestal only

Bowl sizes:
17" (432mm) wide,
12-1/2" (318mm) front to back,
5" (127mm) deep

Compliance Certifications -
Meets or Exceeds the Following Specifications:

- ASME A112.19.2 - 2008/CSA B45.1-08

To Be Specified:

☐ Color: ☐ White ☐ Linen


☐ Faucet Finish:

☐ Supplies:

☐ 1-1/4" Trap:

☐ Nipple:

* See faucet section for additional models available

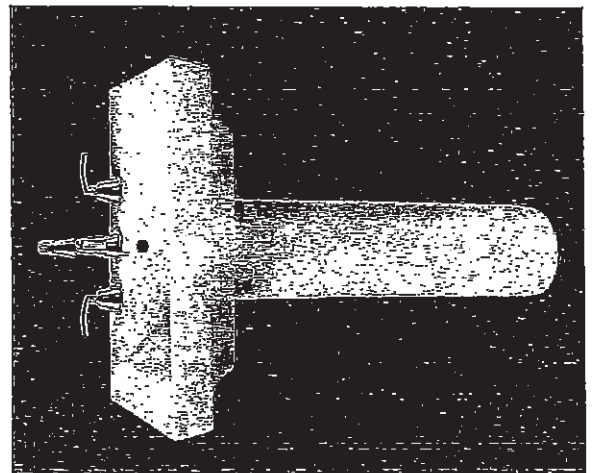

SEE REVERSE FOR ROUGHING-IN DIMENSIONS

bl



COLONY COUNTERTOP SINK

- Vitreous china
 - Self-rimming
 - Front overflow
 - Supplied with template
 - Faucet deck
- (Faucet shown not included)

- ☒ 0346 803
Faucet holes on 203mm (8") centres
- ☐ 0346 403 (Illustrated)
Faucet holes on 102mm (4") centres
- ☐ 0346 001
Centre hole only

Nominal Dimensions:
521 x 448mm (20-1/2" x 17-5/8")

Bowl sizes:
422mm (16-5/8") wide, 279mm (11") front to
back, 143mm (5-5/8") deep

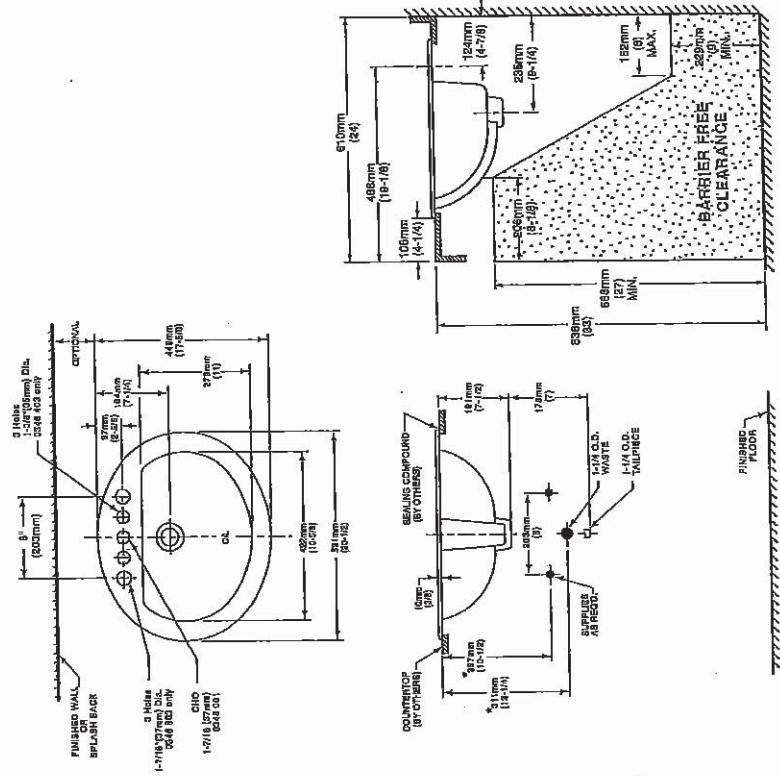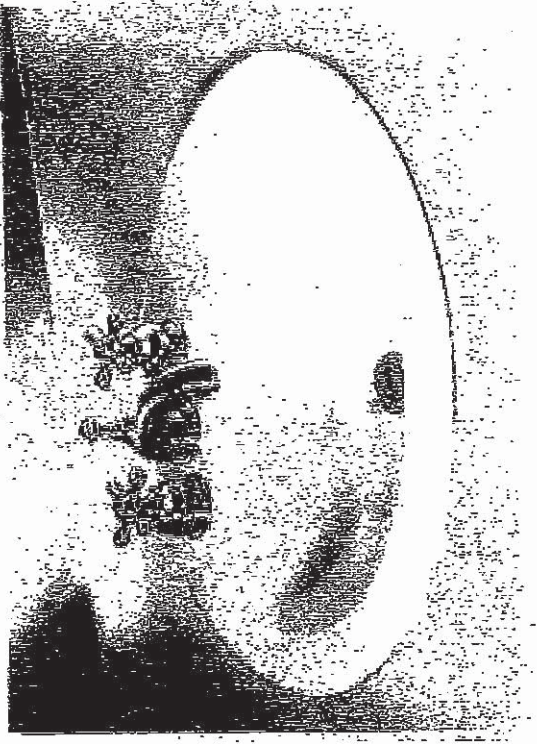

COMPLIANCE CERTIFICATIONS –
Meets or exceeds the following Specifications:

- ASME A112.19.2M for Vitreous China Fixtures.
- CAN/CSA B45 Series.

To Be Specified

☐ Colour: ☒ White ☐ Bone ☐ Silver Gray

☐ Linen

☐ Faucet**:

☐ Faucet Finish:

☐ Supplies & Stops:

☐ Trap 1-1/4" (32 mm):

NOTES:

- * DIMENSIONS SHOWN FOR LOCATION OF SUPPLIES AND "P" TRAP ARE SUGGESTED. FOR COUNTERTOP CUTOUT AND INSTALLATION INSTRUCTIONS USE TEMPLATE SUPPLIED WITH SINK.
- FAUCETS NOT INCLUDED AND MUST BE ORDERED SEPARATELY.
- IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard A112.18.2.
- These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

C-2 COUNTRY LANE
LOT 55-5
20-2329 ELEV. B
THE ENGLEWOOD

22 of 40

American Standard

Style That Works Better

 BARRIER FREE

MASTER BATHROOM

BOXE
UNDERCOUNTER SINK
VITREOUS CHINA


BOXE UNDERCOUNTER SINK

X 2

- Vitreous china
- Rectangular undercounter mount sink with rectangular interior and flat bottom design bowl
- Unglazed rim
- Front overflow
- Supplied with template
- Meets OBC requirement when sink is installed with overflow to the rear
- Mounting clips available separately (P031006000) (Faucet not included)

☐ 0315 000 Unglazed Rim
508 x 406mm (20" x 16")

Bowl size:
438mm (17-1/4") wide,
337mm (13-1/4") front to back,
127mm (5") deep

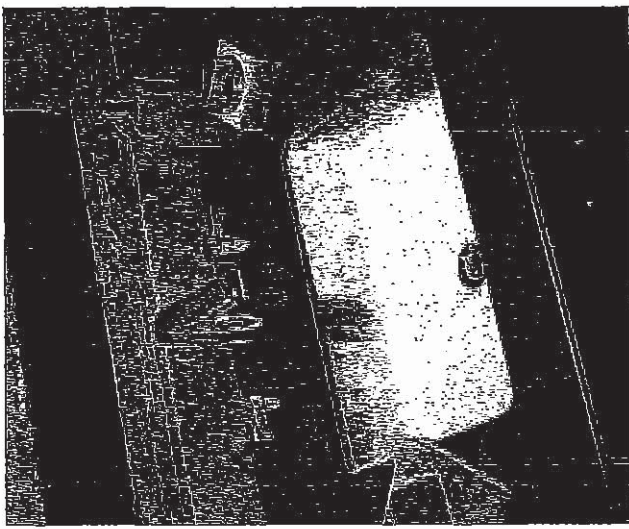

COMPLIANCE CERTIFICATIONS –

Meets or exceeds the following Specifications:

- ASME A112.19.2M for Vitreous China Fixtures.
- CAN/CSA B45 Series.

To Be Specified

- ☐ Colour: ☐ White
- ☐ Faucet*
- ☐ Faucet Finish:
- ☐ Supplies & Stops;
- ☐ Trap 1-1/4" (32 mm):

* See faucet section for additional models available



- Countertop 864mm (34") from finished floor. Sink installed 102mm (4") from front edge of countertop. Countertop thickness to be 25mm (1") maximum.

MEETS THE AMERICAN DISABILITIES ACT GUIDELINES AND ANSI A117.1 ACCESSIBLE AND USEABLE BUILDINGS AND FACILITIES - CHECK LOCAL CODES.



NOTES:

WE RECOMMEND USING SINK AS A TEMPLATE TO DETERMINE PROPER CONTOUR. CUT COUNTERTOP 38MM (1-1/2") INSIDE SINK CONTOUR. FAUCETS NOT INCLUDED AND MUST BE ORDERED SEPARATELY.

- * DIMENSIONS SHOWN FOR LOCATION OF SUPPLIES AND "P" TRAP ARE SUGGESTED.

▼ UNDERCOUNTER MOUNTING KIT SUPPLIED SEPARATELY

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard A112.19.2. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

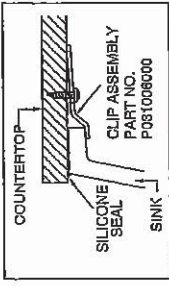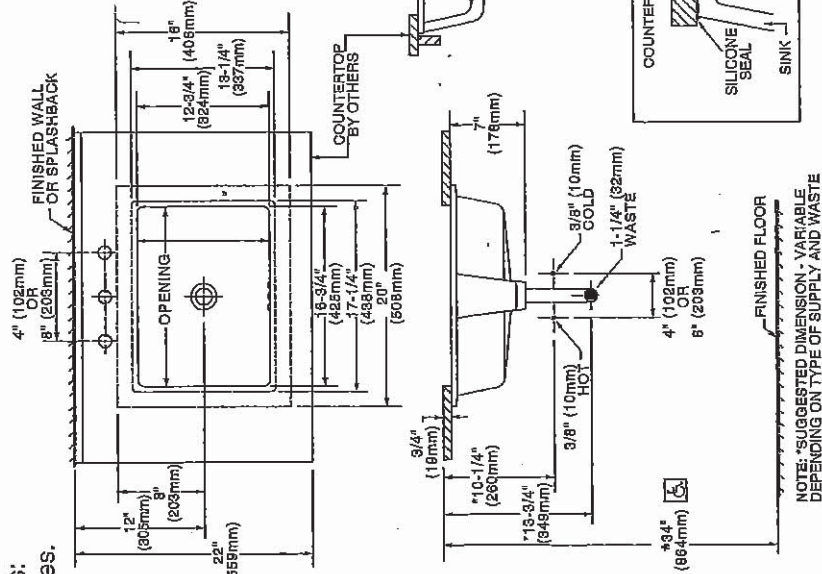

* To comply with ADA standards, overflow hole must face back

C-2 COUNTRY LANE
LOT 55-5
20-2329 ELEV. B
THE ENGLEWOOD

23 of 40

MASTER BATH

X 2



Buy it for looks. Buy it for life.®

Specifications

DESCRIPTION

- Quick connect system
- Metal construction with various finishes identified by suffix
- 1/2" IPS shanks
- Designed to be installed on 8" to 16" centers
- Includes metal pop-up type waste assembly

OPERATION

- Lever style handles with hot and cold color indicators
- Hot side counterclockwise to open (clockwise to close)
- Cold side clockwise to open (counterclockwise to close)

FLOW

- Flow is limited to 1.5 gpm max (5.7 L/min) at 60 psi, for products made before October 2008 flow is limited to 2.2 gpm max (8.3 L/min)

CARTRIDGE

- 1224 cartridge design
- Nonmetallic and stainless steel material


STANDARDS

- Third party certified to WaterSense®, ASME A112.18.1/CSA B125.1 and all applicable requirements referenced therein
- Certified to NSF 61/9 & 372
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act

- ADA  for lever handles

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations

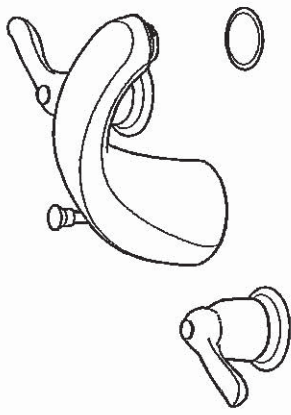


CHATEAU® Two-Handle Widespread Lavatory Faucet

Models: 4945 series

NOTE: SPOUT DESIGNED TO BE INSTALLED THROUGH 1" MIN. DIA. HOLE. VALVES INSTALL THROUGH 1-1/8" MIN. DIA. HOLE.

NOTE: FOR DECK THICKNESS 1-1/2" to 3", USE SERVICE KIT #115001. VALVES INSTALL THROUGH 1-1/4" DIA. HOLE.

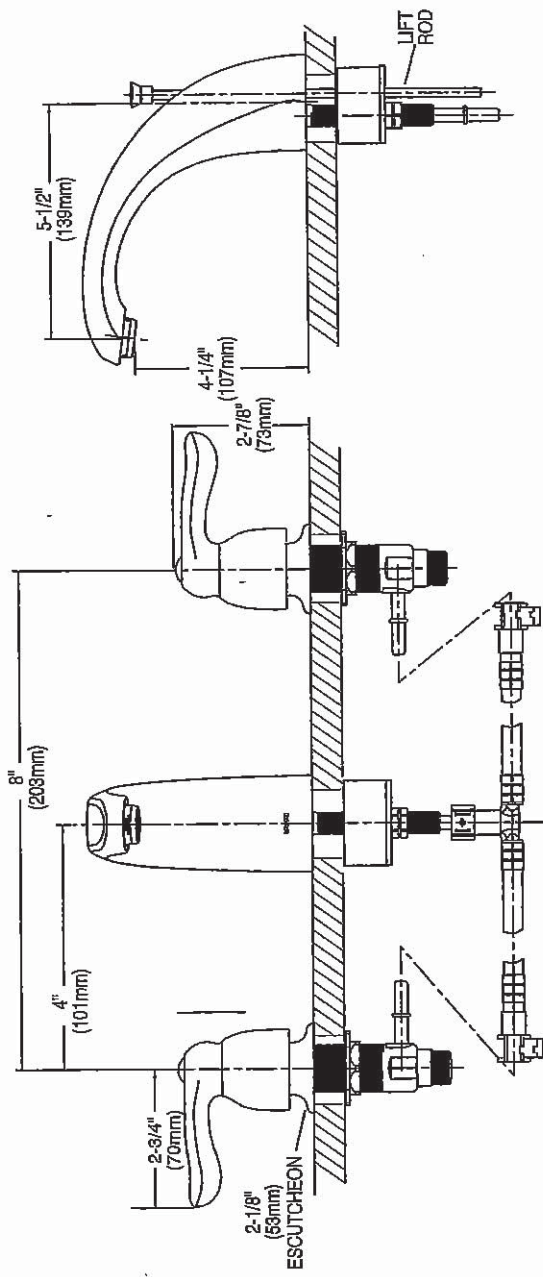

CRITICAL DIMENSIONS

(DO NOT SCALE)


Rev. 8/15

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN
www.moen.com

C-2 COUNTRY LANE
LOT 55-5
20-2329 ELEV. B
THE ENGLEWOOD

24 of 40

MASTER BATH TUB

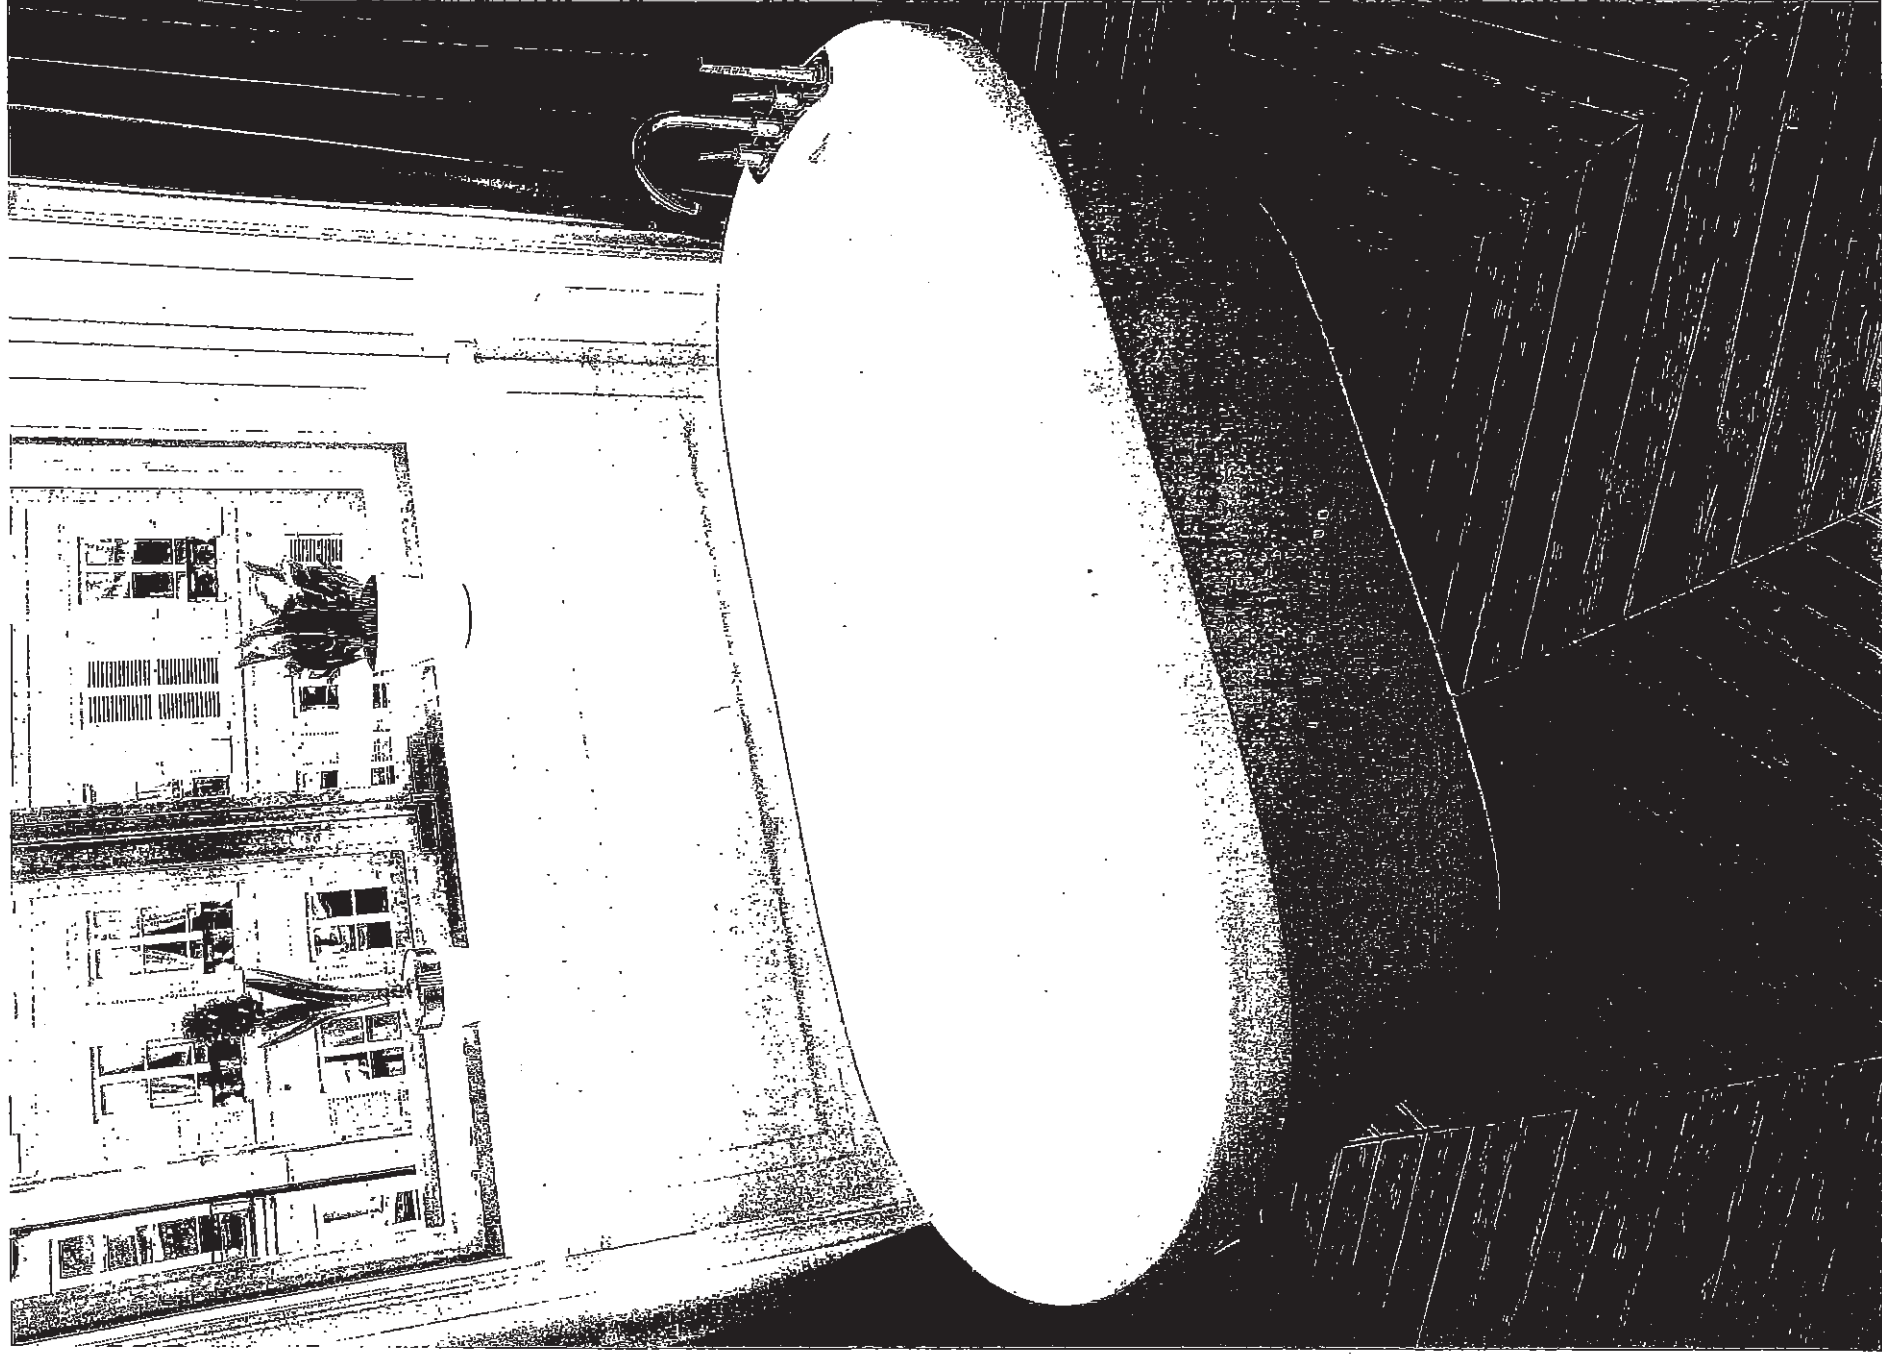

Dani CF2007


24

C-2 COUNTRY LANE
LOT 55-5
20-2329 ELEV. B
THE ENGLEWOOD

25 of 40


Chateau

Transitional

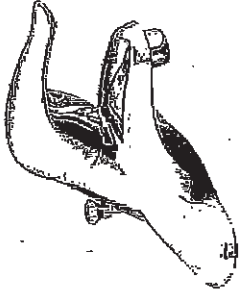

Lavatory Faucet with Pop-Up Drain
Model L4621†

VANITY SINKS AND PEDESTAL

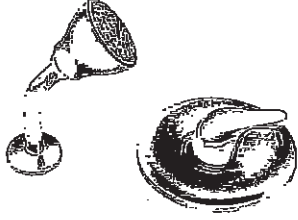

Posi-Temp® Pressure Balancing Tub/Shower
Model 62320 / TL183†

OR

Posi-Temp Valve and Tub/Shower Trim
with Eco-Performance Easy Clean® XL
Model 62320 / TL183EP†

(TL183EP not available in BC)

SHOWER AND 5' TUB FAUCETS



2 Handle Roman Tub with 9" Spout
Model 4796 / T990†

FREESTANDING TUB FAUCETS

62

C-2 COUNTRY LANE
LOT 55-5
20-2329 ELEV. B
THE ENGLEWOOD

26 of 40

MICROWAVE OVENS

LMV2257ST

OVER-THE-RANGE



LMV2257ST

Cooking Performance


- 2.2 cu.ft. Oven Capacity
- 2nd Generation Slide-Out Ventilation
- 1000 Watts
- 400 CFM Exhaust Fan
- Sensor Cook Technology

Style and Design

- GlassTouch™ Controls
- Horizontal Digital Control Panel
- Premium Stainless Steel Finish

Convenience

- ExtendaVent™ 2.0
- EasyClean™ Interior
- Energy Savings Key
- QuietPower™ Ventilation System
- LED Cooktop Light
- Electronic Controls

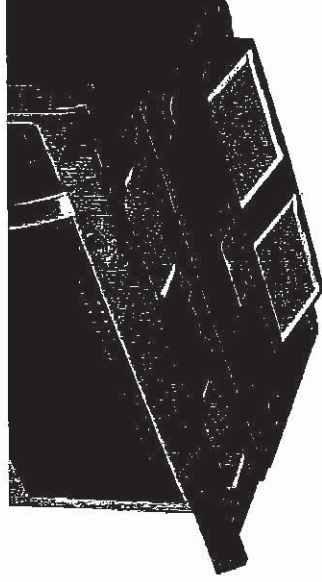

Stainless Steel



Life's Good

26

C-2 COUNTRY LANE
LOT 55-5
20-2329 ELEV. B
THE ENGLEWOOD

27 of 40

OVER-THE-RANGE

Largest Capacity*

With the **largest capacity at 2.2 cu.ft.**, there's always plenty of room to heat large items.

**Based on manufacturers' published specifications of over-the-range microwaves as of January 2014.*

Clear the Air

Say goodbye to smoke and lingering cooking smells and hello to LG's enhanced **ExtendaVent™**. Where most over-the-range microwaves only cover the rear of the cooktop, **2nd Generation Slide-out ExtendaVent™** provides powerful ventilation over the entire cooktop, back to front. That's what we call clearing the air.

Don't Sweat the Splatters

Splills? Splatters? Don't sweat it. LG's **EasyClean™** interior resists stains and buildup, so cleaning your microwave doesn't have to be a chore. Simply wipe with a damp cloth—no chemicals, no scrubbing, no problem.

Save Your Energy


LG's **Energy Savings feature** turns off the display when it has been inactive for 5 minutes. This feature saves energy by dropping the overall power consumption to less than 0.1W.

Perfectly Cooked Meals

Sensor cooking technology measures humidity levels inside the oven to automatically adjust cooking time and power for deliciously perfect results.

Premium, Stylish Design

Why choose between style and power? LG's **premium stainless steel finish** brings elegance and clean lines to your over-the-range microwave and beauty to your kitchen.

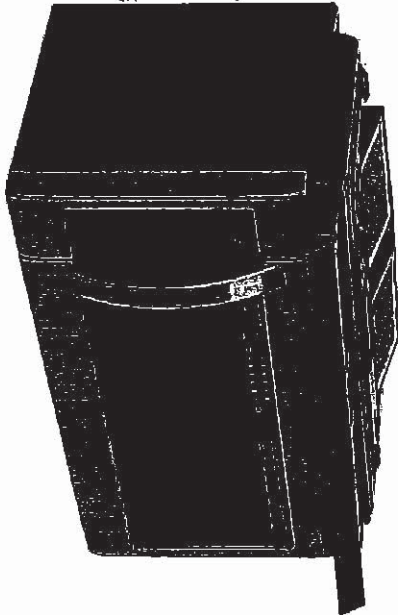

LG ELECTRONICS CANADA INC.
20 Norelco Drive, North York, Ontario, M9L 2X6
Tel: 647.253.6300 | LG.com
Customer Service & Parts
1-888-542-2623

Printed in June 2014

ds

LMV2257ST	
CAPACITY	
Oven Capacity	2.2 cu.ft.
FEATURES	
Output Power	1000W
Control Type	Digital
Display	Horizontal GlassTouch™ Controls VFD Scrolling, 2 Line
Cavity Design	Square
Exterior Design	
Slide-out ExtendaVent™	WideView™ Traditional
COOKING FEATURES	
Sensor Cook Options	8
Power Levels	10
Energy Saving	•
Reheat	Sensor Reheat
Defrost	Auto and Time Defrost
Popcorn Key	•
Ez On (Add 30 seconds)	•
Soft/Melt	•
More/Less	•
Custom Set	•
CONVENIENCE FEATURES	
EasyClean™	•
Energy Savings Key	•
Turntable Type	Round
Turntable Dimensions	14.2"
Turntables On/Off Dual Distribution Technology	•
Clock/Kitchen Timer	•
Completion Buzzer	•
LIGHTING	
Cook Top Light	LED (1)
SAFETY FEATURES	
Child lock	•
VENTING SYSTEM	
Filteration	Variable Grease Filter
Speed (Step)	4 Speed (Turbo/Hi/Low/Slow)
Vent Grill Type	Hidden Vent
Vent Air Flow (CFM)	400 CFM
MATERIALS/FINISHES	
Available Colours	Stainless Steel (ST)
Interior Colour	Gray
DIMENSIONS	
Cavity (WxHxD)	22" x 11 5/8" x 14 5/8"
Exterior (WxHxD)	29 7/8" x 17 13/16" x 15 3/4"
Carton (WxHxD)	33 8/16" x 20 9/16" x 20 3/16"
Weight (Product/Cartron)	65.9 lbs/75.4 lbs
ACCESSORIES	
Rack	•
Carbon Re-Circulation Filter	•
UPC CODES	
LMV2257ST	772454 063725
WARRANTY	
	1 Year parts and labour 5 Years part on Magnetron

Design, features and specifications are subject to change without notice.
Non-metric weights and measurements are approximate.
All trademarks are property of their respective owners.

C-2 COUNTRY LANE
LOT 55-5
20-2329 ELEV. B
THE ENGLEWOOD

34
28 of 40

 Whirlpool® Top Mount Refrigerator

PRODUCT MODEL NUMBERS

WRT311FZD
WRT511SZD

WRT541SZD

Electrical: A 115-volt, 60-Hz, AC-only, 15- or 20-amp fused, grounded electrical supply is required. It is recommended that a separate circuit serving only your refrigerator be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.


NOTE: Before performing any type of installation, cleaning, or removing a light bulb, turn the control (Thermostat, Refrigerator or Freezer Control depending on the model) to OFF and then disconnect the refrigerator from the electrical source. When you are finished, reconnect the refrigerator to the electrical source and reset the control (Thermostat, Refrigerator or Freezer Control depending on the model) to the desired setting. See "Using the Controls."

Water: A cold water supply with water pressure between 30 and 120 psi (207 and 827 kPa) is required to operate ice maker and water dispenser. If you have questions about your water pressure, call a licensed, qualified plumber.

IMPORTANT: The pressure of the water coming out of a reverse osmosis system going to the water inlet valve of the refrigerator needs to be between 30 and 120 psi (207 and 827 kPa).


Reverse Osmosis Water Supply: If a reverse osmosis water filtration system is connected to your cold water supply, the water pressure to the reverse osmosis system needs to be a minimum of 40 to 60 psi (276 to 414 kPa).

PRODUCT DIMENSIONS

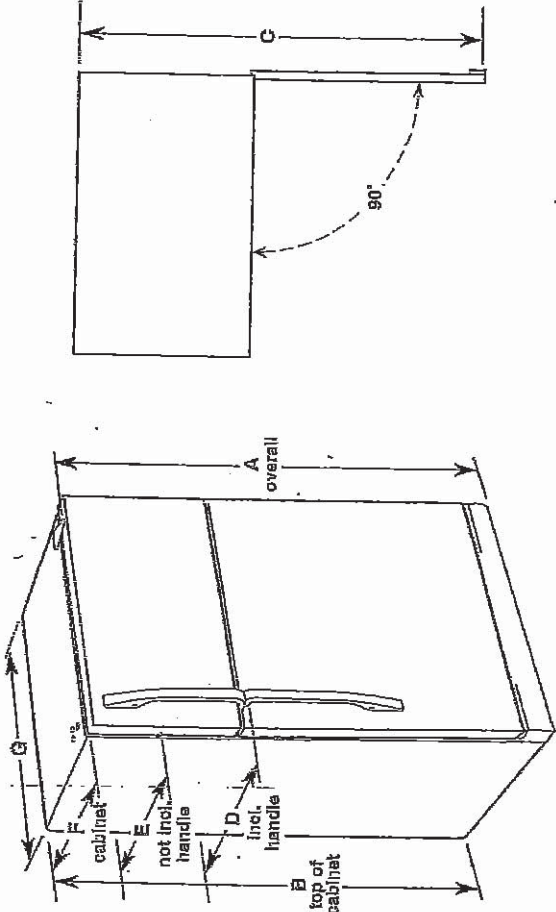

Model Number	Model Size	Reversible Door	Height - Overall "A"	Height - Top of Cabinet "B"	Depth - Door Open 90° "C"	Depth - With Handles "D"	Depth - Without Handles "E"	Depth - Cabinet Only "F"	Width - Cabinet "G"
WRT311FZD	20.5 cu. ft.	Yes	66 1/4" (168.3 cm)	65 1/2" (166.4 cm)	62 1/4" (158.1 cm)	32 1/4" (83.5 cm)	30 5/8" (77.8 cm)	28 1/2" (72.4 cm)	32 3/4" (83.2 cm)
WRT511SZD WRT541SZD	24.1 cu. ft.	Yes	66 1/4" (168.3 cm)	65 1/4" (166.4 cm)	62 1/4" (158.1 cm)	34" (86.4 cm)	32 1/2" (82.3 cm)	28 1/4" (72.4 cm)	32 3/4" (83.2 cm)

LOCATION REQUIREMENTS

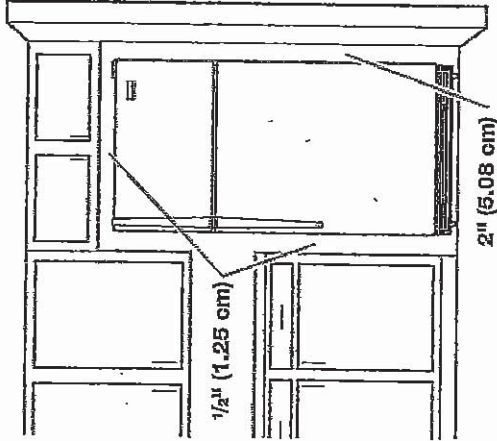

To ensure proper ventilation for your refrigerator, allow for a 1/2" (1.25 cm) space on each and between overhead cabinets and refrigerator top. Allow at least 1" (2.5 cm) between back of cabinet and the wall. If your refrigerator has an ice maker, make sure you leave some extra space at the back for the water line connections.

If you are installing your refrigerator next to a fixed wall, leave 2" (5 cm) minimum on the hinge side (depending on your model) to allow for the door to swing open.

NOTE: This refrigerator is intended for use in a location where the temperature ranges from a minimum of 55°F (13°C) to a maximum of 110°F (43°C). The preferred room temperature range for optimum performance, which reduces electricity usage and provides superior cooling, is between 60°F (15°C) and 90°F (32°C). It is recommended that you do not install the refrigerator near a heat source, such as an oven or radiator.

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

Ref. W10874108
10/29/14

62

C-2 COUNTRY LANE
LOT 55-5
20-2329 ELEV. B
THE ENGLEWOOD


29 of 40

WHIRLPOOL 30" (76.0 CM) FREESTANDING ELECTRIC RANGES
Model YWFE515S0JS

5.3 cu. ft. Whirlpool® electric range with Frozen
Bake™ technology
YWFE515S0JS

Whirlpool®

[Home](#) > [Kitchen Appliances](#) > [Cooking Appliances](#) > [Ranges](#) > [Single Oven Ranges](#) > YWFE515S0JS

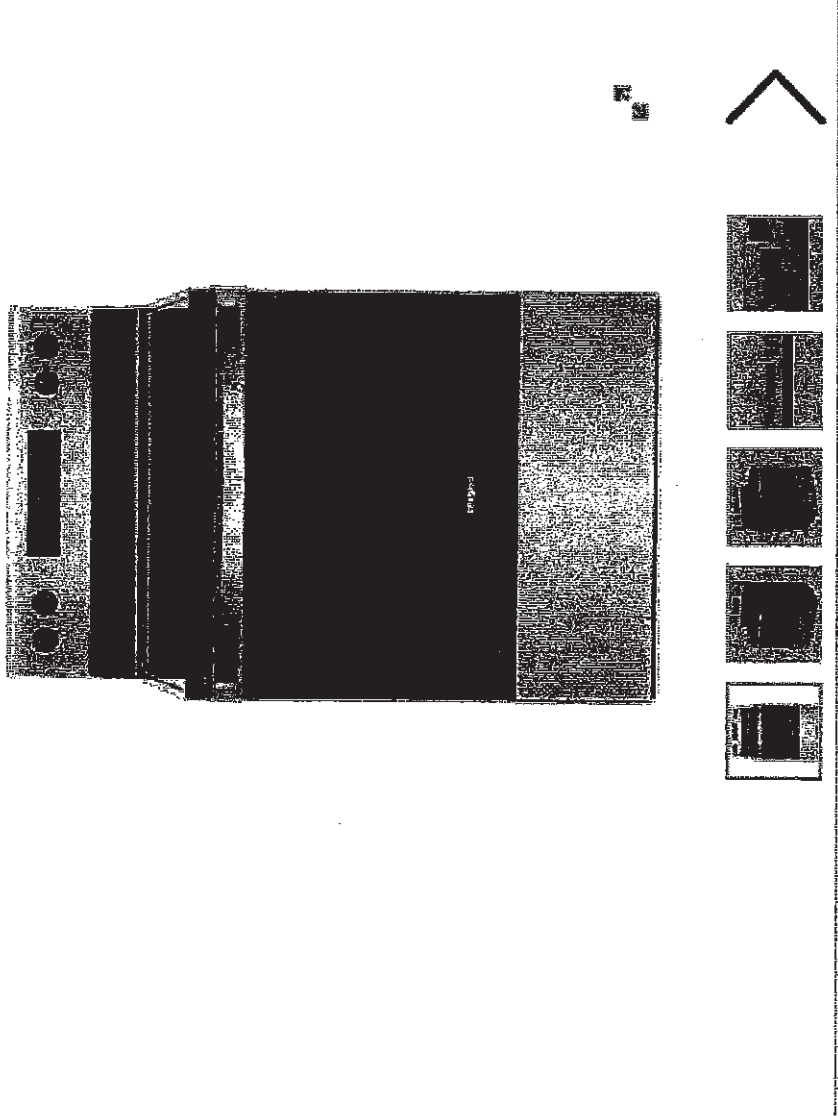


Handwritten signature or initials.

C-2 COUNTRY LANE
LOT 55-5
20-2329 ELEV. B
THE ENGLEWOOD

30 of 40

WHIRLPOOL 30" (76.0 CM) FREESTANDING ELECTRIC RANGES Model YWFE515S0JS

Product Dimensions

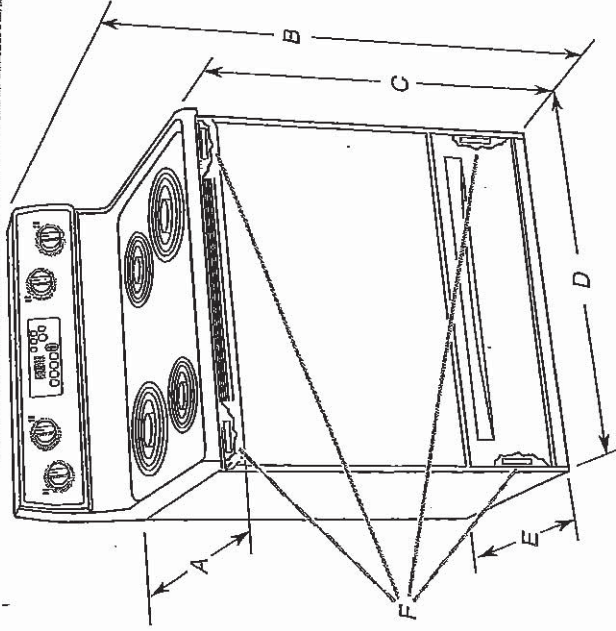

- A. 27³/₄" (70.5 cm) max. depth with handle
- B. 46⁷/₈" (119.1 cm) overall height (max.) with leveling legs screwed all the way in*
- C. 36" (91.4 cm) cooktop height (max.) with leveling legs screwed all the way in*
- D. 29⁷/₈" (75.9 cm) width
- E. 25⁹/₁₆" (64.3 cm) depth - back of range to front of cooktop**
- F. Model/serial/rating plate (located on the frame behind a top corner of the door or either side of the drawer)

IMPORTANT: Range must be level after installation. Follow the instructions in the "Level Range" section. Using the cooktop as a reference for leveling the range is not recommended.

*Range can be raised approximately 1" (2.5 cm) by adjusting the leveling legs.


**Front of door and drawer may extend further forward depending on styling.

Cabinet Dimensions

Cabinet opening dimensions shown are for 25" (64.0 cm) countertop depth, 24" (61.0 cm) base cabinet depth and 36" (91.4 cm) countertop height.

IMPORTANT: If installing a range hood or microwave hood combination above the cooking surface, follow the range hood or microwave hood combination installation instructions for dimensional clearances above the cooktop surface.

A freestanding range may be installed next to combustible walls with zero clearance.

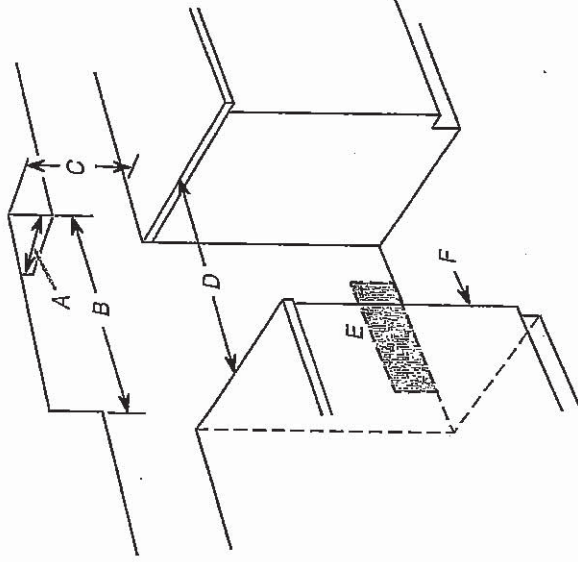

- A. 13" (33.0 cm) max. upper cabinet depth
- B. 30" (76.2 cm) min. opening width
- C. For minimum clearance to top of cooktop, see NOTE*
- D. 30" (76.2 cm) min. opening width
- E. Outlet - 8" (20.3 cm) to 22" (55.9 cm) from either cabinet, 7" (17.8 cm) max. from floor
- F. Cabinet door or hinges should not extend into the cutout.

*NOTE: 24" (61.0 cm) minimum when bottom of wood or metal cabinet is covered by not less than 1/4" (6.4 mm) flame retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015" (0.4 mm) stainless steel, 0.024" (0.6 mm) aluminum or 0.020" (0.5 mm) copper.

30" (76.2 cm) minimum clearance between the top of the cooking platform and the bottom of an uncovered wood or metal cabinet.

Jan 28/20
[Signature]

C-2 COUNTRY LANE
LOT 55-5
20-2329 ELEV. B
THE ENGLEWOOD

31 of 40

WHIRLPOOL 30" (76.0 CM) FREESTANDING ELECTRIC RANGES
Model YWFE515S0JS

Install Anti-Tip Bracket


! WARNING



Tip Over Hazard

A child or adult can tip the range and be killed.
Install anti-tip bracket to floor or wall per installation instructions.
Slide range back so rear range foot is engaged in the slot of the anti-tip bracket.
Re-engage anti-tip bracket if range is moved.
Do not operate range without anti-tip bracket installed and engaged.
Failure to follow these instructions can result in death or serious burns to children and adults.


1. Remove the anti-tip bracket from where it is taped inside the storage drawer or warming drawer.
2. Determine which mounting method to use: floor or wall.
If you have a stone or masonry floor, you can use the wall mounting method. If you are installing the range in a mobile home, you must secure the range to the floor.
3. Determine and mark centerline of the cutout space. The mounting can be installed on either the left-side or right-side of the cutout. Position mounting bracket against the wall in the cutout so that the V-notch of the bracket is 12⁹/₁₆" (31.9 cm) from centerline as shown.

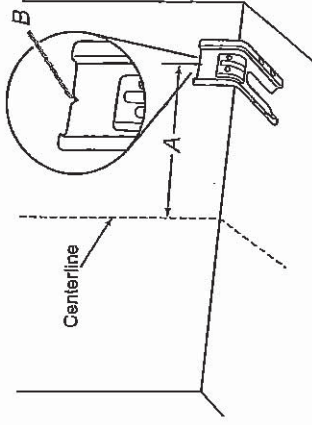


A. 12⁹/₁₆" (31.9 cm)
B. Bracket V-notch

4. Drill two 1/8" (3 mm) holes that correspond to the bracket holes of the determined mounting method. See the following illustrations.


Floor Mounting

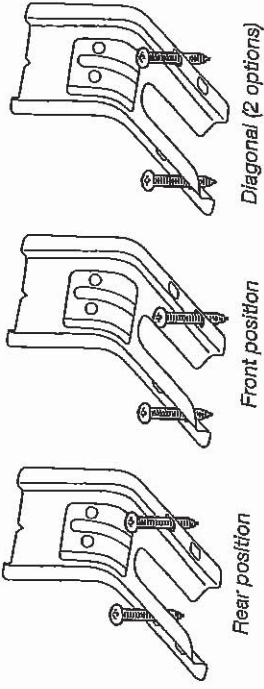

Wall Mounting



5. Using the Phillips screwdriver, mount anti-tip bracket to the wall or floor with the two #12 x 1⁵/₈" (4.1 cm) screws provided.
6. Move range close enough to opening to allow for final electrical connections. Remove shipping base, cardboard or hardboard from under range.
7. Move range into its final location, making sure rear leveling leg slides into anti-tip bracket.



8. Move range forward onto shipping base, cardboard or hardboard to continue installing the range using the following installation instructions.

dd

32.40



Whirlpool
Household Appliances



OTHER AVAILABLE COLORS

Universal Silver



C-2 COUNTRY LANE
LOT 55-5
20-2329 ELEV. B
THE ENGLEWOOD

33^{3 of} 40

Whirlpool® Undercounter Dishwasher

PRODUCT MODEL NUMBERS

WDF110PAB WDF320PAD WDF530PSY
WDF111PAB WDF320PAD WDF640PAD
WDF120PAF WDF510PAB WDF730PAY
WDF121PAF WDF520PAD WDT710PAY
WDF310PAA WDF530PAY WDT720PAD
WDF310PCA WDF580PLY WDT770PAY

Electrical Requirements: 120-volt, 60-Hz, AG only, 15- or 20-amp, fused electrical supply. Copper wire only. A time delay fuse or circuit breaker and separate circuit is recommended.

If direct wiring dishwasher: Use flexible, armored, or nonmetallic, sheathed copper wire with grounding wire that meets the wiring requirements for your home and local codes and ordinances. Use a UL listed or CSA approved conduit connector.

If connecting dishwasher with a power supply cord:

Use Power Supply Cord Kit (Part No. 4317824) marked for use with dishwashers. Follow the kit instructions for installing the power supply cord.

Power supply cord must plug into a grounded 3-prong, outlet, located in the cabinet next to the dishwasher opening. Outlet must meet all local codes and ordinances.


Water Supply Requirements: A hot water line with 20 to 120 psi (138 to 862 kPa) water pressure. Water temperature must be 120°F (49°C) water at dishwasher. Use 3/8" O.D. copper tubing with compression fitting or flexible braided water supply line (1/2" minimum plastic tubing is not recommended). Use a 90° elbow with 3/4"N.P.T. external pipe threads on one end. Do not solder within 6" (15.2 cm) from water inlet valve.

Drain Requirements: A new drain hose is supplied with your dishwasher. If this is not long enough, use a new drain hose with a maximum length of 12' (3.7 m) (Part No. 3385556) that meets all current AHAM/JAPMO test standards. Is resistant to heat and detergent, and fits the 1" (2.5 cm) drain connector of the dishwasher.

Make sure to connect the drain hose to waste tee or disposer inlet above drain trap in house plumbing and 20" (50.8 cm) minimum above the floor. It is recommended

that the drain hose either be looped up and securely fastened to the underside of the counter or be connected to an air gap.


Make sure to use an air gap if the drain hose is connected to house plumbing lower than 20" (50.8 cm) above subfloor or floor.

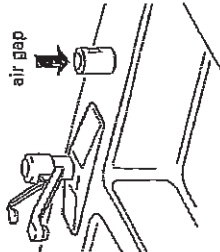

Use 1/2" (1.3 cm) minimum I.D. drain line fittings.

If required, the air gap should be installed in accordance with the air gap installation instructions. When connecting the air gap, a rubber hose (not provided) will be needed to connect to the waste tee or disposer inlet.

PRODUCT DIMENSIONS

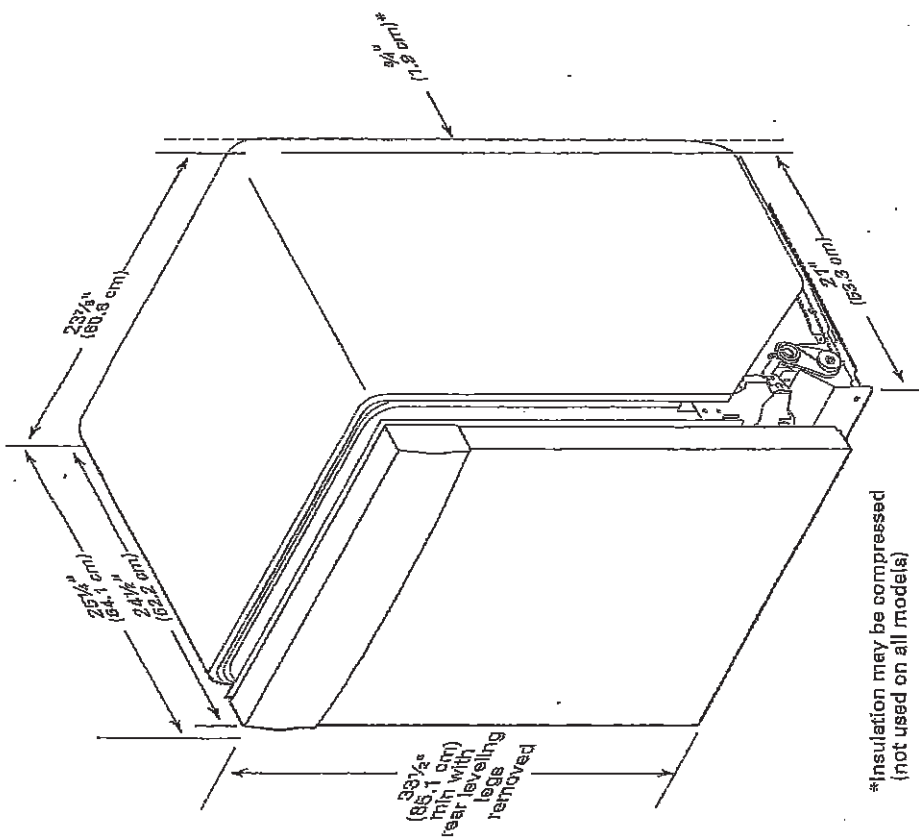

*Insulation may be compressed (not used on all models)

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

Dimensions are for planning purposes only. For complete details, see Installation instructions packed with product. Specifications subject to change without notice.

Handwritten signature or mark.

C-2 COUNTRY LANE
LOT 55-5
20-2329 ELEV. B
THE ENGLEWOOD

34 of 40


CABINET CUTOUT DIMENSIONS

WIDE320PAP

NOTE: Shaded areas of cabinet walls show where utility connections may be installed.

*Measure from the lowest point on the underside of the countertop. May be reduced to 33½" (85.1 cm) by removing the rear leveling legs from dishwasher.

**Minimum, measured from narrowest point of opening.

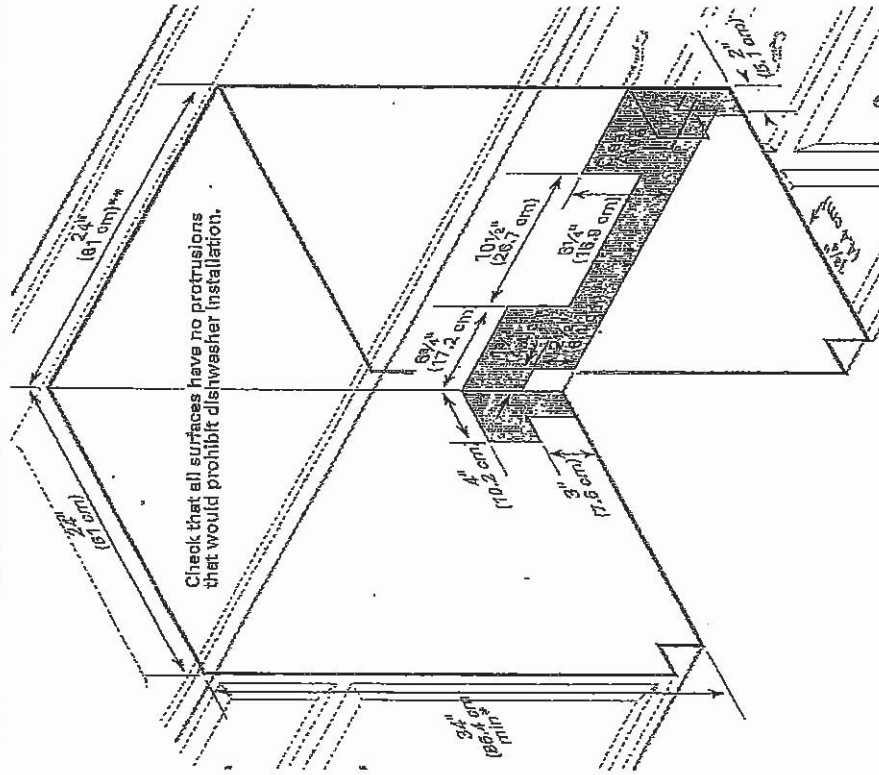


la

C-2 COUNTRY LANE
LOT 55-5
20-2329 ELEV. B
THE ENGLEWOOD

35' 40

WHIRLPOOL WASHER Model #: WFW5620HW

Whirlpool Brand Canada English (Washer and Dryer) (Washer) (Front Load Washer) (WFW5620HW)

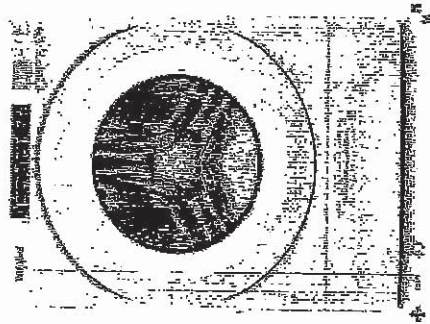

5.2 cu. ft. I.E.C. Closet-Depth
Front Load Washer with
Load & Go™ Dispenser



Whirlpool

5.2 cu. ft. I.E.C. Closet-Depth Front Load Washer with Load & Go™
Dispenser

Model #: WFW5620HW

Dimensions

Depth	88.17 cm, 31-87/16 in
Depth With Door Open 90 Degree	143.51 cm, 56-1/2 in
Minimum Height	88.11 cm, 35-5/8 in
Width	68.58 cm, 27.0 in

Appearance

LCD Touch Screen	No
Window	Yes

Details

Drum Material	Stainless Steel
---------------	-----------------

Cycles and Options

Number of Wash Cycles	37
-----------------------	----

Electrical

Hz	60
----	----

Power Cord Included

Yes

ls

C-2 COUNTRY LANE
LOT 55-5
20-2329 ELEV. B
THE ENGLEWOOD

36 or 40

WHIRLPOOL WASHER Model #: WFW5620HW

LOCATION REQUIREMENTS



Proper Installation is your responsibility.

You will need:

- A water heater set to 120°F (49°C).
- A grounded electrical outlet located within 6 ft (1.8 m) of power cord on back of washer.
- Hot and cold water faucets located within 4 ft (1.2 m) of hot and cold water fill valves on washer, and water pressure of 20–100 psi (137.9–689.6 kPa).
- A level floor with maximum slope of 1" (25 mm) under entire washer. Installing on carpet or surfaces with foam backing is not recommended.
- Floor must support washer's total weight (with water and load) of 315 lbs (143 kgs).

IMPORTANT: Do not install, store, or operate washer where it will be exposed to weather or in temperatures below 32°F (0°C). Water remaining in washer after use may cause damage in low temperatures. See "Washer Care" in your Use and Care Guide for winterizing information.


Whirlpool Models*

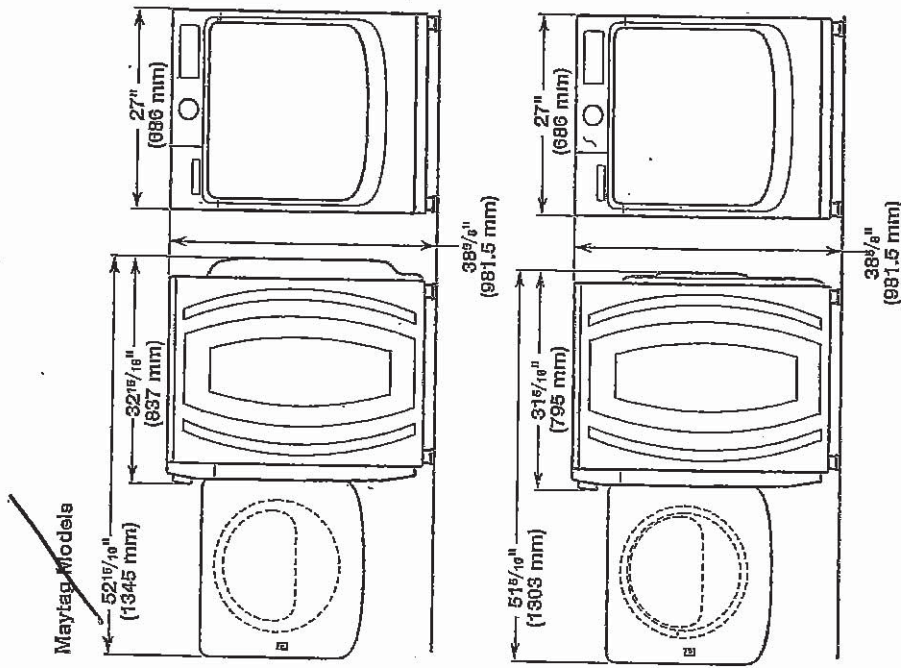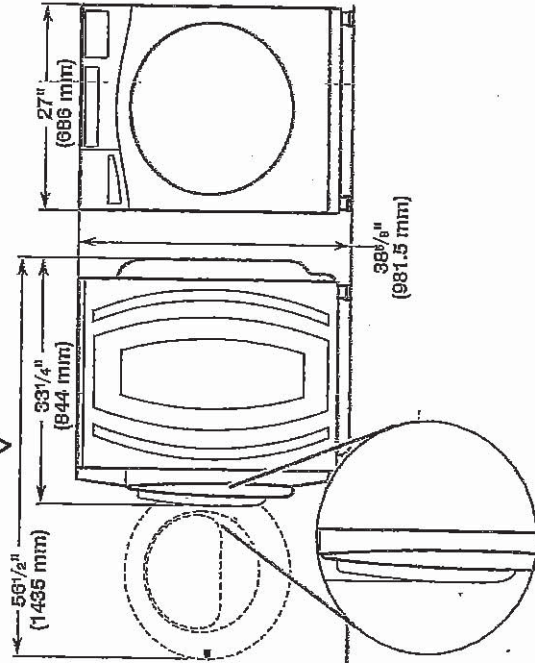

All dimensions show minimum spacing allowed. For each arrangement, consider allowing more space for ease of installation and servicing, and spacing for companion appliances and clearances for walls, doors, and floor moldings.

Space must be large enough to allow door to fully open. Add spacing of 1" (25 mm) on all sides of washer to reduce noise transfer. If a closet door or louvered door is installed, top and bottom air openings in door are required.

Recessed area or closet installation (stacked washer and dryer):

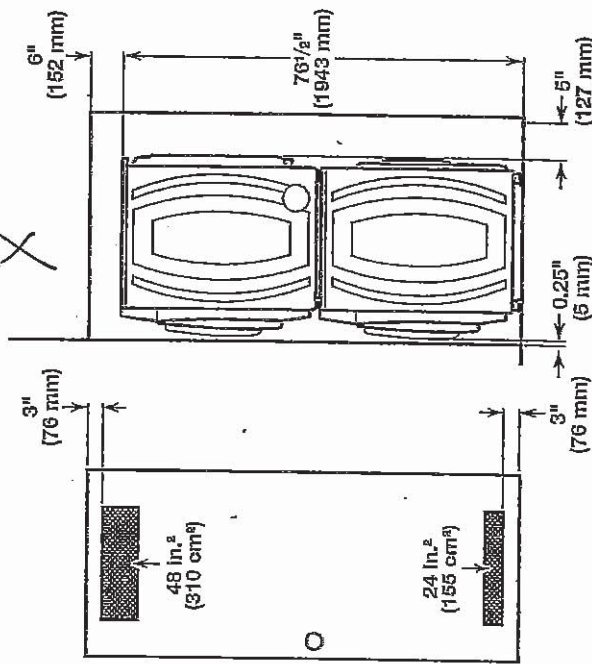


*For additional details (or information) specific to your model, refer to the 'Dimensions' listed for your model at www.whirlpool.com.

62


37 of 40

WHIRLPOOL WASHER Model #: WFW5620HW


Custom under-counter installation:

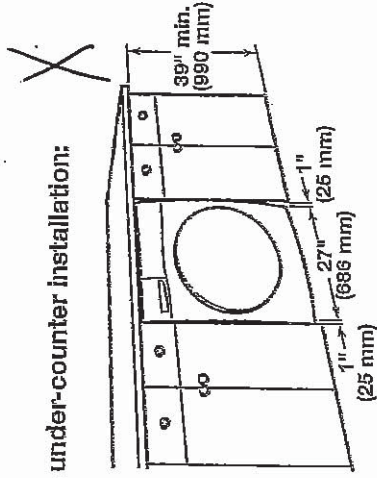

Recessed area or closet installation:

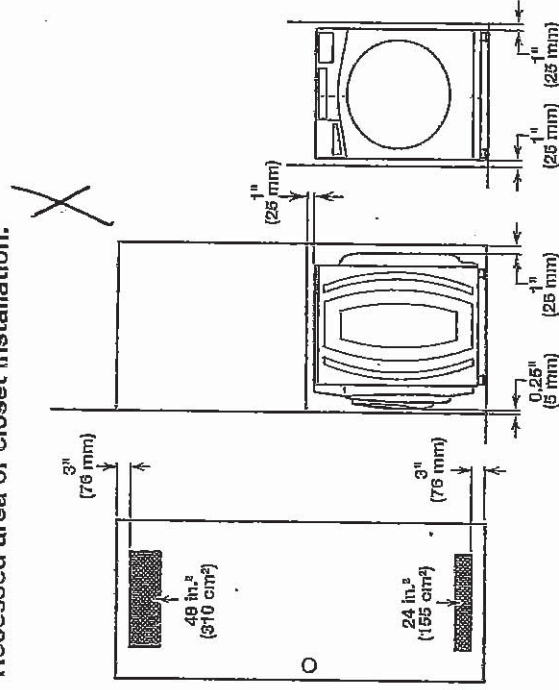

Custom cabinet installation:

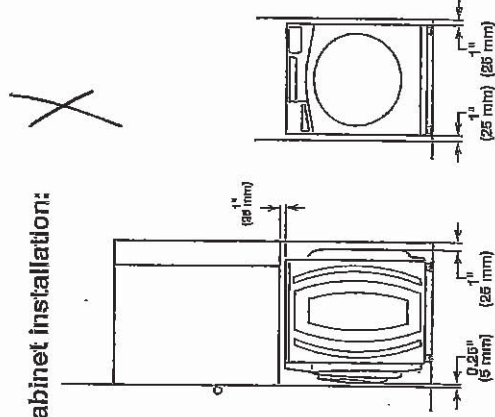


DRAIN SYSTEM

The drain system can be installed using a floor drain, wall standpipe, floor standpipe, or laundry tub. Select the method you need.


IMPORTANT: To avoid siphoning, only 4.5" (114 mm) of drain hose should be inside standpipe. Always secure drain hose with cable tie.

Floor standpipe drain system

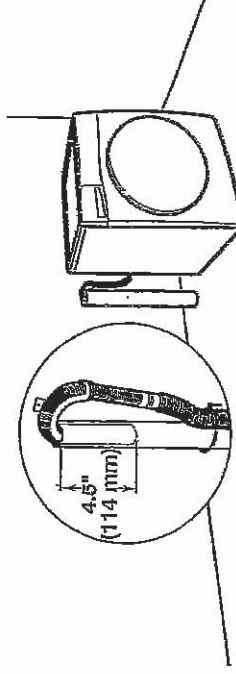


Minimum diameter for a standpipe drain: 2" (51 mm). Minimum carry-away capacity: 17 gal. (64 L) per minute. A 1/4" (6 mm) diameter to 1" (25 mm) diameter Standpipe Adapter Kit is available (Part Number 3963920). Top of standpipe must be at least 30" (762 mm) high; install no higher than 96" (2.44 m) from bottom of washer. If you have an overhead sewer and need to pump higher than 96" (2.44 m), a sump pump and associated hardware are needed. See "Alternate parts."

Wall standpipe drain system

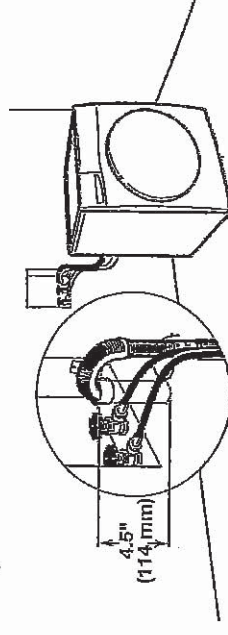

See requirements for floor standpipe drain system.

Laundry tub drain system

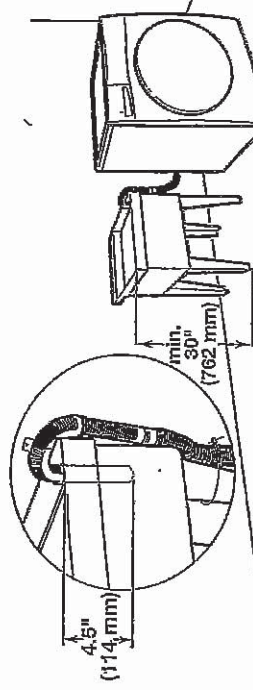

Minimum capacity: 20 gal. (76 L). Top of laundry tub must be at least 30" (762 mm) above floor; install no higher than 96" (2.44 m) from bottom of washer.


Handwritten signature or initials.

C-2 COUNTRY LANE
LOT 55-5
20-2329 ELEV. B
THE ENGLEWOOD

38 of 40

WHIRLPOOL DRYER Model #: YWED5620HW

Whirlpool Brand Canada English | Washers and Dryers | Dryers | Electric Dryers | YWED5620HW

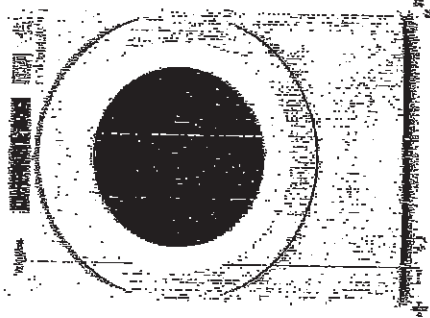

7.4 cu. ft. Front Load Electric Dryer with Intuitive Touch Controls



Whirlpool 7.4 cu. ft. Front Load Electric Dryer with Intuitive Touch Controls

Model #: YWED5620HW

Dimensions

Depth	78.74 cm, 31.0 in
Depth With Door Open 90 Degrees	189.43 cm, 64-1/2 in
Height	98.42 cm, 39-3/4 in
Width	68.59 cm, 27.0 in

Configuration and Overview

Fuel Type	Electric
Cycles and Options	
Cycle Time Remaining	Yes
Lint Filter Indicator	No
Number of Dryer Cycles	36
Number of Dryness Levels	3

Ventilation System	
Long Vent	No
Maximum Vent Length	64
Venting Direction	Left, Right, Bottom, Rear

Electrical	
Hz	60
Power Cord Included	Yes

Handwritten signature or initials.

C2 COUNTRY LANE

LOT 55-5


20-2329 ELEV B

THE ENGLEWOOD

39 of 40

WHIRLPOOL DRYER Model #: YWED5620HW

Back view:

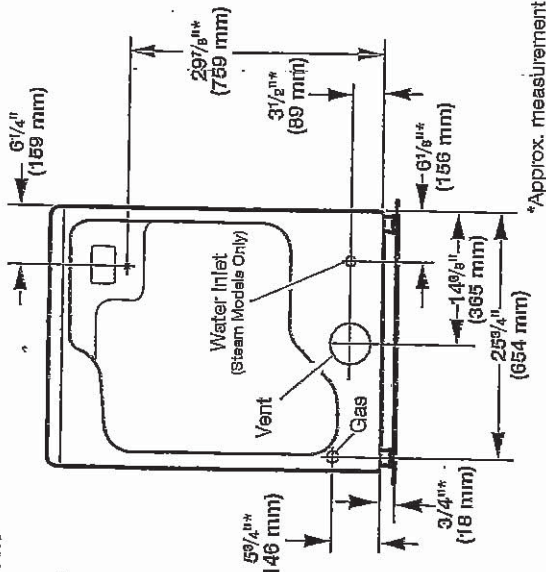

NOTE: Most installations require a minimum of 5" (127 mm) clearance behind dryer for exhaust vent with elbow. See "Venting Requirements."

Installation Clearances

For each arrangement, consider allowing more space for ease of installation and servicing, spacing for companion appliances, and clearances for walls, doors, and floor moldings. Space must be large enough to allow door to fully open. Add spacing on all sides of dryer to reduce noise transfer. If a closet door or louvered door is installed, top and bottom air openings in door are required.

Check code requirements. Some codes limit, or do not permit, installation of the dryer in garages, closets, mobile homes, or sleeping quarters. Contact your local building inspector.


NOTE: No other fuel-burning appliance can be installed in the same closet as a dryer.

Installation spacing for recessed area or closet installation

All dimensions show recommended and minimum spacing allowed.


- Additional spacing should be considered for ease of installation and servicing.
- Additional clearances might be required for wall, door, floor moldings, dryer venting, and gas line.
- Additional spacing should be considered on all sides of the dryer to reduce noise transfer.
- For closet installation with a door, minimum ventilation openings in the top and bottom of the door are required. Louvered doors with equivalent ventilation openings are acceptable.
- Companion appliance spacing should also be considered.

Recommended installation clearances (dryer only):

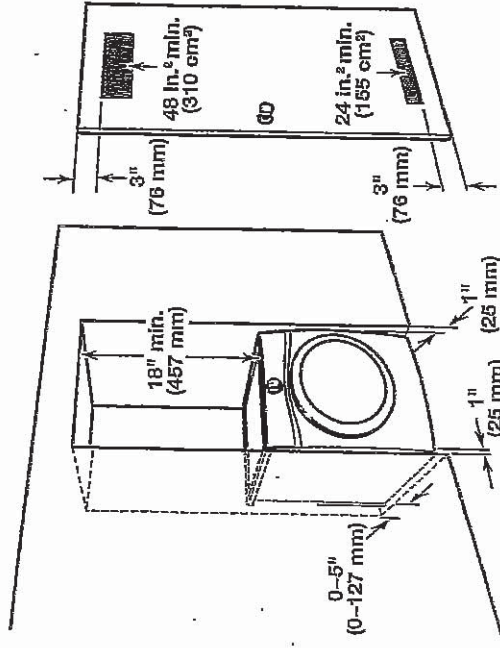

0" (0 mm) rear spacing is allowed for straight back venting only. For steam models only, inlet hose must not be kinked.

Custom under-counter installation:

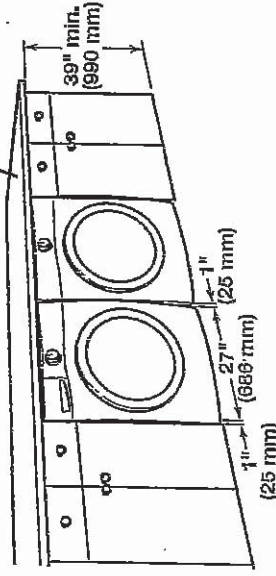

Mobile home - Additional installation requirements:

This dryer is suitable for mobile home installations. The Installation must conform to the Manufactured Home Construction and Safety Standard, Title 24 CFR, Part 3280 (formerly the Federal Standard for Mobile home construction and Safety, Title 24, HUD Part 280) or Standard CAN/CSA-Z240 MH.

Mobile home installations require:

- Metal exhaust system hardware, available for purchase from your dealer. For further information, see "Assistance or Service" in your Use and Care Guide.
- Special provisions must be made in mobile homes to introduce outside air into dryer. Openings (such as a nearby window) should be at least twice as large as dryer exhaust opening.

For mobile home installation of gas dryers:

- Mobile Home Installation Hold-down Kit Part Number 346764 is available to order. For further information, see "Assistance or Service" in your Use and Care Guide.

Handwritten signature or initials.

C2 COUNTRY LANE
LOT 55-5
20-2329 ELEV B
THE ENGLEWOOD

40 of 40

WHIRLPOOL DRYER Model #: YVED5620HW

Additional parts may be required, depending on your installation. Check local codes. Check existing electrical supply and venting. Read "Electrical Requirements" and "Venting Requirements" before purchasing parts.

If using a power supply cord:

- Use a UL Listed power supply cord kit marked for use with clothes dryers. The kit should contain:
 - A UL Listed 30 amp power supply cord, rated 120/240 volt minimum. The cord should be type SRD or SRDT and be at least 4 ft. (1.22 m) long. The wires that connect to the dryer must end in ring terminals or spade terminals with upturned ends.
 - A UL Listed strain relief.

Optional Equipment (not supplied with dryer):

Refer to your Use and Care Guide for information about accessories available for your dryer.

LOCATION REQUIREMENTS

Check code requirements. Some codes limit, or do not permit, installing dryer in garages, closets, mobile homes, or sleeping quarters. Contact your local building inspector.

⚠ WARNING



Explosion Hazard

Keep flammable materials and vapors, such as gasoline, away from dryer.


Place dryer at least 18 inches (460 mm) above the floor for a garage installation.

Failure to do so can result in death, explosion, or fire.

You will need:


- A location allowing for proper exhaust installation. See "Venting Requirements."
 - A separate 15 or 20 amp circuit for a gas dryer or 30 amp circuit for an electric dryer.
 - If using power supply cord, a grounded electrical outlet located within 2 ft. (610 mm) of either side of dryer. See "Electrical Requirements."
 - Floor must support dryer weight of 200 lbs. (90.7 kg). Also consider weight of companion appliance.
 - Cold water faucets located within 4 ft. (1.2 m) of the water fill valves, and water pressure of 20-120 psi (138-827 kPa). You may use your washer's water supply by purchasing the necessary parts noted in "Parts needed."
 - Level floor with maximum slope of 1" (25 mm) under entire dryer. If slope is greater than 1" (25 mm), install Extended Dryer Feet Kit, Part Number 279810. If not level, clothes may not tumble properly and automatic sensor cycles may not operate correctly.
 - For garage installation, place dryer at least 18" (460 mm) above floor. If using a pedestal, you will need 18" (460 mm) to bottom of dryer.
 - The dryer must not be installed or stored in an area where it will be exposed to water and/or weather.
- IMPORTANT:** Do not operate, install, or store dryer where it will be exposed to water, weather, or at temperatures below 40°F (4°C). Lower temperatures may cause dryer not to shut off at end of automatic sensor cycles, resulting in longer drying times.

DRYER DIMENSIONS
Front view:

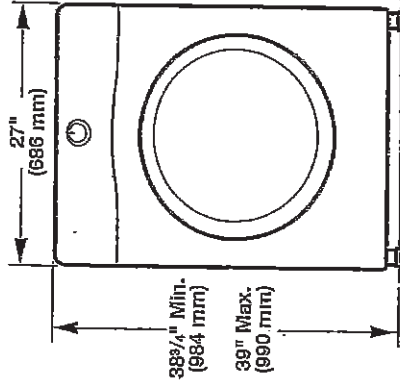


Side view:

Whirlpool Models

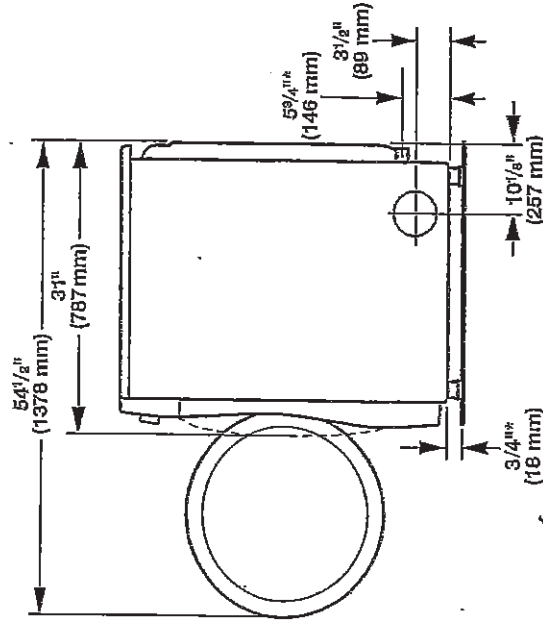

Maytag Models

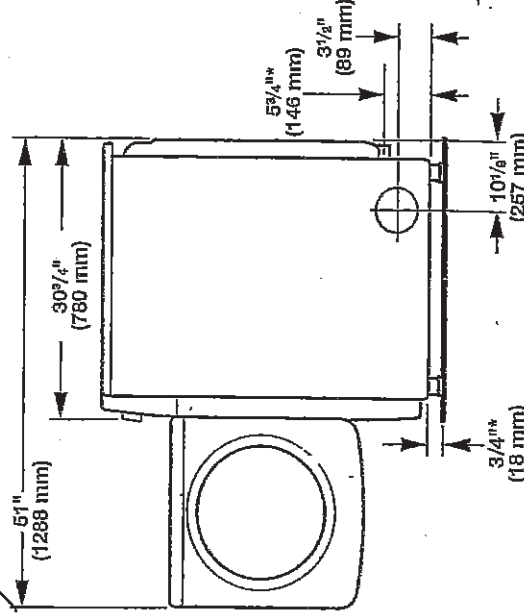

*Approx. measurement.

Handwritten signature or initials.