



09-Aug-21

PRE-Sales Selection Sheet

CHECKLIST

7 of 43

LOT 001-6 * REUSED *

20-2447 ELEV A THE JAMESPORT

PURCHASERS: SAMEER NAMEEZ

CONTACT NO: 647-761-5248

VENDOR: HEATHWOOD HOMES (UPCOUNTRY) LIMITED

OPTIONAL COFFERED CEILING IN GREAT ROOM *

OPTIONAL LOWER LEVEL WITH BEDROOM 4 AND BATH

☒ FINISHED BASEMENT

☐ COLD CELLAR

UPGRADED / MODIFIED ELEVATION

☐ CORNER UPGRADE

☐ SIDE UPGRADE

☐ REAR UPGRADE

CEILING UPGRADE - SMOOTH

☒ MAIN FLOOR *

☐ SECOND FLOOR

ADDITIONAL ROUGH-INS

☒ 200 AMP SERVICE

☐ WET BAR ROUGH IN

GAS ROUGH-IN

☒ STOVE *

☐ BBQ

HOODFAN VENTING

☒ 6" ROUND DUCT *

☐ 7" ROUND DUCT

FULL BASEMENT STAIRS:

PAINT GRADE

UPPER BASEMENT STAIRS:

N/A

LOWER BASEMENT STAIRS:

N/A

STAIRS TO LOWER LEVEL:

ALL OAK

STAIRS TO UPPER LEVEL:

N/A

MAIN STAIRS:

ALL OAK

MEDIA STAIRS (if applicable):

N/A

Date Aug 9/21 Signature on file Purchaser

Aug 8/21

Tina LEEDE

Date

Purchaser

Date

Décor Consultant

* APPROVED *

Date

Purchaser

-08-09-2021

mRow

Date Approved

HEATHWOOD HOMES
(UPCOUNTRY) LIMITED



Interior Finishing Selection Sheet

03-Aug-21

LOT 001-6

20-2447 ELEV A THE JAMESPORT

PURCHASERS: SAMEER NAMEEZ

CONTACT NO: 647-761-5248

VENDOR: HEATHWOOD HOMES (UPCOUNTRY) LIMITED

UPG

Appliances

6-9117 Kitchen HoodFan

☒ CYCLONE 30" STAINLESS CHIMNEY/CANOPY HOODFAN
STAINLESS STEEL SCB51930 UPG 30" PAGES 29-30

Cabinetry

1-9156 Kitchen Cabinet Colour/Style

☐ SIMCOE RAIN CLOUD Viking III STD 3DL

3-2086 Kitchen Cabinet Hardware

☐ HARDWARE 9677 STD

25-9157 Main Bathroom Cabinet Colour/Style

☐ SIMCOE MOONLIGHT Viking III STD 3DL

29-7672 Main Bathroom Cabinet Hardware

☐ HARDWARE 135 STD

28-8796 Main Bathroom Countertop

☐ Countertop PALOMA POLAR ETCHINGS FINISH 6698-46
Formica

20-9157 Master Ensuite Cabinet Colour/Style

☐ SIMCOE MOONLIGHT Viking III STD 3DL

22-7672 Master Ensuite Cabinet Hardware

☐ HARDWARE 135 STD

21-8796 Master Ensuite Countertop

☐ Countertop PALOMA POLAR ETCHINGS FINISH 6698-46
Formica

359-9157 Optional Lower Level Bath Cabinet Colour/Style

☐ SIMCOE MOONLIGHT Viking III STD 3DL

360-7672 Optional Lower Level Bath Cabinet Hardware

☐ HARDWARE 135 STD

361-8796 Optional Lower Level Bath Countertop

☐ Countertop PALOMA POLAR ETCHINGS FINISH 6698-46
Formica

Carpet

37-9246 Bedroom 2 Flooring

☐ Dynasty Tex 40 oz Poly BEACH SHELL DY 84558 STD

38-9246 Bedroom 3 Flooring

☐ Dynasty Tex 40 oz Poly BEACH SHELL DY 84558 STD

363-9246 Bedroom 4 (Optional Lower Level) Flooring

☐ Dynasty Tex 40 oz Poly BEACH SHELL DY 84558 STD

367-9246 Lower Level Hall Flooring

☐ Dynasty Tex 40 oz Poly BEACH SHELL DY 84558 STD

36-9246 Master Bedroom Flooring

☐ Dynasty Tex 40 oz Poly BEACH SHELL DY 84558 STD

52-1079 Throughout Underpad

☐ Underpad 500 Series STD

Ceramics

16-8913 Foyer Flooring

☒ Biel Bianco (White) UN.8L.BIA.1224 UPG_2 12 x 24 SEE
SKETCH # 7 PAGE 11 FOR 12 X 24 TILE DIRECTION

1. The Purchaser acknowledges these selections are subject to the terms and conditions of the applicable Agreement of Purchase and Sale.
2. The Purchaser acknowledges that the Vendor accepts no responsibility in the event the Vendor is unable to supply a selection. The Purchaser agrees to reselect from the currently available selections immediately upon request.
3. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
4. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
5. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
6. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
7. Selections will not be processed unless signed by Heathwood Homes Head Office.
8. The colour selections made on the Colour Chart are final and cannot be changed once submitted.
9. The Purchaser has checked and acknowledges the accuracy of this Colour Chart.

Date 08/03/21

Date

Purchaser

Date

-08-09-2021

Décor Consultant

Date

Purchaser

Date Approved HEATHWOOD HOMES (UPCOUNTRY)
LIMITED



Interior Finishing Selection Sheet

03-AUG-21

LOT 001-6

20-2447 ELEV A THE JAMESPORT

PURCHASERS: SAMEER NAMEEZ

CONTACT NO: 647-761-5248

VENDOR: HEATHWOOD HOMES (UPCOUNTRY) LIMITED

UPG

Ceramics

17-2225 Foyer Grout	☐ Grout (27) Silver STD
4-5730 Kitchen Backsplash	☒ Colour and Dimension Matte Arctic White QT.CD.AR.W.0306MT UPG_1 3 x 6 INSTALL IN HERRINGBONE PATTERN
5-2226 Kitchen Backsplash Grout	☐ Grout (00) White STD
348-9257 Laundry Mud Room Flooring	☐ CARRARA White / Grey GE.CR.WHIT.1313.MT STD 13 x 13
349-2225 Laundry Mud Room Grout	☐ Grout (27) Silver STD
30-9106 Main Bathroom Flooring	☒ Madison Series White Matte GE.MD.WHT.1818.MT UPG 1 18" X 18" Matte
31-2225 Main Bathroom Grout	☐ Grout (27) Silver STD
112-8833 Main Bathroom Wall Tile	☐ Uniwall White QT.UW.WHT.0810 STD 8 x 10 INSTALL STACKED HORIZONTALLY
113-2226 Main Bathroom Wall Tile Grout	☐ Grout (00) White STD
23-8913 Master Ensuite Floor Tile	☒ Biel Bianco (White) UN.BL.BIA.1224 UPG_2 12 x 24 SEE SKETCH # 8 PAGE 20 FOR 12 X 24 TILE DIRECTION
24-2225 Master Ensuite Floor Tile Grout	☐ Grout (27) Silver STD
73-8106 Master Ensuite Shower Floor Tile	☒ ONTARIO HEXAGON MATTE TENDER GREY OD.ON.TGR.02.HEX.MT UPG_2
74-2226 Master Ensuite Shower Floor Tile Grout	☐ Grout (00) White STD
147-8923 Master Ensuite Shower Jamb(s) and Sill(s)	☐ Shower Jamb / Sill Thassos White STD
104-8913 Master Ensuite Shower Wall Tile	☒ Biel Bianco (White) UN.BL.BIA.1224 UPG_2 12 x 24 INSTALL STACKED VERTICALLY
105-2226 Master Ensuite Shower Wall Tile Grout	☐ Grout (00) White STD
350-9106 Optional Lower Level Bath Flooring	☒ Madison Series White Matte GE.MD.WHT.1818.MT UPG 1 18" X 18" Matte
351-2225 Optional Lower Level Bath Grout	☐ Grout (27) Silver STD
352-8833 Optional Lower Level Bath Tub Wall Tile	☐ Uniwall White QT.UW.WHT.0810 STD 8 x 10 INSTALL STACKED HORIZONTALLY
353-2226 Optional Lower Level Bath Tub Wall Tile Grout	☐ Grout (00) White STD

- The Purchaser acknowledges these selections are subject to the terms and conditions of the applicable Agreement of Purchase and Sale.
- The Purchaser acknowledges that the Vendor accepts no responsibility in the event the Vendor is unable to supply a selection. The Purchaser agrees to reselect from the currently available materials and equipment immediately upon request.
- The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
- Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
- The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
- The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
- Selections will not be processed unless signed by Heathwood Homes Head Office.
- The colour selections made on the Colour Chart are final and cannot be changed once submitted.
- The Purchaser has checked and acknowledges the accuracy of this Colour Chart.

08/03/21
Purchaser

5/03/21
Date

Tina Lefur
Décor Consultant

-03-03-2021

Date Purchaser

Date Approved HEATHWOOD HOMES (UPCOUNTRY)
LIMITED



09-Aug-21

OT 001-6

PURCHASERS: SAMEER NAMEEZ

CONTACT NO: 647-761-5248

VENDOR: HEATHWOOD HOMES (UPCOUNTRY) LIMITED

UPG

Ceramics

32-8913 Powder Room Flooring

☒ Biel Bianco (White) UN.BL.BIA.1224 UPG 2 12 x 24 SEE SKETCH # 7 PAGE 19 FOR 12 X 24 TILE DIRECTION

33-2225 Powder Room Grout

☐ Grout (27) Silver STD

53-2232 Throughout Thresholds

☐ Metal Thresholds STD

Electrical

90-5796 Throughout Switches and Plug

☐ Decora White Switches and Plugs STD

Fireplace

136-9114 Great Room Fireplace Mantle

☐ Paint Grade Mantel- Cabinet (Per Plan) WHITE NF 15 STD PAGE 21

135-8865 Great Room Fireplace Type

☐ Dimplex FP3033HL Electric Fireplace

Granite

12-8897 Kitchen Countertop

☒ Quartz-Caesarstone ORGANIC WHITE # 4600 Group 4 UPG 3/4" with Mitered Edge

Hardwood

11-7497 Great Room Flooring

☐ Vintage Northern Solid Sawn Engineered Select V : Red Oak Pearl AURORA (COCOA) Red Oak Pearl 3/4" x 3 1/4"

17-7497 Kitchen/Breakfast Flooring

☒ Vintage Northern Solid Sawn Engineered Select V : Red Oak Pearl AURORA (COCOA) Red Oak Pearl 3/4" x 3 1/4"

12-7497 Living Room Flooring

☐ Vintage Northern Solid Sawn Engineered Select V : Red Oak Pearl AURORA (COCOA) Red Oak Pearl 3/4" x 3 1/4"

98-7497 Main Hall Flooring

☐ Vintage Northern Solid Sawn Engineered Select V : Red Oak Pearl AURORA (COCOA) Red Oak Pearl 3/4" x 3 1/4"

78-7497 Stair Landing to Lower Level Flooring

☐ Vintage Northern Solid Sawn Engineered Select V : Red Oak Pearl AURORA (COCOA) Red Oak Pearl 3/4" x 3 1/4"

77-7497 Stair Landing to Upper Level Flooring

☐ Vintage Northern Solid Sawn Engineered Select V : Red Oak Pearl AURORA (COCOA) Red Oak Pearl 3/4" x 3 1/4"

35-7497 Upper Hall Flooring

☐ Vintage Northern Solid Sawn Engineered Select V : Red Oak Pearl AURORA (COCOA) Red Oak Pearl 3/4" x 3 1/4"

Interior Railings

49-8148 Stairs to Lower Level Handrail/Pickets/Posts Type

☐ Single Collar Alt. Plain w/ Shoes with 3 1/2" Square/Cap Post(s) BLACK METAL STD

1. The Purchaser acknowledges these selections are subject to the terms and conditions of the applicable Agreement of Purchase and Sale.
2. The Purchaser acknowledges that the Vendor accepts no responsibility in the event the Vendor is unable to supply a selection. The Purchaser agrees to reselect from the currently available selections immediately upon request.
3. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
4. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
5. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
6. The Vendor will not be processed unless signed by Heathwood Homes Head Office.
7. The colour selections made on the Colour Chart are final and cannot be changed once submitted.
8. The Purchaser has checked and acknowledges the accuracy of this Colour Chart.

09/03/21

Date

Purchaser

8/3/21

Date

Décor Consultant

TINA LEFUR

Date

Purchaser

Date Approved HEATHWOOD HOMES (UPCOUNTRY) LIMITED



Interior Finishing Selection Sheet

03-Aug-21

LOT 001-6

20-2447 ELEV A THE JAMESPORT

PURCHASERS: SAMEER NAMEEZ

CONTACT NO: 647-761-5248

VENDOR: HEATHWOOD HOMES (UPCOUNTRY) LIMITED

UPG

Interior Railings

43-8148 Stairs to Upper Level Handrail/Pickets/Posts Type

☐ Single Collar Alt. Plain w/ Shoes with 3 1/2" Square/Cap Post(s)
BLACK METAL STD

Interior Stairs

116-1713 Basement Stairs Type

☐ Paint Grade Stairs STD

45-1712 Stairs to Lower Level Type

☐ Oak Stairs UPG_1

39-1712 Stairs to Upper Level Type

☐ Oak Stairs UPG_1

Interior Trim

91-9374 Throughout Trim Size

☐ 4 1/4" Baseboards and 2 3/4" Integrated Backband Casings
STD-Towns

Painting

46-7761 Stairs to Lower Level Colour

☐ Stain handrail, stringers, treads, risers, nosing & posts. (Metal pickets) STAIRS TO BE STAINED TO COMPLEMENT COCOA HARDWOOD. STAIRS WILL VARY FROM FLOORS

40-7761 Stairs to Upper Level Colour

☐ Stain handrail, stringers, treads, risers, nosing & posts. (Metal pickets) STAIRS TO BE STAINED TO COMPLEMENT COCOA HARDWOOD. STAIR WILL VARY FROM FLOORS

240-1716 Throughout Trim - Paint Colour

☐ Trim WHITE STD

51-1717 Throughout Walls - Paint Colour

☐ Wall WARM GREY 22 STD

Plumbing

266-1737 Main Bathroom Plumbing Fixture (Colour)

☐ Plumbing Fixtures WHITE STD

149-1737 Master Ensuite Plumbing Fixture (colour)

☐ Plumbing Fixtures WHITE STD

362-1737 Optional Lower Level Bath Plumbing Fixture (Colour)

☐ Plumbing Fixtures WHITE STD

34-1737 Powder Room Plumbing Fixture (Colour)

☐ Plumbing Fixtures WHITE STD

1. The Purchaser acknowledges these selections are subject to the terms and conditions of the applicable Agreement of Purchase and Sale.
2. The Purchaser acknowledges that the Vendor accepts no responsibility in the event the Vendor is unable to supply a selection. The Purchaser agrees to reselect from the currently available selections immediately upon request.
3. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
4. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
5. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
6. Selections will not be processed unless signed by Heathwood Homes Head Office.
7. The colour selections made on the Colour Chart are final and cannot be changed once submitted.
8. The Purchaser has checked and acknowledges the accuracy of this Colour Chart.

08/03/21

Date

[Signature]

Purchaser

8/3/21

Date

TINA LEFUR

Décor Consultant

-03-09-2021

Date

Purchaser

Date Approved: HEALTHWOOD HOMES (UPCOUNTRY) LIMITED



Sales Selection Sheet
2 of 3

03-Aug-21

LOT 001-6

20-2447 ELEV A THE JAMESPORT

PURCHASERS: SAMEER NAMEEZ

CONTACT NO: 647-761-5248

VENDOR: HEATHWOOD HOMES (UPCOUNTRY) LIMITED

HST #

It is herein understood and agreed between the undersigned parties hereto that the following changes shall be made to the above mentioned Agreement of purchase and Sale in accordance with the agreement and except for such changes noted below, all other terms and conditions in the Agreement of Purchase and Sale shall remain as stated herein: It is further understood that and agreed that all changes and additions shall be installed as per builder's specifications and available selections. The Purchaser hereby agrees to purchase the following extras:

AMOUNT:

Appliances

792 Cyclone 30" Wall Mount Chimney Hood SS
SCB51930 PAGES 29-30

KITCHEN

Qty: 1

Cabinetry

692 Optional Upgrade

Optional Classic Kitchen (Top Drawers in lieu of Bank of Drawers, Crown Moulding, Deep Fridge Uppers, Soft Close Doors and Soft Close Drawers) VIKING I/II/III

Classic Kitchen

Qty: 1

484 Optional Extras

Combo: 12B+10B- Pots and pans drawers (width min. 60cm/max. 90cm) (size subject to floor plan) with upgraded drawers from Metabox to Tandembox Viking (on a Classic Series Kitchen)

KITCHEN

Qty: 1

691 Optional Upgrade

Optional Valance (Trim Only) VIKING I/II/III

Valance

Qty: 1

Ceramics

627 Upgrade 2 Tile
SEE SKETCH # 7
TILE DIRECTION

Foyer Floor

Qty: 1

493 Optional Extras

Supply and install additional backsplash due to chimney hoodfan installation Upgrade 1

Kitchen

Qty: 1

A93 TO BE INSTALLED IN HERRINGBONE PATTERN

- This Sales Selection Sheet when properly executed forms part of our Agreement of Purchase and Sale.
- All extras and upgrades listed above are subject to Construction Progress and Architectural and Municipal requirements.
- In the event the Vendor is unable to incorporate the work approved above in the construction of the house for any reason whatsoever, the Vendor will not be liable to the Purchaser in any way. The monies paid for any changes or optional extras not proceeded with shall be returned to the Purchaser, without interest. The cost of options or extras is non-refundable in all other circumstances. If for any reason whatsoever the Agreement of Purchase and Sale is not completed, the total cost of work approved above will be retained by the Vendor.
- The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
- The Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
- The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
- Selections will not be processed unless signed by Heathwood Homes Head Office.
- The selections made on this schedule are final and cannot be changed once submitted.
- The Purchaser has checked and acknowledges the accuracy of this schedule.

Date

Purchaser

Date APPROVED - 8/3/21 Tina LeFur
Décor Consultant

Date

Purchaser

Date Approved - 8/3/21
HEATHWOOD HOMES (UPCOUNTRY) LIMITED



Sales Selection Sheet
of

03-Aug-21

LOT 001-6

20-2447 ELEV A THE JAMESPORT

PURCHASERS: SAMEER NAMEEZ

CONTACT NO: 647-761-5248

VENDOR: HEATHWOOD HOMES (UPCOUNTRY) LIMITED

HST #

It is herein understood and agreed between the undersigned parties hereto that the following changes shall be made to the above mentioned Agreement of Purchase and Sale in accordance with the agreement and except for such changes noted below, all other terms and conditions in the Agreement of Purchase and Sale shall remain as stated herein: It is further understood that and agreed that all changes and additions shall be installed as per builder's specifications, location and available selections. The Purchaser hereby agrees to purchase the following extras:

AMOUNT:

707 Kitchen Optional Backsplash Qty: 1

704 Upgrade 1 Tile
707 INSTALL IN HRRINGBONE PATTERN

704 M. Ensuite Floor Qty: 1

Upgrade 2 Tile
SEE SKETCH # 8
DIRECTION
PAGE 20 FOR 12 X 24 TILE

626 M. Ensuite Shower Floor Qty: 1

623 Upgrade 2 Tile
INSTALL 12 X 24 TILE STACKED VERTICALLY
M. Ensuite Wall Qty: 1

808 Upgrade Wall: Install Floor tile on Wall
INSTALLLED STACKED VERTICALLY
M. Ensuite Wall Qty: 1

628 Upgrade 2 Tile
SEE SKETCH # 7
DIRECTION
PAGE 19 FOR 12 X 24 TILE
M.Fl.Pow Floor Qty: 1

705 Upgrade 1 Tile
Main Bth Floor Qty: 1

706 Upgrade 1 Tile
Opt Bed4 Bth Floor Qty: 1

1. This Sales Selection Sheet when properly executed forms part of our Agreement of Purchase and Sale.
2. All extras and upgrades listed above are subject to Construction Progress and Architectural and Municipal requirements.
3. In the event the Vendor is unable to incorporate the work approved above in the construction of the house for any reason whatsoever, the Vendor will not be liable to the Purchaser in any way. The monies paid for any changes or optional extras not proceeded with shall be returned to the Purchaser, without interest. The cost of options or extras is non-refundable in all other circumstances. If for any reason whatsoever the Agreement of Purchase and Sale is not completed, the total cost of work approved above will be retained by the Vendor.
4. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
5. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
6. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
7. Selections will not be processed unless signed by Heathwood Homes Head Office.
8. The selections made on this schedule are final and cannot be changed once submitted.
9. The Purchaser has checked and acknowledges the accuracy of this schedule.

8/03/21 Purchaser

8/3/21 Decor Consultant
Date APPROVED -

Date Purchaser

Date Approved HEALTHWOOD HOMES (UPCOUNTRY) LIMITED
M. Rosen



03-Aug-21

Sales Selection Sheet
of

20-2447 ELEV A THE JAMESPORT

LOT 001-6

PURCHASERS: SAMEER NAMEEZ CONTACT NO: 647-761-5248

VENDOR: HEATHWOOD HOMES (UPCOUNTRY) LIMITED

HST #

is herein understood and agreed between the undersigned parties hereto that the following changes shall be made to the above mentioned Agreement of purchase and Sale in accordance with the agreement and except for such changes noted below, all other terms and conditions in the Agreement of Purchase and Sale shall remain as stated herein: It is further understood that and agreed that all changes and additions shall be installed as per builder's specifications, location and available selections. The Purchaser hereby agrees to purchase the following extras:

AMOUNT:

Coffered Ceiling		
629	Optional Upgrade	GREAT ROOM Qty: 1
Drywall		
633	Ceiling Upgrades Smooth Ceilings Main Floor	Qty: 1
Electrical		
284	Optional Extras Extra wall interior outlet on Existing Circuit (does not include kitchen outlets) CENTERED +/- ABOVE THE FIREPLACE 70" +/- FROM THE FLOOR. SKETCH # 7 PAGE 19	GREAT ROOM Qty: 1
286	Optional Extras Ceiling rough-in (Capped) 3X CENTERED +/- ON THE ISLAND; 1X CENTERED ON GREAT ROOM CEILING WITH OWN SWITCH. SEE SKETCH # 7 PAGE 19	KITCHEN Qty: 4
Fireplace		
44		Qty: 1

Purchasers have been advised: heat from the FP can damage TV above a FP and items placed on mantle. Purchasers acknowledge: Heathwood Homes and its contractors will not be liable for any damage on items placed/installed above a FP after closing

Granite

1. This Sales Selection Sheet when properly executed forms part of our Agreement of Purchase and Sale.
2. All extras and upgrades listed above are subject to Construction Progress and Architectural and Municipal requirements.
3. In the event the Vendor is unable to incorporate the work approved above in the construction of the house for any reason whatsoever, the Vendor will not be liable to the Purchaser in any way. The monies paid for any changes or optional extras not proceeded with shall be returned to the Purchaser, without interest. The cost of options or extras is non-refundable in all other circumstances. If for any reason whatsoever the Agreement of Purchase and Sale is not completed, the total cost of work approved above will be retained by the Vendor.
4. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
5. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
6. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
7. Selections will not be processed unless signed by Heathwood Homes Head Office.
8. The selections made on this schedule are final and cannot be changed once submitted.
9. The Purchaser has checked and acknowledges the accuracy of this schedule.

08/03/21	8/3/21	TINA LEFUR
Date	Date	Décor Consultant
	APPROVED	
		M. Loren
Date	Date	Date
		HEATHWOOD HOMES (UPCOUNTRY) LIMITED



03-Aug-21

Sales Selection Sheet
OF

LOT 001-6

20-2447 ELEV A THE JAMESPORT

PURCHASERS: SAMEER NAMEEZ

CONTACT NO: 647-761-5248

VENDOR: HEATHWOOD HOMES (UPCOUNTRY) LIMITED

HST #

is herein understood and agreed between the undersigned parties hereto that the following changes shall be made to the above mentioned Agreement of Purchase and Sale in accordance with the agreement and except for such changes noted below, all other terms and conditions in the Agreement of Purchase and Sale shall remain as stated herein: It is further understood that and agreed that all changes and additions shall be installed as per builder's specifications, location and available selections. The Purchaser hereby agrees to purchase the following extras:

AMOUNT:

651	Optional Upgrade Countertop 3/4" GROUP 4 with double edge	Kitchen	Qty: 1
672	Vintage 3-1/4" Red Oak Select-V	KIT/BRK	Qty: 1
Heating / Air			
277	Optional Extras ROUGH-IN GAS LINE FOR GAS STOVE AT MAIN FLOOR (See specs) (Hook-up not included) Leave standard 120 volt electrical outlet on a separate circuit. SKETCH # 7 PAGE 19 STOVE SPECS PAGES 32-34	KITCHEN	Qty: 1
Mirrors/Glass Products			
639	Shower Upgrade Upgrade to Frameless clear glass with D-Ring Handle in chrome	Master Ensuite	Qty: 1
Plumbing			
216	Kitchen Sink Upgrade Blanco Kitchen Sink Quatrus U 1 Maxi #401248 (32" x 18") Undermount 1 Bowl 9" Deep in Stainless Steel PAGE 22	KITCHEN	Qty: 1
264	Moen -METHOD Chrome one-handle low arc bathroom faucet Single-Hole Faucet (no plate) - (Model: 6810) PAGE 25	POWDER ROOM	Qty: 1

- This Sales Selection Sheet when properly executed forms part of our Agreement of Purchase and Sale.
- All extras and upgrades listed above are subject to Construction Progress and Architectural and Municipal requirements.
 - In the event the Vendor is unable to incorporate the work approved above in the construction of the house for any reason whatsoever, the Vendor will not be liable to the Purchaser in any way. The monies paid for any changes or optional extras not proceeded with shall be returned to the Purchaser without interest. The cost of options or extras is non-refundable in all other circumstances. If for any reason whatsoever the Agreement of Purchase and Sale is not completed, the total cost of work approved above will be retained by the Vendor.
 - The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
 - The Vendor acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
 - The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
 - Selections will not be processed unless signed by Heathwood Homes Head Office.
 - The selections made on this schedule are final and cannot be changed once submitted.
 - The Purchaser has checked and acknowledges the accuracy of this schedule.

08/03/24	8/3/21	TINA LEFUR
Date	Date	Date
Purchaser	APPROVED	Décor Consultant
Purchaser		
Date		
Date		
		HEATHWOOD HOMES (UPCOUNTRY) LIMITED



03-Aug-21

Sales Selection Sheet

LOT 001-6

20-2447 ELEV A THE JAMESPORT

PURCHASERS: SAMEER NAMEEZ

CONTACT NO: 647-761-5248

VENDOR:

HEATHWOOD HOMES (UPCOUNTRY) LIMITED

HST #

is herein understood and agreed between the undersigned parties hereto that the following changes shall be made to the above mentioned Agreement of purchase and Sale in accordance with the agreement and except for such changes noted below, all other terms and conditions in the Agreement of Purchase and Sale shall remain as stated herein: It is further understood that and agreed that all changes and additions shall be installed as per builder's specifications, creation and available selections. The Purchaser hereby agrees to purchase the following extras:

AMOUNT:

This Sales Selection Sheet when properly executed forms part of our Agreement of Purchase and Sale.
All extras and upgrades listed above are subject to Construction Progress and Architectural and Municipal requirements.
In the event the Vendor is unable to incorporate the work approved above in the construction of the house for any reason whatsoever, the Vendor will not be liable to the Purchaser in any way. The monies paid for any changes or optional extras not proceeded with shall be returned to the Purchaser, without interest. The cost of options or extras is non-refundable in all other circumstances. If for any reason whatsoever the Agreement of Purchase and Sale is not completed, the total cost of work approved above will be retained by the Vendor.
The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
Selections will not be processed unless signed by Heathwood Homes Head Office.
The selections made on this schedule are final and cannot be changed once submitted.
The Purchaser has checked and acknowledges the accuracy of this schedule.

<u>68/03/21</u>	<u>[Signature]</u>	<u>8/03/21</u>	<u>TINA LEFUR</u>
Date	Purchaser	Date	Décor Consultant
<u> </u>	<u> </u>	<u>APPROVED -</u>	<u>[Signature]</u>
Date	Purchaser		
<u> </u>	<u> </u>	<u> </u>	<u>HEATHWOOD HOMES (UPCOUNTRY)</u>
Date	Purchaser	Date Approved	LIMITED

CU UPCOUNTRY
LOT 1-6
20-2447 ELEV A
THE JAMESPORT


17 of 43

The Jamesport

20-2447 ELEV. A

ELEVATION A:
2,447 SQ FT

Sketch #5

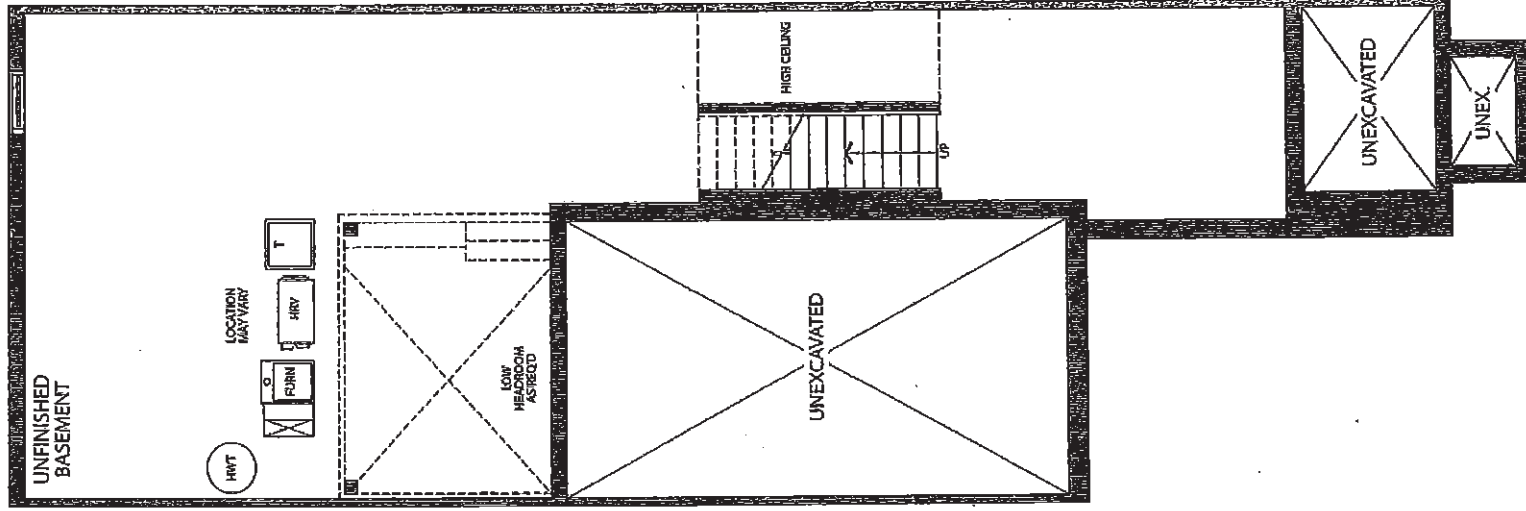


BASEMENT
ELEVATION A & B

UN

18 of 3

20-2447 ELEV. A

Sketch #6



Σ

CU UPCOUNTRY
LOT 1-6
20-2447 ELEV A
THE JAMESPORT


20 of 43

The Jamesport

20-2447 ELEV. A

ELEVATION A:
2,447 SQ FT


Sketch #8

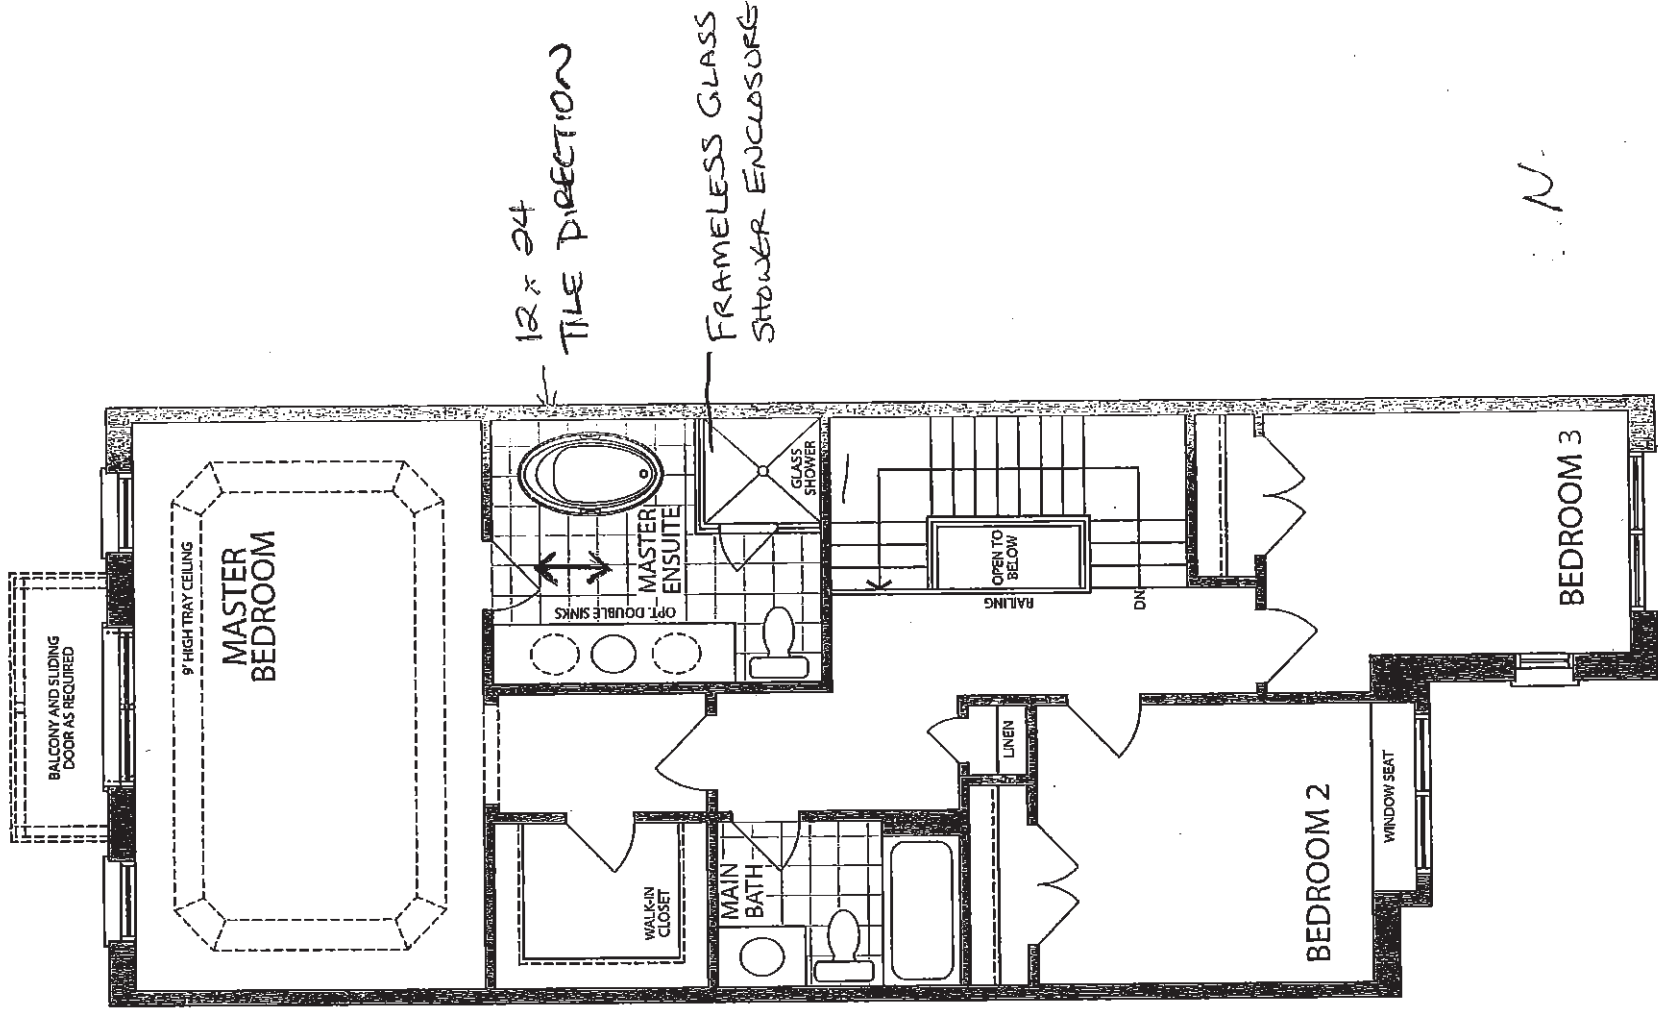

UPPER LEVEL
ELEVATION A

CU UPCOUNTRY
LOT 1-6
20-2447 ELEV A
THE JAMESPORT

21 of 43

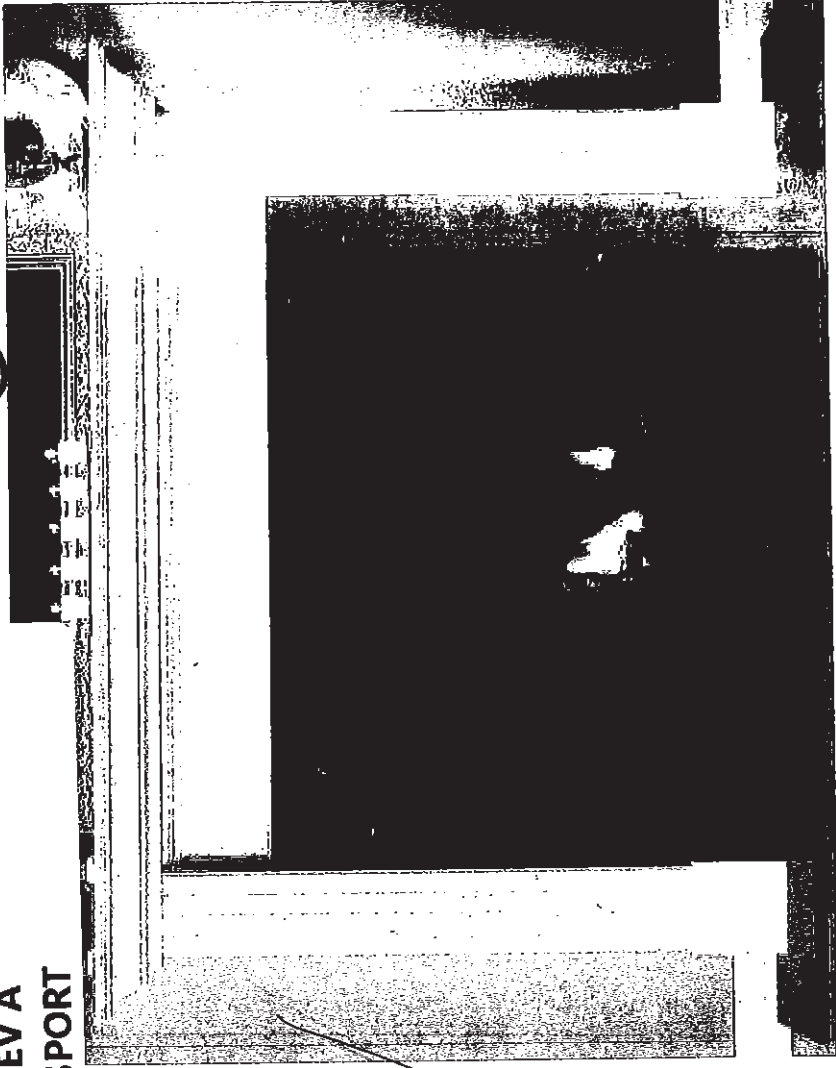

'CABINET'

STANDARD NF 15 Mantel

Clean apron finish with fluted legs
WHITE PAINT GRADE FINISH

(PICTURE SHOWN WITH UPGRADE SURROUND AND HEARTH - PRICED SEPARATELY)



STANDARD NF 17 Mantel

WHITE PAINT GRADE FINISH

(PICTURE SHOWN WITH UPGRADE SURROUND AND HEARTH - PRICED SEPARATELY)

S.N.


CU UPCOUNTRY
LOT 1-6
20-2447 ELEV A
THE JAMESPORT

22 of 43

BLANCO QUATRUS U Maxi
Stainless Steel
Undermount Sink

This new German-engineered sink from BLANCO features a 9-inch bowl depth and zero-radius bowl corners. Made of durable 18 gauge stainless steel.

BLANCO

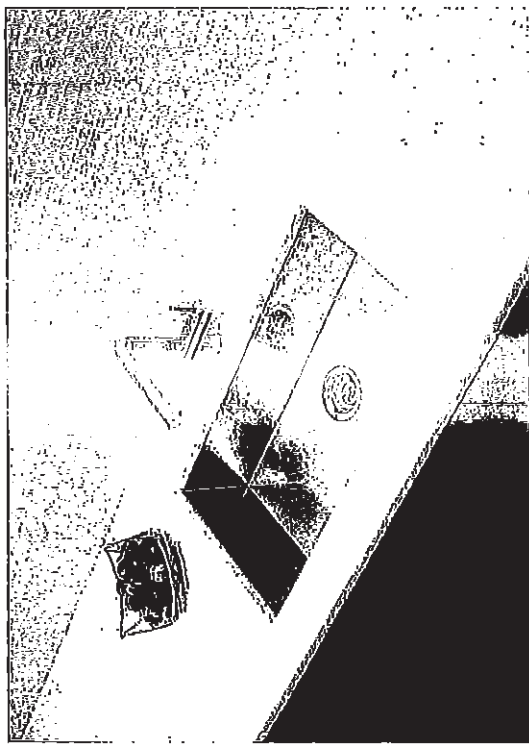

Model No.	Bowl Depth
401248	9" (230 mm)

Material
Durable 18 gauge stainless steel
Brushed finish

Specifications
Minimum Cabinet Size: 33" (840 mm)
Undermount installation

Rear positioned drain hole for maximum usable bowl and cabinet storage space


Zero-radius corners and x-pattern drain grooves

Sound deadening system included

Template included

3 1/2" stainless steel strainer included

Limited Lifetime Warranty

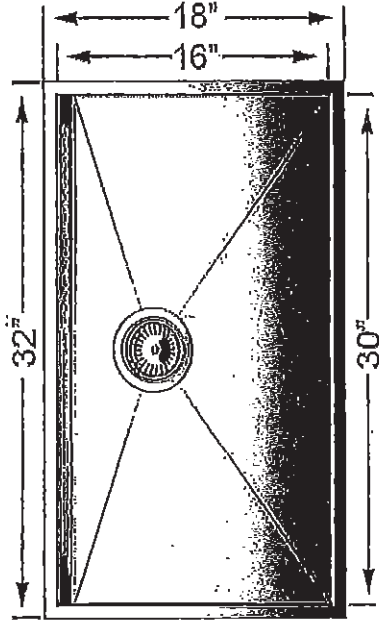

Accessories
Stainless Steel Grid

223192

1. N.


CU UPCOUNTRY
LOT 1-6
20-2447 ELEV A
THE JAMESPORT

23 of 43

STANDARD KITCHEN FAUCET

Align

Modern

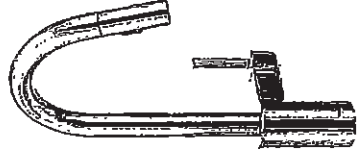

Single Handle Pull-Down Kitchen
Faucet#

Model 7565T

CU UPCOUNTRY
LOT 1-6
20-2447 ELEV A
THE JAMESPORT

24 of 43

*American
Standard*

**BOULEVARD®
PEDESTAL SINK**
VITREOUS CHINA

BOULEVARD® PEDESTAL SINK

- ☐ 0641.800 Faucet holes on 8" (203mm) centers (illustrated)
- ☐ 0641.400 Faucet holes on 4" (102mm) centers
- ☒ 0641.100 Center hole only
 - Classic styled rectangular pedestal lavatory
 - Vitreous china
 - Rear overflow
 - Supplied with mounting kit
 - Right Height® for greater comfort during use
 - Faucet ledge with large deck area (faucet not included)
 - Design coordinates with Boulevard® Toilet
 - Basin has flat bottom to also allow use as an above counter sink or a drop-in sink (with u-shaped cut out)

Nominal Dimensions:

24" x 19" x 35-1/2"
(610 x 483 x 902mm)

- ☐ 0641.008 Pedestal top-8" (203mm) centers
- ☐ 0641.004 Pedestal top-4" (102mm) centers
- ☐ 0641.001 Pedestal top-center hole only
- ☐ 0010.000 Pedestal only

Bowl sizes:

17" (432mm) wide,
12-1/2" (318mm) front to back,
5" (127mm) deep


Compliance Certifications -

Meets or Exceeds the Following Specifications:

- ASME A112.19.2 - 2008/CSA B45.1-08

To Be Specified: ☐ Color: ☐ White ☐ Linen ☐ Faucet Finish: ☐ Supplies: ☐ 1-1/4" Trap: ☐ Nipple:
--

* See faucet section for additional models available

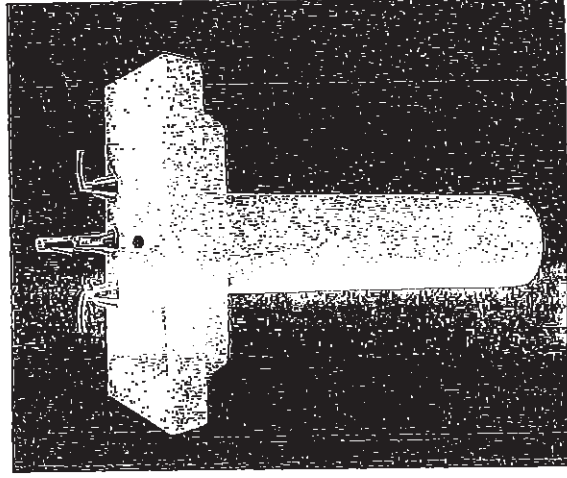

SEE REVERSE FOR ROUGHING-IN DIMENSIONS

S.N.

CU UPCOUNTRY
LOT 1-6
20-2447 ELEV A
THE JAMESPORT

25 of 43

Method™


Traditional | Transitional | Modern
*A modern blend of flat planes and curves
gives Method faucets and accessories an chic look.*



Single Handle Vessel Lav
Faucet with Lift Rod Drain
and Grid Drain Kit ^

Model 6810 / A2020

Chrome
Other

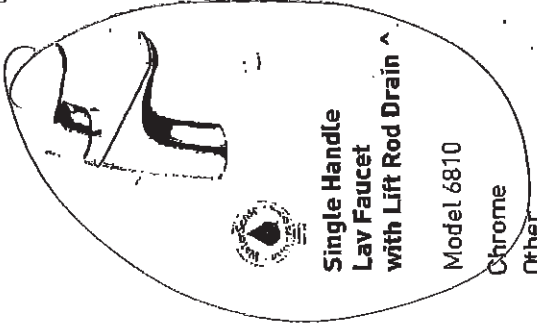

Single Handle
Lav Faucet
with Lift Rod Drain ^

Model 6810

Chrome
Other



Two Handle Adjustable Widespread
(8\"/>

Model T6920 / 69000

Chrome
Other



Two Handle
Roman Tub Faucet

Model T986 / 4796

Chrome
Other



Two Handle Roman Tub
with Hand Shower

Model T987 / 9756

Chrome
Other



Tub Drain Half Kits Available**



Chrome
Other



Tub Drain Half Kits Available**



Chrome
Other



C

BN

FINISH OPTIONS:

To order, combine the model number with one of these finish letter(s):
LifeShine® Brushed Nickel (BN).

To order Chrome (C) model, use model number only.

^ Deckplate included

** T90331 / 140680

CU UPCOUNTRY
LOT 1-6
20-2447 ELEV A
THE JAMESPORT
COLONY COUNTERTOP SINK

- Vitreous china
 - Self-rimming
 - Front overflow
 - Supplied with template
 - Faucet deck
- (Faucet shown not included)

- ☒ 0346 803
Faucet holes on 203mm (8") centres
- ☐ 0346 403 (Illustrated)
Faucet holes on 102mm (4") centres
- ☐ 0346 001
Centre hole only

Nominal Dimensions:
521 x 448mm (20-1/2" x 17-5/8")

Bowl sizes:
422mm (16-5/8") wide, 279mm (11") front to
back, 143mm (5-5/8") deep

COMPLIANCE CERTIFICATIONS –
Meets or exceeds the following Specifications:
• ASME A112.19.2M for Vitreous China Fixtures.
• CAN/CSA B45 Series.

To Be Specified

☐ Colour:

☒ White

☐ Bone

☐ Silver Gray

☐ Linen

☐ Faucet*:



☐ Faucet Finish:

☐ Supplies & Stops:

☐ Trap 1-1/4" (32 mm):

* See faucet section for additional models available
BAS-198


26 of 30
COUNTERTOP SINK
VITREOUS CHINA

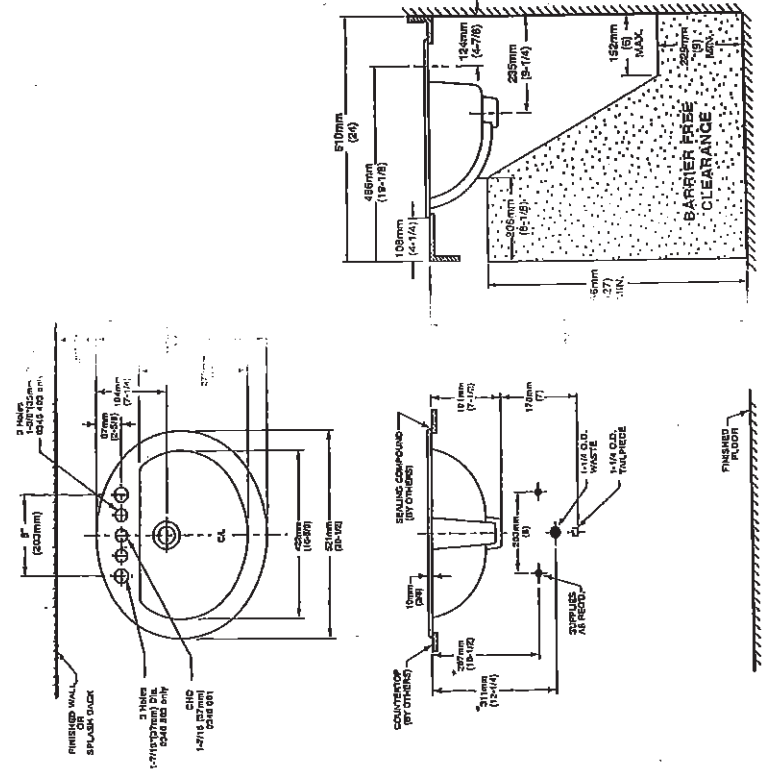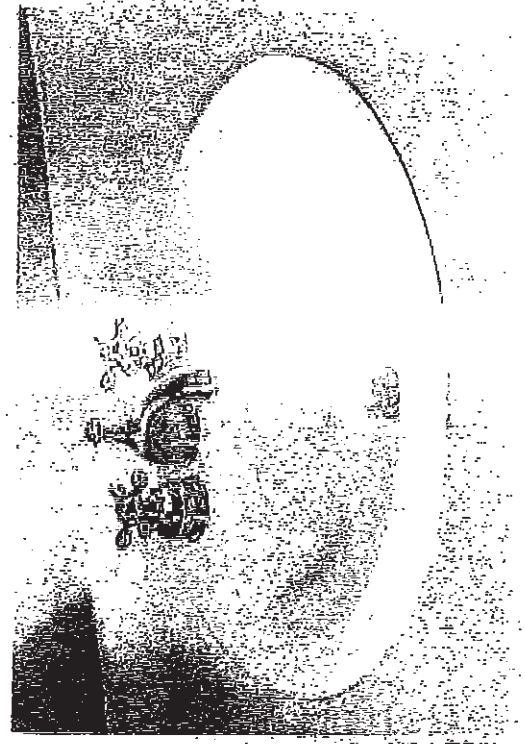

NOTES:
* DIMENSIONS SHOWN FOR LOCATION OF SUPPLIES AND \"P\" TRAP ARE SUGGESTED.
FOR COUNTERTOP CUTOUT AND INSTALLATION INSTRUCTIONS USE TEMPLATE
SUPPLIED WITH SINK.
FAUCETS NOT INCLUDED AND MUST BE ORDERED SEPARATELY
IMPORTANT: Dimensions of fixtures are not standard and may vary within the range of tolerances
established by ANSI Standard A112.19.2.
These measurements are subject to change or discontinuation. No responsibility is assumed for use
of superseded or voided pages.

CU UPCOUNTRY
LOT 1-6
20-2447 ELEV A
THE JAMESPORT

27 of 43

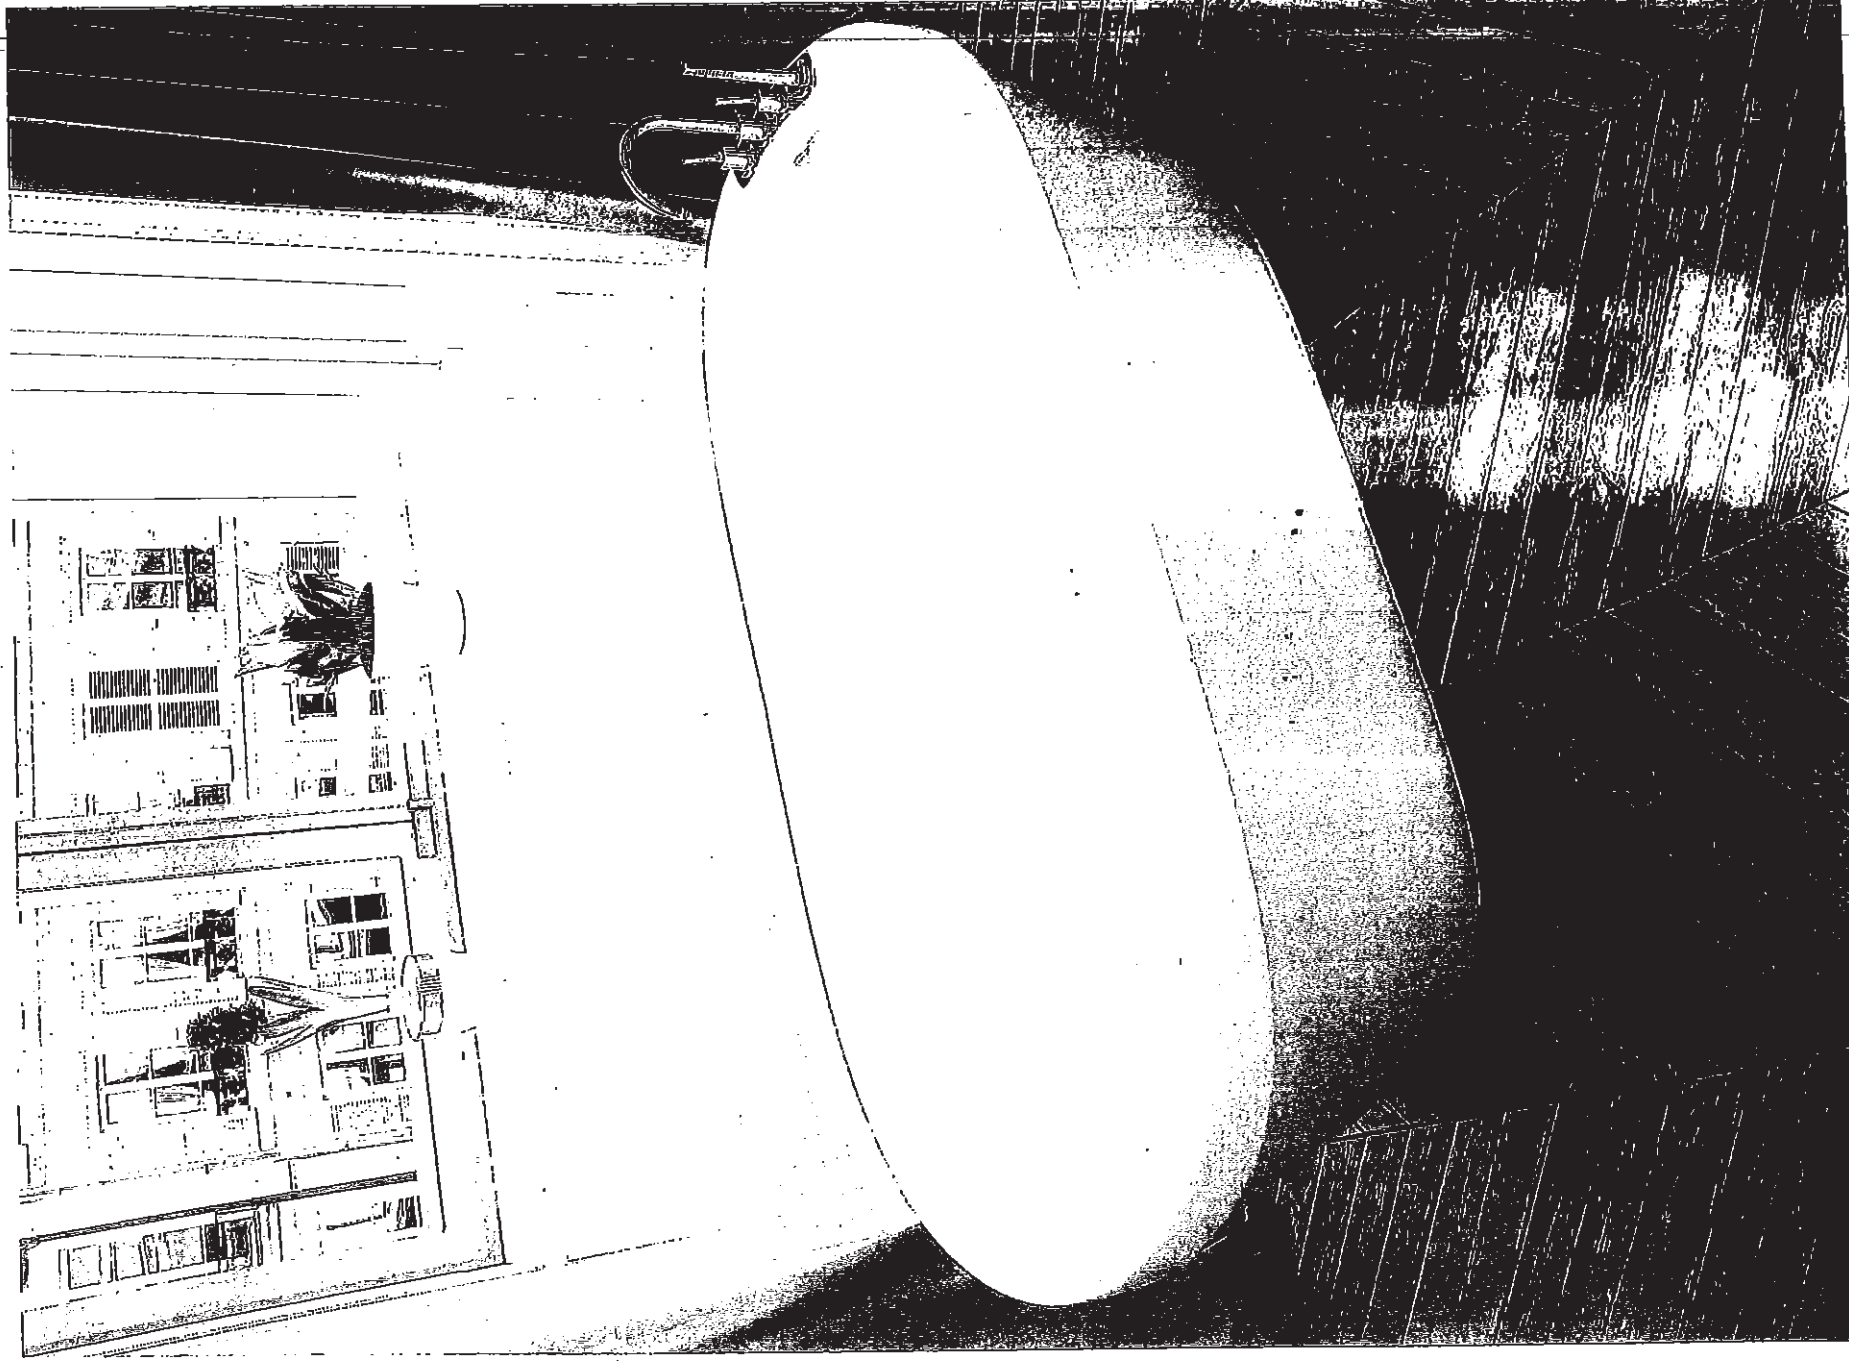

Derri CF2007


S.N.

CU UPCOUNTRY
LOT 1-6
20-2447 ELEV A
THE JAMESPORT

28 of 43


Chateau

Transitional



Lavatory Faucet with Pop-Up Drain
Model L4621†

VANITY SINKS AND PEDESTAL

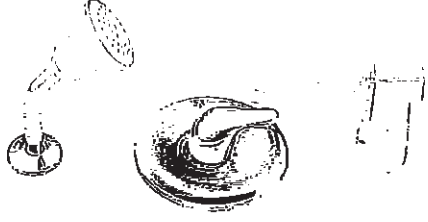

Posi-Temp® Pressure Balancing Tub/Shower
Model 62320 / TL183†

OR

Posi-Temp Valve and Tub/Shower Trim
with Eco-Performance Easy Clean® XL

Model 62320 / TL183EPT
(TL183EP not available in CA)

SHOWER AND 5' TUB FAUCETS



2 Handle Roman Tub with 9" Spout
Model 4796 / T990†


FREESTANDING TUB FAUCETS

N.

CU UPCOUNTRY
LOT 1-6
20-2447 ELEV A
THE JAMESPORT

29 of 43

SC(B)500 | ALITO Collection

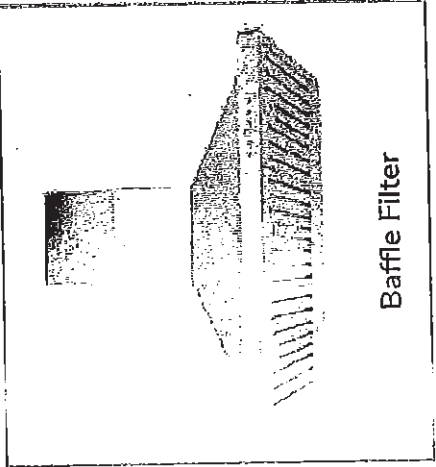

Baffle Filter

Wall Mount

Strong and sturdy with attractive lines and an imposing frame, the SC(B)500 is fitted with time-delay OFF feature up to nine minutes, 550 CFM fan, bright LED lights and a digital three-speed push button control panel.

Green Features



3 Speed Push Button
Control Panel




Dishwasher
Safe Filters



Long-Lasting
LED Light



Time-Delay
OFF Feature

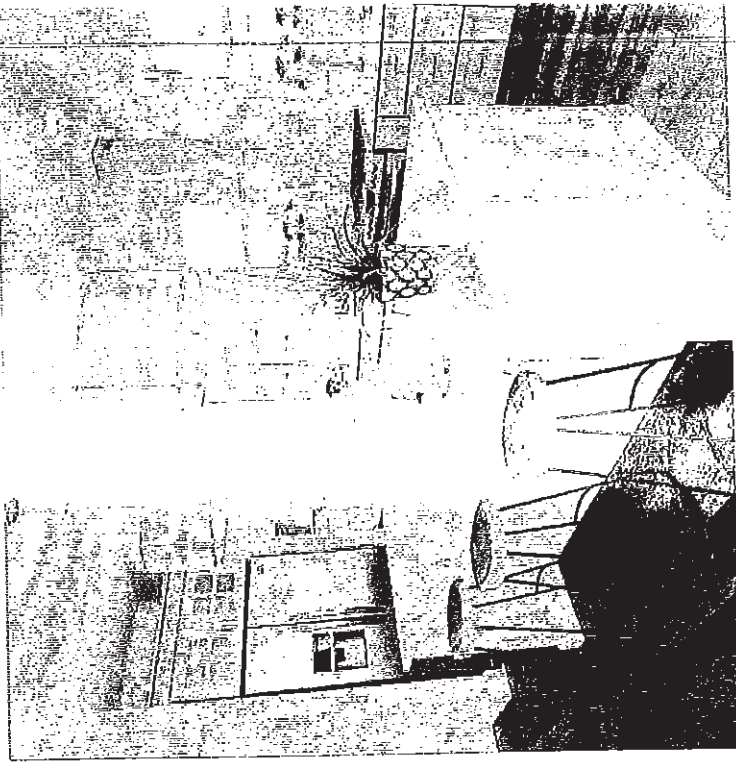

Model	Colour	Ducting	Filters	SIZE	CFM
SC50024	Stainless Steel	6"	Mesh	30"	550
SC50030	Stainless Steel	6"	Mesh	36"	550
SC50036	Stainless Steel	6"	Mesh	42"	550
SCB50024	Stainless Steel	6"	Baffle	30"	550
SCB50030	Stainless Steel	6"	Baffle	36"	550
SCB50036	Stainless Steel	6"	Baffle	42"	550

Cyclone Range Hoods Inc.

1361 Huntingwood Drive, Unit 16, Toronto, ON: M1S 3J1, Canada
Toll Free: 1-888-293-5662 Tel: (416) 293-0933 Fax: (416) 293-4793 Website: www.cyclonerangehoods.com

5-N

CU UPCOUNTRY
LOT 1-6
20-2447 ELEV A
THE JAMESPORT

30 of 43



12 2 5

Cyclone[®]
Breathe Better

SC(B)500 | ALITO Collection

Features

- Wall mount range hood
- 6" round duct adapter
- Non-stick aluminum fan blades
- 3 speed push button control
- 2 LED lights (2 x 1.4W)
- Dishwasher-safe mesh or baffle filters
- Standard chimney fits up to 9 ft. ceiling
- Up to 9 minute time-delay OFF feature
- Plug-in connection

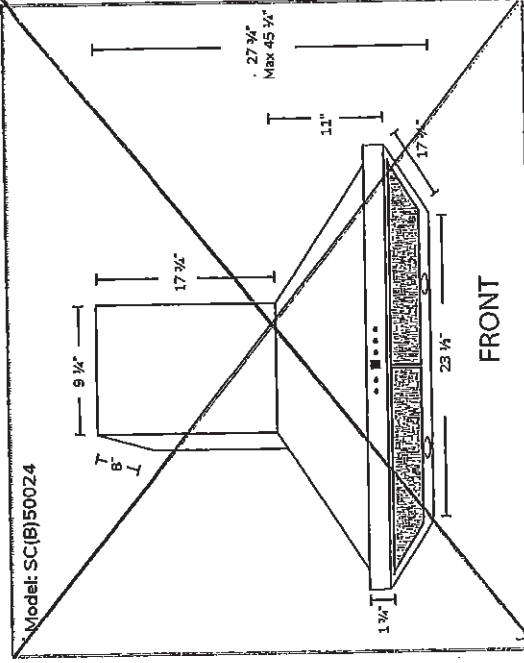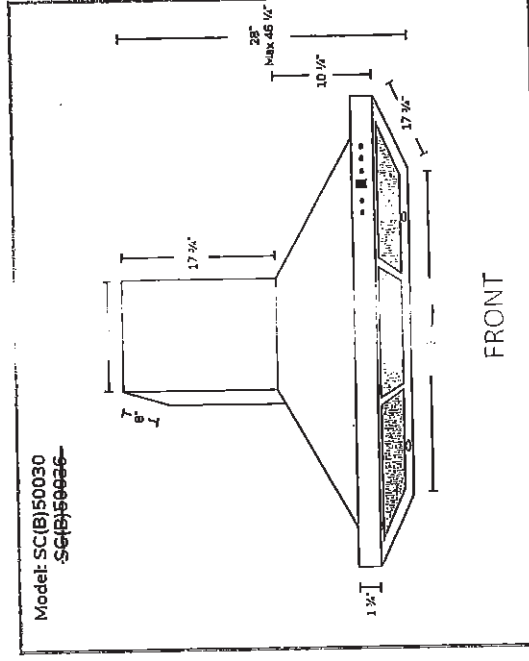

Options

- Filters: SC500 - Quick Release Aluminum Mesh Filters
- **SCB500** - Quick Release Stainless Steel Baffle Filters ✓
- Available Chimney Flues:
 - Short (7 ft. - 8 ft. A1.CH10)
 - Standard (8 ft. - 9 ft. A1.CH18)
 - Extended (9 ft. - 11 ft. A1.CH30)
- Widths: 24", 30", 36"

- Air Flow Volume: 550 CFM
- Electrical Connection: 120V/60Hz
- Power Consumption: 210 Watts
- Current: 2.5 Amps
- Fan Speed: 1600RPM
- Fan Type: Centrifugal Blower

- Finishes: Stainless Steel
- Ducting: 6" Round
- Dimensions: Width: 24", 30", 36"
Height: 46"
Depth: 18"

Specifications

- Noise Level: Min. 2 Sones
Max. 6 Sones



Toronto • Vancouver • Boston
www.CycloneRangeHoods.com

CU UPCOUNTRY
LOT 1-6
20-2447 ELEV A
THE JAMESPORT

PRODUCT MODEL NUMBERS

WRF532SMB
WRF535SMB

WRF535SMB
WRF540CWB

Electrical: A 115-volt, 60-Hz, AC-only, 15- or 20-amp fused, grounded electrical supply is required. It is recommended that a separate circuit serving only your refrigerator be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.

NOTE: Before performing any type of installation, cleaning, or removing a light bulb, turn the control (Thermostat, Refrigerator or Freezer Control depending on the model) to OFF and then disconnect the refrigerator from the electrical source. When you are finished, reconnect the refrigerator to the electrical source and reset the control (Thermostat, Refrigerator or Freezer Control depending on the model) to the desired setting. See "Using the Controls."


Water: A cold water supply with water pressure between 30 and 120 psi (207 and 827 kPa) is required to operate the ice maker and water dispenser. If you have questions about your water pressure, call a licensed, qualified plumber.

IMPORTANT: The pressure of the water coming out of a reverse osmosis system going to the water inlet valve of the refrigerator needs to be between 35 and 120 psi (241 and 827 kPa).

Reverse Osmosis Water Supply: If a reverse osmosis water filtration system is connected to your cold water supply, the water pressure to the reverse osmosis system needs to be a minimum of 40 to 60 psi (276 to 414 kPa).


Whirlpool® Bottom Mount Refrigerator

PRODUCT DIMENSIONS

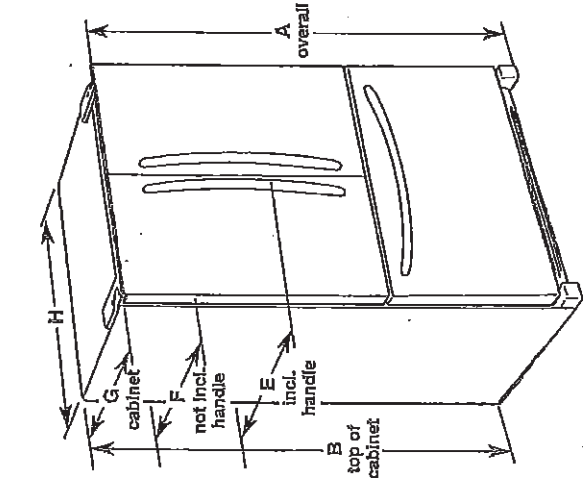

Model Number/Size	Height - Overall "A" (in./cm)	Height - Top of Cabinet "B" (in./cm)	Depth - Doors Open 90° "C" (in./cm)	Depth - Drawer Open "D" (in./cm)	Depth - Without Handles "F" (in./cm)	Depth - Cabinet Only "G" (in./cm)	Width - Cabinet "H" (in./cm)	Width - Door Open 90° "I" (in./cm)
WRF535SMB 25.2 cu. ft.	70 1/8" (178.1 cm)	66 1/8" (174.8 cm)	48 1/8" (122.1 cm)	53 1/8" (135 cm)	32 1/8" (83.7 cm)	29 1/8" (74 cm)	35 1/8" (90.5 cm)	43 1/8" (110.2 cm)
WRF535SMB 25.2 cu. ft.	70 1/8" (178.1 cm)	68 1/8" (174.8 cm)	48 1/8" (122.1 cm)	53 1/8" (135 cm)	32 1/8" (83.7 cm)	29 1/8" (74 cm)	35 1/8" (90.5 cm)	43 1/8" (110.2 cm)
WRF535SMB 27.1 cu. ft.	70 1/8" (178.1 cm)	68 1/8" (174.8 cm)	47 1/8" (119.5 cm)	52 1/8" (132.4 cm)	31 1/8" (79.1 cm)	28 1/8" (71.4 cm)	32 1/8" (82.9 cm)	42 1/8" (107.6 cm)
WRF540CWB 20 cu. ft.	70 1/8" (178.1 cm)	68 1/8" (174.8 cm)	48" (121.9 cm)	44 1/8" (113.0 cm)	28" (71.1 cm)	24 1/8" (61.3 cm)	35 1/8" (90.5 cm)	39 1/8" (100.0 cm)

LOCATION REQUIREMENTS

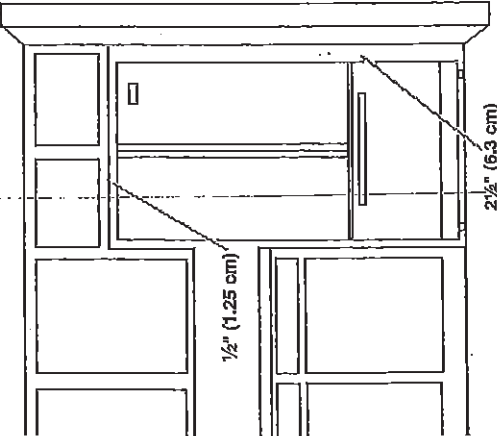

To ensure proper ventilation for your refrigerator, allow for a 1/2" (1.25 cm) space on each side and at the top. Allow for 1" (2.5 cm) of space behind the refrigerator. If your refrigerator has an ice maker, make sure you leave some extra space at the back for the water line connections.

If you are installing your refrigerator next to a tiled wall, leave 2 1/2" (6.3 cm) minimum on the hinge side (some models may require more) to allow for the door to swing open.

NOTE: This refrigerator is intended for use in a location where the temperature ranges from a minimum of 55°F (13°C) to a maximum of 110°F (43°C). The preferred room temperature range for optimal performance, which reduces electricity usage and provides superior food preservation, is between 60°F (15°C) and 90°F (32°C). It is recommended that you do not place the refrigerator near a heat source, such as an oven or radiator.

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications are subject to change without notice.


Ref. W10597594B
10/1/14

32 of 43

CU UPCOUNTRY
LOT 1-6
20-2447 ELEV A
THE JAMESPORT

FRONT CONTROL
GAS RANGES

Whirlpool

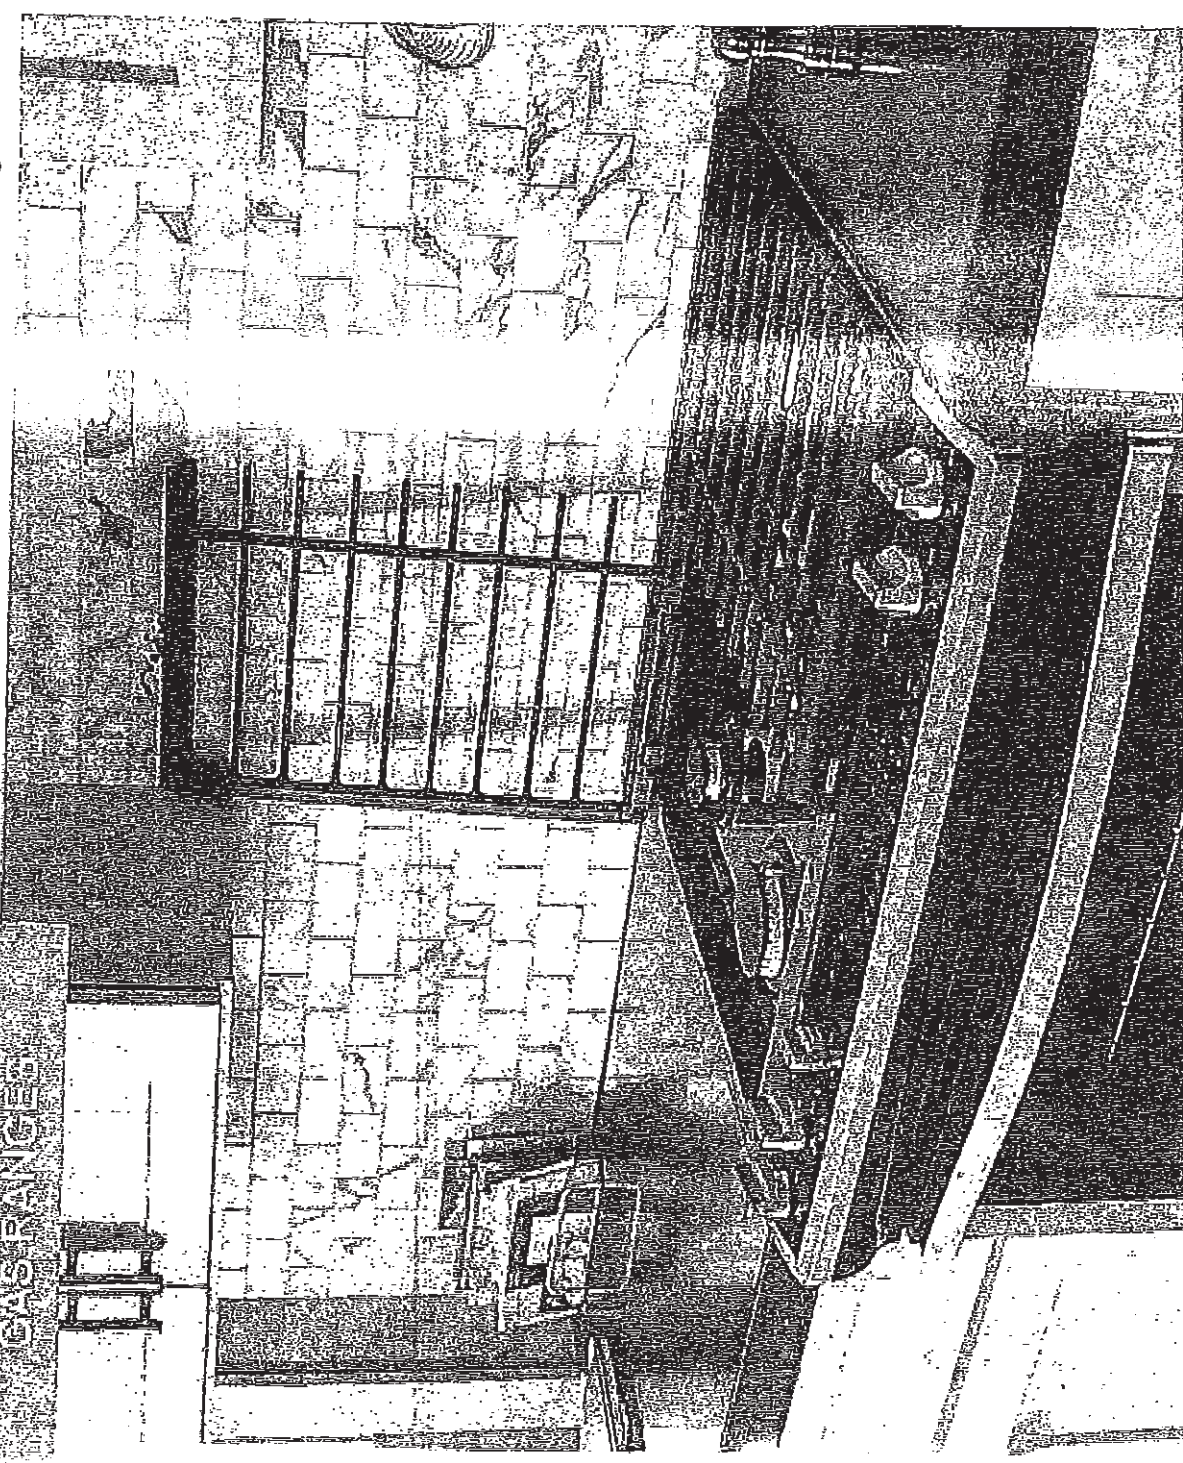

FEATURING



TimeSaver™ system

The TimeSaver™ system's Frozen Bake Technology allows you to skip preheating for favorites like pizza, lasagna, chicken nuggals, fries or pies so you can cook frozen foods faster.



HeatRight™ system

The HeatRight™ system's True convection helps you to cook food faster* with a rear fan and third heating element to circulate hot air over, under, and around food.



CompleteClean™ system

The CompleteClean™ system's EZ-2-Lit™ hinged grates give you quick access to spills on the cooktop. The industry's first hinged design allows you to wipe up under them without removing them entirely. For a more thorough clean, the grates are also dishwasher-safe.

Every day, care™

From the #1 Selling Appliance brand in the USA*

33 of 43

30" Freestanding Range - 5.8 cu. ft.

WEG745HOF

TimeSaver™ system

- Fresh Air™ Technology

HeatRight™ system

- Fast Preheating
- Conversion
- Air-Fire™ burner
- Gas
- Electronic Sensor

CompleteClean System

- 65-100° Hinged Grates
- Advanced Self-cleaning Technology
- 10 precision-engineered knobs

ReadySet™ system

- 10 precision-engineered burners
- 10 precision-engineered grates
- 10 precision-engineered knobs
- 10 precision-engineered knobs

Available colors

S
Stainless Steel

H
White

B
Black

PRODUCT DIMENSIONS

Dimensions shown are approximate. Actual dimensions may vary. Always check dimensions before installation.

1. 15" (381 mm) height
2. 20" (508 mm) height
3. 24" (610 mm) height
4. 28" (711 mm) height
5. 32" (813 mm) height
6. 36" (914 mm) height
7. 40" (1016 mm) height
8. 44" (1118 mm) height
9. 48" (1219 mm) height
10. 52" (1321 mm) height
11. 56" (1413 mm) height
12. 60" (1524 mm) height
13. 64" (1626 mm) height
14. 68" (1728 mm) height
15. 72" (1830 mm) height
16. 76" (1931 mm) height
17. 80" (2033 mm) height
18. 84" (2135 mm) height
19. 88" (2237 mm) height
20. 92" (2339 mm) height
21. 96" (2441 mm) height
22. 100" (2543 mm) height
23. 104" (2645 mm) height
24. 108" (2747 mm) height
25. 112" (2849 mm) height
26. 116" (2951 mm) height
27. 120" (3053 mm) height
28. 124" (3155 mm) height
29. 128" (3257 mm) height
30. 132" (3359 mm) height
31. 136" (3461 mm) height
32. 140" (3563 mm) height
33. 144" (3665 mm) height
34. 148" (3767 mm) height
35. 152" (3869 mm) height
36. 156" (3971 mm) height
37. 160" (4073 mm) height
38. 164" (4175 mm) height
39. 168" (4277 mm) height
40. 172" (4379 mm) height
41. 176" (4481 mm) height
42. 180" (4583 mm) height
43. 184" (4685 mm) height
44. 188" (4787 mm) height
45. 192" (4889 mm) height
46. 196" (4991 mm) height
47. 200" (5093 mm) height
48. 204" (5195 mm) height
49. 208" (5297 mm) height
50. 212" (5399 mm) height
51. 216" (5501 mm) height
52. 220" (5603 mm) height
53. 224" (5705 mm) height
54. 228" (5807 mm) height
55. 232" (5909 mm) height
56. 236" (6011 mm) height
57. 240" (6113 mm) height
58. 244" (6215 mm) height
59. 248" (6317 mm) height
60. 252" (6419 mm) height
61. 256" (6521 mm) height
62. 260" (6623 mm) height
63. 264" (6725 mm) height
64. 268" (6827 mm) height
65. 272" (6929 mm) height
66. 276" (7031 mm) height
67. 280" (7133 mm) height
68. 284" (7235 mm) height
69. 288" (7337 mm) height
70. 292" (7439 mm) height
71. 296" (7541 mm) height
72. 300" (7643 mm) height
73. 304" (7745 mm) height
74. 308" (7847 mm) height
75. 312" (7949 mm) height
76. 316" (8051 mm) height
77. 320" (8153 mm) height
78. 324" (8255 mm) height
79. 328" (8357 mm) height
80. 332" (8459 mm) height
81. 336" (8561 mm) height
82. 340" (8663 mm) height
83. 344" (8765 mm) height
84. 348" (8867 mm) height
85. 352" (8969 mm) height
86. 356" (9071 mm) height
87. 360" (9173 mm) height
88. 364" (9275 mm) height
89. 368" (9377 mm) height
90. 372" (9479 mm) height
91. 376" (9581 mm) height
92. 380" (9683 mm) height
93. 384" (9785 mm) height
94. 388" (9887 mm) height
95. 392" (9989 mm) height
96. 396" (10091 mm) height
97. 400" (10193 mm) height
98. 404" (10295 mm) height
99. 408" (10397 mm) height
100. 412" (10499 mm) height
101. 416" (10601 mm) height
102. 420" (10703 mm) height
103. 424" (10805 mm) height
104. 428" (10907 mm) height
105. 432" (11009 mm) height
106. 436" (11111 mm) height
107. 440" (11213 mm) height
108. 444" (11315 mm) height
109. 448" (11417 mm) height
110. 452" (11519 mm) height
111. 456" (11621 mm) height
112. 460" (11723 mm) height
113. 464" (11825 mm) height
114. 468" (11927 mm) height
115. 472" (12029 mm) height
116. 476" (12131 mm) height
117. 480" (12233 mm) height
118. 484" (12335 mm) height
119. 488" (12437 mm) height
120. 492" (12539 mm) height
121. 496" (12641 mm) height
122. 500" (12743 mm) height
123. 504" (12845 mm) height
124. 508" (12947 mm) height
125. 512" (13049 mm) height
126. 516" (13151 mm) height
127. 520" (13253 mm) height
128. 524" (13355 mm) height
129. 528" (13457 mm) height
130. 532" (13559 mm) height

Page 1 of 1

2

CU UPCOUNTRY
LOT 1-6
20-2447 ELEV A
THE JAMESPORT

34 of 43



Whirlpool® 30" (76.2 cm) Slide-in Gas Range

PRODUCT MODEL NUMBERS

WEG760HDD WEG745HOF

GAS SUPPLY REQUIREMENTS

Gas supply line:

- Provide a gas supply line of $\frac{3}{4}$ " (1.9 cm) rigid pipe to the range location. A smaller size pipe on longer runs may result in insufficient gas supply. With LP gas, piping or tubing size can be $\frac{1}{2}$ " (1.3 cm) minimum. Usually, LP gas suppliers determine the size and materials used in the system.

NOTE: Pipe-joint compounds that resist the action of LP gas must be used. Do not use TEFLON® tape.

Flexible metal appliance connector:

- If local codes permit, a new CSA design-certified, 4 to 6 ft (122 to 182.4 cm) long, $\frac{1}{2}$ " (1.3 cm) or $\frac{3}{4}$ " (1.9 cm) I.D., flexible metal appliance connector may be used for connecting range to the gas supply line.




- A $\frac{1}{2}$ " (1.3 cm) male pipe thread is needed for connection to the female pipe threads of the inlet to the appliance pressure regulator.

- Do not kink or damage the flexible metal tubing when moving the range.

- Must include a shutoff valve:

The supply line must be equipped with a manual shutoff valve. This valve should be located in the same room but external to the range opening, such as an adjacent cabinet. It should be in a location that allows ease of opening and closing. Do not block access to shutoff valve. The valve is for turning on or shutting off gas to the range.



- A. Gas supply line
- B. Shutoff valve "open" position
- C. To range

Gas Pressure Regulator

The gas pressure regulator supplied with this range must be used. The inlet pressure to the regulator should be as follows for proper operation:

Natural gas:

Minimum pressure: 5" WCP

Maximum pressure: 14" WCP

LP gas:


Minimum pressure: 11" WCP

Maximum pressure: 14" WCP

Contact local gas supplier if you are not sure about the inlet pressure.

PRODUCT DIMENSIONS

This manual covers several models. Your model may appear different from the models depicted. Dimensions given are maximum dimensions across all models.

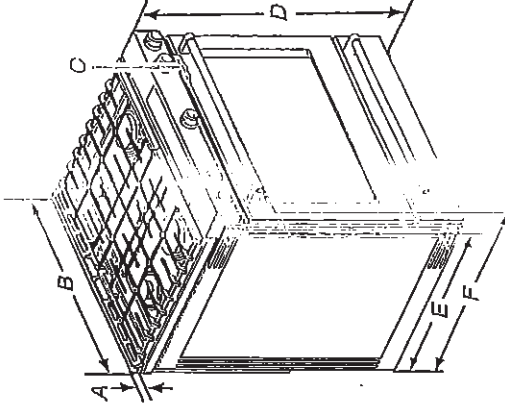

A. 17 $\frac{1}{2}$ " (43.0 cm) height from cooktop to top of vent

B. 28 $\frac{3}{4}$ " (73.3 cm)

C. Model/serial number plate (located behind the oven door on the top right-hand side of the oven frame)

D. 36" (91.4 cm) height to top of cooktop edge with leveling legs screwed all the way in

28 $\frac{3}{4}$ " (73.3 cm) max. depth from front of console to back of range.

28 $\frac{3}{4}$ " (73.3 cm) max. depth from handle to back of range.

IMPORTANT: Range must be level after installation. Follow the instructions in the "Level Range" section. Using the cooktop as a reference for leveling the range is not recommended.

* Range can be raised approximately 1" (2.5 cm) by adjusting the leveling legs.

Type of Gas

Natural gas:

- This range is factory set for use with Natural Gas. See "Gas Conversions" section. The model/serial rating plate located behind the oven door has information on the types of gas that can be used. If the type of gas is not listed, check with the local gas supplier.

LP gas conversion:

Conversion must be done by a qualified technician. No attempt shall be made to convert the appliance from the gas specified on the model/serial rating plate for use with a different gas without consulting the service manual. See "Gas Conversions" section.

TEFLON is a registered trademark of Chemours Company.

35 of 43



Whirlpool
 Home Appliances

A high-contrast, black and white image of a textured surface, possibly a book cover or endpaper. The image shows a dense pattern of small, dark, irregular shapes against a lighter background, creating a grainy, almost abstract appearance. The texture is uneven, with darker areas concentrated towards the bottom and lighter areas towards the top. The overall effect is one of a rough, tactile surface captured in a stark, monochromatic style.



OTHER AVAILABLE COLORS

Black
Model: WDF310PAAB

Biscuit-on-Biscuit
Model: WDF310PAA

White
Model: WDF310PAAW

Universal Silver
Model: WDF310PAA-D

DIMENSIONS		KEY FEATURES: ENERGY STAR® Qualified No One Has Fewer Repairs 17 Years In A Row Resource - Efficient Wash System CEE Tier 1 qualified Tail Tub Design White Plastic Interior Quiet Partner(TM) Sound Package Auto Soil Sensor Electronic Controls 3 Automatic Cycles 1-Hour Wash Cycle Heavy Wash Cycle Normal Cycle 4 Options High Temperature Wash System Heated Dry Option 4 Hour Delay Wash Option 4-Tier SheerClean Direct Feed Wash System Control Lock Vinyl Racks In-Rack Silverware Basket
Maximum Height	34 1/2 Inches	
Minimum Height	33 1/2 Inches	
Height	34 1/2 Inches	
Depth	24 1/2 Inches	
Width	23 7/8 Inches	
Dimensions shown are for planning purposes only. For complete information, see installation instructions packaged with product.		
ELECTRICAL		
15 Amps Amps. 60 Hz. 120 V. 15,		
Before purchasing this appliance, read important information about its estimated annual energy consumption or energy efficiency rating that is available from your dealer.		

In-Rack Silverware Basket

CU UPCOUNTRY
LOT 1-6
20-2447 ELEV A
THE JAMESPORT

36 of 43

Whirlpool® Undercounter Dishwasher

PRODUCT MODEL NUMBERS

WDF110PAB	WDEX10PLA	WDF530PSY
WDF111PAB	WDF320PAD	WDF540PAD
WDF120PAF	WDF510PAY	WDF730PAY
WDF121PAF	WDF520PAD	WDT1710PAY
WDF310PAA	WDF530PAY	WDT720PAD
WDF310PCA	WDF530PLY	WDT770PAY

Electrical Requirements: 120-volt, 60-Hz, AC only, 15- or 20-amp. fused electrical supply. Copper wire only. A time delay fuse or circuit-breaker and separate circuit is recommended.

If direct wiring dishwasher: Use flexible, armored, or nonmetallic, sheathed copper wire with grounding wire that meets the wiring requirements for your home and local codes and ordinances.

Use a UL listed or CSA approved conduit connector.

If connecting dishwasher with a power supply cord:

Use Power Supply Cord Kit (Part No. 4317824) marked for use with dishwashers. Follow the kit instructions for installing the power supply cord.

Power supply cord must plug into a grounded 3 prong, outlet, located in the cabinet next to the dishwasher opening. Outlet must meet all local codes and ordinances.


Water Supply Requirements: A hot water line with 20 to 120 psi (138 to 862 kPa) water pressure. Water temperature must be 120°F (49°C) water at dishwasher. Use 3/8" O.D. copper tubing with compression fitting or flexible braided water supply line (1/2" minimum plastic tubing is not recommended). Use a 90° elbow with 1/4"N.P.T. external pipe threads on one end. Do not solder within 6" (15.2 cm) from water inlet valve.

Drain Requirements: A new drain hose is supplied with your dishwasher. If this is not long enough, use a new drain hose with a maximum length of 12 (3.7 m) (Part No. 3385556) that meets all current AHAM/APMO test standards, is resistant to heat and detergent, and fits the 1" (2.5 cm) drain connector of the dishwasher.

Make sure to connect the drain hose to waste tee or disposer inlet above drain trap in house plumbing and 20" (50.8 cm) minimum above the floor. It is recommended

that the drain hose either be looped up and securely fastened to the underside of the counter or be connected to an air gap.


Make sure to use an air gap if the drain hose is connected to house plumbing lower than 20" (50.8 cm) above subfloor or floor.



Use 1/2" (1.3 cm) minimum I.D. drain line fittings.

If required, the air gap should be installed in accordance with the air gap installation instructions. When connecting the air gap, a rubber hose (not provided) will be needed to connect to the waste tee or disposer inlet.

PRODUCT DIMENSIONS

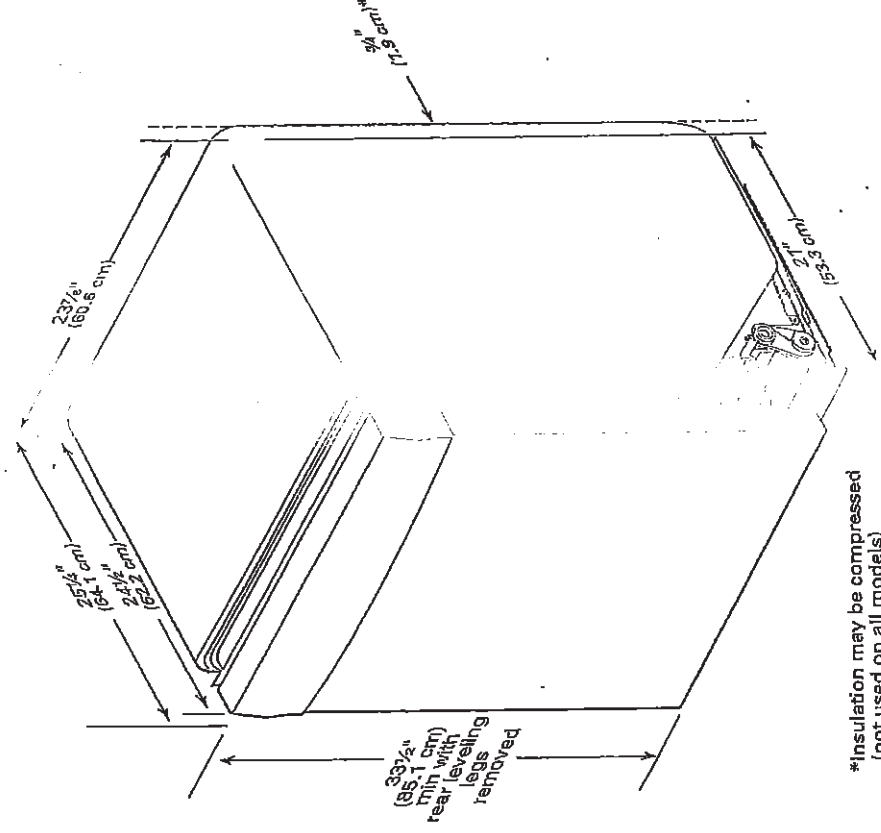

*Insulation may be compressed (not used on all models)

CU UPCOUNTRY
LOT 1-6
20-2447 ELEV A
THE JAMESPORT

37 of 43


CABINET CUTOUT DIMENSIONS

WDF-320-PAB

NOTE: Shaded areas of cabinet walls show where utility connections may be installed.

*Measure from the lowest point on the underside of the countertop. May be reduced to 33½" (85.1 cm) by removing the rear leveling legs from dishwasher.

**Minimum, measured from narrowest point of opening.

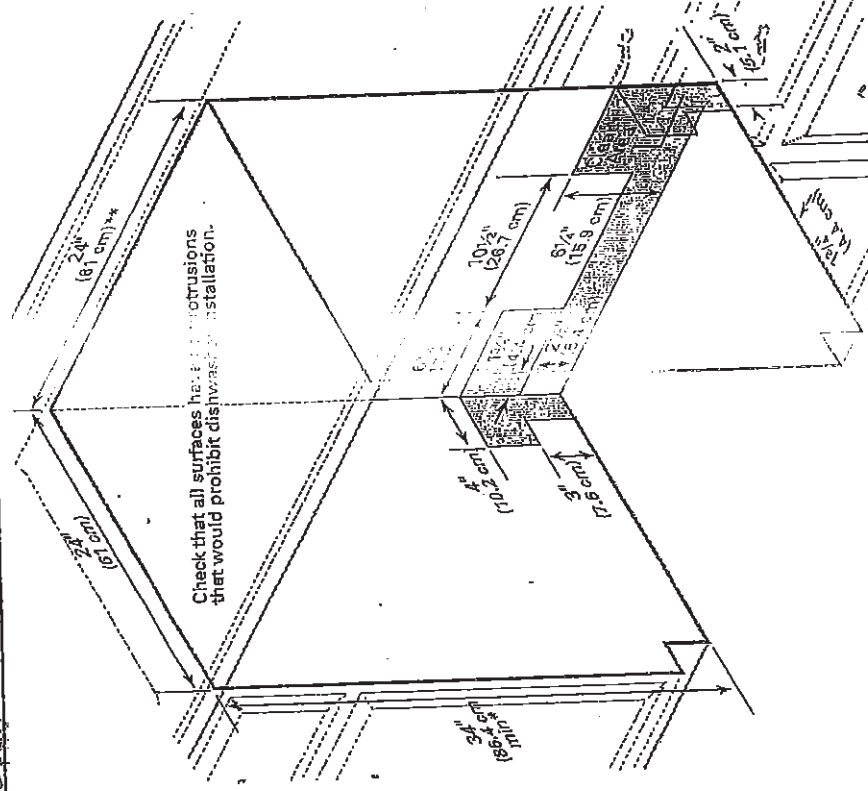

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.


Dimensions are for planning purposes only. For details, see installation instructions packed with product. Specification is subject to change without notice.

CU UPCOUNTRY
LOT 1-6
20-2447 ELEV A
THE JAMESPORT

38 of 43

WHIRLPOOL WASHER Model #: WFW5620HW

Whirlpool Brand Canada English | Washer and Dryers | Washers | Front Load Washers | WFW5620HW

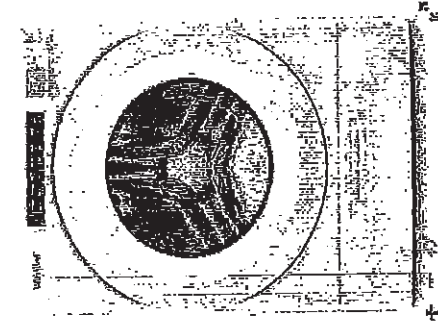

5.2 cu. ft. I.E.C. Closet-Depth
Front Load Washer with
Load & Go™ Dispenser



Whirlpool

5.2 cu. ft. I.E.C. Closet-Depth Front Load Washer with Load & Go™
Dispenser

Model #: WFW5620HW

Dimensions

Depth	80.17 cm, 31-9/16 in
Depth With Door Open 90 Degree	143.51 cm, 56-1/2 in
Minimum Height	98.11 cm, 38-5/8 in
Width	68.58 cm, 27.0 in

Appearance

LCD/Touch Screen	No
Window	Yes

Details

Drum Material	Stainless Steel
---------------	-----------------

Cycles and Options

Number of Wash Cycles	87
-----------------------	----

Electrical

Hz	60
Power Cord Included	Yes

CU UPCOUNTRY
LOT 1-6
20-2447 ELEV A
THE JAMESPORT

39 of 43

WHIRLPOOL WASHER Model #: WFW5620HW

LOCATION REQUIREMENTS



Proper installation is your responsibility.

You will need:

- A water heater set to 120°F (49°C).
- A grounded electrical outlet located within 6 ft (1.8 m) of power cord on back of washer.
- Hot and cold water faucets located within 4 ft (1.2 m) of hot and cold water fill valves on washer, and water pressure of 20-100 psi (137.9-689.6 kPa).
- A level floor with maximum slope of 1" (25 mm) under entire washer. Installing on carpet or surfaces with foam backing is not recommended.
- Floor must support washer's total weight (with water and load) of 315 lbs (143 kgs).


IMPORTANT: Do not install, store, or operate washer where it will be exposed to weather or in temperatures below 32°F (0°C). Water remaining in washer after use may cause damage in low temperatures. See "Washer Care" in your Use and Care Guide for winterizing information.

Whirlpool Models* ✓

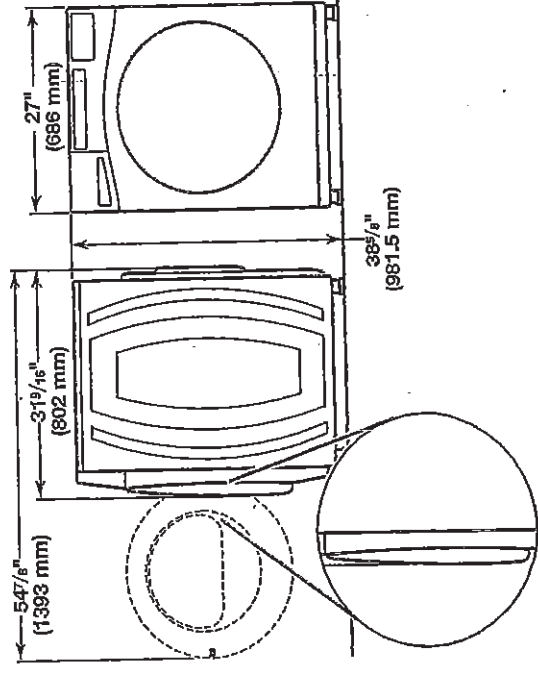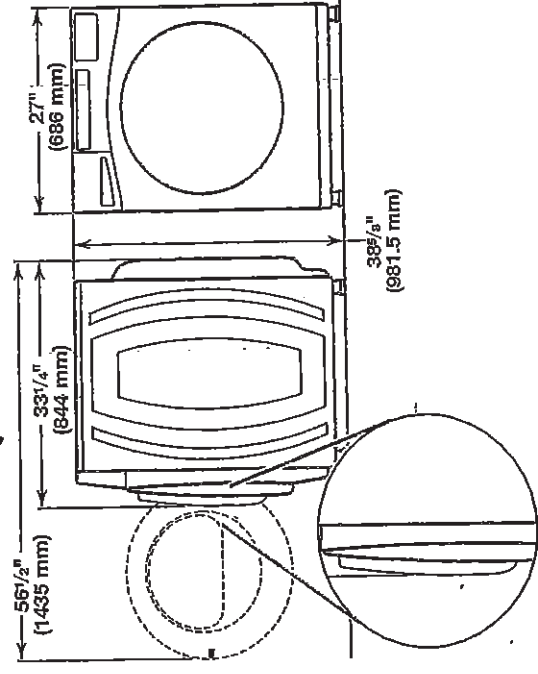

*For additional details (or information) specific to your model, refer to the 'Dimensions' listed for your model at www.whirlpool.com.

Maytag Models

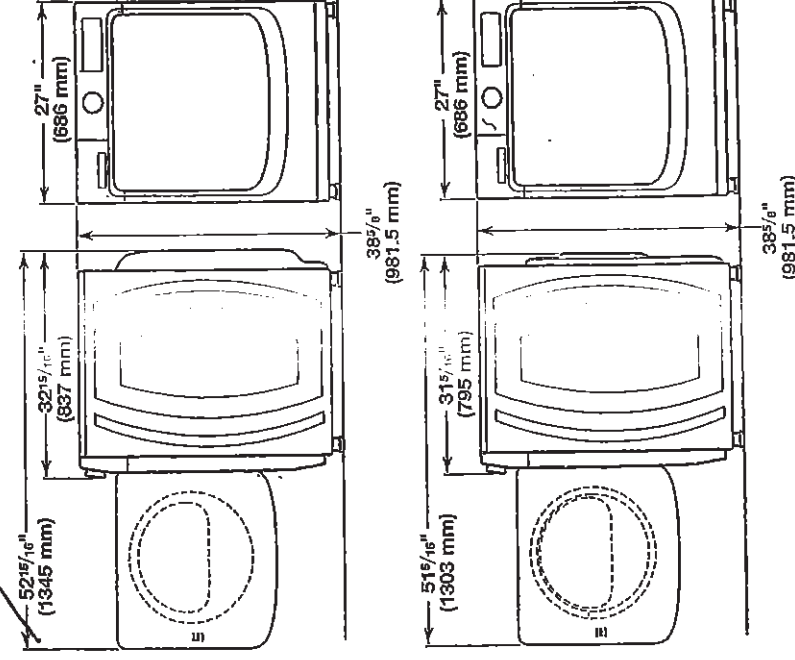


38 5/8" (981.5 mm)

All dimensions show minimum spacing allowed. For each arrangement, consider allowing more space for ease of installation and servicing, and allowing for companion appliances and clearances for walls, doors and floor moldings.

Space must be large enough to allow door to fully open. Add spacing of 1" (25 mm) on both sides of washer to reduce noise transfer. If a closet door or covered door is installed, top and bottom air openings in door are required.

X


Recessed area or closet installation (stacked washer and dryer):

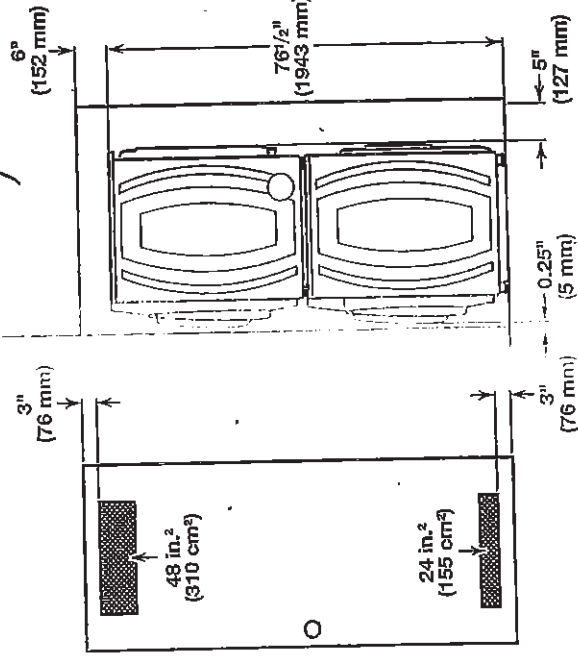


CU UPCOUNTRY
LOT 1-6
20-2447 ELEV A
THE JAMESPORT

WHIRLPOOL WASHER Model #: WFW5620HW


Custom under-counter installation: X

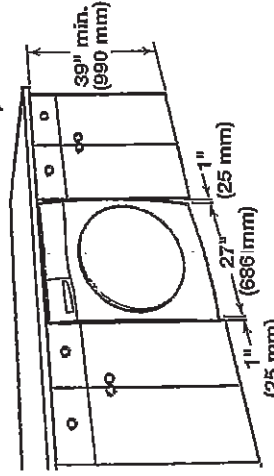

Recessed area or closet installation: X

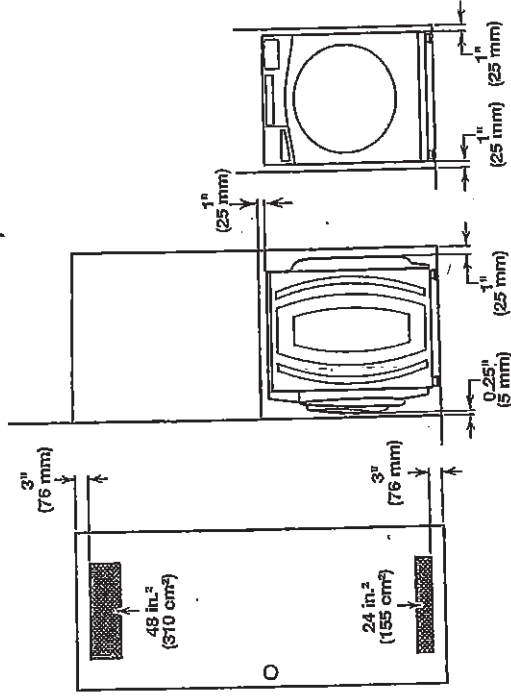

Custom cabinet installation: X

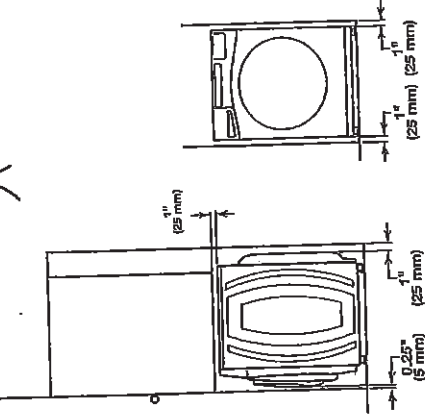


DRAIN SYSTEM

The drain system can be installed using a floor drain, wall standpipe, floor standpipe, or laundry tub. Select the method you need.


IMPORTANT: To avoid siphoning, only 4.5" (114 mm) of drain hose should be inside standpipe. Always secure drain hose with cable tie.

Floor standpipe drain system

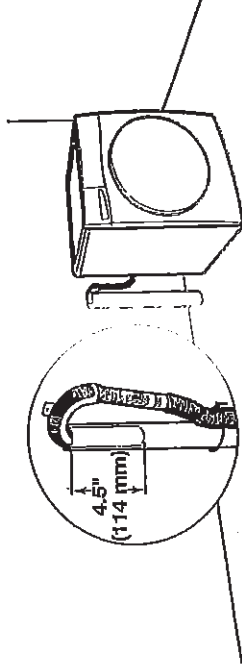


Minimum diameter for a standpipe drain: 2" (51 mm). Minimum carry-away capacity: 17 gal. (64 L) per minute. A 1/4" (6 mm) diameter to 1" (25 mm) diameter Standpipe Adapter Kit is available (Part Number 3363920). Top of standpipe must be at least 30" (762 mm) high; install no higher than 96" (2.44 m) from bottom of washer. If you have an overhead sewer and need to pump higher than 96" (2.44 m), a sump pump and associated hardware are needed. See "Alternate parts."

Wall standpipe drain system

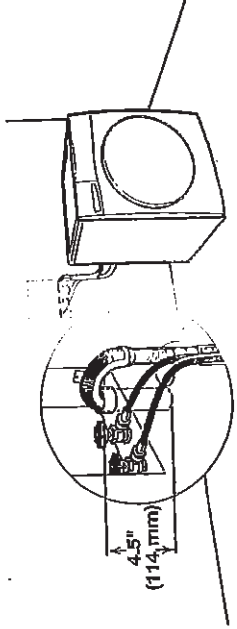

See requirements for floor standpipe drain system.

Laundry tub drain system

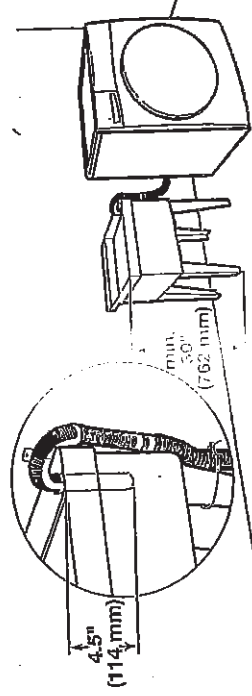


Minimum capacity: 20 gal. (76 L). Top of laundry tub must be at least 30" (762 mm) above floor; install no higher than 96" (2.44 m) from bottom of washer.

CU UPCOUNTRY
LOT 1-6
20-2447 ELEV A
THE JAMESPORT

41 of 43

WHIRLPOOL DRYER Model #: YWED5620HW

Whirlpool Brand Canada (English) | Washer and Dryer | Dryers | Electric Dryers | YWED5620HW

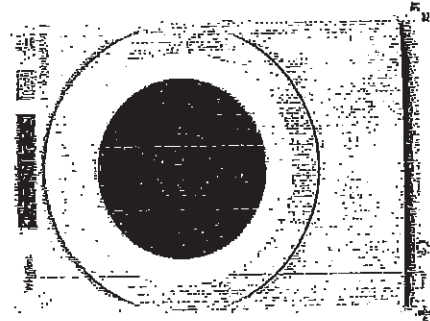

Get the
look you style
want

7.4 cu. ft. Front Load Electric
Dryer with Intuitive Touch
Controls



Whirlpool 7.4 cu. ft. Front Load Electric Dryer with Intuitive Touch Controls

Model #: YWED5620HW

Dimensions

Depth	78.74 cm, 31.0 in
Depth With Door Open 90 Degree	138.43 cm, 54-1/2 in
Height	98.42 cm, 38-3/4 in
Width	69.53 cm, 27.0 in

Configuration and Overview

Fuel Type	Electric
Cycles and Options	
Cycle Time Remaining	Yes
Last Filter Indicator	No
Number of Dryer Cycles	36
Number of Dryness Levels	3

Ventilation System

Long Vent	No
Maximum Vent Length	64
Venting Direction	Left, Right, Bottom, Rear

Electrical


Hz	60
Power Cord Included	Yes

U

**CU UPCOUNTRY
LOT 1-6
20-2447 ELEV A
THE JAMESPORT**

WHIRLPOOL DRYER Model #: YWED5620HW

Back view

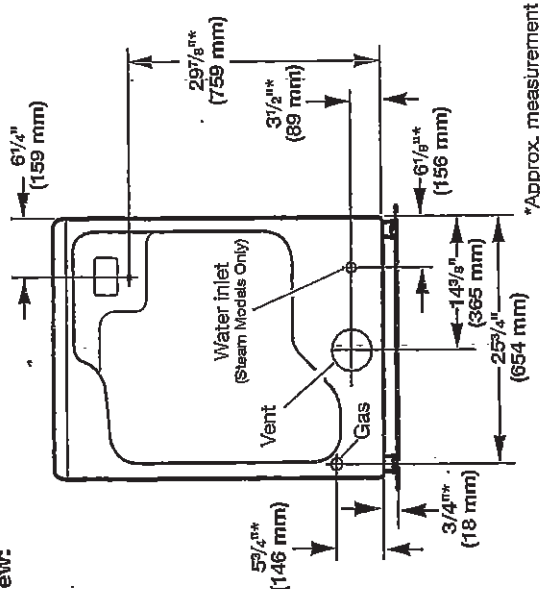

NOTE: Most installations require a minimum of 5" (127 mm) clearance behind dryer for exhaust vent with elbow. See "Venting Requirements."

Installation Clearances

For each arrangement, consider allowing more space for ease of installation and servicing, spacing for companion appliances, and clearances for walls, doors, and floor moldings. Space must be large enough to allow door to fully open. Add spacing on all sides of dryer to reduce noise transfer. If a closet door or louvered door is installed, top and bottom air openings in door are required.

Check code requirements. Some codes limit, or do not permit, installation of the dryer in garages, closets, mobile homes, or sleeping quarters. Contact your local building inspector.


NOTE: No other fuel-burning appliance can be installed in the same closet as a dryer.

Installation spacing for recessed area or closet installation

All dimensions show recommended and minimum spacing allowed.


- Additional spacing should be considered for ease of installation and servicing.
- Additional clearances might be required for wall, door, floor moldings, dryer venting, and gas line.
- Additional spacing should be considered on all sides of the dryer to reduce noise transfer.
- For closet installation with a door, minimum ventilation openings in the top and bottom of the door are required. Louvered doors with equivalent ventilation openings are acceptable.
- Companion appliance spacing should also be considered.

Recommended installation clearances (dryer only):

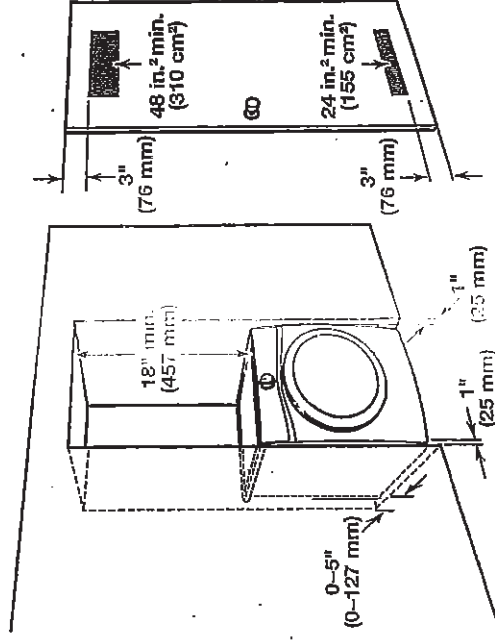

0" (0 mm) rear spacing is allowed for straight back venting only. For steam models only, inlet hose must not be kinked.

Custom under-counter installation:

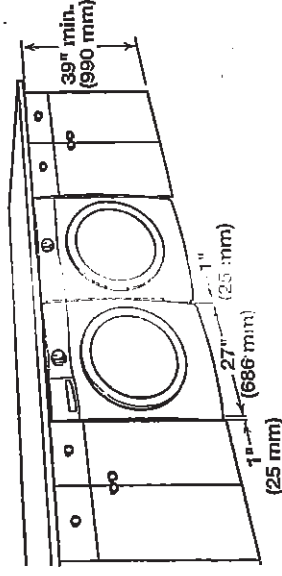

Mobile home -- Additional installation requirements:

This dryer is suitable for mobile home installations. The installation must conform to the Manufactured Home Construction and Safety Standard, Title 24 CFP, Part 3280 (formerly the Federal Standard for Mobile home construction and Safety, Title 24 HUD Part 280) or Standard CAN/CSA-Z240 MH.

Mobile home installations require:

- Metal exhaust system hardware, available for purchase from your dealer. For further information, see "Assistance or Service" in your Use and Care Guide.
- Special provisions must be made in mobile homes to introduce outside air into dryer. Openings (such as a nearby window) should be at least twice as large as dryer exhaust opening.

For mobile home installation of gas dryers:

- Mobile Home Installation Hold-down Kit Part Number 346764 is available to order. For further information, see "Assistance or Service" in your Use and Care Guide.

42 of 43

CU UPCOUNTRY
LOT 1-6
20-2447 ELEV A
THE JAMESPORT

43 of 43

WHIRLPOOL DRYER Model #: YWED5620HW

Additional parts may be required, depending on your installation. Check local codes. Check existing electrical supply and venting. Read "Electrical Requirements" and "Venting Requirements" before purchasing parts.

If using a power supply cord:

Use a UL Listed power supply cord kit marked for use with clothes dryers. The kit should contain:

- A UL Listed 30 amp power supply cord, rated 120/240 volt minimum. The cord should be type SRD or SRDT and be at least 4 ft. (1.22 m) long. The wires that connect to the dryer must end in ring terminals or spade terminals with upturned ends.
- A UL Listed strain relief.

Optional Equipment (not supplied with dryer):

Refer to your Use and Care Guide for information about accessories available for your dryer.

LOCATION REQUIREMENTS

Check code requirements. Some codes limit, or do not permit, installing dryer in garages, closets, mobile homes, or sleeping quarters. Contact your local building inspector.

⚠ WARNING



Explosion Hazard


Keep flammable materials and vapors, such as gasoline, away from dryer.
Place dryer at least 18 inches (460 mm) above the floor for a garage installation.
Failure to do so can result in death, explosion, or fire.

You will need:


- A location allowing for proper exhaust installation. See "Venting Requirements."
- A separate 15 or 20 amp circuit for a gas dryer or 30 amp circuit for an electric dryer.
- If using power supply cord, a grounded electrical outlet located within 2 ft. (610 mm) of either side of dryer. See "Electrical Requirements."
- Floor must support dryer weight of 200 lbs. (90.7 kg). Also consider weight of companion appliance.
- Cold water faucets located within 4 ft. (1.2 m) of the water fill valves, and water pressure of 20-120 psi (138-827 kPa). You may use your washer's water supply by purchasing the necessary parts noted in "Parts needed."
- Level floor with maximum slope of 1" (25 mm) under entire dryer. If slope is greater than 1" (25 mm), install Extended Dryer Feet Kit, Part Number 279810. If not level, clothes may not tumble properly and automatic sensor cycles may not operate correctly.
- For garage installation, place dryer at least 18" (460 mm) above floor. If using a pedestal, you will need 18" (460 mm) to bottom of dryer.
- The dryer must not be installed or stored in an area where it will be exposed to water and/or weather.

IMPORTANT: Do not operate, install, or store dryer where it will be exposed to water, weather, or at temperatures below 40°F (4°C). Lower temperatures may cause dryer not to shut off at end of automatic sensor cycles, resulting in longer drying times.


DRYER DIMENSIONS
Front view:

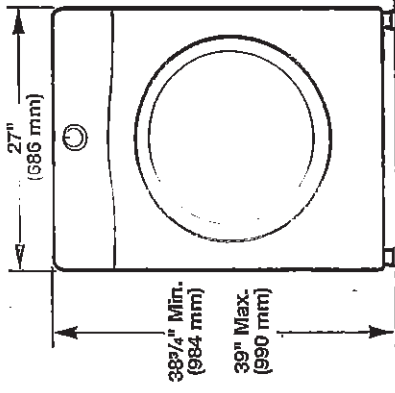

Side view:
Whirlpool Models

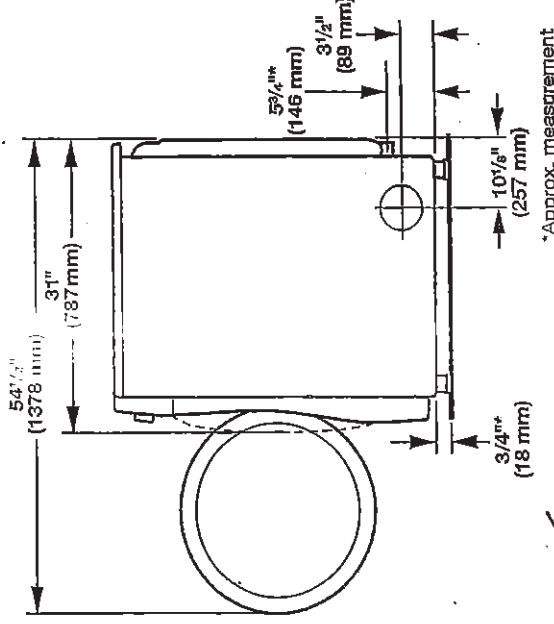

Maytag Models

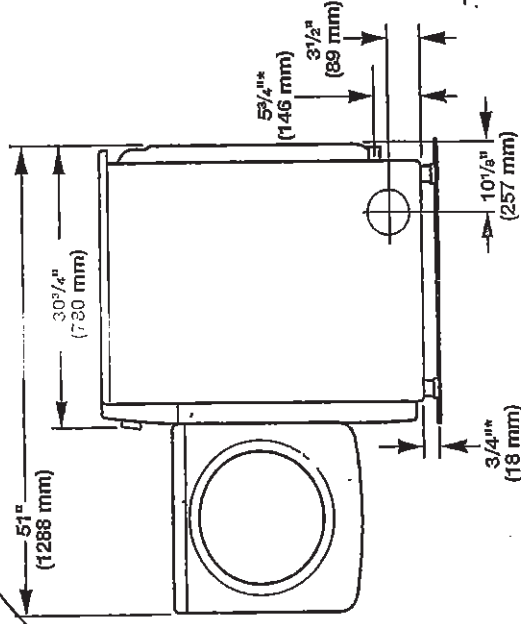

*Approx. measurement.

5-N