

LOT 003-7

20-2212 ELEV B THE ROSLYN

PURCHASERS: KARTHIK SILIVERU

CONTACT NO: 437-922-5116

VENDOR: HEATHWOOD HOMES (UPCOUNTRY) LIMITED

UPG

Appliances

6-9117 Kitchen HoodFan

- ☒ CYCLONE 30" STAINLESS CHIMNEY/CANOPY HOODFAN
STAINLESS STEEL SCB51930 UPG 30" PAGES 34-35

Cabinetry

1-9169 Kitchen Cabinet Colour/Style

- ☐ CHARLESTON NAVY BLUE Viking III STD 3DL

3-2086 Kitchen Cabinet Hardware

- ☐ HARDWARE 9677 STD

101-6247 Laundry Room Opt. Cabinet

- ☐ CAMDEN SHALE GREY CL Viking III MAPLE

103-2086 Laundry Room Opt. Cabinet Hardware

- ☐ HARDWARE 9677 STD

25-6289 Main Bathroom Cabinet Colour/Style

- ☐ TORONTO TIMBERLAKE CL Viking III MAPLE

29-7672 Main Bathroom Cabinet Hardware

- ☐ HARDWARE 135 STD

28-8827 Main Bathroom Countertop

- ☐ Countertop CALCUTTA MARBLE 4925K-07 Wilsonart

20-9168 Master Ensuite Cabinet Colour/Style

- ☐ CHARLESTON MOONLIGHT Viking III STD 3DL

22-7672 Master Ensuite Cabinet Hardware

- ☒ HARDWARE 135 STD

21-8822 Master Ensuite Countertop

- ☐ Countertop WHITE CARRARA 4924-38 Wilsonart

414-9111 Powder Room Lower Level Cabinet Colour/Style

- ☐ SIMCOE ORCHID VIKING III STD 3DL

416-7672 Powder Room Lower Level Cabinet Hardware

- ☐ HARDWARE 135 STD

415-8800 Powder Room Lower Level Countertop

- ☐ Countertop INUKSHUK TAUPE P-345 LM Arborite

Carpet

37-9248 Bedroom 2 Flooring

- ☐ Dynasty Tex 40 oz Poly BLACK ICE DY 89418 STD

38-9248 Bedroom 3 Flooring

- ☐ Dynasty Tex 40 oz Poly BLACK ICE DY 89418 STD

14-9248 Family Room Flooring

- ☐ Dynasty Tex 40 oz Poly BLACK ICE DY 89418 STD

367-9248 Lower Level Hall Flooring

- ☐ Dynasty Tex 40 oz Poly BLACK ICE DY 89418 STD

36-9248 Master Bedroom Flooring

- ☐ Dynasty Tex 40 oz Poly BLACK ICE DY 89418 STD

52-1079 Throughout Underpad

- ☐ Underpad 500 Series STD

Ceramics

16-5594 Foyer Flooring

- ☐ Kelly Grey GE.KL.GRY.1313 STD 13" X 13"

1. The Purchaser acknowledges these selections are subject to the terms and conditions of the applicable Agreement of Purchase and Sale.
2. The Purchaser acknowledges that the Vendor accepts no responsibility in the event the Vendor is unable to supply a selection. The Purchaser agrees to reselect from the currently available selections immediately upon request.
3. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
4. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
5. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
6. Selections will not be processed unless signed by Heathwood Homes Head Office.
7. The colour selections made on the Colour Chart are final and cannot be changed once submitted.
8. The Purchaser has checked and acknowledges the accuracy of this Colour Chart.

Sept 16/21 Signature on

Date Purchaser

file

Sept 16/21

Date

Décor Consultant

-09-10-2021

Date Purchaser

Date Approved HEATHWOOD HOMES (UPCOUNTRY)

LIMITED

LOT 003-7

20-2212 ELEV B THE ROSLYN

PURCHASERS: KARTHIK SILVERU

CONTACT NO: 437-922-5116

VENDOR: HEATHWOOD HOMES (UPCOUNTRY) LIMITED

UPG

Ceramics

17-7704 Foyer Grout	☐ Grout (19) Pearl Gray STD
7-9110 Kitchen/Breakfast Flooring	☐ Madison Series White Matte GE.MD.WHT.1224.MT UPG 2-12" X 24" Matte 18 x 18 UPG 1
8-2225 Kitchen/Breakfast Grout	☐ Grout (27) Silver STD
66-9110 Laundry Room Flooring	☐ Madison Series White Matte GE.MD.WHT.1224.MT UPG 2 12" X 24" Matte
67-2225 Laundry Room Grout	☐ Grout (27) Silver STD
30-8261 Main Bathroom Flooring	☐ Serpentine Beyaz/White TR.ST.BYZ.1313 STD 13x13
31-2222 Main Bathroom Grout	☐ Grout (105) Driftwood STD
27-8257 Main Bathroom Tub Wall Tile	☐ Serpentine Beyaz/White TR.ST.BYZ.0810 STD 8 x 10 INSTALL VERTICALLY
26-2226 Main Bathroom Tub Wall Tile Grout	☐ Grout (00) White STD
23-9255 Master Ensuite Floor Tile	☐ SEMPRE White Matte TR.SP.WHITE.1313 STD 13" x 13"
24-2225 Master Ensuite Floor Tile Grout	☐ Grout (27) Silver STD
73-8661 Master Ensuite Shower Floor Tile	☐ Ontario Series Mosaic Snow White Matte OD.ON.SWT.0202.MT.N STD 2 x 2
74-2226 Master Ensuite Shower Floor Tile Grout	☐ Grout (00) White STD
147-8923 Master Ensuite Shower Jamb(s) and Sill(s)	☐ Shower Jamb / Sill Thassos White STD
104-9020 Master Ensuite Shower Wall Tile	☐ Weave White QT.WV.WHT.0810 STD 8 x 10 INSTALL VERTICALLY
105-2226 Master Ensuite Shower Wall Tile Grout	☐ Grout (00) White STD
191-7704 Mud Room Flooring	☐ Grout (19) Pearl Gray STD
190-5594 Mud Room Grout	☐ Kelly Grey GE.KL.GRY.1313 STD 13" X 13"
32-9110 Powder Room Flooring	☐ Madison Series White Matte GE.MD.WHT.1224.MT UPG 2 12" X 24" Matte
33-2225 Powder Room Grout	☐ Grout (27) Silver STD
369-5594 Powder Room Lower Level Flooring	☐ Kelly Grey GE.KL.GRY.1313 STD 13" X 13"

1. The Purchaser acknowledges these selections are subject to the terms and conditions of the applicable Agreement of Purchase and Sale.
2. The Purchaser acknowledges that the Vendor accepts no responsibility in the event the Vendor is unable to supply a selection. The Purchaser agrees to reselect from the currently available selections immediately upon request.
3. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
4. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
5. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
6. Selections will not be processed unless signed by Heathwood Homes Head Office.
7. The colour selections made on the Colour Chart are final and cannot be changed once submitted.
8. The Purchaser has checked and acknowledges the accuracy of this Colour Chart.

Signature of Piv

Sep 10. 21

Date

Purchaser

Date ~~APPROVED~~ - Décor Consultant

-09- 10' 2021

Date

Purchaser

Date Approved HEATHWOOD HOMES (UPCOUNTRY)

LIMITED



Interior Finishing Selection Sheet

10-Sep-21

LOT 003-7

20-2212 ELEV B THE ROSLYN

PURCHASERS: KARTHIK SILVERU

CONTACT NO: 437-922-5116

VENDOR: HEATHWOOD HOMES (UPCOUNTRY) LIMITED

UPG

Ceramics

370-7704 Powder Room Lower Level Grout

☐ Grout (19) Pearl Gray STD

53-2232 Throughout Thresholds

☐ Metal Thresholds STD

Electrical

90-5796 Throughout Switches and Plug

☐ Decora White Switches and Plugs STD

Fireplace

136-8891 Great Room Fireplace Mantle

☐ Paint Grade Mantle- Cabinet (Per Plan) WHITE NF-17 STD
PAGE 27

135-8865 Great Room Fireplace Type

☐ Dimplex FP3033HL Electric Fireplace

Granite

2-9121 Kitchen Countertop

☒ MSI Quartz ICED WHITE Group 1 UPG 3/4" with Mitered Edge

Hardwood

11-7497 Great Room Flooring

☐ Vintage Northern Solid Sawn Engineered Select V : Red Oak Pearl AURORA (COCOA) Red Oak Pearl 3/4" x 3 1/4"

100-7497 Main Stairs Landing(s) Flooring

☐ Vintage Northern Solid Sawn Engineered Select V : Red Oak Pearl AURORA (COCOA) Red Oak Pearl 3/4" x 3 1/4"

78-7497 Stair Landing to Lower Level Flooring

☐ Vintage Northern Solid Sawn Engineered Select V : Red Oak Pearl AURORA (COCOA) Red Oak Pearl 3/4" x 3 1/4"

35-7497 Upper Hall Flooring

☐ Vintage Northern Solid Sawn Engineered Select V : Red Oak Pearl AURORA (COCOA) Red Oak Pearl 3/4" x 3 1/4"

Interior Railings

145-8148 Main Stairs Handrail/Pickets/Posts Type

☐ Single Collar Alt. Plain w/ Shoes with 3 1/2" Square/Cap Post(s) BLACK METAL STD

49-8148 Stairs to Lower Level Handrail/Pickets/Posts Type

☐ Single Collar Alt. Plain w/ Shoes with 3 1/2" Square/Cap Post(s) BLACK METAL STD

Interior Stairs

116-1713 Basement Stairs Type

☐ Paint Grade Stairs STD

142-1712 Main Stairs Type

☐ Oak Stairs UPG_1

45-1712 Stairs to Lower Level Type

☐ Oak Stairs UPG_1

Interior Trim

1. The Purchaser acknowledges these selections are subject to the terms and conditions of the applicable Agreement of Purchase and Sale.
2. The Purchaser acknowledges that the Vendor accepts no responsibility in the event the Vendor is unable to supply a selection. The Purchaser agrees to reselect from the currently available selections immediately upon request.
3. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
4. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
5. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
6. Selections will not be processed unless signed by Heathwood Homes Head Office.
7. The colour selections made on the Colour Chart are final and cannot be changed once submitted.
8. The Purchaser has checked and acknowledges the accuracy of this Colour Chart.

Signature on file

Date Purchaser

Date ~~REMOVED~~ Décor Consultant

-09-10-2021

Date Purchaser

Date Approved HEATHWOOD HOMES (UPCOUNTRY) LIMITED



10-Sep-21

Interior Finishing Selection Sheet

LOT	003-7	20-2212 ELEV B THE ROSLYN
PURCHASERS: KARTHIK SILVERU		CONTACT NO: 437-922-5116
VENDOR: HEATHWOOD HOMES (UPCOUNTRY) LIMITED		

UPG

Interior Trim

91-9374 Throughout Trim Size

Painting

143-7761 Main Stairs Colour

☐ 4 1/4" Baseboards and 2 3/4" Integrated Backbend Casings
STD-Towns

☐ Stain handrail, stringers, treads, risers, nosing & posts. (Metal pickets) STAIN TO COMPLEMENT Red Oak Pearl AURORA (COCOA) - SHADE WILL VARY

46-7761 Stairs to Lower Level Colour

☐ Stain handrail, stringers, treads, risers, nosing & posts. (Metal pickets) STAIN TO COMPLEMENT Red Oak Pearl AURORA (COCOA) - SHADE WILL VARY

240-1716 Throughout Trim - Paint Colour

☐ Trim WHITE STD

51-1717 Throughout Walls - Paint Colour

☐ Wall WARM GREY 22 STD

Plumbing

266-1737 Main Bathroom Plumbing Fixture (Colour)

☐ Plumbing Fixtures WHITE STD

149-1737 Master Ensuite Plumbing Fixture (colour)

☐ Plumbing Fixtures WHITE STD

34-1737 Powder Room Plumbing Fixture (Colour)

☐ Plumbing Fixtures WHITE STD

371-1737 Powder Room Lower Level Plumbing Fixture (Colour)

☐ Plumbing Fixtures WHITE STD

1. The Purchaser acknowledges these selections are subject to the terms and conditions of the applicable Agreement of Purchase and Sale.
2. The Purchaser acknowledges that the Vendor accepts no responsibility in the event the Vendor is unable to supply a selection. The Purchaser agrees to reselect from the currently available selections immediately upon request.
3. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
4. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
5. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
6. Selections will not be processed unless signed by Heathwood Homes Head Office.
7. The colour selections made on the Colour Chart are final and cannot be changed once submitted.
8. The Purchaser has checked and acknowledges the accuracy of this Colour Chart.

Date	Signature On File	Sep 10 21	Decor Consultant
Date	Purchaser	-09- 10 2021	my Rosen
Date	Purchaser	Date Approved	HEATHWOOD HOMES (UPCOUNTRY) LIMITED

LOT 003-7

20-2212 ELEV B THE ROSLYN

PURCHASERS: KARTHIK SILIVERU

CONTACT NO: 437-922-5116

VENDOR: HEATHWOOD HOMES (UPCOUNTRY) LIMITED

HST #

It is herein understood and agreed between the undersigned parties hereto that the following changes shall be made to the above mentioned Agreement of Purchase and Sale in accordance with the agreement and except for such changes noted below, all other terms and conditions in the Agreement of Purchase and Sale shall remain as stated herein: It is further understood that and agreed that all changes and additions shall be installed as per builder's specifications, location and available selections. The Purchaser hereby agrees to purchase the following extras:

AMOUNT:

Cabinetry

405 Optional Extras Qty: 1

KITCHEN

12B- Pots and pans drawers (width min. 60cm/max. 90cm) (size subject to floor plan) Viking

SEE SKETCH # 12 PAGE 24

1201 Optional Extras Qty: 3

KITCHEN

32B- Open base cabinet price per foot (no door[s], includes finished interior) Viking

TO BE INSTALLED ON THE SIDE OF THE ISLAND

SEE SKETCH # 12 PAGE 24

447 Optional Extras Qty: 1

KITCHEN

30H- Wall cabinet with shelf for microwave (finished interior) (opening 24"W x 13 3/4"H x 17"D) * electrical priced separately Viking

TO BE INSTALLED AT THE END SKETCH # 12 PAGE 24

897 Optional Upgrade Qty: 1

Ldry Uppers

Optional Upgrade VIKING I/II/III

431 Optional Extras Qty: 1

MASTER BATHROOM

11D- Vanity bank of drawers (max. width 55cm) Viking

SEE SKETCH # 14 PAGE 26

Ceramics

913 Kit/Brk Floor Qty: 1

Upgrade 1 Tile

912 Laundry Floor Qty: 1

Upgrade 1 Tile

1. This Sales Selection Sheet when properly executed forms part of our Agreement of Purchase and Sale.
2. All extras and upgrades listed above are subject to Construction Progress and Architectural and Municipal requirements.
3. In the event the Vendor is unable to incorporate the work approved above in the construction of the house for any reason whatsoever, the Vendor will not be liable to the Purchaser in any way. The monies paid for any changes or optional extras not proceeded with shall be returned to the Purchaser, without interest. The cost of options or extras is non-refundable in all other circumstances. If for any reason whatsoever the Agreement of Purchase and Sale is not completed, the total cost of work approved above will be retained by the Vendor.
4. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
5. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
6. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
7. Selections will not be processed unless signed by Heathwood Homes Head Office.
8. The selections made on this schedule are final and cannot be changed once submitted.
9. The Purchaser has checked and acknowledges the accuracy of this schedule.

Sept 16/21 Signature on file
Purchaser by e-mail

Sept 10/21 RIT SALEM
Date ~~Approved~~ Décor Consultant

-09- 10 2021



Date Purchaser

Date Approved HEATHWOOD HOMES (UPCOUNTRY)
LIMITED



10-Sep-21

Sales Selection Sheet
OF 18

LOT 003-7

20-2212 ELEV B THE ROSLYN

PURCHASERS: KARTHIK SILVERU

CONTACT NO: 437-922-5116

VENDOR: HEATHWOOD HOMES (UPCOUNTRY) LIMITED

HST #

It is herein understood and agreed between the undersigned parties hereto that the following changes shall be made to the above mentioned Agreement of Purchase and Sale in accordance with the agreement and except for such changes noted below, all other terms and conditions in the Agreement of Purchase and Sale shall remain as stated herein: It is further understood that and agreed that all changes and additions shall be installed as per builder's specifications, location and available selections. The Purchaser hereby agrees to purchase the following extras:

AMOUNT:

909

Upgrade 1 Tile

M.Flr.Pow Floor

Qty: 1

Electrical

11

KITCHEN

Qty: 1

MOVE ELECTRICAL PLUG AS ORDERED PRE-SSS PAGE 9 OF 14 AND SKETCH # 7 PAGE 13 FROM BASE BESIDE FRIDGE TO NEW LOCATION IN UPPER CABINET AT END OF KITCHEN SEE NEW SKETCH # 11 AND 12 PAGES 23 AND 24

Granite

921

Optional Upgrade

Kitchen

Qty: 1

Countertop 3/4" GROUP 1 with double edge

Plumbing

226

STANDARD Kitchen Sink Option

KITCHEN

Qty: 1

KINDRED Kitchen Sink Collection - Reginox NS1930U/9 Stainless Kitchen Single Bowl Undermount Sink (or equivalent)

PAGE 28

1. This Sales Selection Sheet when properly executed forms part of our Agreement of Purchase and Sale.
2. All extras and upgrades listed above are subject to Construction Progress and Architectural and Municipal requirements.
3. In the event the Vendor is unable to incorporate the work approved above in the construction of the house for any reason whatsoever, the Vendor will not be liable to the Purchaser in any way. The monies paid for any changes or optional extras not proceeded with shall be returned to the Purchaser, without interest. The cost of options or extras is non-refundable in all other circumstances. If for any reason whatsoever the Agreement of Purchase and Sale is not completed, the total cost of work approved above will be retained by the Vendor.
4. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
5. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
6. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
7. Selections will not be processed unless signed by Heathwood Homes Head Office.
8. The selections made on this schedule are final and cannot be changed once submitted.
9. The Purchaser has checked and acknowledges the accuracy of this schedule.

Sept 10/21 Signature on file
Date Purchaser by email

Sept 10/21

IRIT SALEM

Date

Purchaser

Date APPROVED

Décor Consultant

Date

Purchaser

-09-10-2021

Date Approved HEATHWOOD HOMES (UPCOUNTRY) LIMITED



10-Sep-21

Sales Selection Sheet
B
OF

LOT	003-7	20-2212 ELEV B THE ROSLYN
PURCHASERS:	KARTHIK SILIVERU	CONTACT NO: 437-922-5116
VENDOR:	HEATHWOOD HOMES (UPCOUNTRY) LIMITED	HST #

It is herein understood and agreed between the undersigned parties hereto that the following changes shall be made to the above mentioned Agreement of Purchase and Sale in accordance with the agreement and except for such changes noted below, all other terms and conditions in the Agreement of Purchase and Sale shall remain as stated herein: It is further understood that and agreed that all changes and additions shall be installed as per builder's specifications, location and available selections. The Purchaser hereby agrees to purchase the following extras:

AMOUNT:

1. This Sales Selection Sheet when properly executed forms part of our Agreement of Purchase and Sale.
2. All extras and upgrades listed above are subject to Construction Progress and Architectural and Municipal requirements.
3. In the event the Vendor is unable to incorporate the work approved above in the construction of the house for any reason whatsoever, the Vendor will not be liable to the Purchaser in any way. The monies paid for any changes or optional extras not proceeded with shall be returned to the Purchaser, without interest. The cost of options or extras is non-refundable in all other circumstances. If for any reason whatsoever the Agreement of Purchase and Sale is not completed, the total cost of work approved above will be retained by the Vendor.
4. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
5. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
6. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
7. Selections will not be processed unless signed by Heathwood Homes Head Office.
8. The selections made on this schedule are final and cannot be changed once submitted.
9. The Purchaser has checked and acknowledges the accuracy of this schedule.

Date	Sept 10/21	Signature
	Purchaser	on file by e-mail

Date	Sept 10/21	IRIT SALEM
	Décor Consultant	
Date	-09- 10' 2021	MyRosen

Date Approved HEATHWOOD HOMES (UPCOUNTRY) LIMITED


CU - COUNTRY LANE
LOT 3-7
20-2212 ELEV. B
THE ROSLYN

21 of 48
The Roslyn

20-2212 ELEV. B

ELEVATION B: 2,217 SQ FT

Sketch #9

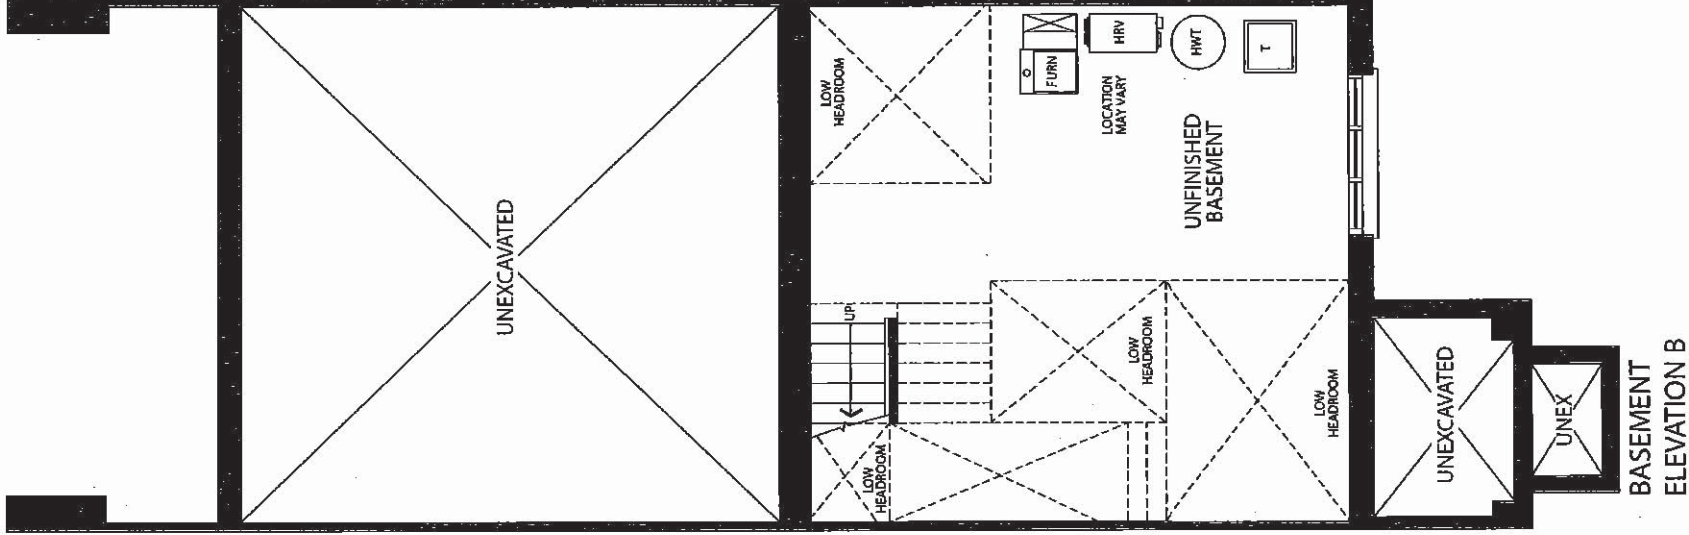


CU - COUNTRY LANE
LOT 3-7
20-2212 ELEV. B
THE ROSLYN

22 of 48
The Roslyn

20-2212 ELEV. B

ELEVATION B: 2,217 SQ FT

Sketch #10

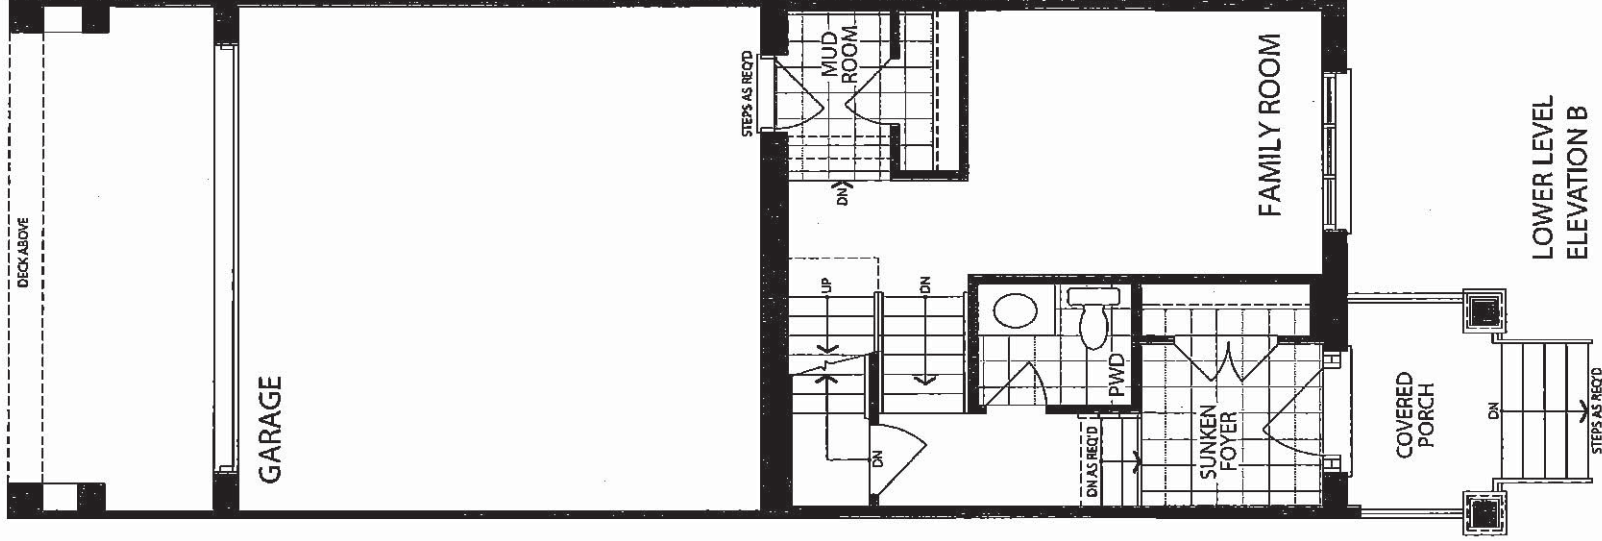


CU - COUNTRY LANE
LOT 3-7
20-2212 ELEV. B
THE ROSLYN

23 of 48
The Roslyn

20-2212 ELEV. B

ELEVATION B: 2,217 SQ FT

Sketch # 11

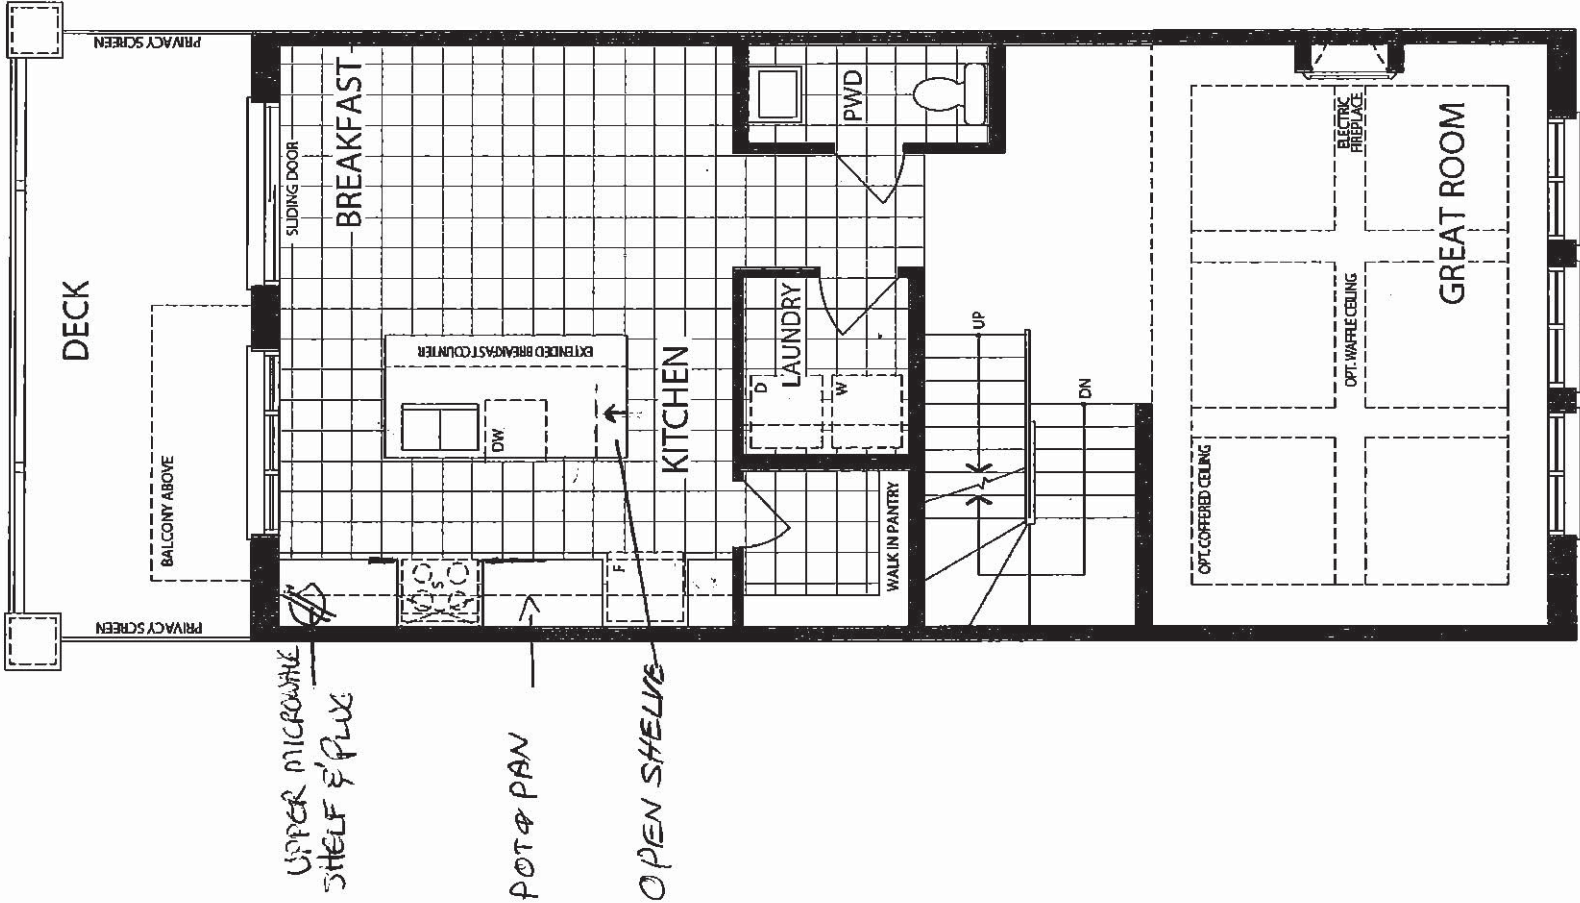

MAIN LEVEL
ELEVATION B

CU - COUNTRY LANE
LOT 3-7
20-2212 ELEV. B
THE ROSLYN

F R E N D I
K I T C H E N S L I M I
1350 Shawson Drive, Mississauga, ON L4W



HEATHWOOD HOMI
COUNTRY LANE, WHIT
MODEL: 20-2212 (2008

STANDARD CONTRACT INCLUDES:

- Appliance Openings**
- Hood Opening: 30"W builder ho
 - Fridge Opening: 37 3/8 "W X 73
 - Fridge cabinet: 30cm deep
 - Stove Opening: 30" Freestanding
 - Dishwasher Opening: 24"

Standard Kitchens Scope:

- 100cm H wall cabinets
- Std. Blum Hinges - **not soft close**
- Std. Metabox Drawers - **not soft close**
- Min 40cm W drawer
- Backing on all cabinets
- Countertop by others
- Upgrade applied paneled fridge & dishwashers supply only (appliance hardware by others)

Classic Collection
Optional Upgrade to Includes:



- Top Drawer Construction (in lieu of Standard bank of drawers)
- Tandem Box **Soft Close Drawers**
- Blumotion **Soft Close Hinges for Doors**
- Crown Moulding
- Deep Fridge Upper w/Deep Panel
- Tall upper Cabinets

THIS DRAWING IS FOR DESIGN PURPOSES ONLY.
IT IS NOT AN EXACT REPRESENTATION.

STANDARD KITCHEN

Sketch #12

NEW LOCATION
PLUG /
MICROWAVE SHELF

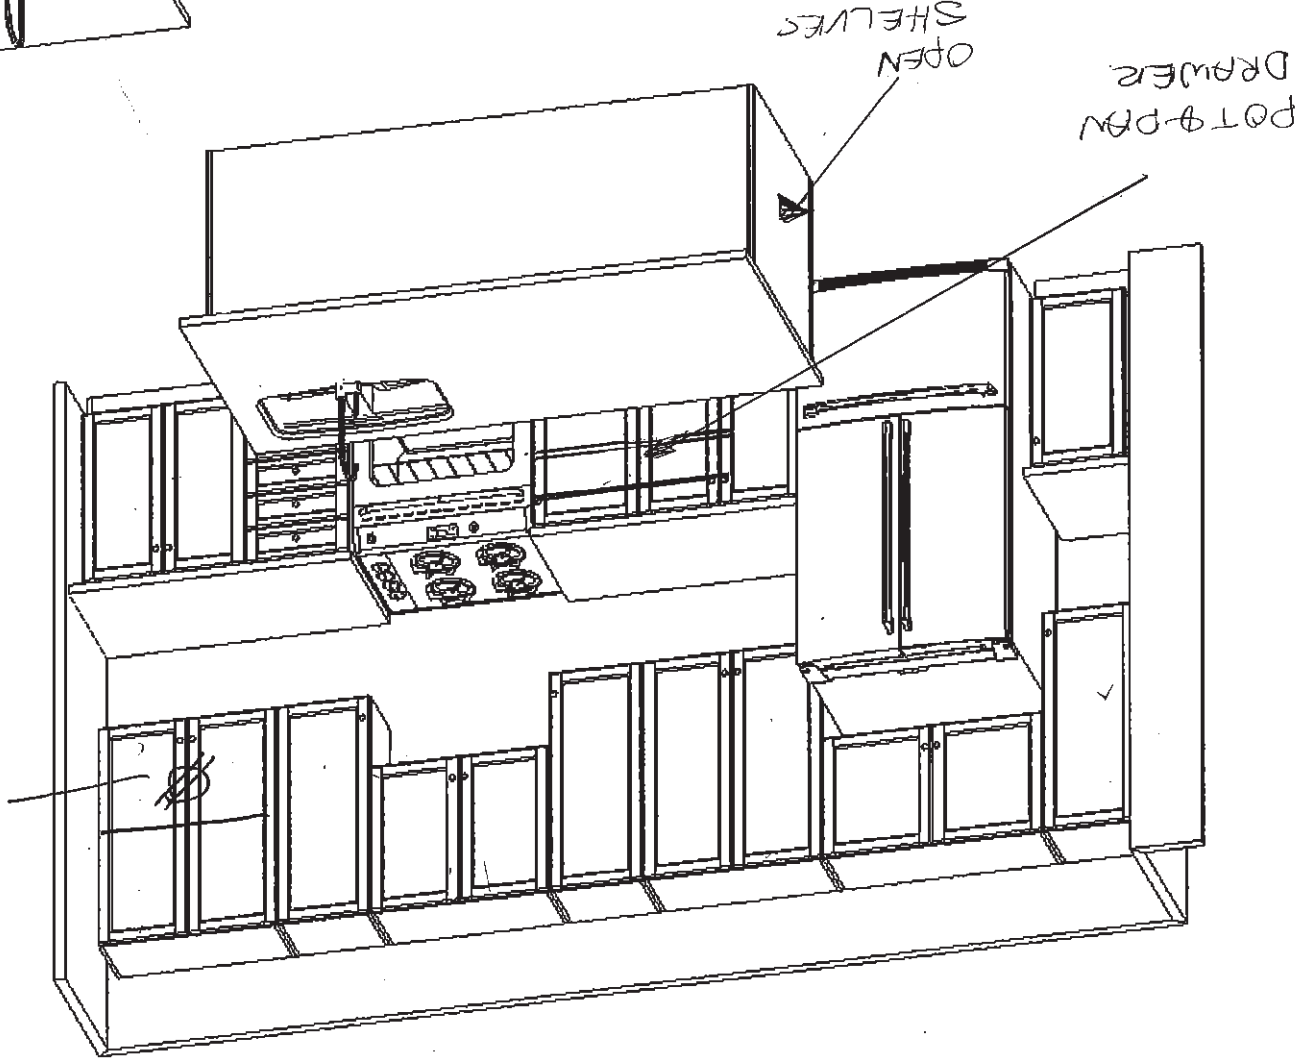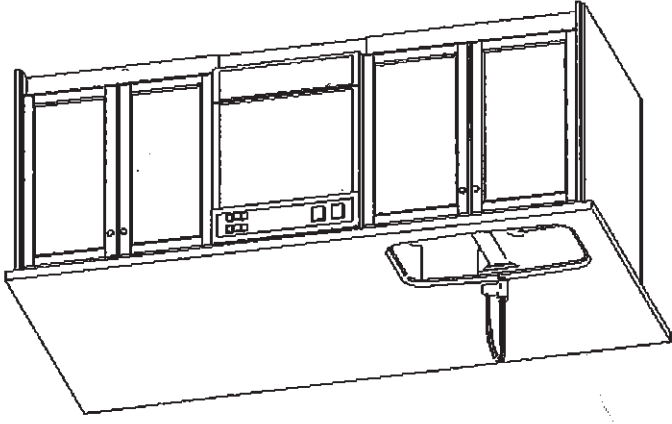

6/28/2021

24 of 18


CU - COUNTRY LANE
LOT 3-7
20-2212 ELEV. B
THE ROSLYN

25 of 48
The Roslyn

20-2212 ELEV. B

ELEVATION B: 2,217 SQ FT

Sketch # 13

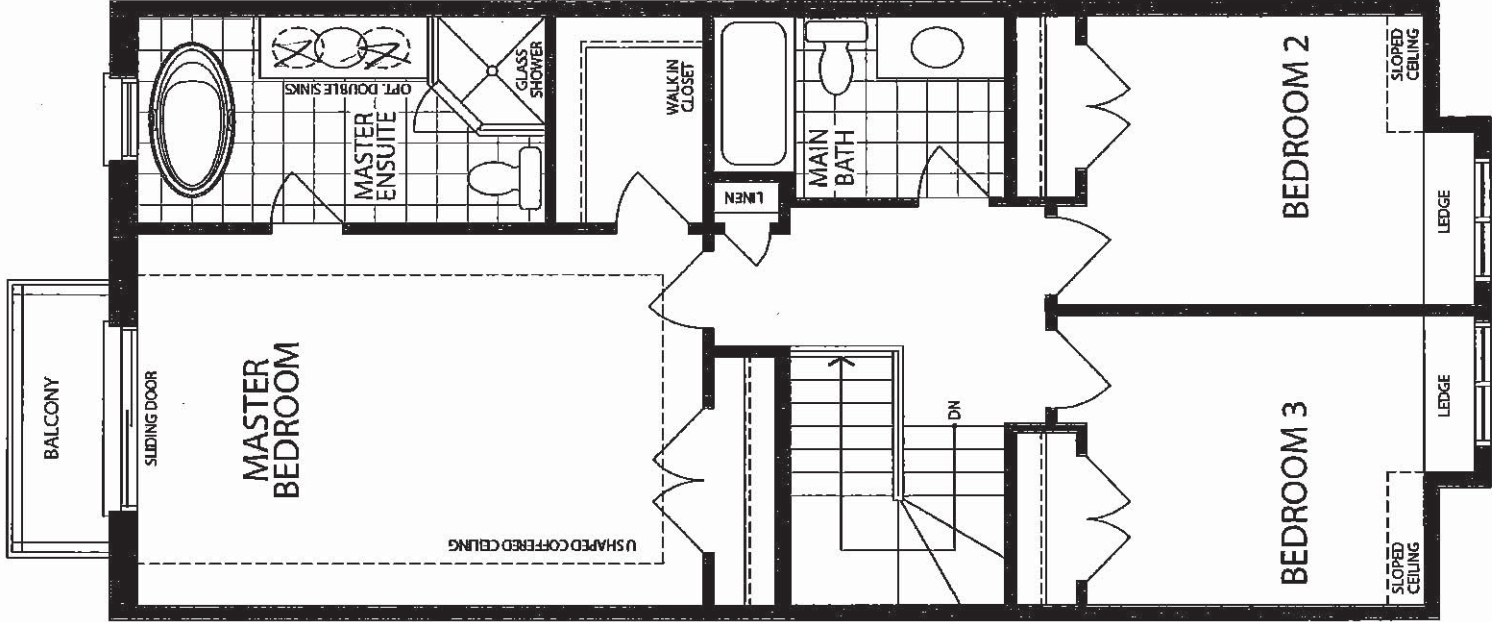

UPPER LEVEL
ELEVATION B

CU - COUNTRY LANE
 LOT 3-7
 20-2212 ELEV. B
 THE ROSLYN

FRENDE
 KITCHENS LIMIT



1350 Shawson Drive, Mississauga, ON L4W

HEATHWOOD HOME
 COUNTRY LANE, WHITE
 MODEL: 20-2212 (2008)

STANDARD CONTRACT INCLUDES:





Standard Vanity & Laundry Scope:

- Powder by others, pedestal
- All vanities include laminate top
- Std. Blum Hinges - **not soft close**
- Std. Tandem Box Drawers - **Soft C**
- Master Ens: (x1) Top drawer
- Mains: Full height doors (top drawers added if Masters can't accommodate)
- Optional laundry base & wall cabinets

Sketch # 14

26 of 18

THIS DRAWING IS FOR DESIGN PURPOSES ONLY.
 IT IS NOT AN EXACT REPRESENTATION.

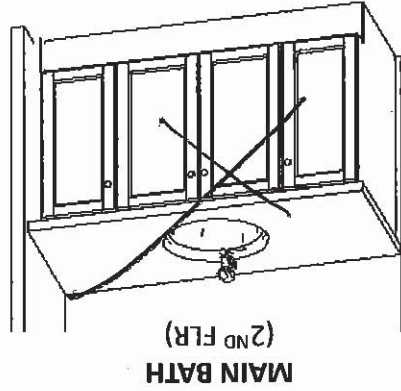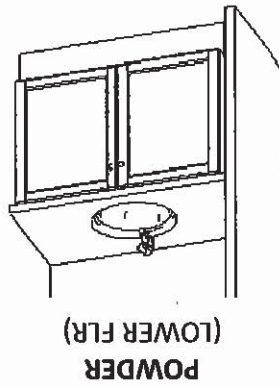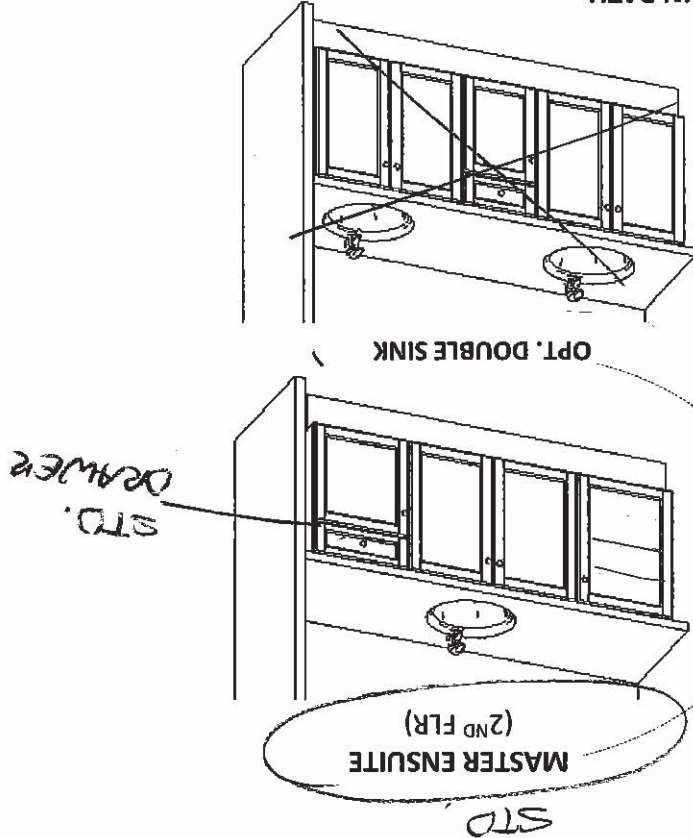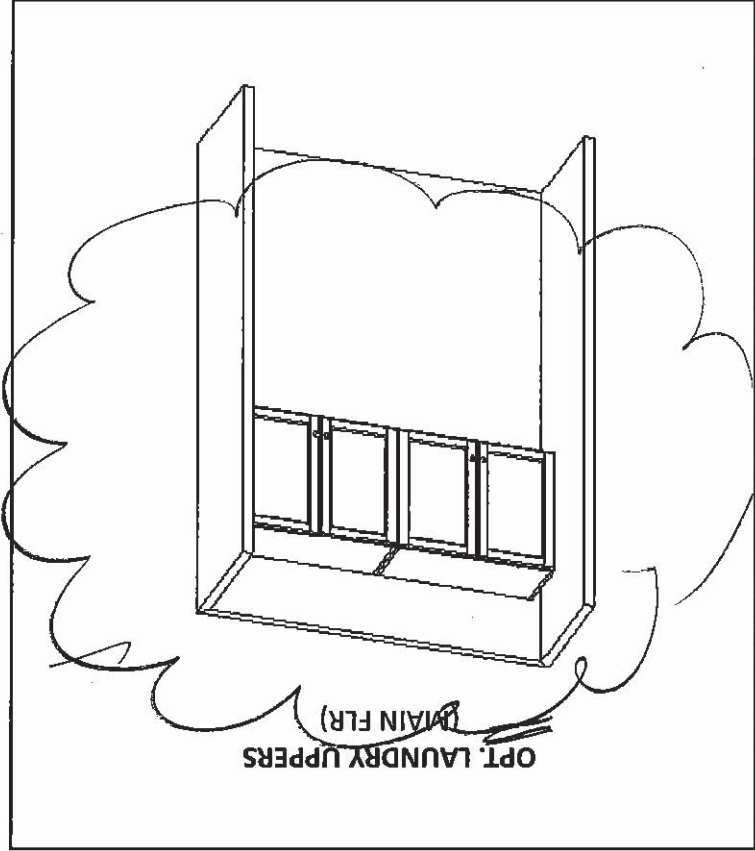


6/28/2021

BANK OF DEWAS

STD

CU - COUNTRY LANE
LOT 3-7
20-2212 ELEV. B
THE ROSLYN


27 of 48

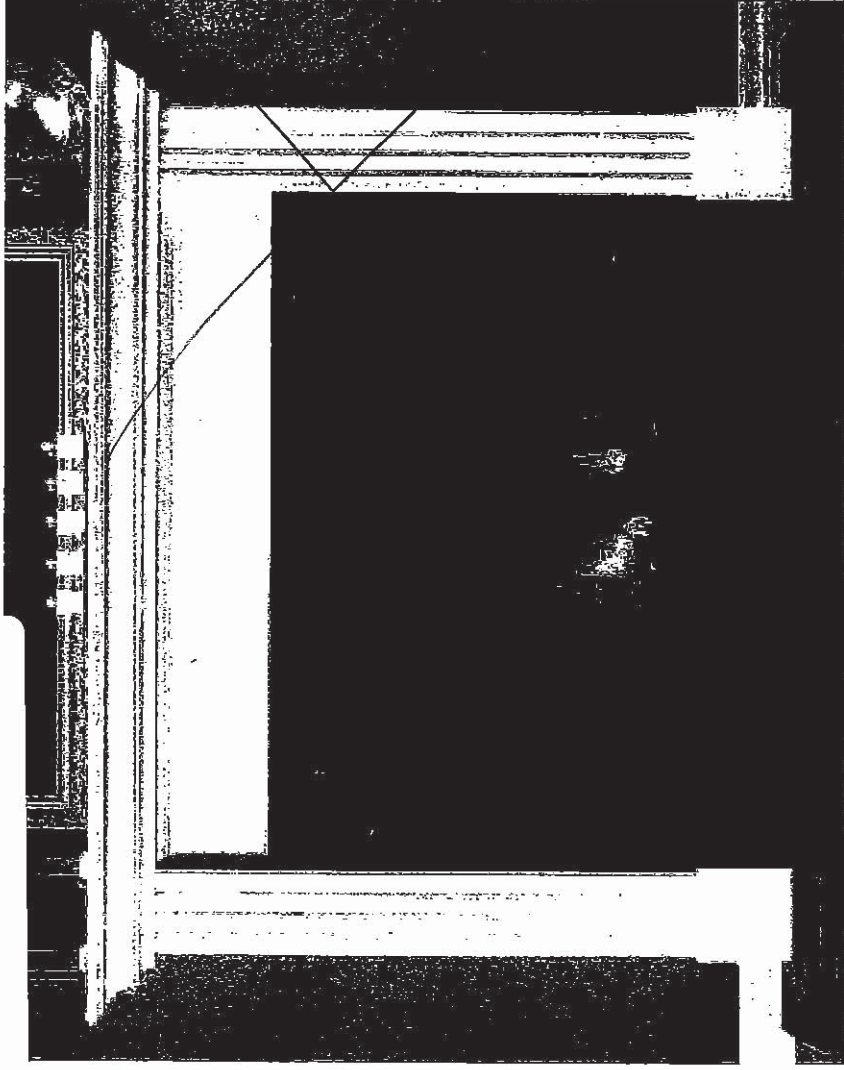

STANDARD NF 15 Mantel

Clean apron finish with fluted legs
WHITE PAINT GRADE FINISH

(PICTURE SHOWN WITH UPGRADE SURROUND AND HEARTH -PRICED SEPARATELY)

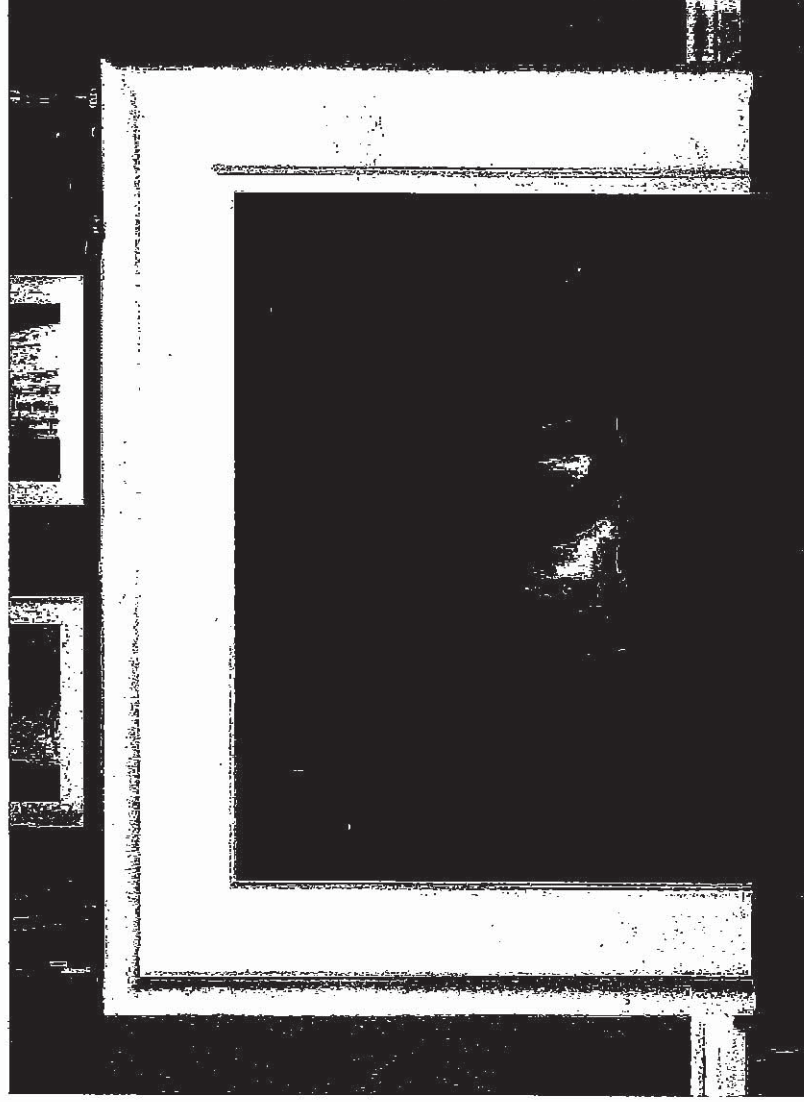

'CABINET'

STANDARD NF 17 Mantel

WHITE PAINT GRADE FINISH



(PICTURE SHOWN WITH UPGRADE SURROUND AND HEARTH -PRICED SEPARATELY)

CU - COUNTRY LANE
LOT 3-7
20-2212 ELEV. B
THE ROSLYN

28 of 48

Stainless Steel | 122.0264.716

FAMILY : Sinks | SERIES : RegInox | MODEL : NS1930U/9 | FINISH : Stainless Steel | INSTALLATION TYPE : Undermount

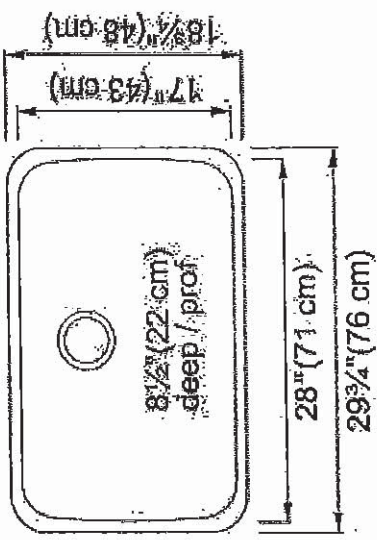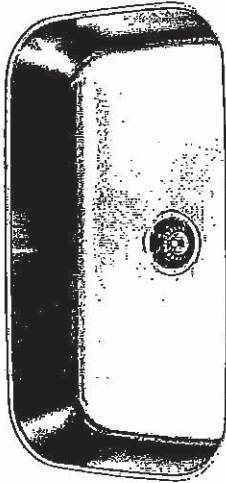

TECHNICAL DATA	
Width overall	18 3/4"
Length overall	29 3/4"
Width of large bowl	17"
Length of large bowl	28"
Depth of large bowl	8 1/2"
Cabinet Size	36"
Number of Bowls	1
Waste Outlet Diameter	3 1/2"
Cut-Out Template	Yes
Faucet Hole	None
Type of Material	18 Gauge Stainless Steel
Surface Finish	SILK
Special feature	Rear Drain Waste Hole Location
Waste Kit Included	YES


CU - COUNTRY LANE
LOT 3-7
20-2212 ELEV. B
THE ROSLYN

29 of 48

STANDARD KITCHEN FAUCET

Align

Modern

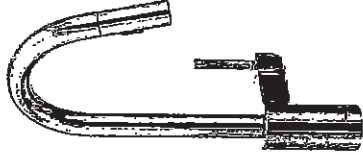

Single Handle Pull-Down Kitchen
Faucet*

Model 7565+

CU - COUNTRY LANE
LOT 3-7
20-2212 ELEV. B
THE ROSLYN

30 of 48

*American
Standard*

**BOULEVARD®
PEDESTAL SINK**
VITREOUS CHINA

BOULEVARD® PEDESTAL SINK

- ☐ 0641.800 Faucet holes on 8" (203mm) centers (Illustrated)
- * ☒ 0641.400 Faucet holes on 4" (102mm) centers
- ☐ 0641.100 Center hole only
 - Classic styled rectangular pedestal lavatory
 - Vitreous china
 - Rear overflow
 - Supplied with mounting kit
 - Right Height® for greater comfort during use
 - Faucet ledge with large deck area (faucet not included)
 - **Design coordinates with Boulevard® Toilet**
 - Basin has flat bottom to also allow use as an **above counter sink** or a **drop-in sink** (with u-shaped cut out)

Nominal Dimensions:

24" x 19" x 35-1/2"
(610 x 483 x 902mm)

- ☐ 0641.008 Pedestal top-8" (203mm) centers
- ☐ 0641.004 Pedestal top-4" (102mm) centers
- ☐ 0641.001 Pedestal top-center hole only
- ☐ 0010.000 Pedestal only

Bowl sizes:

17" (432mm) wide,
12-1/2" (318mm) front to back,
5" (127mm) deep

Compliance Certifications -


Meets or Exceeds the Following Specifications:

- ASME A112.19.2 - 2008/CSA B45.1-08

To Be Specified:

- ☐ Color: ☐ White ☐ Linen
- ☐ Faucet Finish:
- ☐ Supplies:
- ☐ 1-1/4" Trap:
- ☐ Nipple:

* See faucet section for additional models available

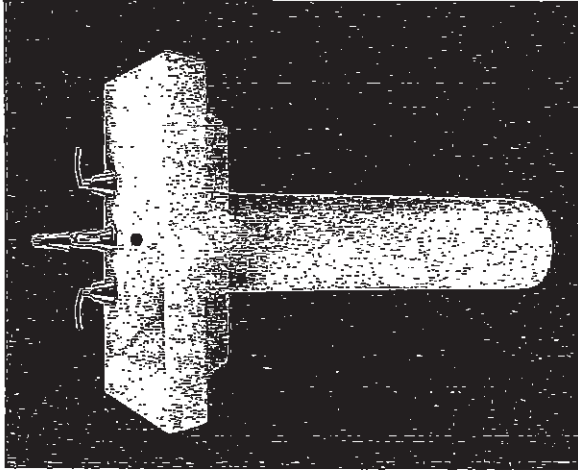

SEE REVERSE FOR ROUGHING-IN DIMENSIONS

CU - COUNTRY LANE
LOT 3-7
20-2212 ELEV. B
THE ROSLYN

American Standard



BARRIER FREE

COLONY COUNTERTOP SINK

- Vitreous china
 - Self-rimming
 - Front overflow
 - Supplied with template
 - Faucet deck
- (Faucet shown not included)

☒ 0346 803

Faucet holes on 203mm (8") centres

☐ 0346 403 (Illustrated)

Faucet holes on 102mm (4") centres

☐ 0346 001

Centre hole only

Nominal Dimensions:

521 x 448mm (20-1/2" x 17-5/8")

Bowl sizes:

422mm (16-5/8") wide, 279mm (11") front to back, 143mm (5-5/8") deep

COMPLIANCE CERTIFICATIONS -

Meets or exceeds the following Specifications:

- ASME A112.19.2M for Vitreous China Fixtures.
- CAN/CSA B45 Series.

To Be Specified




- ☐ Colour: ☒ White ☐ Bone ☐ Silver Gray
- ☐ Linen
- ☐ Faucet*:
- ☐ Faucet Finish:
- ☐ Supplies & Stops:
- ☐ Trap 1-1/4" (32 mm):

* See faucet section for additional models available

BAS-198

© 2000 American Standard Inc.


01/07

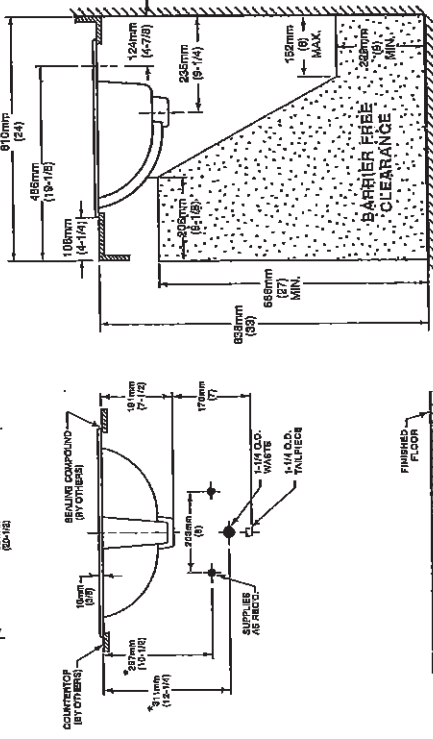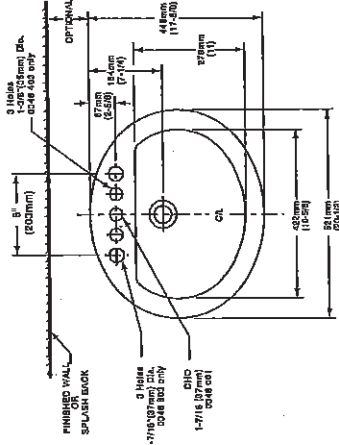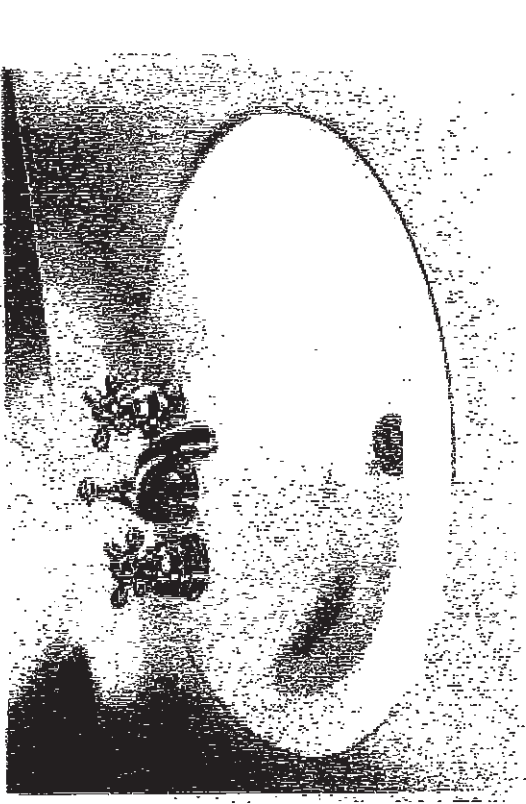

NOTES:
* DIMENSIONS SHOWN FOR LOCATION OF SUPPLIES AND "P" TRAP ARE SUGGESTED. FOR COUNTERTOP CUTOUT AND INSTALLATION INSTRUCTIONS USE TEMPLATE SUPPLIED WITH SINK.
FAUCETS NOT INCLUDED AND MUST BE ORDERED SEPARATELY.
IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard A112.19.2.
These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

CU - COUNTRY LANE
LOT 3-7
20-2212 ELEV. B
THE ROSLYN

32 of 48

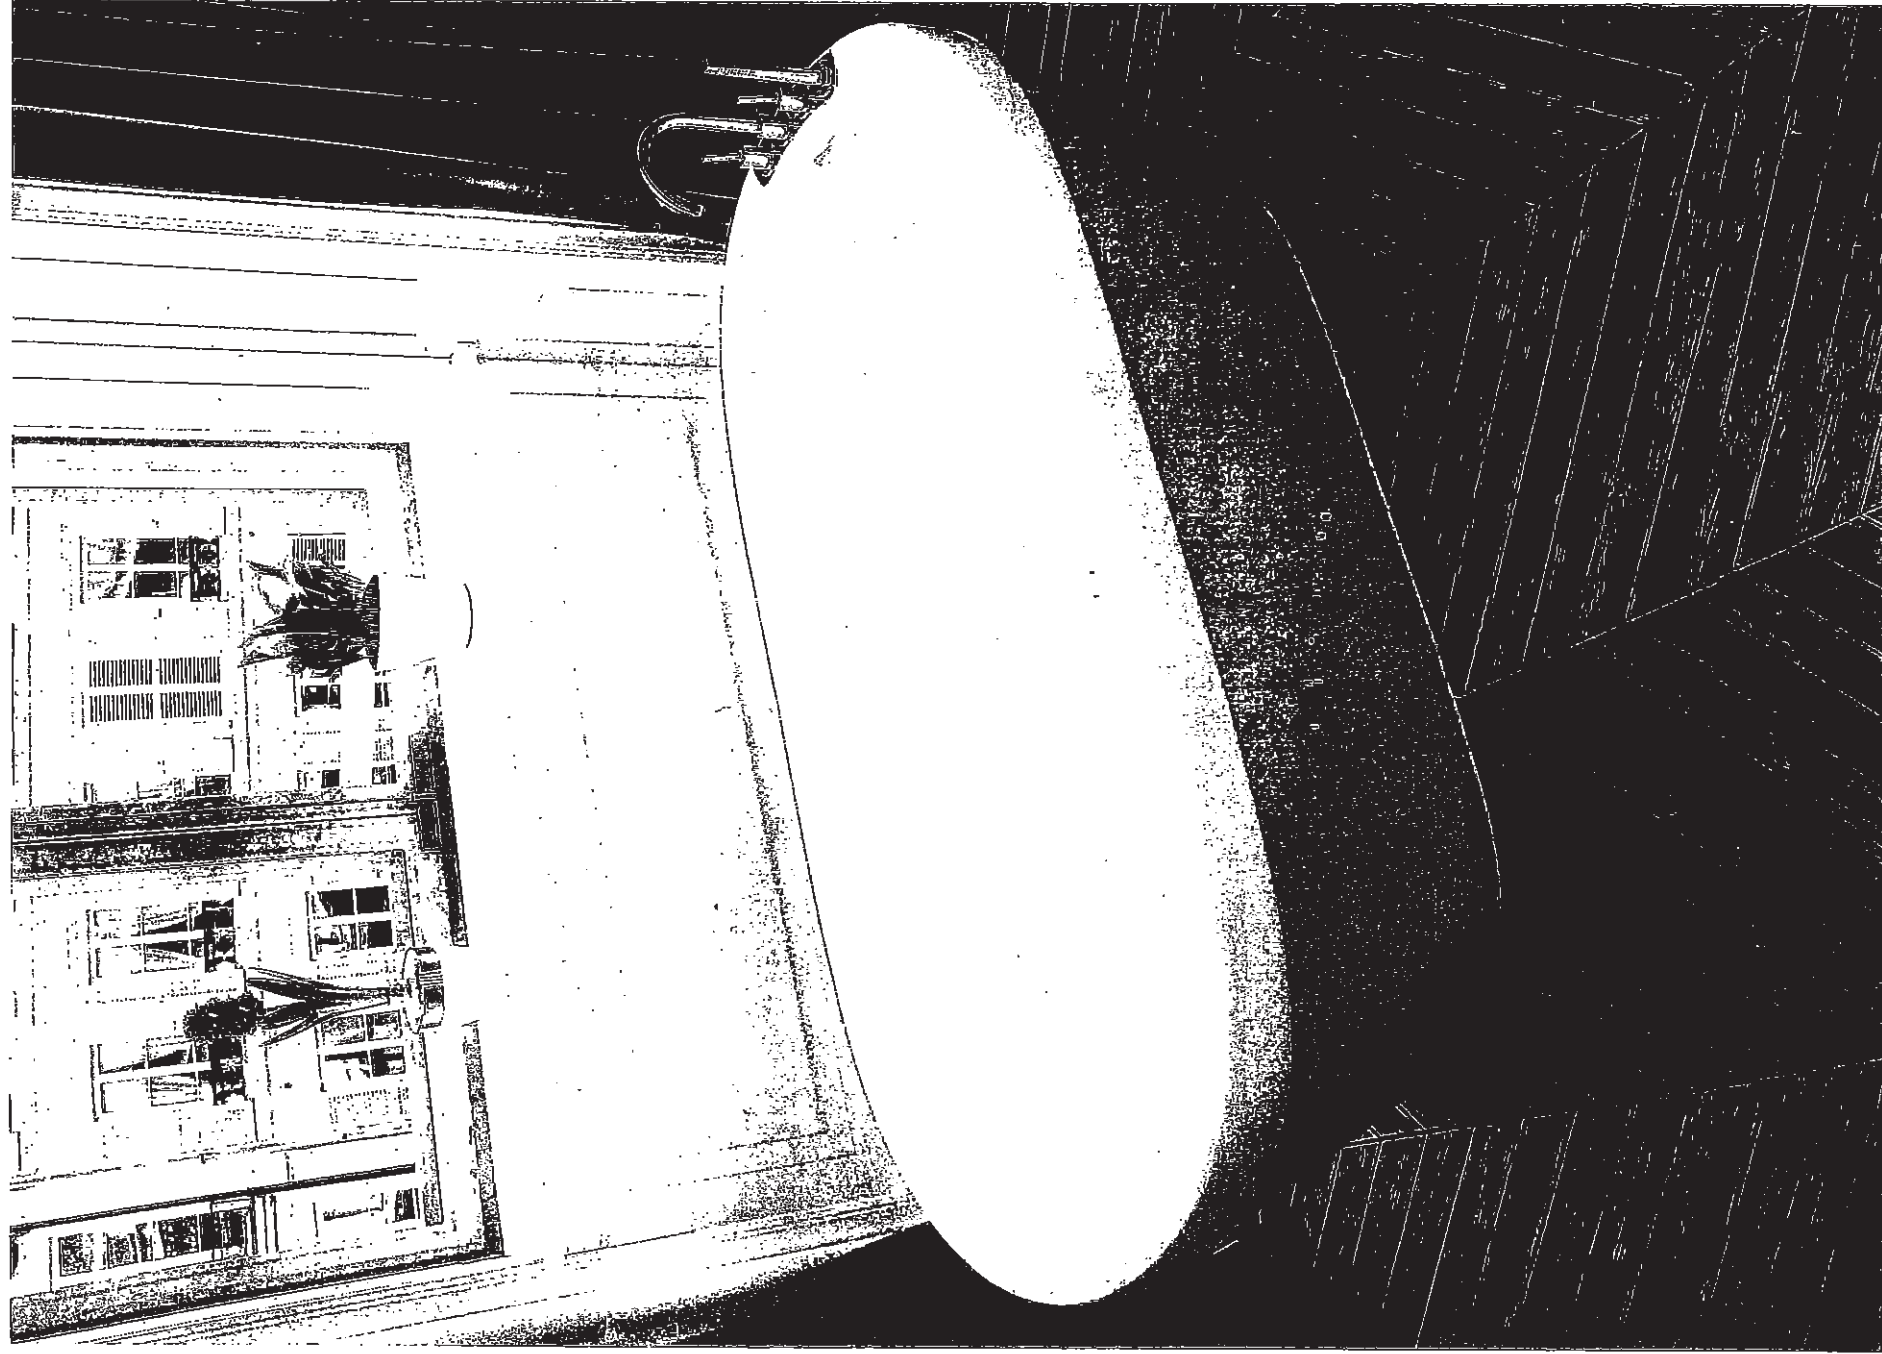


Deml CF2007

CU - COUNTRY LANE
LOT 3-7
20-2212 ELEV. B
THE ROSLYN

33 of 48


Chateau

Transitional



Lavatory Faucet with Pop-Up Drain
Model L4621†

VANITY SINKS AND PEDESTAL



Posi-Temp® Pressure Balancing Tub/Shower
Model 62320 / TL183†

OR

Posi-Temp Valve and Tub/Shower Trim
with Eco-Performance Easy Clean® XL

Model 62320 / TL183EP†
(TL183EP not available in BC)

SHOWER AND 5' TUB FAUCETS



2 Handle Roman Tub with 9" Spout
Model 4796 / T990†


FREESTANDING TUB FAUCETS

CU - COUNTRY LANE
LOT 3-7
20-2212 ELEV. B
THE ROSLYN


34 or 48

SC(B)519 | ALITO Collection

Cyclone®
Breathe Better

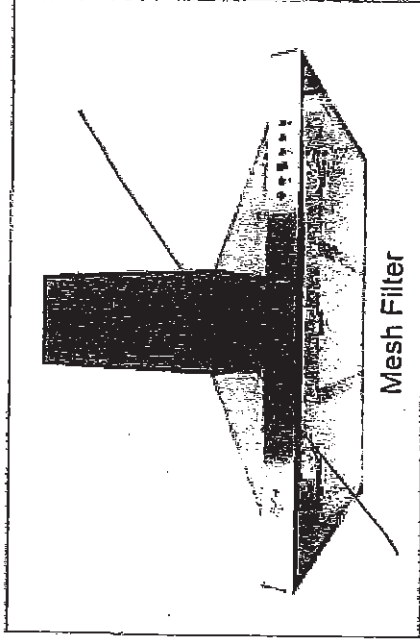

Mesh Filter

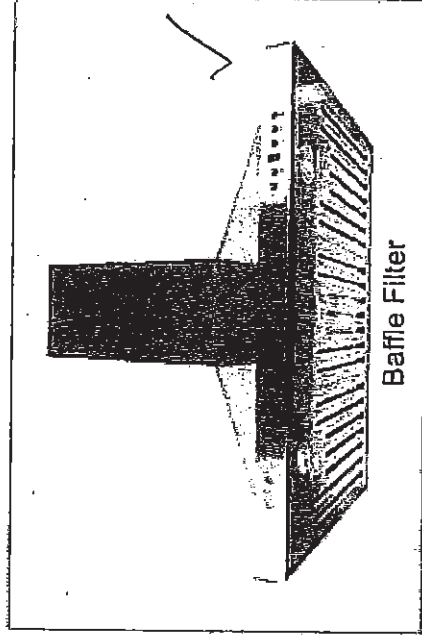

Baffle Filter

Wall Mount

Strong and sturdy with attractive lines and an imposing frame, the SC(B)519 is fitted with a time-delay OFF feature up to nine minutes, a 550 CFM fan, two bright front mounted LED lights and a digital three-speed push button control panel.

Green Features



3 Speed Push Button
Control Panel




Long-Lasting
LED Lights



Time-Delay
OFF Feature



Grease Cup

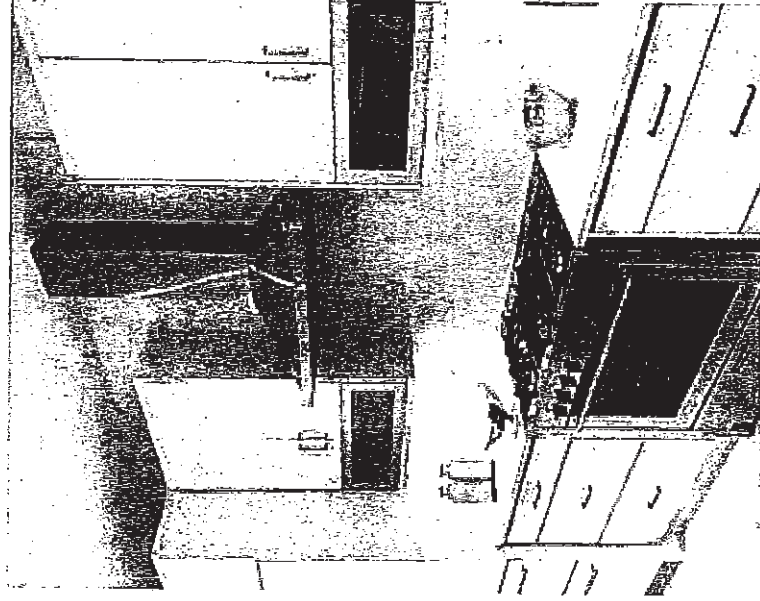

Model	Colour	Ducting	Filters	Size	CFM
SG51924	Stainless Steel	6"	Mesh	24"	550
SC51930	Stainless Steel	6"	Mesh	30"	550
SC51936	Stainless Steel	6"	Mesh	36"	550
SCB51924	Stainless Steel	6"	Baffle	24"	550
SCB51930	Stainless Steel	6"	Baffle	30"	550
SCB51936	Stainless Steel	6"	Baffle	36"	550

Cyclone Range Hoods Inc.

1361 Huntingwood Drive, Unit 16, Toronto, ON, M1S 3J1, Canada.

Toll Free: 1-888-293-5662 Tel: (416) 293-0933 Fax: (416) 293-4793 Website: www.CycloneRangeHoods.com

CU - COUNTRY LANE
LOT 3-7
20-2212 ELEV. B
THE ROSLYN


35 of 48

SC(B)519 | ALITO Collection

Cyclone®
Breathe Better


Features

- Wall mount range hood
- 6" round duct adapter
- Non-stick aluminum fan blades
- 3 speed push button control
- 2 LED lights (2 x 1.4W, 4000K)
- Quick release aluminum mesh filters
- Standard chimney fits up to 9 ft. ceiling
- Up to 9 minutes time-delay OFF feature
- Plug-In connection

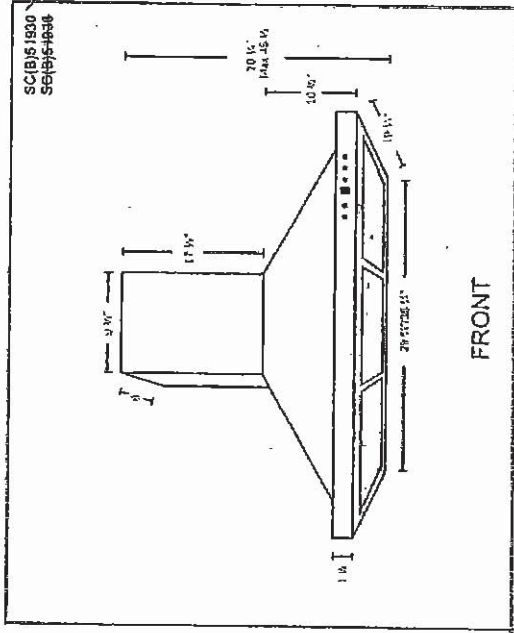

Options

- Filters:
 - SC519 - Quick Release Aluminum Mesh Filters
 - SCB519 - Quick Release Stainless Steel Baffle Filters**
- Chimney Flues:
 - A1.CH10 - short (7'-8' ceilings)
 - A1.CH18 - standard (8'-9' ceilings)
 - A1.CH30 - extended (9'-11' ceilings)
- Widths: 24" (30") 36"

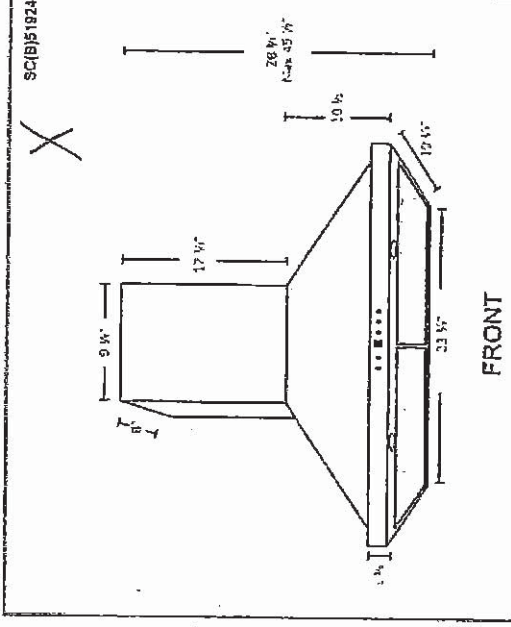

Specifications

- Air Flow Volume: 550 CFM
- Electrical Connection: 120 V/60 Hz
- Power Consumption: 300 Watts

- Current: 2.5 Amps
- Fan Speed: 1599 RPM
- Fan Type: Centrifugal Blower

- Finishes: Stainless Steel
- Ducting: 6" Round
- Noise Level: Min. 2 Sones
Max. 6 Sones



Toronto • Vancouver • Boston
www.CycloneRangeHoods.com

CU - COUNTRY LANE
LOT 3-7
20-2212 ELEV. B
THE ROSLYN

34
36 of 48

Whirlpool® Top Mount Refrigerator

PRODUCT MODEL NUMBERS

WRT311FZD
WRT511SZD

WRT641SZD

Electrical: A 115-volt, 60-Hz, AC-only, 15- or 20-amp fused, grounded electrical supply is required. It is recommended that a separate circuit serving only your refrigerator be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.


NOTE: Before performing any type of installation, cleaning, or removing a light bulb, turn the control (Thermostat, Refrigerator or Freezer Control depending on the model) to OFF and then disconnect the refrigerator from the electrical source. When you are finished, reconnect the refrigerator to the electrical source and reset the control (Thermostat, Refrigerator or Freezer Control depending on the model) to the desired setting. See "Using the Controls."

Water: A cold water supply with water pressure between 30 and 120 psi (207 and 827 kPa) is required to operate ice maker and water dispenser. If you have questions about your water pressure, call a licensed, qualified plumber.

IMPORTANT: The pressure of the water coming out of a reverse osmosis system going to the water inlet valve of the refrigerator needs to be between 30 and 120 psi (207 and 827 kPa).


Reverse Osmosis Water Supply: If a reverse osmosis water filtration system is connected to your cold water supply, the water pressure to the reverse osmosis system needs to be a minimum of 40 to 60 psi (276 to 414 kPa).

PRODUCT DIMENSIONS

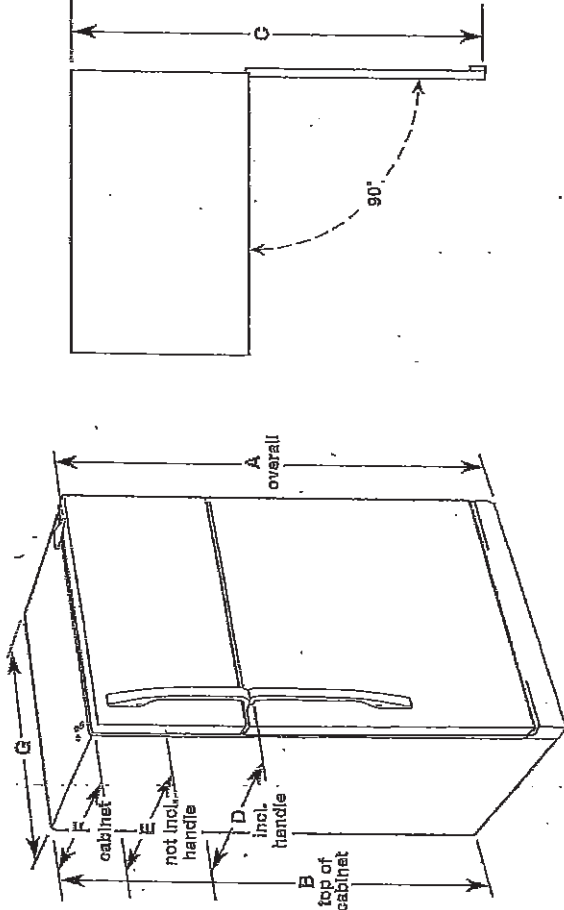

Model Number	Model Size	Reversible Door	Height - Overall "A"	Height - Top of Cabinet "B"	Depth - Door Open 90° "C"	Depth - With Handles "D"	Depth - Without Handles "E"	Depth - Cabinet Only "F"	Width - Cabinet "G"
WRT311FZD	20.5 cu. ft.	Yes	66 1/4" (168.3 cm)	65 1/2" (166.4 cm)	62 1/4" (158.1 cm)	32 1/4" (83.5 cm)	30 5/8" (77.8 cm)	28 1/2" (72.4 cm)	32 3/4" (83.2 cm)
WRT611SZD WRT641SZD	21.9 cu. ft.	Yes	66 1/2" (168.3 cm)	65 1/2" (166.4 cm)	62 1/4" (158.1 cm)	34" (86.4 cm)	32 1/2" (82.8 cm)	28 1/2" (72.4 cm)	32 3/4" (83.2 cm)

LOCATION REQUIREMENTS

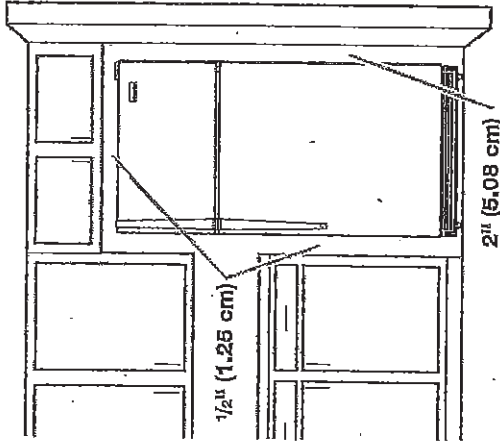

To ensure proper ventilation for your refrigerator, allow for a 1/2" (1.25 cm) space on each and between overhead cabinets and refrigerator top. Allow at least 1" (2.5 cm) between back of cabinet and the wall. If your refrigerator has an ice maker, make sure you leave some extra space at the back for the water line connections.

If you are installing your refrigerator next to a fixed wall, leave 2" (5 cm) minimum on the hinge side (depending on your model) to allow for the door to swing open.

NOTE: This refrigerator is intended for use in a location where the temperature ranges from a minimum of 55°F (13°C) to a maximum of 110°F (43°C). The preferred room temperature range for optimum performance, which reduces electricity usage and provides superior cooling, is between 60°F (15°C) and 90°F (32°C). It is recommended that you do not install the refrigerator near a heat source, such as an oven or radiator.

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.





Dimensions are for planning purposes only. For complete details, see installation instructions packed with product. Specifications subject to change without notice.

Ref. W10874108
10/29/14

CU - COUNTRY LANE
LOT 3-7
20-2212 ELEV. B
THE ROSLYN

37 of 48

Refrigerator Door Swing Verification

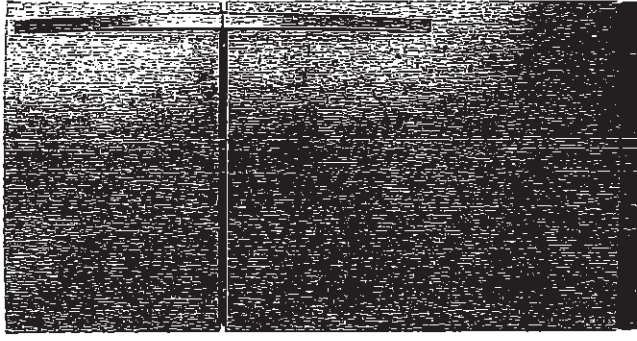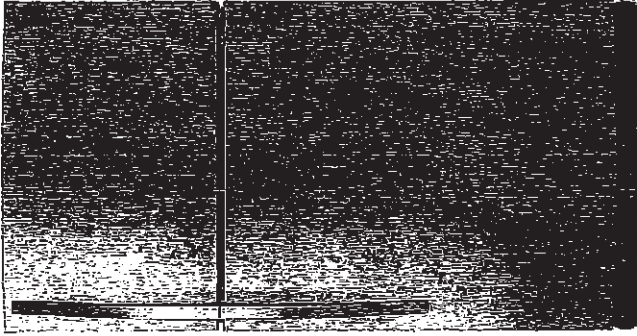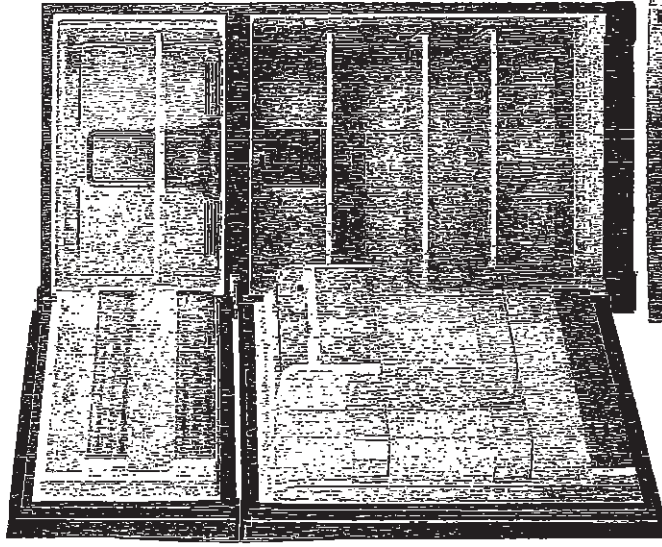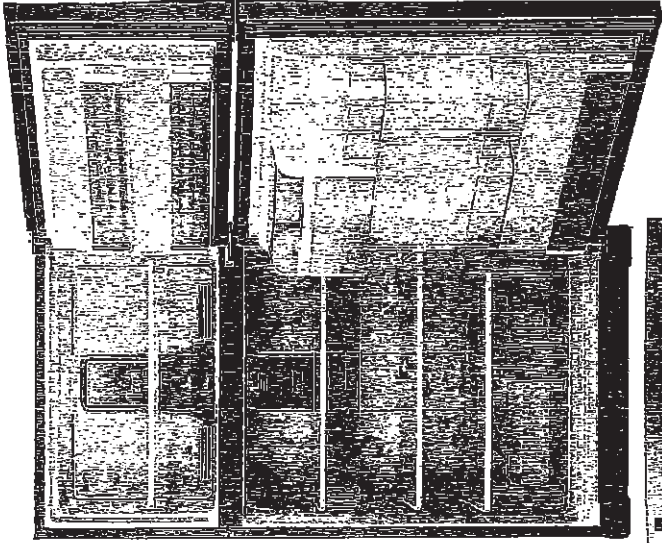

When facing the refrigerator



RIGHT HAND
DOOR OPENING

- Hinges on right
- Handle on left

mks

INITIAL

LEFT HAND
DOOR OPENING

- Hinges on left
- Handle on right



INITIAL

POCKET RIGHT


Please check and INITIAL your door swing selection.

CU - COUNTRY LANE
LOT 3-7
20-2212 ELEV. B
THE ROSLYN

38 of 48

Whirlpool®

FRONT-CONTROL
GAS RANGES

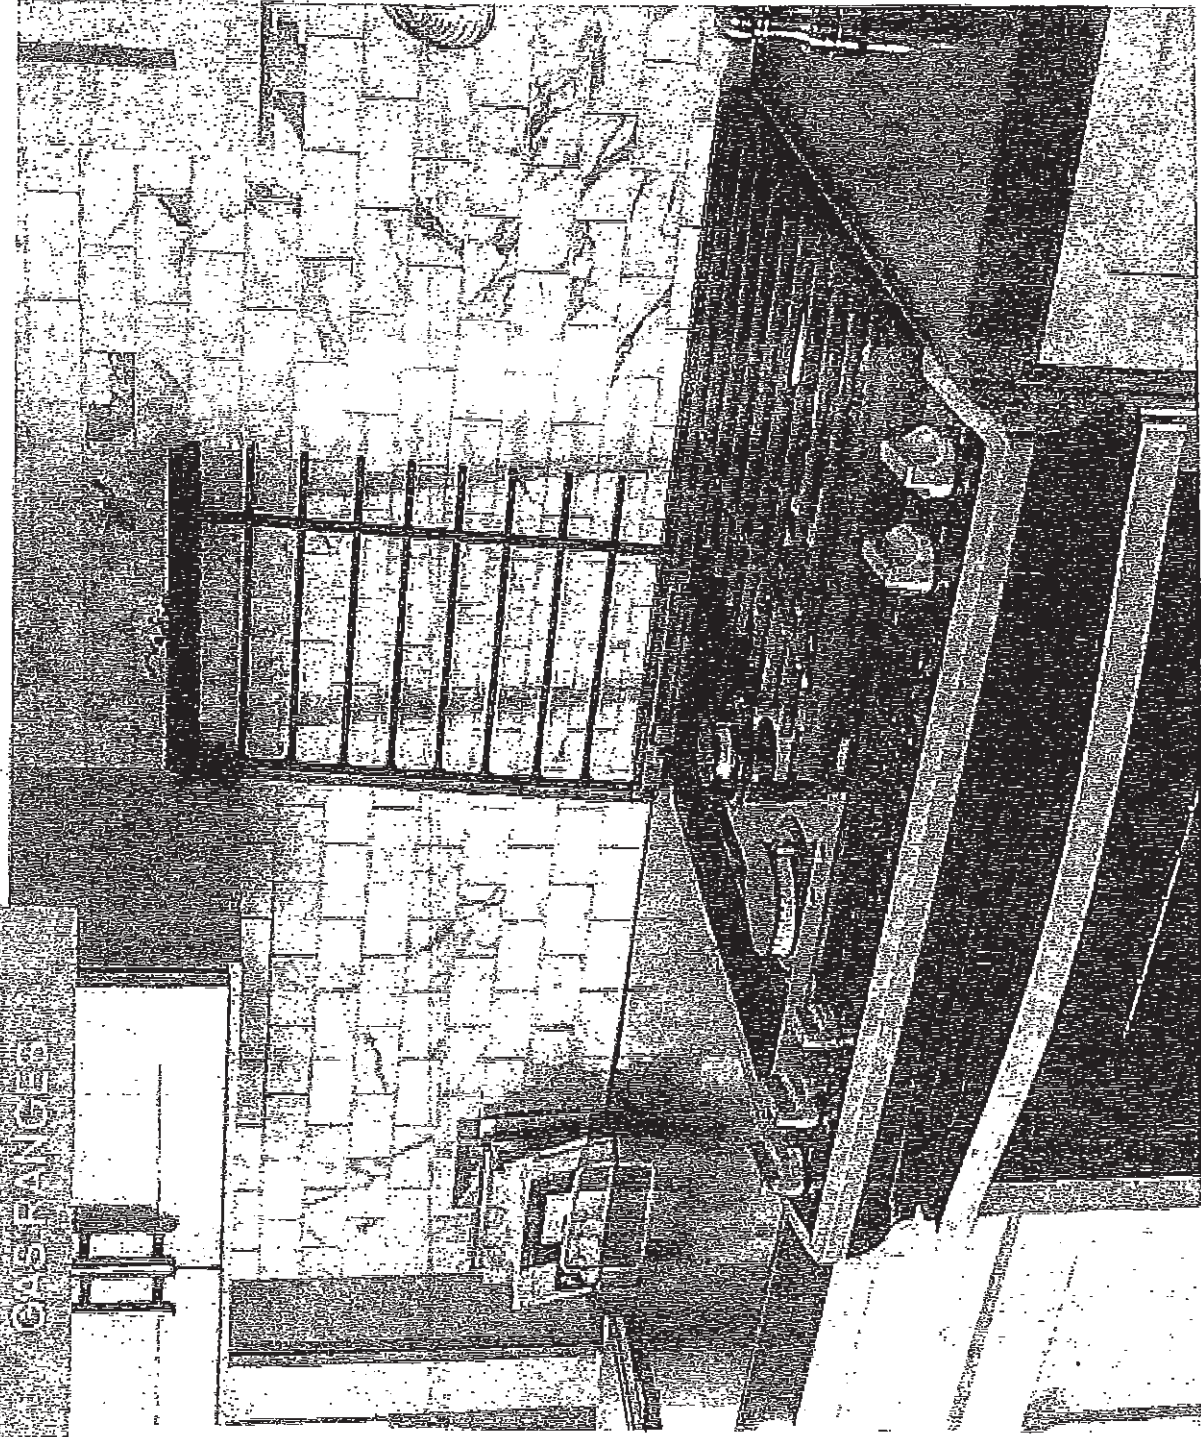

FEATURING



TimeSavor™ system

The TimeSavor™ system's Frozen Bake Technology allows you to skip preheating for favorites like pizza, lasagna, chicken nuggets, fries or pies

so you can cook frozen foods faster.



HeatRight™ system

The HeatRight™ system's True convection helps you to cook food faster, with a rear fan and third heating element to circulate hot air over, under, and around food.



CompleteClean™ system

The CompleteClean™ system's EZ-2-Lit™ hinged grates give you quick access to spills on the cooktop. The industry first hinged design allows you to wipe up under them without removing them entirely. For a more thorough clean, the grates are also dishwasher-safe.

Every day, care.™

From the #1 Selling Appliance brand in the USA!

CU - COUNTRY LANE
LOT 3-7
20-2212 ELEV. B
THE ROSLYN

39 of 48



30" (76.2 cm) Slide-in Gas Range

PRODUCT MODEL NUMBERS

WEG780H0D

WEG780H0D

WEG746H0F

GAS SUPPLY REQUIREMENTS

Gas supply line:

- Provide a gas supply line of $\frac{3}{4}$ " (1.9 cm) rigid pipe to the range location. A smaller size pipe on longer runs may result in insufficient gas supply. With LP gas, piping or tubing size can be $\frac{1}{2}$ " (1.3 cm) minimum. Usually, LP gas suppliers determine the size and materials used in the system.

NOTE: Pipe-joint compounds that resist the action of LP gas must be used. Do not use TEFLON® tape.

Flexible metal appliance connector:

- If local codes permit, a new CSA design-certified, 4 to 5 ft (122 to 152.4 cm) long, $\frac{1}{2}$ " (1.3 cm) or $\frac{3}{4}$ " (1.9 cm) I.D., flexible metal appliance connector may be used for connecting range to the gas supply line.




- A $\frac{1}{2}$ " (1.3 cm) male pipe thread is needed for connection to the female pipe threads of the inlet to the appliance pressure regulator.

- Do not kink or damage the flexible metal tubing when moving the range.

- Must include a shutoff valve:

The supply line must be equipped with a manual shutoff valve. This valve should be located in the same room but external to the range opening, such as an adjacent cabinet. It should be in a location that allows ease of opening and closing. Do not block access to shutoff valve. The valve is for turning on or shutting off gas to the range.



- A. Gas supply line
- B. Shutoff valve "open" position
- C. To range

Gas Pressure Regulator

The gas pressure regulator supplied with this range must be used. The inlet pressure to the regulator should be as follows for proper operation:

Natural gas:

Minimum pressure: 6" WCP

Maximum pressure: 14" WCP

LP gas:


Minimum pressure: 11" WCP

Maximum pressure: 14" WCP

Contact local gas supplier if you are not sure about the inlet pressure.

PRODUCT DIMENSIONS

This manual covers several models. Your model may appear different from the models depicted. Dimensions given are maximum dimensions across all models.

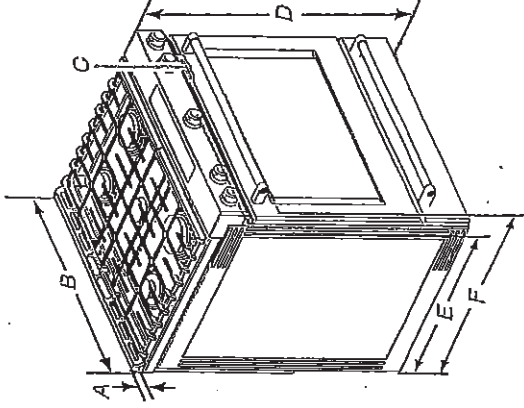

- A. $1\frac{1}{8}$ " (3.0 cm) height from cooktop to top of vent
- B. $29\frac{1}{2}$ " (75.9 cm)
- C. Model/serial number plate (located behind the oven door on the top right-hand side of the oven frame)
- D. 36" (91.4 cm) height to top of cooktop edge with leveling legs screwed all the way in*
- E. $28\frac{1}{8}$ " (71.9 cm) max. depth from front of console to back of range.
- F. $28\frac{1}{4}$ " (73.3 cm) max. depth from handle to back of range.

IMPORTANT: Range must be level after installation. Follow the instructions in the "Level Range" section. Using the cooktop as a reference for leveling the range is not recommended.

* Range can be raised approximately 1" (2.5 cm) by adjusting the leveling legs.

Type of Gas

Natural gas:

- This range is factory set for use with Natural gas. See "Gas Conversions" section. The model/serial rating plate located behind the control panel has information on the types of gas that can be used. If the types of gas listed do not include the type of gas available, check with the local gas supplier.

LP gas conversion:

Conversion must be done by a qualified service technician. No attempt shall be made to convert the appliance from the gas specified on the model/serial rating plate for use with a different gas without consulting the serving gas supplier. See "Gas Conversions" section.

TEFLON is a registered trademark of Chemours.

4048



OTHER AVAILABLE COLORS

	Black Model: WDF310PAA-B
	Biscuit-on-Biscuit Model: WDF310PAA-T
	Whitita Model: WDF310PAA-W
	Universal Silver Model: WDF310PAA-D



DIMENSIONS		KEY FEATURES:
Maximum Height	34 1/2 Inches	ENERGY STAR® Qualified No One Has Fewer Repairs 17 Years In A Row Resource - Efficient Wash System CEE Tier 1 qualified Tall Tub Design White Plastic Interior Quiet Partner(TM) 1 Sound Package Auto Soil Sensor Electronic Controls 3 Automatic Cycles 1-Hour Wash Cycle Heavy Wash Cycle Normal Cycle 4 Options High Temperature Wash System Heated Dry Option 4 Hour Delay Wash Option 4-Tier SheerClean Direct Feed Wash System Control Lock Vinyl Racks In-Rack Silverware Basket
Minimum Height	33 1/2 Inches	
Height	34 1/2 Inches	
Depth	24 1/2 Inches	
Width	23 7/8 Inches	
Dimensions shown are for planning purposes only. For complete information, see installation instructions packaged with product.		
ELECTRICAL		
15 Amps Amps, 60 Hz, 120 V, 15,		
Before purchasing this appliance, read Important Information about its estimated annual energy consumption or energy efficiency rating that is available from your dealer.		

CU - COUNTRY LANE
LOT 3-7
20-2212 ELEV. B
THE ROSLYN

41 of 48

Whirlpool® Undercounter Dishwasher

PRODUCT MODEL NUMBERS

WDF110PAB	WDF310PLA	WDF530PSY
WDF111PAB	WDF320PAD	WDF540PAD
WDF120PAF	WDF510PAY	WDF730PAY
WDF121PAF	WDF520PAD	WDT710PAY
WDF310PAA	WDF530PAY	WDT720PAD
WDF310PCA	WDF530PLY	WDT770PAY

Electrical Requirements: 120-volt, 60-Hz, AC only, 15- or 20-amp, fused electrical supply. Copper wire only. A time delay fuse or circuit breaker and separate circuit is recommended.

If direct wiring dishwasher: Use flexible, armored, or nonmetallic, sheathed copper or nonmetallic, sheathed copper wire with grounding wire that meets the wiring requirements for your home and local codes and ordinances.

Use a UL listed or CSA approved conduit connector.

If connecting dishwasher with a power supply cord:

Use Power Supply Cord Kit (Part No. 4317824) marked for use with dishwashers. Follow the kit

instructions for installing the power supply cord.

Power supply cord must plug into a grounded 3 prong, outlet, located in the cabinet next to the dishwasher opening. Outlet must meet all local codes and ordinances.


Water Supply Requirements: A hot water line with 20 to 120 psi (138 to 862 kPa) water pressure. Water temperature must be 120°F (49°C) water at dishwasher. Use 3/8" O.D. copper tubing with compression fitting or flexible braided water supply line (1/2" minimum plastic tubing is not recommended). Use a 90° elbow with 1/4" I.P.T. external pipe threads on one end. Do not solder within 6" (15.2 cm) from water inlet valve.

Drain Requirements: A new drain hose is supplied with your dishwasher. If this is not long enough, use a new drain hose with a maximum length of 12' (3.7 m) (Part No. 3385566) that meets all current AHAM/IAPMO test standards, is resistant to heat and detergent, and fits the 1" (2.5 cm) drain connector of the dishwasher.

Make sure to connect the drain hose to waste tee or disposer inlet above drain trap in house plumbing and 20" (50.8 cm) minimum above the floor. It is recommended

that the drain hose either be looped up and securely fastened to the underside of the counter or be connected to an air gap.


Make sure to use an air gap if the drain hose is connected to house plumbing lower than 20" (50.8 cm) above subfloor or floor.



Use 1/2" (1.3 cm) minimum I.D. drain line fittings.

If required, the air gap should be installed in accordance with the air gap installation instructions. When connecting the air gap, a rubber hose (not provided) will be needed to connect to the waste tee or disposer inlet.

PRODUCT DIMENSIONS

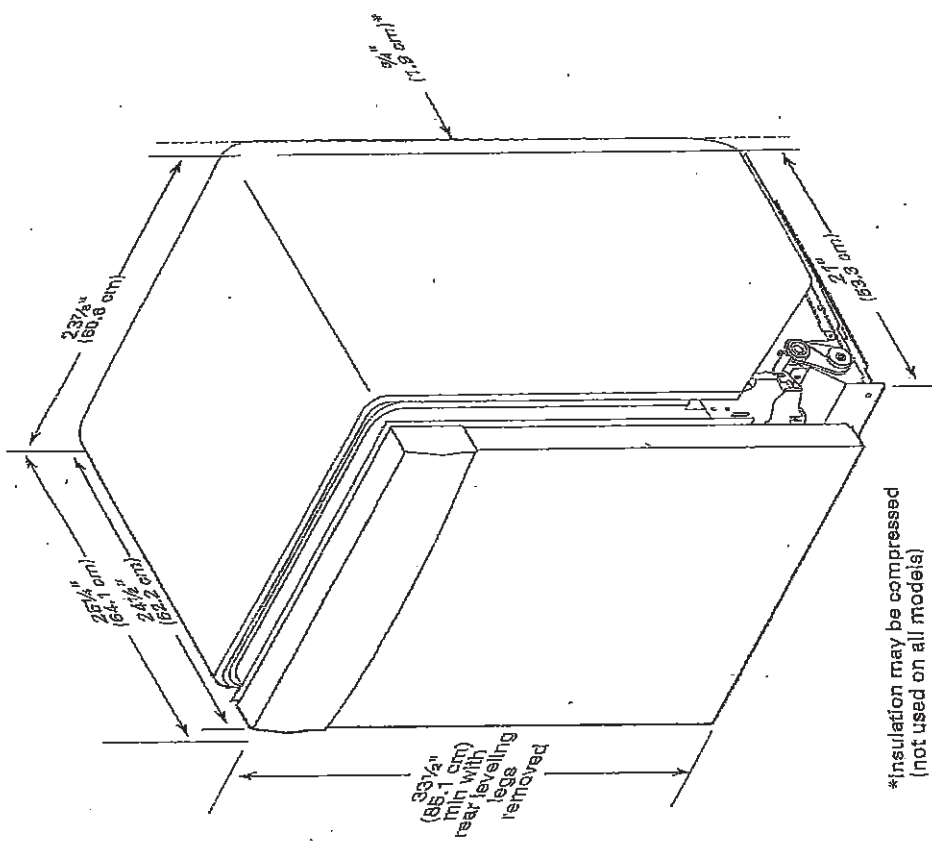

*Insulation may be compressed
(not used on all models)

CU - COUNTRY LANE
LOT 3-7
20-2212 ELEV. B
THE ROSLYN

42 of 48


CABINET CUTOUT DIMENSIONS

WIDE 320 PAD

NOTE: Shaded areas of cabinet walls show where utility connections may be installed.

*Measure from the lowest point on the underside of the countertop. May be reduced to 33½" (85.1 cm) by removing the rear leveling legs from dishwasher.

**Minimum, measured from narrowest point of opening.

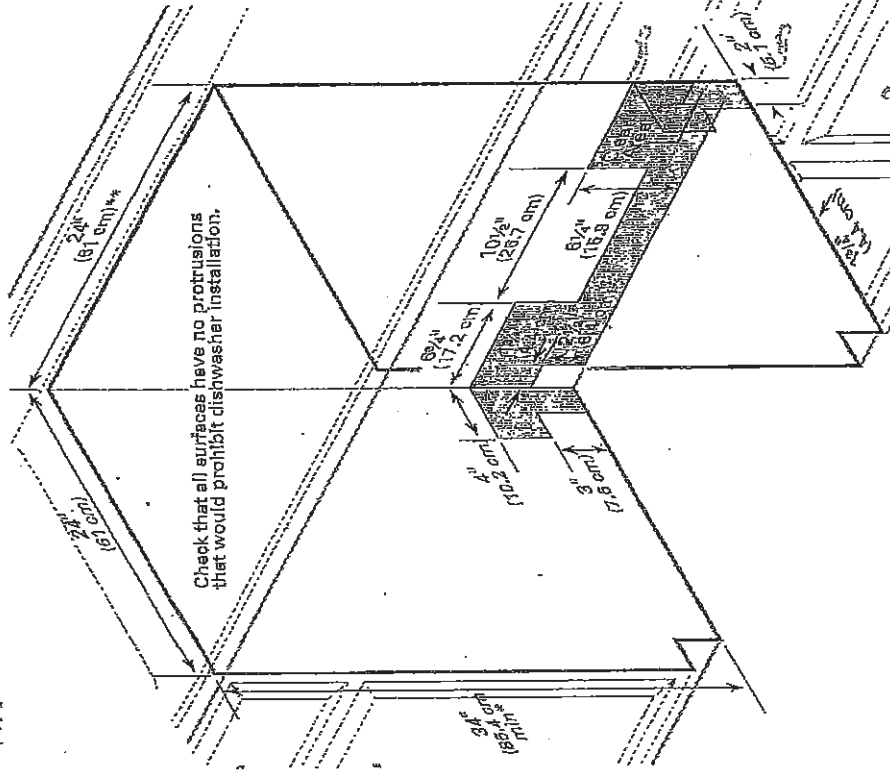


CU - COUNTRY LANE
LOT 3-7
20-2212 ELEV. B
THE ROSLYN


43 of 48

WHIRLPOOL WASHER Model #: WFW5620HW

Whirlpool Brazil, Canada, England | Washers and Dryers | Washers | Front Load Washers | WFW5620HW

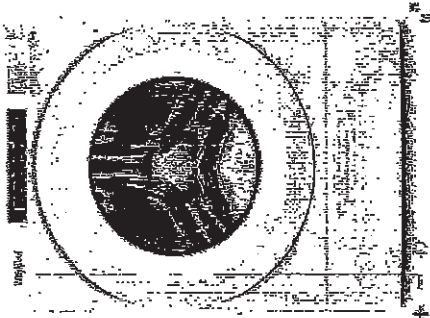

5.2 cu. ft. I.E.C. Closet-Depth
Front Load Washer with
Load & Go™ Dispenser



Whirlpool

5.2 cu. ft. I.E.C. Closet-Depth Front Load Washer with Load & Go™
Dispenser

Model #: WFW5620HW

Dimensions

Depth	80.17 cm; 31-5/8 in.
Depth With Door Open 90 Degrees	149.51 cm; 59-1/2 in.
Minimum Height	98.11 cm; 38-5/8 in.
Width	68.58 cm; 27.0 in.

Appearance

LCD Touch Screen	No
Window	Yes

Details

Drum Material	Stainless Steel
---------------	-----------------

Cycles and Options

Number of Wash Cycles	37
-----------------------	----

Electrical

Hz	60
Power Cord Included	Yes

CU - COUNTRY LANE
LOT 3-7
20-2212 ELEV. B
THE ROSLYN

44 of 48

WHIRLPOOL WASHER Model #: WFW5620HW

LOCATION REQUIREMENTS



Proper installation is your responsibility.

You will need:



- A water heater set to 120°F (49°C).
- A grounded electrical outlet located within 6 ft (1.8 m) of power cord on back of washer.
- Hot and cold water faucets located within 4 ft (1.2 m) of hot and cold water fill valves on washer, and water pressure of 20–100 psi (137.9–689.6 kPa).
- A level floor with maximum slope of 1" (25 mm) under entire washer. Installing on carpet or surfaces with foam backing is not recommended.
- Floor must support washer's total weight (with water and load) of 315 lbs (143 kgs).

IMPORTANT: Do not install, store, or operate washer where it will be exposed to weather or in temperatures below 32°F (0°C). Water remaining in washer after use may cause damage in low temperatures. See "Washer Care" in your Use and Care Guide for winterizing information.

Whirlpool Models* ✓

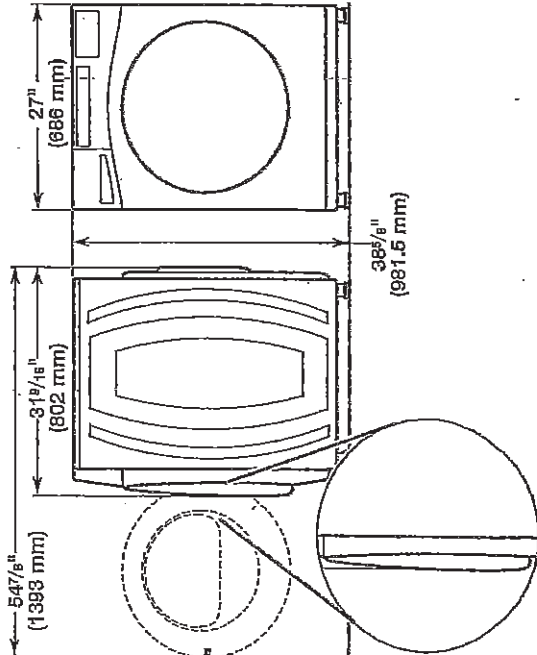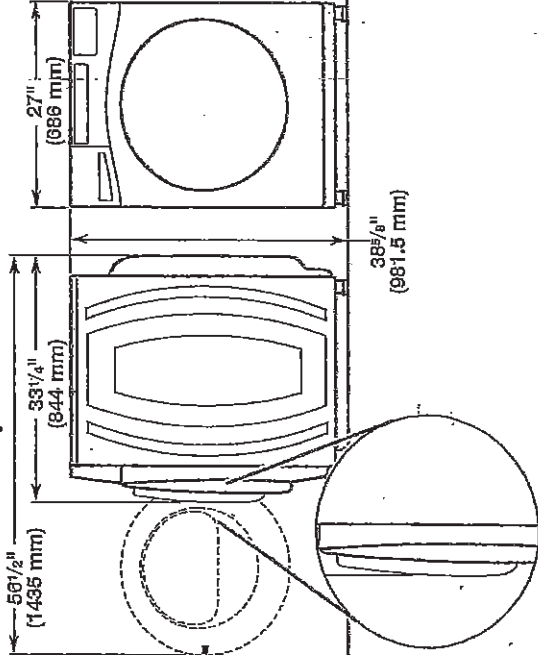


~~Maytag Models~~

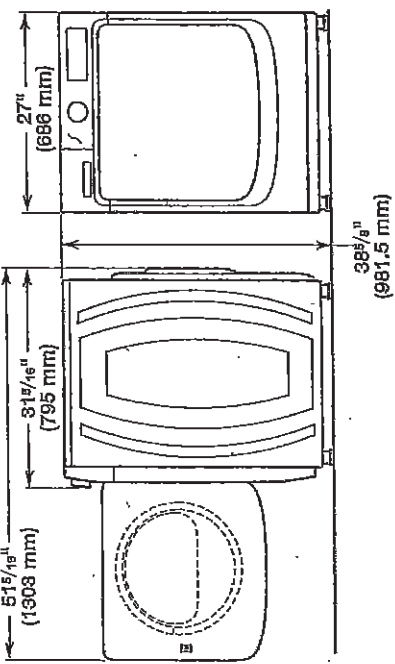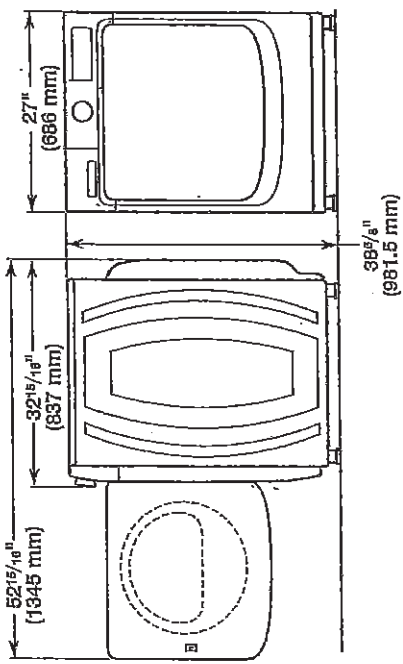

All dimensions show minimum spacing allowed.
For each arrangement, consider allowing more space for ease of installation and servicing, and spacing for companion appliances and clearances for walls, doors, and floor moldings.
Space must be large enough to allow door to fully open.
Add spacing of 1" (25 mm) on all sides of washer to reduce noise transfer. If a closet door or louvered door is installed, top and bottom air openings in door are required.

Recessed area or closet installation
(stacked washer and dryer):

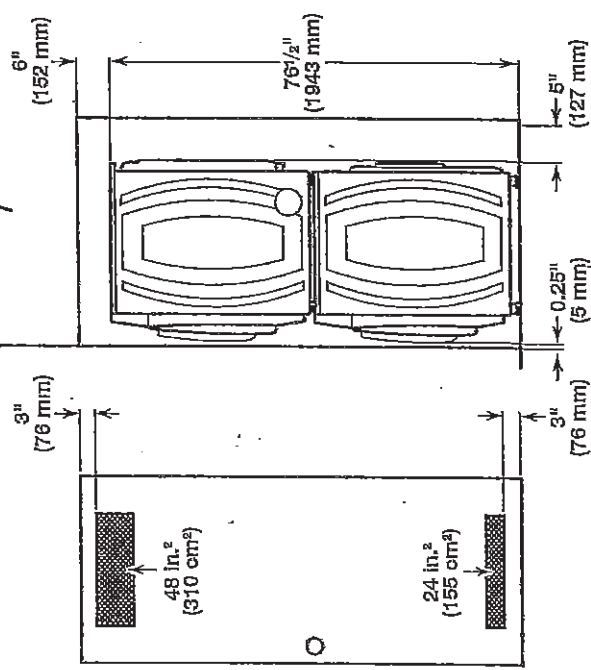


*For additional details (or information) specific to your model, refer to the 'Dimensions' listed for your model at www.whirlpool.com.

CU - COUNTRY LANE
LOT 3-7
20-2212 ELEV. B
THE ROSLYN


45 or 48

WHIRLPOOL WASHER Model #: WFW5620HW


Custom under-counter installation: X

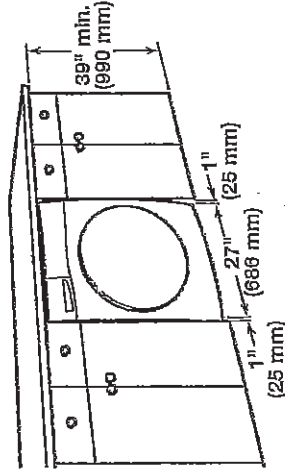

Recessed area or closet installation: X

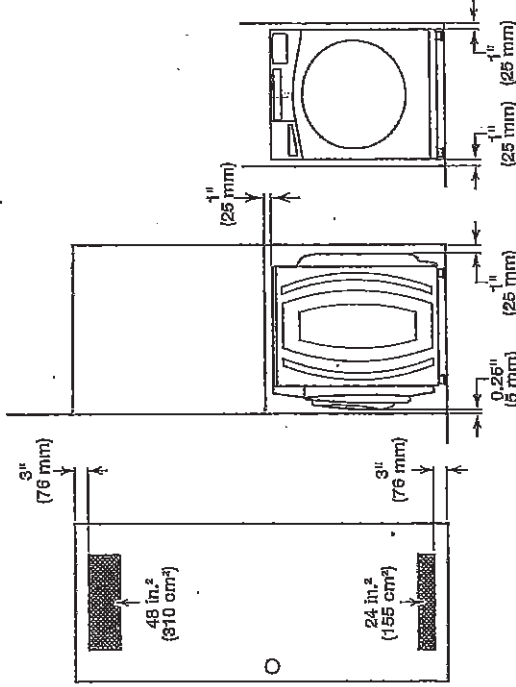

Custom cabinet installation: X

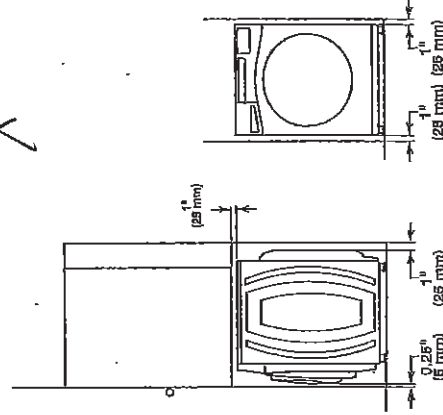


DRAIN SYSTEM

The drain system can be installed using a floor drain, wall standpipe, floor standpipe, or laundry tub. Select the method you need.


IMPORTANT: To avoid siphoning, only 4.5" (114 mm) of drain hose should be inside standpipe. Always secure drain hose with cable tie.

Floor standpipe drain system

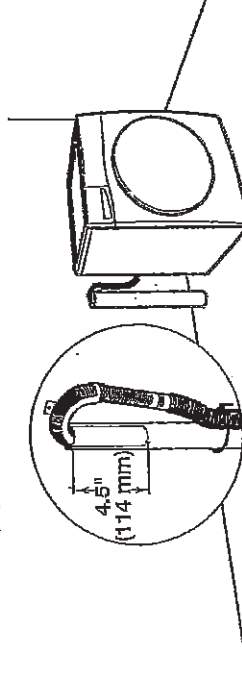


Minimum diameter for a standpipe drain: 2" (51 mm). Minimum carry-away capacity: 17 gal. (64 L) per minute. A 1/4" (6 mm) diameter to 1" (25 mm) diameter Standpipe Adapter Kit is available (Part Number 3363920). Top of standpipe must be at least 30" (762 mm) high; install no higher than 96" (2.44 m) from bottom of washer. If you have an overhead sewer and need to pump higher than 96" (2.44 m), a sump pump and associated hardware are needed. See "Alternate parts."

Wall standpipe drain system

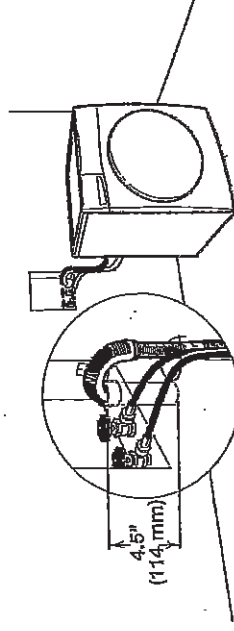

See requirements for floor standpipe drain system.

Laundry tub drain system

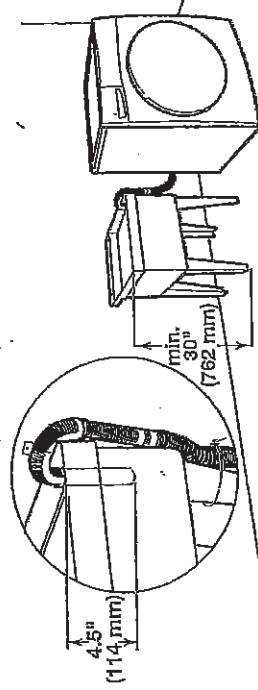


Minimum capacity: 20 gal. (76 L). Top of laundry tub must be at least 30" (762 mm) above floor; install no higher than 96" (2.44 m) from bottom of washer.

CU - COUNTRY LANE
LOT 3-7
20-2212 ELEV. B
THE ROSLYN

46^{of} 48

WHIRLPOOL DRYER Model #: YWED5620HW

Whirlpool Brand Centella English | Washer and Dryer | Dryers | Electric Dryers | YWED5620HW

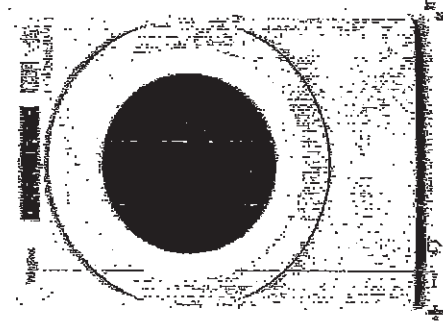

7.4 cu. ft. Front Load Electric
Dryer with Intuitive Touch
Controls



Whirlpool 7.4 cu. ft. Front Load Electric Dryer with Intuitive Touch Controls
Model #: YWED5620HW

Dimensions

Depth	78.74 cm, 31.0 in
Depth With Door Open 90 Degree	138.43 cm, 54-1/2 in
Height	96.42 cm, 38-5/8 in
Width	68.58 cm, 27.0 in

Configuration and Overview

Fuel Type	Electric
-----------	----------

Cycles and Options

Cycle Time Remaining	Yes
Lint Filter Indicator	No
Number of Dryer Cycles	86
Number of Dryness Levels	3

Ventilation System

Lint Vent	No
Maximum Vent Length	64
Venting Direction	Left, Right, Bottom, Rear

Electrical


Hz	60
Power Cord Included	Yes

CU - COUNTRY LANE
LOT 3-7
20-2212 ELEV. B
THE ROSLYN

47 of 48

WHIRLPOOL DRYER Model #: YWED5620HW

Back view:

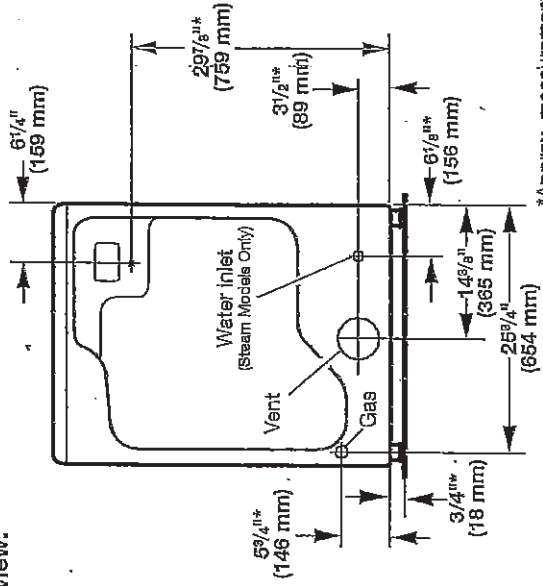

NOTE: Most installations require a minimum of 5" (127 mm) clearance behind dryer for exhaust vent with elbow. See "Venting Requirements."

Installation Clearances

For each arrangement, consider allowing more space for ease of installation and servicing, spacing for companion appliances, and clearances for walls, doors, and floor moldings. Space must be large enough to allow door to fully open. Add spacing on all sides of dryer to reduce noise transfer. If a closet door or louvered door is installed, top and bottom air openings in door are required.

Check code requirements. Some codes limit, or do not permit, installation of the dryer in garages, closets, mobile homes, or sleeping quarters. Contact your local building inspector.


NOTE: No other fuel-burning appliance can be installed in the same closet as a dryer.

Installation spacing for recessed area or closet installation

All dimensions show recommended and minimum spacing allowed.


- Additional spacing should be considered for ease of installation and servicing.
- Additional clearances might be required for wall, door, floor moldings, dryer venting, and gas line.
- Additional spacing should be considered on all sides of the dryer to reduce noise transfer.
- For closet installation with a door, minimum ventilation openings in the top and bottom of the door are required. Louvered doors with equivalent ventilation openings are acceptable.
- Companion appliance spacing should also be considered.

Recommended installation clearances (dryer only):

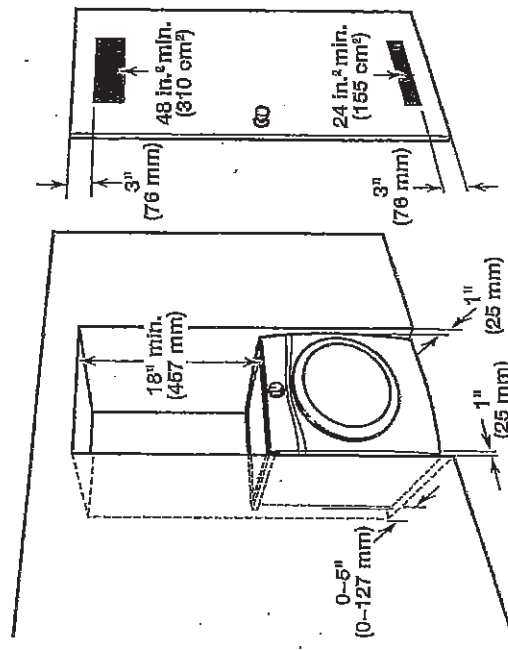

0" (0 mm) rear spacing is allowed for straight back venting only. For steam models only, inlet hose must not be kinked.

Custom under-counter installation:

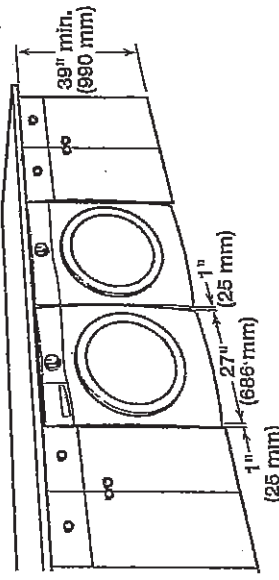

Mobile home - Additional installation requirements:

This dryer is suitable for mobile home installations. The installation must conform to the Manufactured Home Construction and Safety Standard, Title 24 CFR, Part 3280 (formerly the Federal Standard for Mobile home construction and Safety, Title 24, HUD Part 280) or Standard CAN/CSA-Z240 MH.

Mobile home installations require:

- Metal exhaust system hardware, available for purchase from your dealer. For further information, see "Assistance or Service" in your Use and Care Guide.
- Special provisions must be made in mobile homes to introduce outside air into dryer. Openings (such as a nearby window) should be at least twice as large as dryer exhaust opening.

For mobile home installation of gas dryers:

- Mobile Home Installation Hold-down Kit Part Number 346764 is available to order. For further information, see "Assistance or Service" in your Use and Care Guide.

CU - COUNTRY LANE
LOT 3-7
20-2212 ELEV. B
THE ROSLYN

48 OF 48

WHIRLPOOL DRYER Model #: YVED5620HW

Additional parts may be required, depending on your installation. Check local codes. Check existing electrical supply and venting. Read "Electrical Requirements" and "Venting Requirements" before purchasing parts.

If using a power supply cord:

Use a UL Listed power supply cord kit marked for use with clothes dryers. The kit should contain:

- A UL Listed 30 amp power supply cord, rated 120/240 volt minimum. The cord should be type SRD or SRDT and be at least 4 ft. (1.22 m) long. The wires that connect to the dryer must end in ring terminals or spade terminals with upturned ends.
- A UL Listed strain relief.

Optional Equipment (not supplied with dryer):

Refer to your Use and Care Guide for information about accessories available for your dryer.

LOCATION REQUIREMENTS

Check code requirements. Some codes limit, or do not permit, installing dryer in garages, closets, mobile homes, or sleeping quarters. Contact your local building inspector.

⚠ WARNING



Explosion Hazard

Keep flammable materials and vapors, such as gasoline, away from dryer.

Place dryer at least 18 inches (460 mm) above the floor for a garage installation.


Failure to do so can result in death, explosion, or fire.

You will need:


- A location allowing for proper exhaust installation. See "Venting Requirements."
- A separate 15 or 20 amp circuit for a gas dryer or 30 amp circuit for an electric dryer.
- If using power supply cord, a grounded electrical outlet located within 2 ft. (610 mm) of either side of dryer. See "Electrical Requirements."
- Floor must support dryer weight of 200 lbs. (90.7 kg). Also consider weight of companion appliance.
- Cold water faucets located within 4 ft. (1.2 m) of the water fill valves, and water pressure of 20–120 psi (138–827 kPa). You may use your washer's water supply by purchasing the necessary parts noted in "Parts needed."
- Level floor with maximum slope of 1" (25 mm) under entire dryer. If slope is greater than 1" (25 mm), install Extended Dryer Feet Kit, Part Number 279810. If not level, clothes may not tumble properly and automatic sensor cycles may not operate correctly.
- For garage installation, place dryer at least 18" (460 mm) above floor. If using a pedestal, you will need 18" (460 mm) to bottom of dryer.
- The dryer must not be installed or stored in an area where it will be exposed to water and/or weather.

IMPORTANT: Do not operate, install, or store dryer where it will be exposed to water, weather, or at temperatures below 40°F (4°C). Lower temperatures may cause dryer not to shut off at end of automatic sensor cycles, resulting in longer drying times.

DRYER DIMENSIONS
Front view:

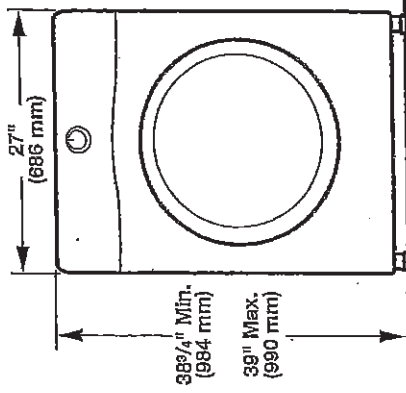


Side view:
Whirlpool Models

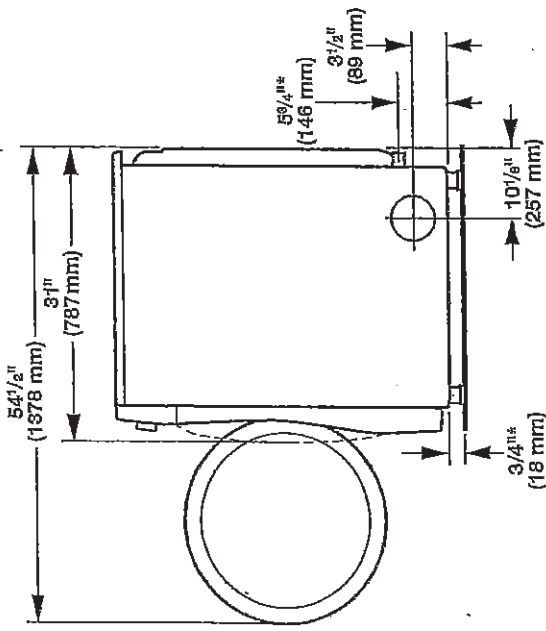

*Approx. measurement

Maytag Models

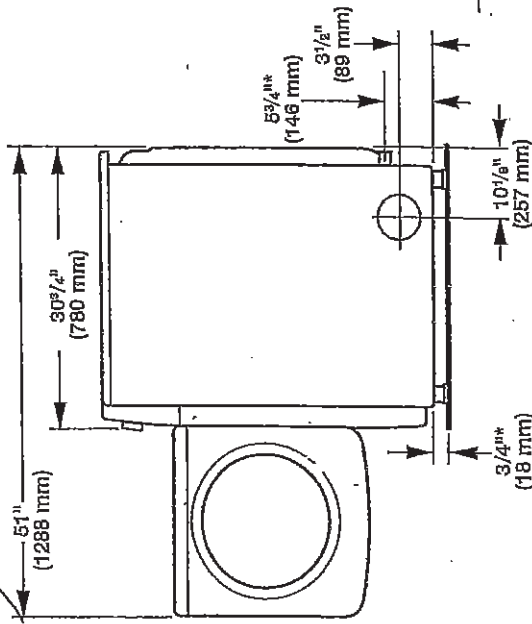

*Approx. measurement