Sales Selection Sheet Checklist

Heathwood Homes (Huron) Limited

Date Approved

LOT 3186A-6 Model: 20-2095 END B The Forbes PURCHASERS: VARINDER SINGH/ **Heathwood Homes (Huron) Limited VENDOR:** OPTIONAL DOUBLE SINKS IN MASTER ENSUITE BATHROOM UPGRADE TO 8' INTERIOR DOORS ON MAIN FLOOR **UPGRADE MANDOOR TO GARAGE TO 8'** FINISHED BASEMENT **COLD CELLAR UPGRADED / MODIFIED ELEVATION CORNER UPGRADE REAR UPGRADE CEILING UPGRADE - SMOOTH** Y MAIN FLOOR SECOND FLOOR **BASEMENT** ADDITIONAL ROUGH-INS 200 AMP SERVICE WET BAR ROUGH-IN **HUMIDIFIER** Y Y AIR CONDITIONING GAS ROUGH-IN **STOVE DRYER BBQ** ADDITIONAL FIREPLACE KITCHEN: HOODFAN VENTING SIZE **6 IN ROUND DUCT** 7 IN ROUND DUCT **FULL BASEMENT STAIRS:** Carpet Grade N/A **UPPER BASEMENT STAIRS:** LOWER BASEMENT STAIRS: N/A MAIN STAIRS: All Oak MEDIA STAIRS (if applicable): N/A LOFT STAIRS (if applicable): N/A Mar 30, 2022 IRIT SALEM Mar 30, 2022 Signature on file Date **Decor Consultant:** Purchaser: **Date** Mar 30, 2022 MARILYN ROSEN **Date** Purchaser:

Locked Date:

VARINDER SINGH/
Project: Wallaceton
Unit: 3186A-6, Phase: 3
Model: 20-2095 END B The Forbes

2 6 362 4 4 1 2021 12:23 25

Locked: Closed:

Kitchen	

Cabinet Colour/Style	6243	Viking III-CAMDEN-OYSTER CL-MAPLE ***STD***
Countertop	9121	MSI Quartz GROUP 1 ICED WHITE 3/4 inch with double mitre edge ***1***
Countertop Edge	4005	DOUBLE MITRE 1 1/2 INCH ***UPG***
Cabinet Hardware	2086	9677-HARDWARE ***STD***
Island Cabinet Colour/Style	6243	Viking III-CAMDEN-OYSTER CL-MAPLE ***STD***
Island Countertop	9121	MSI Quartz GROUP 1 ICED WHITE 3/4 inch with double mitre edge ***1***
Backsplash	5721	QT.CD.ARW.0306.BR-Colour and Dimension Bright-Arctic White-3 x 6 ***1***
Backsplash Grout	2226	Grout-(00) White ***STD***
Backsplash Tile Pattern	3100	HERRINGBONE ***UPG***
HoodFan	9904	YWMH31017HZ-Whirlpool Over-The-Range Microwave Hood Combination-SS-30 inch
Appliance	9904	Purchasers have been advised: standard fridge opening is a minimum 37 3/8 x 73 3/8". Ice Waterline Rough-In is included.
Appliance	9904	Standard stove opening is 30" and standard dishwasher opening is 24". Any gas stove will require backsplash or stainless steel backing to avoid fire hazards.
Appliance	9904	Purchasers acknowledge: Heathwood Homes and its contractors will not be responsible for any kitchen cabinet changes due to appliances dimension changes after
Comment		

Kitchen/Breakfast

Flooring	9904	TR.SP.WHITE.1313 SEMPRE White Matte 13
Floor Tile Grout	7705	Grout-(01) Alabaster ***UPG***
Floor Tile Pattern	3000	STANDARD SQUARE ***STD***

VARINDER SINGH/ Project: Wallaceton Unit: 3186A-6, Phase: 3 Model: 20-2095 END B The Forbes

Page 2 of 9

362 362 362 4 102021 12:23 25

Locked:

	Closed.			
Comment OR 9255				
Foyer				
Flooring	3000	TR.SP.WHITE.1313 SEMPRE White Matte 13		
Floor Tile Grout	7705	Grout-(01) Alabaster ***UPG***		
Floor Tile Pattern	3000	STANDARD SQUARE ***STD***		
Comment				
Laundry Room				
Flooring	3000	TR.SP.WHITE.1313 SEMPRE White Matte 13		
Floor Tile Grout	7705	Grout-(01) Alabaster ***UPG***		
Floor Tile Pattern	3000	STANDARD SQUARE ***STD***		
Comment				
Laundry Room Opt.				
Cabinet - Uppers	9111	VIKING III SIMCOE ORCHID 3DL ***1***		
Cabinet Hardware	2092	9661-HARDWARE ***STD***		
Comment				
Mud Room				
Flooring	2092	TR.SP.WHITE.1313 SEMPRE White Matte 13		

VARINDER SINGH/
Project: Wallaceton
Unit: 3186A-6, Phase: 3
Model: 20-2095 END B The Forbes

Page 3 of 9

Created: 1142/2021 12:23.2

Locked: Closed:

	Floor Tile Gr	rout	7705	Grout-(01) Alabaster ***UPG***
	Floor Tile Pa	attern	3000	STANDARD SQUARE ***STD***
	Comment	OR 9255		
Pow	der Room			
	Flooring		3000	TR.SP.WHITE.1313 SEMPRE White Matte 13
	Floor Tile Gr	rout	7705	Grout-(01) Alabaster ***UPG***
	Floor Tile Pa	attern	3000	STANDARD SQUARE ***STD***
	Plumbing Fi	xture (Colour)	1737	Plumbing Fixtures-WHITE ***STD***
	Comment	OR 9255		
Hall				
	Flooring		1737	TR.SP.WHITE.1313 SEMPRE White Matte 13
	Grout		7705	Grout-(01) Alabaster ***UPG***
	Floor Tile Pa	attern	3000	STANDARD SQUARE ***STD***
	Comment	x		
Gre	at Room			
J. 0				
	Flooring		9359	Red Oak Pearl-Vintage Engineered-BARISTA-3/4 inch x 3 1/4 inch ***STD***
	Comment			

VARINDER SINGH/ Project: Wallaceton Unit: 3186A-6, Phase: 3 Model: 20-2095 END B The Forbes 5 **6**362 **4**4 **6**362 **1**12:23 25

Locked:

		Closed:
Hanar Hall		
Upper Hall		
Florida	0050	DV 40707 D + . T MVOTIO DEIOE 40
Flooring	9252	DY 16787 -Dynasty Tex-MYSTIC BEIGE-40 oz Poly***STD***
		roly STD
Comment		
Comment		
Finished Basement (Rec) Room/Hall		
Flooring	9252	DY 16787 -Dynasty Tex-MYSTIC BEIGE-40 oz
· ·		Poly***STD***
Comment		
Master Bedroom		
Flooring	9252	DY 16787 -Dynasty Tex-MYSTIC BEIGE-40 oz
		Poly***STD***
•		
Comment		
Bedroom 2		
200100111 <u>2</u>		
Flooring	9252	DY 16787 -Dynasty Tex-MYSTIC BEIGE-40 oz
Tiooning	3232	Poly***STD***
Comment		
Bedroom 3	_	
Flooring	9252	DY 16787 -Dynasty Tex-MYSTIC BEIGE-40 oz Poly***STD***
		Poly***S1D***
Comment		
Bedroom 4	— ,	
Deal Colling		
Flooring	9252	DY 16787 -Dynasty Tex-MYSTIC BEIGE-40 oz
Flooring	3232	Poly***STD***
Comment		
Page 4 of 9		

VARINDER SINGH/
Project: Wallaceton
Unit: 3186A-6, Phase: 3
Model: 20-2095 END B The Forbes



Locked: Closed:

Cabinet Colour/Style	9111	VIKING III SIMCOE ORCHID 3DL ***STD***
Countertop	8822	4924-38-Countertop-WHITE CARRARA-Wilsonart ***STD***
Countertop Edge	1111	N/A *****
Cabinet Hardware	2092	9661-HARDWARE ***STD***
Floor Tile	2092	TR.SP.WHITE.1313 SEMPRE White Matte 13
Floor Tile Grout	7705	Grout-(01) Alabaster ***UPG***
Floor Tile Pattern	3000	STANDARD SQUARE ***STD***
Shower Floor Tile	8661	OD.ON.SWT.0202.MT.N-Ontario Series Mosaic-Snow White Matte-2 x 2 ***STD***
Shower Floor Tile Grout	2226	Grout-(00) White ***STD***
Shower Floor Tile Pattern	3000	STANDARD SQUARE ***STD***
Shower Wall Tile	9020	QT.WV.WHT.0810-Weave-White-8 x 10 ***STD***
Shower Wall Tile Grout	2226	Grout-(00) White ***STD***
Shower Wall Tile Pattern	3090	VERTICAL STACKED ***STD***
Shower Jamb(s) and Sill(s)	8923	Shower Jamb / Sill-Thassos White ***STD***
Plumbing Fixture (colour)	1737	Plumbing Fixtures-WHITE ***STD***

VARINDER SINGH/
Project: Wallaceton
Unit: 3186A-6, Phase: 3
Model: 20-2095 END B The Forbes

Locked: Closed:

Main Bathroom		
Cabinet Colour/Style	9111	VIKING III SIMCOE ORCHID 3DL ***STD***
Countertop	8822	4924-38-Countertop-WHITE CARRARA-Wilsonart ***STD***
Countertop Edge	1111	N/A *****
Cabinet Hardware	2092	9661-HARDWARE ***STD***
Flooring	2092	TR.SP.WHITE.1313 SEMPRE White Matte 13
Floor Tile Grout	7705	Grout-(01) Alabaster ***UPG***
Floor Tile Pattern	3000	STANDARD SQUARE ***STD***
Wall Tile	8833	QT.UW.WHT.0810-Uniwall-White-8 x 10 ***STD***
Wall Tile Grout	2226	Grout-(00) White ***STD***
Main Bathroom Tile Pattern	3090	VERTICAL STACKED ***STD***
Plumbing Fixture (Colour)	1737	Plumbing Fixtures-WHITE ***STD***
Comment		
Finished Basement Bathroom		
Cabinet Colour/Style	9111	VIKING III SIMCOE ORCHID 3DL ***STD***
Countertop	8822	4924-38-Countertop-WHITE CARRARA-Wilsonart ***STD***
Countertop Edge	1111	N/A *****
Cabinet Hardware	2092	9661-HARDWARE ***STD***
Flooring	2092	TR.SP.WHITE.1313 SEMPRE White Matte 13

VARINDER SINGH/
Project: Wallaceton
Unit: 3186A-6, Phase: 3
Model: 20-2095 END B The Forbes

362 Ced: 1142(21 12:23 25

Locked: Closed:

Floor Tile Grout	7705	Grout-(01) Alabaster ***UPG***
Floor Tile Pattern	3000	STANDARD SQUARE ***STD***
Shower Floor Tile	8661	OD.ON.SWT.0202.MT.N-Ontario Series Mosaic-Snow White Matte-2 x 2 ***STD***
Shower Floor Tile Grout	2226	Grout-(00) White ***STD***
Shower Floor Tile Pattern	3000	STANDARD SQUARE ***STD***
Shower Wall Tile	9020	QT.WV.WHT.0810-Weave-White-8 x 10 ***STD***
Shower Wall Tile Grout	2226	Grout-(00) White ***STD***
Shower Wall Tile Pattern	3090	VERTICAL STACKED ***STD***
Shower Jamb(s)	8923	Shower Jamb / Sill-Thassos White ***STD***
Plumbing Fixture (Colour)	1737	Plumbing Fixtures-WHITE ***STD***
Comment Great Room Fireplace		
	0005	D:
Type	8865	Dimplex-Electric Fireplace-PF3033HL ***STD*** NF-17-Paint Grade Mantle- Cabinet (Per Plan)-WHITE ***STD*** PG 2
Surround Opt.	1111	N/A *****
Disclaimer	1111	Purchasers have been advised: heat from the FP can damage TV above a FP and items placed on mantle.
Disclaimer Comment	1111	Heathwood and its contractors will not be liable for any damage on items placed/installed above a FP after closing.

Basement Stairs

VARINDER SINGH/
Project: Wallaceton
Unit: 3186A-6, Phase: 3
Model: 20-2095 END B The Forbes

9 **4** 4 4

Locked: Closed:

Туре	1714	Carpet Grade Stairs ***STD BASEMENT STAIRS***
Colour	7940	Sambucca STAIN TO COMPLIMENT HARDWOOD AND WILL VARY FROM FLOORING ***99***
Carpet Runner	1111	N/A *****
Carpet Ruffilei	1111	
Handrail/Pickets/Post Type	9119	Handrail only on closed walls (one or two sides per building code) ***STD***
Handrail/Pickets/Post Colours	7762	Carpet Grade-Stain handrail, stringers, nosing _post(s). (Me
Carpet	9252	DY 16787 -Dynasty Tex-MYSTIC BEIGE-40 oz Poly***STD***
Custom Stain/Paint	1111	N/A *****
Custom Stam/Famil	1111	
Comment		
Basement Stairs Landings (Upper a	nd Lo	
Flooring	1111	N/A *****
Comment		
Main Stairs		
Туре	1712	Oak Stairs ***STD MAIN STAIRS***
Colour	7940	Sambucca STAIN TO COMPLIMENT HARDWOOD AND
		WILL VARY FROM FLOORING ***99***
Carpet Runner	1111	N/A *****
Handrail/Pickets/Posts Type	8148	Single Collar Alt. Plain w/ Shoes with 3 1/2" Square/Cap
Handraii/Fickets/Fosts Type	0140	Post(s)-BLACK ***2***
Handrail/Pickets/Posts Colour	7761	Oak Grade-Stain handrail,stringers,treads,risers,nosingpos
Custom Stain/Paint	1111	N/A *****
Comment		

VARINDER SINGH/
Project: Wallaceton
Unit: 3186A-6, Phase: 3
Model: 20-2095 END B The Forbes

10 6³⁶²/₄/₄

Locked: Closed:

Flooring	1111	N/A *****		
Comment				
Comment				
Throughout				
Wells Deint Colour	4747	00 Mell M	ADM ODEV ***CTD***	
Walls - Paint Colour	1717	ZZ-vvaii-vv	ARM GREY ***STD***	
Underpad	1079	500 Series	-Underpad ***STD***	
Thresholds	2232	Metal Thre	sholds ***STD***	
Switches and Plug	5796	Decora Wh	nite Switches and Plugs ***S	TD***
emenes and ring	0.00	Dood W	nio omiono ana mage	
Trim Size	8705	4 ¼ Baseb	oard and 2 ¾ Casings ***ST	D***
Trim - Paint Colour	1716	Trim-WHIT	E ***STD***	
Comment				
Purchaser:				
VARINDER SINGH		Date	Decor Consultant	Date
Purchaser:				
		Date	Wallaceton	Date Approved

construction summary Of 44



Lot: 3186A-6 Model: 20-2095 END B The Forbes

Project/Phase: Wallaceton / 3

Offer	Five Appliances: SS Fridge, Stove, Dishwasher: White Front Loader Washer/Dryer - Townhomes
Worksheet	Note:
Offer	The Purchaser(s) acknowledge that they have NOT been referred by an existing Heathwood Homeowner and therefor are not
	entitled to a referral fee under Heathwood Homes referral program
Worksheet	Note:

DisciplineMS.rpt 13dec21 Page 1 of 6

Printed and Sent: 06-Apr-22



Lot: 3186A-6

Model: 20-2095 END B The Forbes Project/Phase: Wallaceton / 3

APPLIANCES

Invoice	Qty.	Description
921	1	- APPLIANCES - WHIRLPOOL OTR SS - YWMH31017HZ
313,492		
06Apr22		
		CABINETRY - notification; ELECTRICAL - delete std range hood; HEATING/AIR CONDITIONING - Duct Size
		to 6"

CABIN		RY Description
921 313,652 06Apr22	1	KITCHEN - 05H-66cm deep fridge enclosure (counter depth) with no walls ([2] 66cm deep gables and [1] 66cm deep cabinet) (This is not a zero clearance enclosure. Standard heights and widths will be used.) Viking SKETCH # 2
921 307,044 06Apr22	1	LAUNDRY ROOM - CABINETRY - VIKING I/II/III - OPT. LAUNDRY ROOM UPPERS - UPG SKETCH # 3
921 334,723 06Apr22 **	1	MASTER ENSUITE - PLUMBING - OPTION FROM ONE SINK TO DOUBLE SINKS INCLUDING STD CHATEAU FAUCET OVERMOUNT COLONY SINK ONE EXTRA VANITY LIGHT AND CABINET CONVERSION 2D VIKING SKETCH # 3 CABINETRY-2D Convert Cabinetry Viking; Eletrical-Additional Vanity Light
921 313,492 06Apr22 **	1	- APPLIANCES - WHIRLPOOL OTR SS - YWMH31017HZ CABINETRY - notification; ELECTRICAL - delete std range hood; HEATING/AIR CONDITIONING - Duct Size to 6"
921 313,768 06Apr22	1	- 11A-Upper angle corner per unit Viking SKETCH # 2

DisciplineMS.rpt 13dec21 Page 2 of 6

Printed and Sent: 06-Apr-22



Lot: 3186A-6 Model: 20-2095 END B The Forbes Project/Phase: Wallaceton / 3

	CERAMICS			
Invoice	Qty.	Description		
921 309,530 06Apr22	1	KITCHEN - CERAMICS - BACKSPLASH - KITCHEN - UPGRADE 1		
921 309,529 06Apr22	1	KITCHEN - CERAMICS - BACKSPLASH - INSTALL IN HERRINGBONE PATTERN - KITCHEN - PATTERN		
921 309,613 06Apr22	1	LAUNDRY ROOM - CERAMICS - FLOOR GROUT - LAUNDRY ROOM - GROUT		
921 309,614 06Apr22	1	MAIN BATHROOM - CERAMICS - FLOOR GROUT - MAIN BATHROOM - GROUT		
921 309,616 06Apr22	1	MUD ROOM - CERAMICS - FLOOR GROUT - MUD ROOM - GROUT		
921 309,615 06Apr22	1	IAIN HALL - CERAMICS - FLOOR GROUT - MAIN HALL - GROUT		
921 309,612 06Apr22	1	OYER - CERAMICS - FLOOR GROUT - FOYER - GROUT		
921 309,617 06Apr22	1	POWDER ROOM - CERAMICS - FLOOR GROUT - POWDER ROOM - GROUT		
921 309,610 06Apr22	1	MASTER ENSUITE - CERAMICS - FLOOR GROUT - ENSUITE MASTER - GROUT		
921 309,611 06Apr22	1	FINISHED BASEMENT BATHROOM - CERAMICS - FLOOR GROUT - FINISHED BASEMENT BATHROOM - GROUT		
921 309,568 06Apr22	1	KITCHEN/BREAKFAST - CERAMICS - FLOOR - KITCHEN / BREAKFAST - GROUT		

DisciplineMS.rpt 13dec21 Page 3 of 6



Lot: 3186A-6

Model: 20-2095 END B The Forbes

Project/Phase: Wallaceton / 3

DRYWALL

Invoice	Qty.	Description
921 314,346	4	- INTERIOR TRIM - UPGRADE FROM STANDARD 6 FT 8 INCH 2 PANEL HOLLOW CORE SINGLE DOOR TO 8 FT 2 PANEL HOLLOW CORE SINGLE DOOR
06Apr22		FOYER CLOSET, BASEMENT STAIRS, MUDROOM CLOST, POWDER ROOM DOOR DRYWALL-Notify;FRAMING-Notify;PAINTING-paint upgraded door and frame
921 310,719	1	- DRYWALL - SMOOTH CEILING IN MAIN FLOOR
06Apr22		PAINTING - Paint smooth ceiling
921 314,346	1	- EXTERIOR WINDOWS AND DOORS - UPGRADE MAN DOOR FROM STANDARD 6 FT 8 INCH 6 PANEL SINGLE DOOR TO 8 FT 2 6 PANEL SINGLE DOOR
06Apr22		GARAGE DOOR 8' - 6 PANEL DOOR DRYWALL-Notify; FRAMING-Notify; INTERIOR TRIM-Notify; PAINTING-paint upgraded door and frame

ELECTRICAL

Invoice	Qty.	Description
921 314,224	2	- ELECTRICAL - CEILING ROUGH-IN (CAPPED)
06Apr22		1X :GREAT ROOM TO BE INSTALLED IN THE CENTRE OF THE ROOM - ISE EXISTINF SWITCH PLUG 1X KITCHEN- ABOVE THE BREAKFAST BAR- USE SEPARATE SWITCH SEE SKETCH # 2
921 314,223	1	KITCHEN - ELECTRICAL - ADDITIONAL SWITCH
06Apr22		TO BE USE FOR TH R/I CAP LIGHT ABOVE THE ISLAND SEE SKETCH # 2
921 314,232	1	GREAT ROOM - ELECTRICAL - EXTRA WALL INTERIOR OUTLET ON EXISTING CIRCUIT (DOES NOT INCLUDE KITCHEN OUTLETS)
06Apr22		TO BE INSTALLED ABOVE THE CENTRE OF THE FIRE PLACE 70) FROM FLOOR SEE SKETCH # 2
921 334,723	1	MASTER ENSUITE - PLUMBING - OPTION FROM ONE SINK TO DOUBLE SINKS INCLUDING STD CHATEAU FAUCET OVERMOUNT COLONY SINK ONE EXTRA VANITY LIGHT AND CABINET CONVERSION 2D VIKING
06Apr22 **		SKETCH # 3 CABINETRY-2D Convert Cabinetry Viking; Eletrical-Additional Vanity Light
921	1	- APPLIANCES - WHIRLPOOL OTR SS - YWMH31017HZ
313,492		
06Apr22 **		CABINETRY - notification; ELECTRICAL - delete std range hood; HEATING/AIR CONDITIONING - Duct Size to 6"

FRAM	FRAMING		
Invoice	Qty.	Description	
921 314,346 06Apr22 **	4	- INTERIOR TRIM - UPGRADE FROM STANDARD 6 FT 8 INCH 2 PANEL HOLLOW CORE SINGLE DOOR TO 8 FT 2 PANEL HOLLOW CORE SINGLE DOOR FOYER CLOSET, BASEMENT STAIRS, MUDROOM CLOST, POWDER ROOM DOOR DRYWALL-Notify; FRAMING-Notify; PAINTING-paint upgraded door and frame	
921 314,346	1	- EXTERIOR WINDOWS AND DOORS - UPGRADE MAN DOOR FROM STANDARD 6 FT 8 INCH 6 PANEL SINGLE DOOR TO 8 FT 2 6 PANEL SINGLE DOOR	
06Apr22		GARAGE DOOR 8' - 6 PANEL DOOR DRYWALL-Notify; FRAMING-Notify; INTERIOR TRIM-Notify; PAINTING-paint upgraded door and frame	

DisciplineMS.rpt 13dec21 Page 4 of 6

Printed and Sent: 06-Apr-22

15 of 44



CONSTRUCTION SUMMARY

Lot: 3186A-6

Model: 20-2095 END B The Forbes Project/Phase: Wallaceton / 3

GLASS PRODUCTS / MIRRORS

Invoice	Qty.	Description
---------	------	-------------

921 310,751	-	MASTER ENSUITE - MIRRORS/GLASS PRODUCTS - UPGRADE TO FRAMELESS CLEAR GLASS WITH D-RING HANDLE IN CHROME - ENSUITE MASTER
06Apr22		

GRANITE

Invoice Qty. Description

1038	1	Kitchen / Island - GRANITE - COUNTERTOP - 3/4 INCH GROUP 1 WITH MITRE EDGE - KITCHEN / ISLAND - UPG
311,135		
01Apr22		

HEATING / AIR CONDITIONING

		, milit con all militarian
Invoice	Qty.	Description

921 313,492 06Apr22 **	1	- APPLIANCES - WHIRLPOOL OTR SS - YWMH31017HZ CABINETRY - notification; ELECTRICAL - delete std range hood; HEATING/AIR CONDITIONING - Duct Size to 6"
921 314,336 06Apr22	1	- HEATING/AIR - HUMIDIFIER LENNOX HCWB3-17 FROM 2,001 TO 4,000 SQ.FT. (INCLUDING BASEMENT)

INTERIOR RAILINGS

Invoice Qty. Description

921 312,320 06Apr22	1 MAIN STAIRS - INTERIOR RAILINGS - BLACK METAL - SINGLE SQUARE/CAP POST(S) AS PER PLAN - MAIN STAIR - UPG	E COLLAR ALT. PLAIN W/ SHOES WITH 3 1/2 INCH
---------------------------	--	--

INTERIOR TRIM AND DOORS

Invoice Qty. Description

	-	
921 314,346	4	- INTERIOR TRIM - UPGRADE FROM STANDARD 6 FT 8 INCH 2 PANEL HOLLOW CORE SINGLE DOOR TO 8 FT 2 PANEL HOLLOW CORE SINGLE DOOR
06Apr22	FOYER CLOSET, BASEMENT STAIRS, MUDROOM CLOST, POWDER ROOM DOOR DRYWALL-Notify;FRAMING-Notify;PAINTING-paint upgraded door and frame	
921 314,346	1	- EXTERIOR WINDOWS AND DOORS - UPGRADE MAN DOOR FROM STANDARD 6 FT 8 INCH 6 PANEL SINGLE DOOR TO 8 FT 2 6 PANEL SINGLE DOOR
06Apr22		GARAGE DOOR 8' - 6 PANEL DOOR DRYWALL-Notify: FRAMING-Notify: INTERIOR TRIM-Notify: PAINTING-paint upgraded door and frame

DisciplineMS.rpt 13dec21 Page 5 of 6

Printed and Sent: 06-Apr-22



Lot: 3186A-6

Model: 20-2095 END B The Forbes

Project/Phase: Wallaceton / 3

PAINTING

Invoice	Qty.	Description
921 314,346	4	- INTERIOR TRIM - UPGRADE FROM STANDARD 6 FT 8 INCH 2 PANEL HOLLOW CORE SINGLE DOOR TO 8 FT 2 PANEL HOLLOW CORE SINGLE DOOR
06Apr22 **		FOYER CLOSET, BASEMENT STAIRS, MUDROOM CLOST, POWDER ROOM DOOR DRYWALL-Notify;FRAMING-Notify;PAINTING-paint upgraded door and frame
921 310,719	1	- DRYWALL - SMOOTH CEILING IN MAIN FLOOR
06Apr22 **		PAINTING - Paint smooth ceiling
921 314,346	1	- EXTERIOR WINDOWS AND DOORS - UPGRADE MAN DOOR FROM STANDARD 6 FT 8 INCH 6 PANEL SINGLE DOOR TO 8 FT 2 6 PANEL SINGLE DOOR
06Apr22		GARAGE DOOR 8' - 6 PANEL DOOR DRYWALL-Notify: FRAMING-Notify: INTERIOR TRIM-Notify: PAINTING-paint upgraded door and frame

PLUMBING

Invoice	Qty.	Description

STRUCTURED WIRING

\mathbf{S}	\mathbf{C}	UI	* *	11/11	١,
_	_				

Invoice	Qty.	Description
921	1	GREAT ROOM - STRUCTURED WIRING - CONDUIT PIPE TO ABOVE FIREPLACE ROUGH-IN
314,540		
06Apr22		TO BE INSTALLED ABOVE THE CENTRE OF THE FIRE PLACE 70" FROM FLOOR
		SEE SKETCH# PAGE

DisciplineMS.rpt 13dec21 Page 6 of 6

20-2095 END ELEV. B

Model: 20-2095 END B The Forbes

17 of 44


SKETCH #1

THE FORBES

ELEVATION B | 2,720 SQ. FT.

Includes 638 sq. ft. of Finished Lower Level

WALLACETON

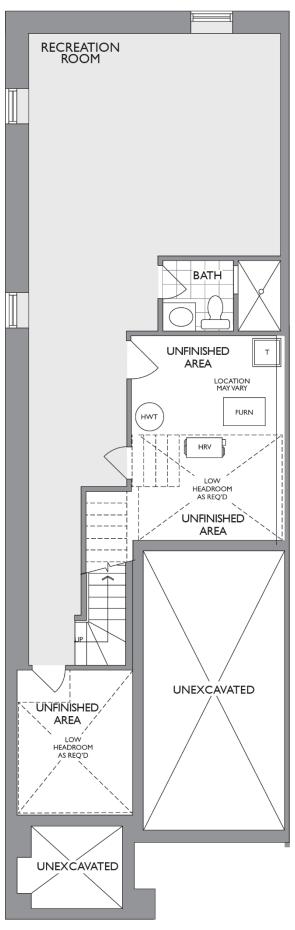

Model: 20-2095 END B The Forbes

18 of 44

THE FORBES


SKETCH #2

ELEVATION B | 2,720 SQ. FT.

Includes 638 sq. ft. of Finished Lower Level

WALLACETON

20-2095 END ELEV. B

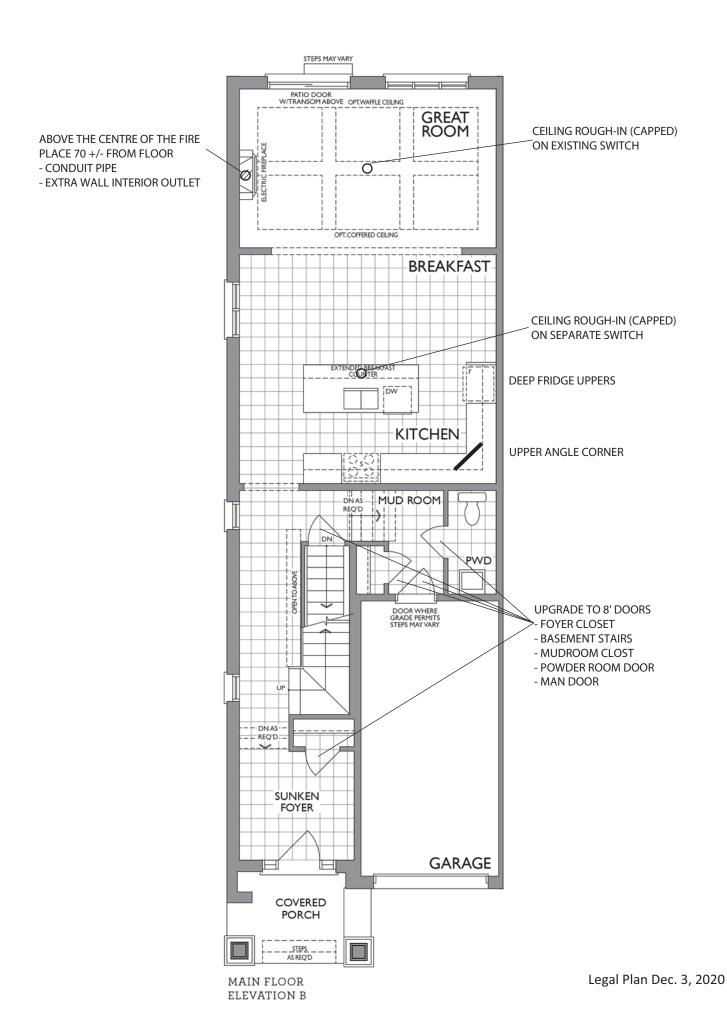

Model: 20-2095 END B The Forbes

19 of 44

SKETCH #3


ELEVATION B | 2,720 SQ. FT.

THE FORBES

Includes 638 sq. ft. of Finished Lower Level

WALLACETON

20-2095 END ELEV. B

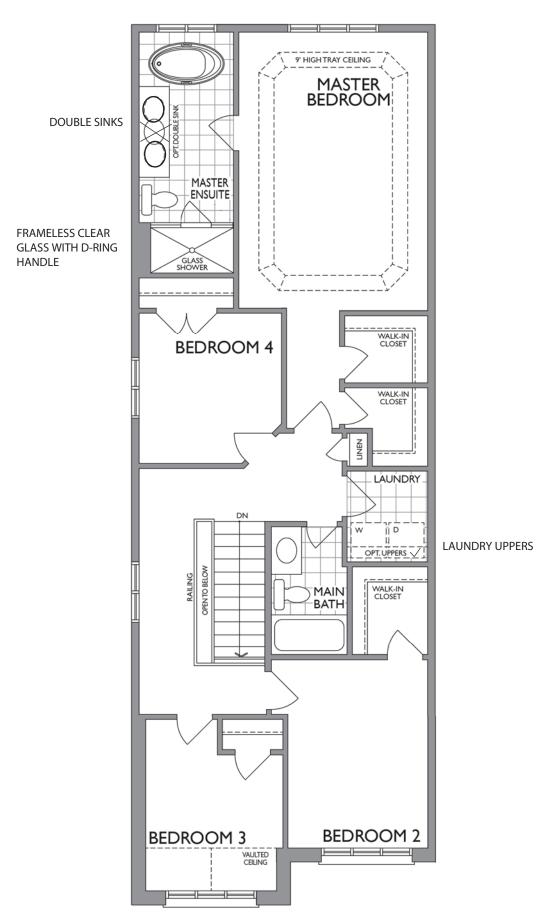

SECOND FLOOR ELEVATION B

Legal Plan Dec. 3, 2020

20 of 44





NFAS NF17 Mantel CABINET

Plumbing Fixture / Kitchen Sinks 15410


Project: Wallaceton Unit: 3186A-6, Phase: 3


21 of 44 Model: 20-2095 END B The Forbes



ND1831UA/9







ND1831UA/9 SPECIFICATION

Model ND1831UA/9 is a double (two equal size) bowl undermount sink manufactured by Franke Kindred Canada Limited from 18 gauge stainless steel. Product has silk finished rims and linear brush finished bowls. Sink is fully undercoated. Basket strainer waste fittings (3 1/2", 89 mm) are included. Sink is backed with a limited lifetime warranty.

- O.D. 17 3/4" x 30 7/8" x 8 1/2" (45 x 78 x 22 cm)
- Recommended for minimum 36" cabinet

Franke Kindred Canada Limited

P.O. Box 190, 1000 Franke Kindred Road, Midland, Ontario, Canada, L4R 4K9 Phone: 866-687-7465 Fax: 800-361-8408

22 of 44

MOEN

FAUCET DESCRIPTION

Reflex™ pulldown system offers smooth operation, easy movement and secure docking Power Clean™ spray technology Metal construction with various finishes identified by suffix

Quick connect installation

- Pulldown spray with 68" braided hose Flexible supply lines with 3/8" compression fittings
- High arc spout provides height and reach to fill or clean large pots while pulldown wand provides the maneuverability for cleaning or rinsing 360° rotating spout

Faucet designed for handle to be mounted on right side only

OPERATION

Lever style handle

Temperature controlled by 100° arc of handle travel

Operates with less than 5 lbs. of force

• Operates in stream or spray mode in the pullout or retracted position **FLOW**

Flow is limited to 1.5 gpm (5.7 L/min) max at 60 psi

CARTRIDGE

• 1255™ Duralast™ cartridge

STANDARDS


Third party certified to IAPMO Green, ASME A112.18.1/CSA B125.1 and all applicable requirements therein including NSF 61/9G & 372

- Meets CalGreen and Georgia SB370 requirements Complies with California Proposition 65 and with the Federal Safe Drinking
- The backflow protection system in the device consists of two independently operating check valves, a primary and a secondary which prevent backflow
- ADA 🖒 for lever handle

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the
- 10 year limited warranty when used in a multifamily installation
- 5 year limited warranty when used in a commercial installation Visit www.moen.com/support for complete details and limitations

Specifications




ALIGN™ **Single Handle High Arc Pulldown Kitchen Faucet**

Models: 7565 series

NOTE: THIS FAUCET IS DESIGNED TO BE INSTALLED THROUGH 1 HOLE, 1-1/2" (38mm) MIN. DIA. (OPTIONAL 3-HOLE ESCUTCHEON 141002 AVAILABLE)



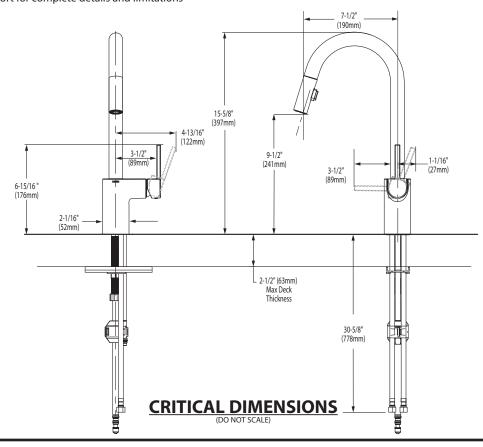

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN

www.moen.com

Rev. 6/20



BOULEVARD® PEDESTAL SINK VITREOUS CHINA

BARRIER FREE (ABOVE COUNTER OR DROP-IN ONLY)

BOULEVARD® PEDESTAL SINK

☐ 0641.800 Faucet holes on 8" (203mm) centers (Illustrated)

STD • 0641.400 Faucet holes on 4" (102mm) centers

☐ 0641.100 Center hole only

- Classic styled rectangular pedestal lavatory
- · Vitreous china
- Rear overflow
- Supplied with mounting kit
- Right Height® for greater comfort during use
- Faucet ledge with large deck area (faucet not included)
- Design coordinates with Boulevard® Toilet
- Basin has flat bottom to also allow use as an **above counter** sink or a **drop-in** sink (with u-shaped cut out)

Nominal Dimensions:

24" x 19" x 35-1/2" (610 x 483 x 902mm)

- ☐ 0641.008 Pedestal top-8" (203mm) centers
- ☐ 0641.004 Pedestal top-4" (102mm) centers
- ☐ 0641.001 Pedestal top-center hole only
- ☐ 0010.000 Pedestal only

Bowl sizes:

17" (432mm) wide, 12-1/2" (318mm) front to back, 5" (127mm) deep

Compliance Certifications -

Meets or Exceeds the Following Specifications:

• ASME A112.19.2 - 2008/CSA B45.1-08

To Be Specified:

- ☐ Color: ☐ White ☐ Linen
- ☐ Faucet Finish:
- Supplies:
- ☐ 1-1/4" Trap:
- □ Nipple:



SEE REVERSE FOR ROUGHING-IN DIMENSIONS


^{*} See faucet section for additional models available

24 of 44

Model: 20-2095 END B The Forbes

4merican tandard

BOULEVARD® PEDESTAL SINK

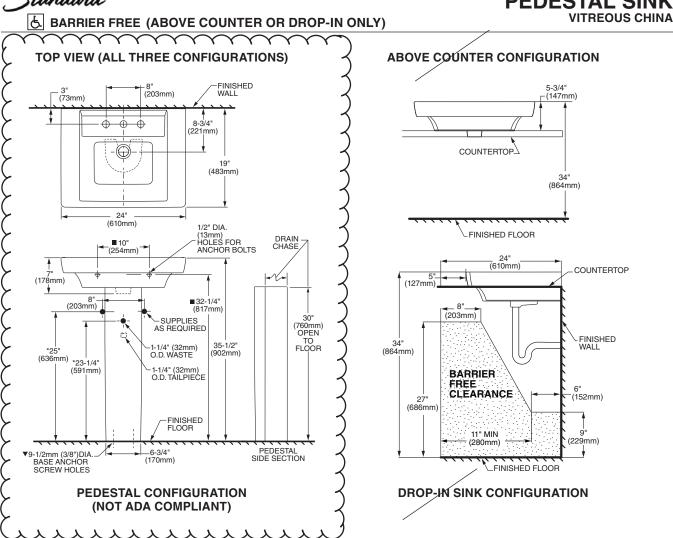

ABOVE COUNTER AND DROP-IN SINK CONFIGURATIONS MEET THE AMERICANS WITH DISABILITIES ACT GUIDELINES AND ANSI A117.1 ACCESSIBLE AND USABLE BUILDINGS AND FACILITIES - CHECK LOCAL CODES.

Top of sink installed at 34" (864mm) height from finished floor. Sink installed 5" (127mm) minimum from front edge of countertop. Provide 27" (686mm) knee clearance area.

NOTES:

* DIMENSIONS SHOWN FOR LOCATION OF SUPPLIES AND "P" TRAPS ARE SUGGESTED.

▼ PEDESTAL ANCHORING SCREWS NOT INCLUDED.

■ SUITABLE FOR REINFORCEMENT ONLY. ACTUAL DIMENSIONS MUST BE TAKEN FROM FIXTURE.

FITTING NOT INCLUDED AND MUST BE ORDERED SEPARATELY.

PROVIDE SUITABLE REINFORCEMENT FOR ALL WALL SUPPORTS.

NETAL ATTOM INSTRUCTIONS SUBPLIED WITH LANGUAGO V. INSTALLATION INSTRUCTIONS SUPPLIED WITH LAVATORY.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerance established by ANSI Standard A112.19.2 These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

© 2018 AS America Inc.

Model: 20-2095 END B The Forbes

25 of 44

American Standard

BARRIER FREE

COLONY™ COUNTERTOP SINK

VITREOUS CHINA

COLONY COUNTERTOP SINK

- · Vitreous china
- Self-rimming
- · Front overflow
- · Supplied with template
- Faucet deck (Faucet shown not included)

☐ 0346 803 → Faucet hotes on 203 nm (8"), centres	~
O346 403 (Illustrated) Faucet holes on 102mm (4") centres	; ; }
Contro hole only	~


Centre hole only


Nominal Dimensions: 521 x 448mm (20-1/2" x 17-5/8")


Bowl sizes:

422mm (16-5/8") wide, 279mm (11") front to back, 143mm (5-5/8") deep









COMPLIANCE CERTIFICATIONS -

Meets or exceeds the following Specifications:

- ASME A112.19.2M for Vitreous China Fixtures.
- · CAN/CSA B45 Series.

To Be Specified

- ☐ Colour: ☐ White ☐ Bone ☐ Silver Gray ☐ Linen
- □ Faucet*:
- □ Faucet Finish:
- ☐ Supplies & Stops:
- ☐ Trap 1-1/4" (32 mm):

NOTES:

* DIMENSIONS SHOWN FOR LOCATION OF SUPPLIES AND "P" TRAP ARE SUGGESTED. FOR COUNTERTOP CUTOUT AND INSTALLATION INSTRUCTIONS USE TEMPLATE SUPPLIED WITH SINK.

SUPPLIED WITH SINK.

FAUCETS NOT INCLUDED AND MUST BE ORDERED SEPARATELY.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard A112.19.2.

These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

BAS-198 .

^{*} See faucet section for additional models available

Model: 20-2095 END B The Forbes

26 of 44



DEMI™ **Product Specification Sheet**

Two Piece Freestanding Collection

CF2007 Two Piece Freestanding Soaker


Size: 60" x 32" x 22"

1524 mm x 813 mm x 559 mm




- Vacuum formed acrylic reinforced with fiberglass
- Scratch, stain and fade resistant high gloss finish
- Installation friendly two piece design
- Accepts deck mounted faucet
- Includes integral pop up drain and rectangular overflow
- Includes levelling feet


TWO PIECE ASSEMBLY

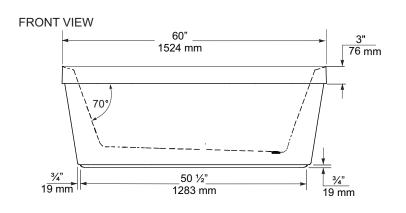

END VIEW



TOP VIEW

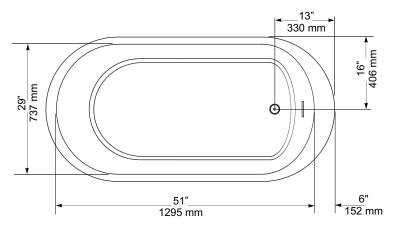

GENERAL SPECIFICATIONS

Average Weight 90 lb 41 kg Bathing Well at bottom 43"x 20" 1092 x 508 mm 195 litres Capacity Drain to Overflow Water Depth Drain to Overflow 406 mm Drain Opening (dia.) 51 mm Overflow Opening 2 1/4"x 1/2" 57 x 13 mm Drain to Floor Clearance

NOTES: Please confirm measurements on actual product to ensure proper identification. Bathtub to be installed on the floor supported by 5 self levelling feet. Adjust if required to level the bathtub for adequate drainage. Refer to installation instructions for additional information.

IMPORTANT: Dimensions of fixtures are nominal and may vary \pm %" (6 mm). Weight may vary \pm 5 lb (2.3 kg). Drawing is not to scale. These measurements are subject to change at manufacturer's discretion.

Compliance Certifications -

Meets or Exceeds the following Specifications:

CAN/CSA - B45 Series





Fax: 416.231.0929 www.mirolin.com

Customer Service: 416.231.5790 Canada, U.S.A.: 800.**MIROLIN**(647-6546) Fax, Canada: 800.463.2236

R0084162 25 Sep. 2018

Model: 20-2095 END B The Forbes

27 of 44

American Standard

Style That Works Better

FloWise™ DUAL FLUSH **ELONGATED TOILET**

VITREOUS CHINA


FloWise™ DUAL FLUSH ELONGATED TOILET

2476 216

- Vitreous china
- · Low-consumption Dual Flush Full flush 6.0 Lpf/1.3 gpf, Partial flush 3.0 Lpf/0.66 gpf.
- · Elongated wash down bowl
- · Internal trapway fully-glazed, 2-1/4" (57mm) ballpass
- · Concealed trapway bowl
- · Chrome-plated top mounted push button actuator
- Easy to clean sanitary dam on bowl
- Includes Elongated Slow Close Seat
- 100% factory flush tested
- · 2 bolt caps

Separate Component Parts:

- ☐ 3067 316 Elongated Bowl with Slow Close Seat
- **4035 216** Unlined Tank



- **☐** 3067 316 Elongated Bowl
- **4035 516** Lined Tank


Nominal Dimensions: 794 x 432 x 765mm (31-1/4" x 17" x 30-1/8")


Compliance Certifications -Meets or Exceeds the Following Specifications:

- ASME A112.19.2M (and 19.6M)
- · CAN/CSA B45 series

To Be Specified

- Colour: 020 White
- Supply with stop:





NOTES:
THIS TOILET IS DESIGNED TO ROUGH-IN AT A MINIMUM DIMENSION OF 305MM (12")
FROM FINISHED WALL TO C/L OF OUTLET.
SUPPLY NOT INCLUDED WITH FIXTURE AND MUST BE ORDERED SEPARATELY.
* DIMENSION SHOWN FOR LOCATION OF SUPPLY IS SUGGESTED.
FOR ADDITIONAL INFORMATION REFER TO INSTALLATION INSTRUCTIONS SUPPLIED.
IMPORTANT. Dimensions of fixture are peripaid and may use within the prepare of the present IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerance established by ANSI Standard A112.19.2

established by Ankist damagna (112.19.2). These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

UPGRADED VALUE ADDED FEATURES AT NO EXTRA CHARGE

TOI-284

© 2008 American Standard

28 of 44

MOEN[®]

DESCRIPTION

- Metal construction with various finishes identified by suffix
- 16" long 3/8" tubing connections Includes metal or 50/50 pop-up type waste assembly where noted **OPERATION**
- Pivot action lever style handle Temperature controlled through 180° degree arc of handle travel **FLOW**

Flow is limited to 1.5 gpm max (5.7L/min) at 60 psi CARTRIDGE

- 1225 cartridge design
- Nonmetallic/nonferrous and stainless steel material
- Can accommodate reversed piping and back to back installations


- Third party certified to WaterSense®, CSA B-125.1, ASME A112.18.1 and all applicable requirements referenced therein including NSF61/9
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act

 ADA for lever handle

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations

Specifications



CHATEAU® Single-Handle Lavatory Faucet

with Metal Waste Assembly


Model: L4625 series L4631BC **Bulk Packed (12 per carton):** L64624 series

with 50/50 Waste Assembly **Bulk Packed (12 per carton):** L64625 series

Less Waste **Bulk Packed (12 per carton):** L64600 series

NOTE: THIS FAUCET IS DESIGNED TO BE INSTALLED THRU 3-1" DIA. HOLES, 2" ON CENTER



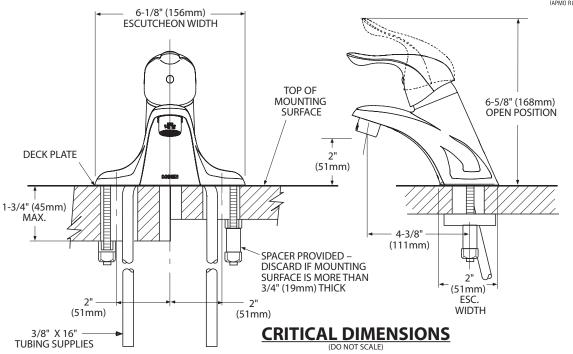

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN

www.moen.com

Rev 8/15

29 of 44



Buy it for looks. Buy it for life.®

There is more than 1 version of this model. Page down to identify the version you have.

- Metal construction with various finishes identified by suffix
- Includes non-metalic showerhead, arm, flange and non-metalic diverter tub spout

OPERATION

- Handle operates counterclockwise through a 270° arc with off at 6 o'clock and maximum hot at the 9 o'clock position. Shut off in clockwise direction
- Adjustable temperature limit stop to control maximum hot water temperature
- Pressure balancing mechanism maintains selected discharge temperature to $\pm\,3^\circ$

- Showerhead is limited to 2.5 gpm (9.5 L/min) at 80 psi EP suffix models are limited to 1.75 gpm (6.6 L/min) at 80 psi
- NH suffix models contain no showerhead

CARTRIDGE

- 1222 cartridge design Accommodates back to back installations
- Nonmetallic/nonferrous and stainless steel material

STANDARDS

- Third party certified to meet ASME A112.18.1/CSA B125.1 and all applicable requirements referenced therein
- EP suffix models are third party certified to WaterSense®

ADA (for lever handle

6.5" (165mm) ESC. DIAM.

WARRANTY

Lifetime limited warranty against leaks, drips and finish defects

2"CC (51mm) 1 7/8" IPS (48mm) MAX WALL

FINISHED WALL LINE

4-1/2" (114mm)

WALL OPENING

(133mm

7-1/2" (190mm)

to the original consumer purchaser 5 year warranty if used in commercial installations

Specifications






CHATEAU° POSI-TEMP° Single-Handle Tub/Shower Trim Kit

Models: TL181 series - valve trim only (Bulk Packed 12 per carton) TL182 series - shower trim only (Bulk Packed 12 per carton) TL183 series - tub/shower trim

(Bulk Packed 12 per carton)

Valves: 62300 series 2500 series

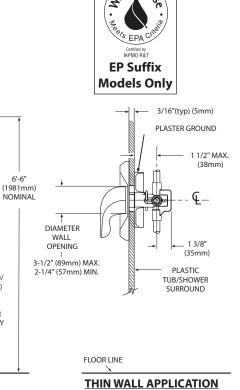

THICK WALL APPLICATION CRITICAL DIMENSIONS

FLOOR LINE

— 1/2" MIN. CC (13mm) 5/8" MIN. IPS (16mm)

2 1/2" MAX. (63mm)

SHOWER

48" (1219mm) 32" (813mm)

AND TUB ONLY

(DO NOT SCALE)

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN

www.moen.com

TL183sp: Rev. 5/13

Model: 20-2095 END B The Forbes

30 of 44

MOEN[®]

EN Specifications

DESCRIPTION

 Metal construction with various finishes identified by suffix OPERATION


- · Lever style handles with hot and cold color indicator
- Rotate hot side handle counterclockwise to open (clockwise to close) and the cold side handle (clockwise to open) and (counterclockwise to close)

STANDARDS

- Third party certified to: ASME A112.18.1/CSA B-125.1, and all applicable requirements referenced therein
- ADA 🕒 for lever handles

WARRANTY


- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
- 10 year limited warranty when used in a multi-family installation
- 5 year limited warranty when used in a commercial installation Visit www.moen.com/support for complete details and limitations




CHATEAU® Two-Handle Garden Tub Trim

Models: T994 series

Valves: 4792, 4793, 4794, 4796, 4797, 4798

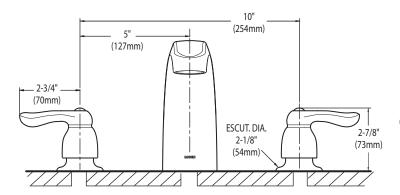

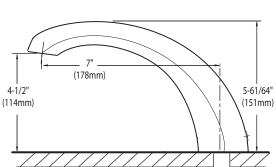

CRITICAL DIMENSIONS

(DO NOT SCALE)

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN

www.moen.com

Rev. 3/19

Model: 20-2095 END B The Forbes

31 of 44

WMH31017H

OVER-THE-RANGE MICROWAVE



DISHWASHER-SAFE TURNTABLE PLATE



Clean up spills on the turntable by simply putting it in the dishwasher.

2-SPEED, 300 CFM MOTOR CLASS*



Match the right amount of ventilation to the dish being prepared and quickly get rid of cooking odors with two different fan speed settings.

MICROWAVE PRESETS



Get just the right amount of heat and time, whether you're cooking or defrosting, with specific preset options.

		-		- Wages	
OTHER FEATURES • Add 30 seconds option		White (W)	Black (B)	Fingerprint Resistaint Stainless Steel (Z)	Silver (S)
 Electronic touch 					
controls	MODEL	WMH31017HW	WMH31017HB	WMH31017HZ	WMH31017HS
 Adjustable cooktop lighting 	Max height (in)	17-1/8"	17-1/8"	17-1/8"	17-1/8"
iigi turig	Width (in)	29-15/16"	29-15/16"	29-15/16"	29-15/16"
	Depth (in)	15-9/16"	15-9/16"	15-9/16"	15-9/16"



^{*}Performance varies based on installation. ®/™ ©2018 Whirlpool. All rights reserved. 1/18. WC170107A

Model: 20-2095 END B The Forbes

32 of 44

VENTING DESIGN SPECIFICATIONS

This section is intended for architectural designer and builder/ contractor reference only.


- Vent materials needed for installation are not provided with microwave hood combination.
- We do not recommend using a flexible metal vent.
- To avoid possible product damage, be sure to vent air outside, unless using recirculation installation. Do not vent exhaust air into concealed spaces, such as spaces within walls or ceilings, attics, crawl spaces, or garages.

For optimal venting installation, we recommend:

- Using roof or wall caps that have backdraft dampers
- Using a rigid metal vent
- Using the most direct route by minimizing the length of the vent and number of elbows to provide efficient performance
- Using uniformly sized vents
- Using duct tape to seal all joints in the vent system
- Using caulking compound to seal exterior wall or roof opening around cap
- Not installing 2 elbows together for optimal hood


If venting through the wall, be sure that there is proper clearance within the wall for the damper to open fully.

If venting through the roof, and rectangular-to-round transition is used, be sure there are at least 3" (7.6 cm) of clearance between the top of the microwave oven and the transition piece. See "Rectangular-to-Round Transition" illustration.



Rectangular-to-Round Transition


NOTE: The minimum 3" (7.6 cm) clearance must exist between the top of the microwave oven and the rectangular to round transition piece so that the damper can open freely and fully.



- A. Roof cap
- B. 6" (15.2 cm) min. diameter round vent
- C. Elbow (for wall venting only)
- D. Wall cap
- E. 31/4" x 10" to 6" (8.3 x 25.4 cm to 15.2 cm) rectangular to round transition piece
- F. Vent extension piece, at least 3" (7.6 cm) high

Recommended Standard Fittings

The following length equivalents are for use when figuring vent length. See the examples in "Recommended Vent Length".



- A. Rectangular-to-round transition piece: $3^{1/4}$ " x 10" to 6" = 5 ft (8.3 x 25.4 cm to 15.2 cm = 1.5 m)
- B. Roof cap: 31/4" x 10" = 24 ft (8.3 x 25.4 cm = 7.3 m) C. 90° elbow: 31/4" x 10" = 25 ft (8.3 x 25.4 cm = 7.6 m)
- D. 90° elbow: 6" = 10 ft (15.2 cm = 3 m)
- E. Wall cap: $3\frac{1}{4}$ " x 10" = 40 ft (8.3 x 25.4 cm = 12.2 m)
- F. 45° elbow: 6'' = 5 ft (15.2 cm = 1.5 m)
- G. 90° flat elbow: $3\frac{1}{4}$ " x 10" = 10 ft (8.3 x 25.4 cm = 3 m)

Model: 20-2095 END B The Forbes


33 of 44

Recommended Vent Length

The total length of the vent system including straight vent, elbow(s), transitions, and wall or roof caps must not exceed the equivalent of 140 ft (42.7 m) for either type of vent. See the "Recommended Standard Fittings" section for equivalent lengths.

For best performance, use no more than three 90° elbows. To calculate the length of the system you need, add the equivalent lengths of each vent piece used in the system. See the following examples:

$3\frac{1}{4}$ " x 10" (8.3 x 25.4 cm) vent system = 73 ft (22.2 m) total




A. One $3\frac{1}{4}$ " x 10" (8.3 x 25.4 cm) 90° elbow = 25 ft (7.6 m)

B. 1 wall cap = 40 ft (12.2 m)

C. 2 ft (0.6 m) + 6 ft (1.8 m) straight = 8 ft (2.4 m)

6" (15.2 cm) vent system = 73 ft (22.2 m) total



A. Two 90° elbows = 20 ft (6.1 m)

B. 1 wall cap = 40 ft (12.2 m)

C. 1 rectangular-to-round transition piece = 5 ft (1.5 m)

D. 2 ft (0.6 m) + 6 ft (1.8 m) straight = 8 ft (2.4 m)

If the existing vent is round, a rectangular-to-round transition piece must be used. In addition, a rectangular 3" (7.6 cm) extension vent between the damper assembly and rectangular-to-round transition piece must be installed to keep the damper from sticking.

Model: 20-2095 END B The Forbes

34 of 44



Whirtpool® 21 cu. ft. Top-Freezer Refrigerator WRT541SZD



Fingerprint-Resistant Stainless WRT541SZDZ

Also available in:

White	WRT541SZDW
Black	WRT541SZDB
Monochromatic Stainless Steel	WRT541SZDM

Capacity					
Total Capacity	21 cu. ft.				
Refrigerator Capacity	15 cu. ft.				
Freezer Capacity	6 cu. ft.				
General Features & Properti	es				
EZ Connect Icemaker Kit					
LED Interior Lighting					
ENERGY STAR® Certified					
Electronic Temperature Controls					
Freezer Temperature Controls					
Clear Door Bins					
Adjustable Door Bins					
Quiet Cooling					
Fingerprint Resistant					
Electrical Details					
Amps	6.5				
Volts	115				
Certifications					
ADA Compliant	Yes				
ENERGY STAR® Certified	Yes				

Technical Details				
Refrigerator Type	Top-Freezer			
Number of Doors	2			
Number of Interior Refrigerator Shelves	3			
Number of Refrigerator Door Bins	1 Fixed, 4 Adjustable			
Number of Interior Freezer Shelves	1			
Number of Freezer Door Bins	2 Fixed			
Lighting Type	LED			
Ice Maker	Optional			
Ice Maker Location	Freezer			
Dispenser Type	N/A			
Dimensions				
Product Dimensions (H x W x D)	66-1/4" x 32-3/4" x 34"			
Depth with Door Open 90°	62-1/4"			
Cutout Dimensions	Allow extra 1/2" on sides and top Allow extra 1" on rear			
Reference Material				

Key Features & Benefits

Frameless Glass Shelves


Store more items on wall-to-wall shelves for greater storage flexibility.

Flexi-Slide™ Bin

Make space for tall items with the bin that quickly and easily moves side to side.

Humidity-Controlled Crispers

Store fruits and vegetables in their ideal environment.

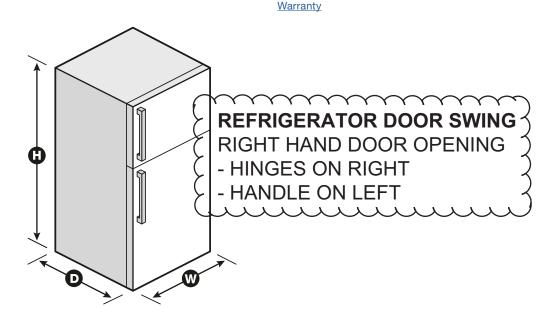

Dimension Guide Use & Care Guide

Energy Guide

NOTE: Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

®/™ © 2020. All rights reserved. Printed in the U.S.A. D200052XXC. WRT541SZDSPECSHEETV01.

Model: 20-2095 END B The Forbes

35 of 44



Top Mount Refrigerator

PRODUCT MODEL NUMBERS

WRT311FZD WRT511SZD WRT541SZD

Electrical: A 115-volt, 60-Hz, AC-only, 15-or 20-amp fused, grounded electrical supply is required. It is recommended that a separate circuit serving only your refrigerator be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.


NOTE: Before performing any type of installation, cleaning, or removing a light bulb, turn the control (Thermostat, Refrigerator or Freezer Control depending on the model) to OFF and then disconnect the refrigerator from the electrical source. When you are finished, reconnect the refrigerator to the electrical source and reset the control (Thermostat, Refrigerator or Freezer Control depending on the model) to the desired setting. See "Using the Controls."

Water: A cold water supply with water pressure between 30 and 120 psi (207 and 827 kPa) is required to operate ice maker and water dispenser. If you have questions about your water pressure, call a licensed, qualified plumber.

IMPORTANT: The pressure of the water coming out of a reverse osmosis system going to the water inlet valve of the refrigerator needs to be between 30 and 120 psi (207 and 827 kPa).


Reverse Osmosis Water Supply: If a reverse osmosis water filtration system is connected to your cold water supply, the water pressure to the reverse osmosis system needs to be a minimum of 40 to 60 psi (276 to 414 kPa).

PRODUCT DIMENSIONS

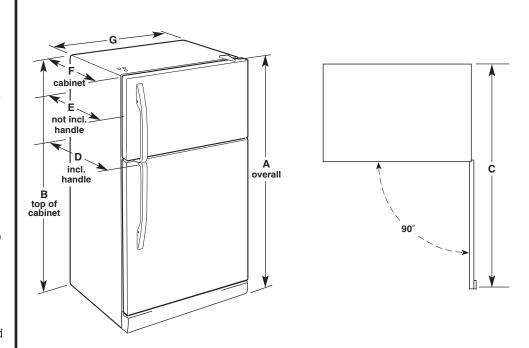

Model Number	Model Size	Reversible Door	Height - Overall "A"	Height - Top of Cabinet "B"	Depth - Door Open 90° "C"	Depth - With Handles "D"	Depth - Without Handles "E"	Depth - Cabinet Only "F"	Width - Cabinet "G"
WRT311FZD	20.5 cu. ft.	Yes	661/4" (168.3 cm)	65½" (166.4 cm)	621/4" (158.1 cm)	32 ⁷ / ₈ " (83.5 cm)	30 ⁵ / ₈ " (77.8 cm)	28½" (72.4 cm)	32¾" (83.2 cm)
WRT511SZD WRT541SZD	21.3 cu. ft.	Yes	66½" (168.3 cm)	65½" (166.4 cm)	62½" (158.1 cm)	34" (86.4 cm)	32½" (82.3 cm)	28½" (72.4 cm)	32¾" (83.2 cm)

LOCATION REQUIREMENTS



To ensure proper ventilation for your refrigerator, allow for a $\frac{1}{2}$ " (1.25 cm) space on each and between overhead cabinets and refrigerator top. Allow at least 1" (2.5 cm) between back of cabinet and the wall. If your refrigerator has an ice maker, make sure you leave some extra space at the back for the water line connections.

If you are installing your refrigerator next to a fixed wall, leave $2^{\prime\prime}$ (5 cm) minimum on the hinge side (depending on your model) to allow for the door to swing open.

NOTE: This refrigerator is intended for use in a location where the temperature ranges from a minimum of 55°F (13°C) to a maximum of 110°F (43°C). The preferred room temperature range for optimum performance, which reduces electricity usage and provides superior cooling, is between 60°F (15°C) and 90°F (32°C). It is recommended that you do not install the refrigerator near a heat source, such as an oven or radiator.

Model: 20-2095 END B The Forbes

36 of 44






Available Finishes/Colours




YWFE515S0JB Black



YWFF515S0JS Stainless Steel



Manuals & Literature:





<u> Warranty</u>

5.3 cu. ft. Whirlpool® electric range with Frozen Bake™ technology

YWFE515S0JS

This Whirlpool® electric range with a dual element stove top helps you get dinner to the table. Skip preheating for favorites like pizza with Frozen Bake™ technology. This self cleaning oven also prevents cooked food from getting cold with the Keep Warm setting. Closed door broiling helps keep the kitchen comfortable.

Top Features

FlexHeat™ Dual Radiant Element

Get two elements in one with a 6" inner ring that's great for smaller pots and pans and a 9" expandable outer ring that makes room for larger cookware.

Frozen Bake™ technology
Skip preheating and cook frozen favorites like pizza in fewer steps with preprogrammed settings that automatically adjust cooking times for you.

Keep Warm setting

Keep dishes from getting cold with this setting that delivers low heat to the oven.

Closed Door Broiling
Maintain the optimal cooking temperature for food while still keeping the kitchen comfortable and cool using this broiling temperature management system that helps prevent overheating.

Exterior

Dimensions	
Depth	27 3/4
Height	36
Width	29 7/8

Configuration and Overview		
Range Type	Freestanding	
Fuel Type	Electric	
Size (IN,inches)	30	

Exterior	
Door Removable	Yes
Drawer Type	Storage Drawer
Oven Door	Glass Window
Oven Window Size	Extra Large
Handle Color	Stainless Steel
Handle Material	Metal


Handle Type	Reach-Through Handle
Features	
Hot Surface Indicator Light	Yes
Heating Element On Indicator Light	Yes
Power On Indicator Light	No
Griddle	NA
Automatic Convection Conversion Temperature Adjust	No
Power Outage Compatible	No

Model: 20-2095 END B The Forbes

37 of 44

WHIRLPOOL 30" (76.0 CM) FREESTANDING ELECTRIC RANGES Model YWFE515S0JS

Product Dimensions



- A. 273/4" (70.5 cm) max. depth with handle
- B. 46⁷/₈" (119.1 cm) overall height (max.) with leveling legs screwed all the way in*
- C. 36" (91.4 cm) cooktop height (max.) with leveling legs screwed all the way in*
- D. 297/8" (75.9 cm) width
- E. 25⁵/₁₆" (64.3 cm) depth back of range to front of cooktop**
- F. Model/serial/rating plate (located on the frame behind a top corner of the door or either side of the drawer)

IMPORTANT: Range must be level after installation. Follow the instructions in the "Level Range" section. Using the cooktop as a reference for leveling the range is not recommended.


- *Range can be raised approximately 1" (2.5 cm) by adjusting the leveling legs.
- **Front of door and drawer may extend further forward depending on styling.

Cabinet Dimensions

Cabinet opening dimensions shown are for 25" (64.0 cm) countertop depth, 24" (61.0 cm) base cabinet depth and 36" (91.4 cm) countertop height.

IMPORTANT: If installing a range hood or microwave hood combination above the cooking surface, follow the range hood or microwave hood combination installation instructions for dimensional clearances above the cooktop surface.

A freestanding range may be installed next to combustible walls with zero clearance.



- A. 13" (33.0 cm) max. upper cabinet depth
- B. 30" (76.2 cm) min. opening width
- C. For minimum clearance to top of cooktop, see NOTE*
- D. 30" (76.2 cm) min. opening width
- E. Outlet 8" (20.3 cm) to 22" (55.9 cm) from either cabinet, 7" (17.8 cm) max. from floor.
- F. Cabinet door or hinges should not extend into the cutout.

*NOTE: 24" (61.0 cm) minimum when bottom of wood or metal cabinet is covered by not less than 1/4" (6.4 mm) flame retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015" (0.4 mm) stainless steel, 0.024" (0.6 mm) aluminum or 0.020" (0.5 mm) copper.

30" (76.2 cm) minimum clearance between the top of the cooking platform and the bottom of an uncovered wood or metal cabinet.

Model: 20-2095 END B The Forbes

38 of 44

WHIRLPOOL 30" (76.0 CM) FREESTANDING ELECTRIC RANGES Model YWFE515S0JS

Electrical Requirements - Canada Only



Electrical Shock Hazard

Electrically ground range.

Failure to do so can result in death, fire, or electrical shock.

If codes permit and a separate ground wire is used, it is recommended that a qualified electrical installer determine that the ground path is adequate and wire gauge are in accordance with local codes.

Be sure that the electrical connection and wire size are adequate and in conformance with CSA Standard C22.1, Canadian Electrical Code, Part 1 - latest edition, and all local codes and ordinances.

A copy of the above code standards can be obtained from:

Canadian Standards Association 178 Rexdale Blvd. Toronto, ON M9W 1R3 CANADA

Check with a qualified electrical installer if you are not sure the range is properly grounded.

Range Rating*		Specified Rating of Power Supply Cord Kit and Circuit Protection
120/240 V	120/208 V	Amps
8.8 - 16.5 KW 16.6 - 22.5 KW	7.8 - 12.5 KW 12.6 - 18.5 KW	40 or 50** 50

^{*}The NEC calculated load is less than the total connected load listed on the model/serial/rating plate.

- A time-delay fuse or circuit breaker is recommended.
- This range is equipped with a CSA International Certified Power Cord intended to be plugged into a standard 14-50R wall receptacle. Be sure the wall receptacle is within reach of range's final location.



Do not use an extension cord.


INSTALLATION INSTRUCTIONS

Unpack Range

Excessive Weight Hazard

Use two or more people to move and install range. Failure to do so can result in back or other injury.


- **1.** Remove shipping materials, tape and film from range.
- 2. Remove oven racks and parts package from inside oven.
- 3. Do not remove the shipping base at this time.



A. Shipping base

4. On Ranges Equipped with a Storage Drawer:


Remove the storage drawer. See the "Storage Drawer" section. Use a 1/4" (6.4 mm) drive ratchet to lower the rear leveling legs one-half turn. Use a wrench or pliers to lower front leveling legs one-half turn.



- A. 1/4" (6.4 mm) drive ratchet
- B. Rear leveling leg
- C. Wrench or pliers
- D. Front leveling leg

On Ranges Equipped with a Warming Drawer or Premium Storage Drawer:

On ranges equipped with a warming drawer or premium storage drawer, the rear legs cannot be accessed by removing the warming drawer or premium storage drawer. It will be necessary to adjust the rear legs from outside the range. Use wrench or pliers to lower the front and rear leveling legs one half turn.



- A. Rear leveling leg
- B. Wrench or pliers
- C. Front leveling leg

^{*}If connecting to a 50 A circuit, use a 50 A rated cord with kit. For 50 A rated cord kits, use kits that specify use with a nominal 13/8" (3.5 cm) diameter connection opening.

Model: 20-2095 END B The Forbes

39 of 44

WHIRLPOOL 30" (76.0 CM) FREESTANDING ELECTRIC RANGES Model YWFE515S0JS

Install Anti-Tip Bracket

AWARNING

Tip Over Hazard

A child or adult can tip the range and be killed.

Install anti-tip bracket to floor or wall per installation instructions.


Slide range back so rear range foot is engaged in the slot of the anti-tip bracket.

Re-engage anti-tip bracket if range is moved.

Do not operate range without anti-tip bracket installed and engaged.

Failure to follow these instructions can result in death or serious burns to children and adults.


- Remove the anti-tip bracket from where it is taped inside the storage drawer or warming drawer.
- 2. Determine which mounting method to use: floor or wall. If you have a stone or masonry floor, you can use the wall mounting method. If you are installing the range in a mobile home, you must secure the range to the floor.
- 3. Determine and mark centerline of the cutout space. The mounting can be installed on either the left-side or right-side of the cutout. Position mounting bracket against the wall in the cutout so that the V-notch of the bracket is 129/16" (31.9 cm) from centerline as shown.



A. 129/16" (31.9 cm) B. Bracket V-notch

 Drill two 1/8" (3 mm) holes that correspond to the bracket holes of the determined mounting method. See the following illustrations.

Floor Mounting



Wall Mounting



- 5. Using the Phillips screwdriver, mount anti-tip bracket to the wall or floor with the two #12 x $1^5/8$ " (4.1 cm) screws provided.
- **6.** Move range close enough to opening to allow for final electrical connections. Remove shipping base, cardboard or hardboard from under range.
- 7. Move range into its final location, making sure rear leveling leg slides into anti-tip bracket.



8. Move range forward onto shipping base, cardboard or hardboard to continue installing the range using the following installation instructions.

40 of 44





Monochromatic Stainless Steel WDF540PADM

Also available in:

White	WDF540PADW
Black	WDF540PADB

Capacity			
Total Place Settings	15		
General Features & Properties			
Soil Sensor			
In-Door Silverware Basket			
Sani Rinse Option			
Normal Cycle			
Heavy Cycle			
High Temperature Wash Option			
Heated Dry Option			
ENERGY STAR® Certified			
Industry's Best Selling Dishwasher Brand [†]			
Electrical Details			
Amps	15		
Volts	120		
Hz 60			
Certifications			
ENERGY STAR® Certified	Yes		

Technical Details	
Dishwasher Type	Built-in
Control Location	Front
Control Type	Electronic
Number of Wash Cycles	5
Number of Options	5
dBA [*]	53
Number of Racks	2
Tub Material	Plastic
Wash System	Filter
Wash System Type	Removable Filter
Number of Wash Arms	3
Dimensions	
Product Dimensions (H x W x D)	34-1/2" x 23-7/8" x 24-1/2"
Depth with Door Open 90°	49-1/2"
Reference Material	

Dimension Guide

Install Guide

Use & Care Guide

Energy Guide

Warranty

Key Features & Benefits

Sensor Cycle


Automatically get the right wash and dry settings for each load with two sensors that measure temperature, soil level and load size during prewash and the wash cycle.

1-Hour Wash Cycle

Clean the dishes you need fast with a cycle that thoroughly takes care of plates, pans and glasses in just an hour."

Cycle Memory

Quickly start your dishwasher with one button. It automatically remembers the last cycle you picked so it's stored and ready to go.



^{*}Per IEC standards. **Compared to Normal cycle with lightly soiled loads. †Based on 12-month average of unit sales. TraQline 2018. NOTE: Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

®/™ © 2020. All rights reserved. Printed in the U.S.A. D200052XXA. WDF540PADSPECSHEETV01.

Model: 20-2095 END B The Forbes

41 of 44



PRODUCT MODEL NUMBERS

WDF110PAB	WDF310PLA	WDF530PSY
WDF111PAB	WDF320PAD	WDF540PAD
WDF120PAF	WDF510PAY	WDF730PAY
WDF121PAF	WDF520PAD	WDT710PAY
WDF310PAA	WDF530PAY	WDT720PAD
WDF310PCA	WDF530PLY	WDT770PAY

Electrical Requirements: 120-volt, 60-Hz, AC only, 15- or 20-amp. fused electrical supply. Copper wire only. A time delay fuse or circuit breaker and separate circuit is recommended.


If direct wiring dishwasher: Use flexible, armored,

or nonmetallic, sheathed copper wire with grounding wire that meets the wiring requirements for

your home and local codes and ordinances. Use a UL listed or CSA approved conduit connector.

If connecting dishwasher with a power supply cord:

Use Power Supply Cord Kit (Part No. 4317824) marked for use with dishwashers. Follow the kit



instructions for installing the power supply cord. Power supply cord must plug into a grounded 3 prong, outlet, located in the cabinet next to the dishwasher opening. Outlet must meet all local codes and ordinances.



Water Supply Requirements: A hot water line with 20 to 120 psi (138 to 862 kPa) water pressure. Water temperature must be 120°F (49°C) water at dishwasher. Use 3/8" O.D. copper tubing with compression fitting or flexible braided water supply line (1/2" minimum plastic tubing is not recommended). Use a 90°elbow with ¾"N.P.T. external pipe threads on one end. Do not solderwithin 6" (15.2 cm) from water inlet valve.

Drain Requirements: A new drain hose is supplied with your dishwasher. If this is not long enough, use a new drain hose with a maximum length of 12' (3.7 m) (Part No. 3385556) that meets all current AHAM/IAPMO test standards, is resistant to heat and detergent, and fits the 1" (2.5 cm) drain connector of the dishwasher.

Make sure to connect the drain hose to waste tee or disposer inlet above drain trap in house plumbing and (50.8 cm) minimum above the floor. It is recommended




that the drain hose either be looped up and securely fastened to the underside of the counter or be connected to an air gap.

Make sure to use an air gap if the drain hose is connected to house plumbing lower than 20" (50.8 cm) above subfloor or floor.

Use ½" (1.3 cm) minimum I.D. drain line fittings. If required, the air gap should be installed in accordance with the air gap installation instructions. When connecting the air gap, a rubber hose (not provided) will be needed to connect to the waste tee or disposer inlet.

PRODUCT DIMENSIONS

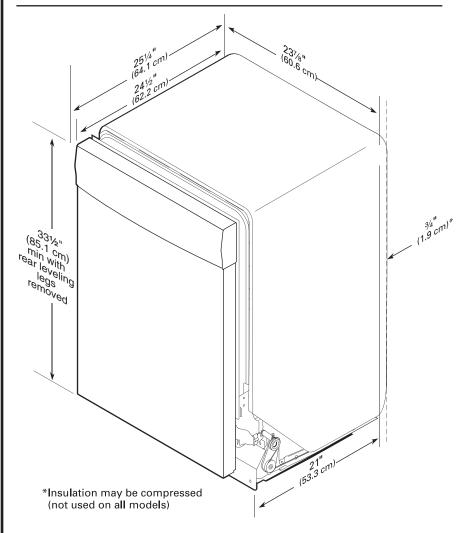


42 of 44

CABINET CUTOUT DIMENSIONS

NOTE: Shaded areas of cabinet walls show where utility connections may be installed.

- *Measure from the lowest point on the underside of the countertop. May be reduced to 33½" (85.1 cm) by removing the rear leveling legs from dishwasher.
- **Minimum, measured from narrowest point of opening.

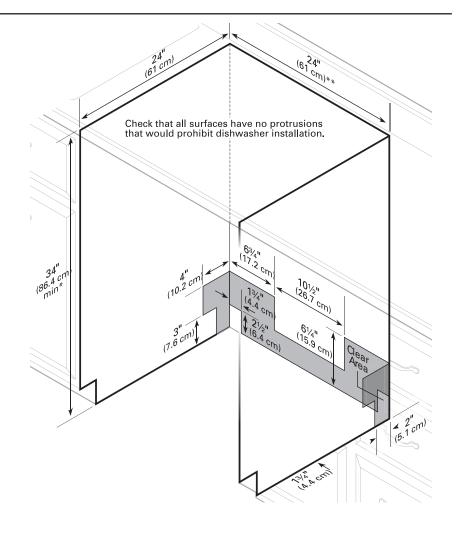

43 of 44

WHIRLPOOL WASHER Model #: WFW5620HW

Whirlpool Brand Canada English | Washer and Dryers | Washers | Front Load Washers | WFW5620HW



5.2 cu. ft. I.E.C. Closet-Depth Front Load Washer with Load & Go™ Dispenser



5.2 cu. ft. I.E.C. Closet-Depth Front Load Washer with Load & Go™ Dispenser

Model #: WFW5620HW

Dimensions

Depth	80.17 cm, 31-9/16 in
Depth With Door Open 90 Degree	143.51 cm, 56-1/2 in
Minimum Height	98.11 cm, 38-5/8 in
Width	68.58 cm, 27.0 in
Appearance	
LCD Touch Screen	No

Details

Drum Material	Stainless Steel	

Cycles and Options

Number of Wash Cycles	37	

Electrical

Hz	60
Power Cord Included	Yes

44 of 44

WHIRLPOOL DRYER Model #: YWED5620HW

Whirlpool Brand Canada English | Washer and Dryers | Dryers | Electric Dryers | YWED5620HW



Define Your Style

7.4 cu. ft. Front Load Electric Dryer with Intuitive Touch Controls



7.4 cu. ft. Front Load Electric Dryer with Intuitive Touch Controls

Model #: YWED5620HW

Dimensions

78.74 cm, 31.0 in				
138.43 cm, 54-1/2 in				
98.42 cm, 38-3/4 in				
68.58 cm, 27.0 in				
Configuration and Overview				
Electric				

Cycles and Options

Cycle Time Remaining	Yes
Lint Filter Indicator	No
Number of Dryer Cycles	36
Number of Dryness Levels	3

Ventilation System

Long Vent	No
Maximum Vent Length	64
Venting Direction	Left, Right, Bottom, Rear

Electrical

Hz	60)

Power Cord Included Yes