Sales Selection Sheet Checklist

1 of 43

PURCHASERS: SIDDHARTH, VALLABHDAS CHOKSHI/
VENDOR: Heathwood Homes (Huron) Limited

WOB BASEMENT LOT

Locked Date:			Date Approved	Heathwood Homes (Huron) Limited	d
Date	Purchaser:		Dec 10, 2021	MARILYN ROSEN	
Date	Fuiciid5ei.		Date	Decoi Consultant.	
Dec 10, 2021 Date	Purchaser:		Dec 10, 202	Decor Consultant:	_
Dec 10, 2021	Signature on file		Dec 10, 202	1 IRIT SALEM	
LOFT STAIRS	(it applicable):	N/A			
MEDIA STAIRS		N/A			
MAIN STAIRS:		All Oak			
	MENT STAIRS:	Carpet Grade			
UPPER BASEN		All Oak			
FULL BASEME		N/A			
Y 7 IN RO	OUND DUCT				
	OUND DUCT				
KITCHEN: HO	ODFAN VENTING SI	ZE			
ADDITIO	ONAL FIREPLACE				
BBQ					
DRYER					
STOVE					
GAS ROUGH-I	IN				
=	NDITIONING				
HUMIDI					
	AR ROUGH-IN				
	P SERVICE				
ADDITIONAL F	BOILCH INS				
BASEM	ENT				
SECON	ID FLOOR				
MAIN F	LOOR				
CEILING UPGI	RADE - SMOOTH				
	O O O O O				
	JPGRADE				
_	MODIFIED ELEVATION R UPGRADE	JN			
UDCDADED //	MODIFIED EL EVATIO	an an			
COLD	CELLAR				
Y FINISHE	ED BASEMENT				
COFFE	RED CEILING IN DIN	IING ROOM			
COFFE	RED CEILING IN GR	EAT ROOM			

SIDDHARTH, VALLABHDAS CHOKSHI/ Project: Wallaceton Unit: 3188B-9, Phase: 3 Model: 20-1790 A The Dunmore

Page 1 of 9

chen		
Cabinet Colour/Style	6181	Viking II-TORONTO-CHOCOLATE CL-OAK ***STD***
Countertop	7821	Group 1-Granite-GRIGIO SARDO-3/4 inch ***STD***
Countertop Edge	4010	SINGLE POLISHED STRAIGHT EDGE 3/4 INCH ***STD***
Cabinet Hardware	2086	9677-HARDWARE ***STD***
Island Cabinet Colour/Style	6181	Viking II-TORONTO-CHOCOLATE CL-OAK ***STD***
Island Countertop	7821	Group 1-Granite-GRIGIO SARDO-3/4 inch ***STD***
Backsplash	1111	N/A *****
Backsplash Grout	1111	N/A *****
Backsplash Tile Pattern	1111	N/A *****
HoodFan	1111	AV1308 Air King 30
Appliances	1111	Purchasers have been advised: standard fridge opening is
		a minimum 37 3/8 x 73 3/8". Ice Waterline Rough-In is included.
Appliances	1111	Standard stove opening is 30" and standard dishwasher opening is 24". Any gas stove will require backsplash or stainless steel backing to avoid fire hazards.
Appliances	1111	Purchasers acknowledge: Heathwood Homes and its contractors will not be responsible for any kitchen cabinet changes due to appliances dimension changes after
Comment		
chen/Breakfast		
Flooring	1111	TR.SP.WHITE.1313 SEMPRE White Matte 13
Floor Tile Grout	7705	Grout-(01) Alabaster ***UPG***
Floor Tile Pattern	3000	STANDARD SQUARE ***STD***

SIDDHARTH, VALLABHDAS CHOKSHI/ Project: Wallaceton Unit: 3188B-9, Phase: 3 Model: 20-1790 A The Dunmore

Comment		
Foyer		
Flooring	3000	TR.SP.WHITE.1313 SEMPRE White Matte 13
Floor Tile Grout	7705	Grout-(01) Alabaster ***UPG***
Floor Tile Pattern	3000	STANDARD SQUARE ***STD***
Comment		
Laundry Room		
Flooring	3000	GE.BY.AZR.1313 New Byzantine Azzuro 13
Floor Tile Grout	7705	Grout-(01) Alabaster ***UPG***
. 1001 1.110 0.1001		
Floor Tile Pattern	3000	STANDARD SQUARE ***STD***
Comment		
Laundry Room Opt.		
Cabinet - Uppers	1111	N/A *****
Cabinet Hardware	1111	N/A *****
Comment		
Mud Room		
Flooring	1111	TR.SP.WHITE.1313 SEMPRE White Matte 13
Page 2 of 9	_	

SIDDHARTH, VALLABHDAS CHOKSHI/ Project: Wallaceton Unit: 3188B-9, Phase: 3 Model: 20-1790 A The Dunmore

Floor Tile Grout	7705	Grout-(01) Alabaster ***UPG***
Floor Tile Pattern	3000	STANDARD SQUARE ***STD***
Comment		
Powder Room		
Flooring	3000	TR.SP.WHITE.1313 SEMPRE White Matte 13
Floor Tile Grout	7705	Grout-(01) Alabaster ***UPG***
Floor Tile Pattern	3000	STANDARD SQUARE ***STD***
Plumbing Fixture (Colour)	1737	Plumbing Fixtures-WHITE ***STD***
Comment		
Hall		
Flooring		
Flooring	1737	9255- TR.SP. WHITE 13131 SEMPRE MATTE 13 STD. SQ.
Flooring	1737	7705- GROUT ALABASTER UPG
Comment		
Dining Room		
Diffiling Room		
Flooring	9062	White Oak UVF-Vintage Northern Solid Sawn : White Oak : Sculpted UVF-BUCKINGHAM-3/4 inch x 5 inch ***2***
Comment		
Great Room	_	
Page 3 of 9	9062	White Oak LIVF-Vintage Northern Solid Sawn · White Oak ·

SIDDHARTH, VALLABHDAS CHOKSHI/ Project: Wallaceton Unit: 3188B-9, Phase: 3 Model: 20-1790 A The Dunmore

Flooring	JUU2	Transc our our annugo rection our ours. Transc our.
-		Sculpted UVF-BUCKINGHAM-3/4 inch x 5 inch ***2***
Comment		
Upper Hall		
Flooring	0250	DV 14253 Dynasty Toy DDOV/INCIAL WILLIE 40 or
Flooring	9250	DY 14253 -Dynasty Tex-PROVINCIAL WHITE-40 oz Poly***STD***
Comment		
L		
Finished Basement (Rec) Room/Hall		
Flooring	9250	DY 14253 -Dynasty Tex-PROVINCIAL WHITE-40 oz
	<u></u>	Poly***STD***
Comment		
Master Bedroom		
Flooring	9250	DY 14253 -Dynasty Tex-PROVINCIAL WHITE-40 oz
-		Poly***STD***
Comment		
Bedroom 2		
Flooring	9250	DY 14253 -Dynasty Tex-PROVINCIAL WHITE-40 oz
		Poly***STD***
Commont		
Comment		
D. J		
Bedroom 3		
Flooring	9250	DY 14253 -Dynasty Tex-PROVINCIAL WHITE-40 oz Poly***STD***
		I diy STD
Comment		
Johnnent		
Master Ensuite		
master Ensuite		
Page 4 of 9	0160	Miking III CHADI ESTONI MOONII ICHT 2DI ***STD***

SIDDHARTH, VALLABHDAS CHOKSHI/ Project: Wallaceton Unit: 3188B-9, Phase: 3 Model: 20-1790 A The Dunmore



Capillet Coloul/Style	9100	VIKING IN-CHARLESTON-IVICONLIGITI-ODL STD
Countertop	8822	4924-38-Countertop-WHITE CARRARA-Wilsonart ***STD***
Countertop Edge	1111	N/A *****
Cabinet Hardware	2086	9677-HARDWARE ***STD***
Floor Tile	5490	GE.LR.GRY.1313-La Riserva-Grey-13 x 13 ***STD***
Floor Tile Grout	7705	Grout-(01) Alabaster ***UPG***
Floor Tile Pattern	3000	STANDARD SQUARE ***STD***
Shower Floor Tile	8108	OD.ON.DGR.02.HEX.MT-ONTARIO HEXAGON MATTE-DARK GREY ***2***
Shower Floor Tile Grout	7704	Grout-(19) Pearl Gray ***STD***
Shower Floor Tile Pattern	1111	N/A *****
Shower Wall Tile	9020	QT.WV.WHT.0810-Weave-White-8 x 10 ***STD***
Shower Wall Tile Grout	2226	Grout-(00) White ***STD***
Shower Wall Tile Pattern	3090	VERTICAL STACKED ***STD***
Shower Jamb(s) and Sill(s)	8923	Shower Jamb / Sill-Thassos White ***STD***
Plumbing Fixture (colour)	1737	Plumbing Fixtures-WHITE ***STD***
Comment		
/lain Bathroom		
Cabinet Colour/Style	9158	Viking III-SIMCOE-NAVY BLUE-3DL ***STD***
Countertop	8827	4925K-07-Countertop-CALCUTTA MARBLE-Wilsonart
age 5 of 9		

SIDDHARTH, VALLABHDAS CHOKSHI/ Project: Wallaceton Unit: 3188B-9, Phase: 3 Model: 20-1790 A The Dunmore

		^^^STD^^^
Countertop Edge	1111	N/A *****
Cabinet Hardware	2086	9677-HARDWARE ***STD***
Flooring	5494	GE.NA.GRY.1313-New Albion-Grey-13 x 13 ***STD***
Floor Tile Grout	7705	Grout-(01) Alabaster ***UPG***
Floor Tile Pattern	3000	STANDARD SQUARE ***STD***
Wall Tile	5442	GE.NA.GRY.0810-New Albion-Grey-8 x 10 ***STD***
Wall Tile Grout	2226	Grout-(00) White ***STD***
Main Bathroom Tile Pattern	3090	VERTICAL STACKED ***STD***
	4707	
Plumbing Fixture (Colour)	1737	Plumbing Fixtures-WHITE ***STD***
Comment		
Finished Basement Bathroom		
Cabinet Colour/Style	6181	Viking II-TORONTO-CHOCOLATE CL-OAK ***STD***
Countarton	0010	1876K-52-Countertop-SPRING CARNIVAL-Wilsonart
Countertop	8819	***STD***
Countertop Edge	1111	N/A *****
Cabinet Hardware	2086	9677-HARDWARE ***STD***
Flooring	8622	GE.CN.CSB.1313-Corte Milia-Casablanca-13 x 13 ***STD***
Floor Tile Grout	7707	Grout-(39) Ivory ***UPG***
Floor Tile Pattern	3000	STANDARD SQUARE ***STD***

SIDDHARTH, VALLABHDAS CHOKSHI/ Project: Wallaceton Unit: 3188B-9, Phase: 3 Model: 20-1790 A The Dunmore

			ı
Shower Floor Tile	8661	OD.ON.SWT.0202.MT.N-Ontario Series Mosaic-Snow	
		White Matte-2 x 2 ***STD***	I
Shower Floor Tile Grout	2226	Grout-(00) White ***STD***	I
Shower Floor Tile Pattern	3000	STANDARD SQUARE ***STD***	
Shower Wall Tile	9020	QT.WV.WHT.0810-Weave-White-8 x 10 ***STD***	
Shower Wall Tile Grout	2226	Grout-(00) White ***STD***	I
Shower Wall Tile Pattern	3090	VERTICAL STACKED ***STD***	
			1
Shower Jamb(s)	8923	Shower Jamb / Sill-Thassos White ***STD***	
Plumbing Fixture (Colour)	1737	Plumbing Fixtures-WHITE ***STD***	ı
Comment			
Great Room Fireplace			
Great Room Fireplace			1
Туре	8865	Dimplex-Electric Fireplace-PF3033HL ***STD***	
Mantle	9114	NF 15-Paint Grade Mantle- Cabinet (Per Plan)-WHITE ***STD***	PG 21
Course and Ont	4444	N/A *****	I
Surround Opt.	1111	IN/A	
Disclaimer	1111	Purchasers have been advised: heat from the FP can damage TV above a FP and items placed on mantle.	
Disclaimer	1111	Heathwood and its contractors will not be liable for any damage on items placed/installed above a FP after closing.	
		damago em temo piacoa/motanea abovo a FF attor cicoling.	ı
Comment			
Basement Stairs			
Туре	1714	Carpet Grade Stairs ***STD BASEMENT STAIRS***	
Colour	7936	Buckingham STAIN TO COMPLIMENT HARDWOOD AND]
30.00.		WILL VARY FROM FLOORING ***99***	I
Carpet Runner	1111	N/A *****	
Page 7 of 9			l .

SIDDHARTH, VALLABHDAS CHOKSHI/ Project: Wallaceton Unit: 3188B-9, Phase: 3 Model: 20-1790 A The Dunmore

Handrail/Pick	ets/Post Type	9119	Handrail only on closed walls (one or two sides per building code) ***STD***
Handrail/Pick	ets/Post Colours	1729	Carpet Grade-Stain handrail, pickets, stringers, nosing _pos
Carpet		9250	DY 14253 -Dynasty Tex-PROVINCIAL WHITE-40 oz Poly***STD***
Custom Stain	n/Paint	1111	N/A *****
Comment			
Basement Stairs	Landings (Upper and	Lo	
Flooring		9062	White Oak UVF-Vintage Northern Solid Sawn : White Oak : Sculpted UVF-BUCKINGHAM-3/4 inch x 5 inch ***5***
Comment			
Main Stairs			
Туре		1712	Oak Stairs ***STD MAIN STAIRS***
Colour		7936	Buckingham STAIN TO COMPLIMENT HARDWOOD AND WILL VARY FROM FLOORING ***99***
Carpet Runne	er	1111	N/A *****
Handrail/Pick	ets/Posts Type	7651	1 5/16 inch Turned pickets with 3 1/2" Turned Post(s)-ALL OAK***STD***
Handrail/Pick	ets/Posts Colour	1728	Oak Grade-Stain handrail,oak pickets,stringers,treads,riser
Custom Stain	/Paint	1111	N/A *****
Comment			
Main Stairs Land	ing(s)		
Flooring		9062	White Oak UVF-Vintage Northern Solid Sawn : White Oak : Sculpted UVF-BUCKINGHAM-3/4 inch x 5 inch ***2***
Comment			
Page 8 of 9			

SIDDHARTH, VALLABHDAS CHOKSHI/ Project: Wallaceton Unit: 3188B-9, Phase: 3 Model: 20-1790 A The Dunmore

Γhroughout					
Walls - Paint Co	lour 1	717	22-Wall-WA	RM GREY ***STD***	
Underpad	1	079	500 Series-l	Jnderpad ***STD***	
Thresholds	2	232	Metal Thres	holds ***STD***	
Switches and Pl	_	796		te Switches and Plugs ***S	STD***
Trim Size	_	3705		ard and 2 ¾ Casings ***ST	
5.25	<u> </u>				
Trim - Paint Col	our 1	716	Trim-WHITE	***STD***	
Comment					
Purchaser: SIDDH	ARTH, VALLABHDAS		Date	Decor Consultant	Date
Purchaser:)ate	Wallaceton	Date Approved

construction summary of 43



Lot: 3188B-9 Model: 20-1790 A The Dunmore Project/Phase: Wallaceton / 3

Offer	Five Appliances: SS Fridge, Stove, Dishwasher: White Front Loader Washer/Dryer - Townhomes
Worksheet	Note:
Offer	The Purchaser(s) acknowledge that they have NOT been referred by an existing Heathwood Homeowner and therefor are not entitled to a referral fee under Heathwood Homes Referral program.
Worksheet	Note:

DisciplineMS.rpt 13dec21 Page 1 of 6

Printed and Sent: 13-Apr-22

construction summary of 43



Lot: 3188B-9

Model: 20-1790 A The Dunmore Project/Phase: Wallaceton / 3

ALUMINUM

Invoice	Qty.	Description
974	1	- THIS IS A WALK OUT BASEMENT WITH JULIETTE RAILING ACROSS MAIN FLOOR SLIDING PATIO DOOR
13Apr22 ** NoCat		Note: AS PER AMENDMENT DATED DEC 10, 2021

CABINETRY

Invoice	Qty.	Description
974 313,624 13Apr22		KITCHEN - 04H-66cm deep fridge enclosure (counter depth) with (1) wall ([1] 66cm deep gable and [1] 66cm deep cabinet) (This is not a zero clearance enclosure. Standard heights and widths will be used.) Viking SKETCH # 3
974 313,976 13Apr22	1	KITCHEN - 25A-COMBO: Upper angle corner per unit with glass door and finished interior clear glass Viking SKETCH # 3

CERAMICS

Invoice	Qty.	Description
974 308,455 13Apr22	1	MAIN HALL - CERAMICS - FLOOR -MAIN HALLWAY CHANGE HARDWOOD TO STD. CERAMIC FLOOR SEE SKETCH # 2
10110122		HARDWOOD - delete std hardwood
974 308,519 13Apr22	1	MASTER ENSUITE - CERAMICS - FLOOR GROUT - ENSUITE MASTER - GROUT
974 308,520 13Apr22	1	FINISHED BASEMENT BATHROOM - CERAMICS - FLOOR GROUT - FINISHED BASEMENT BATHROOM - GROUT
974 308,521 13Apr22	1	FOYER - CERAMICS - FLOOR GROUT - FOYER - GROUT
974 308,522 13Apr22	1	KITCHEN - CERAMICS - FLOOR GROUT - KITCHEN - GROUT
974 308,523 13Apr22	1	LAUNDRY ROOM - CERAMICS - FLOOR GROUT - LAUNDRY ROOM - GROUT
974 308,524 13Apr22	1	MAIN BATHROOM - CERAMICS - FLOOR GROUT - MAIN BATHROOM - GROUT
974 308,525 13Apr22	1	MUD ROOM - CERAMICS - FLOOR GROUT - MUD ROOM - GROUT

DisciplineMS.rpt 13dec21 Page 2 of 6

Printed and Sent: 13-Apr-22

13 of 43



Lot: 3188B-9 Model: 20-1790 A The Dunmore Project/Phase: Wallaceton / 3

$\mathbf{F}\mathbf{R}$	Δ	M	ICS

Invoice	Qty.	Description
974 308,526 13Apr22	1	POWDER ROOM - CERAMICS - FLOOR GROUT - POWDER ROOM - GROUT
974 308,521 13Apr22	1	MAIN HALL - CERAMICS - FLOOR GROUT - MAIN HALLWAY- GROUT
974 308,533 13Apr22	1	MASTER ENSUITE - CERAMICS - SHOWER FLOOR - ENSUITE MASTER - UPGRADE 2

COFFERED CEILING

Invoice	Qty.	Description
974	1	- COFFERED CEILING - OPT. COFFERED CEILING - DINING ROOM
310,658		
13Apr22		
		DRYWALL - notification; PAINTING- notification
974	1	- COFFERED CEILING - OPT. COFFERED CEILING - GREAT ROOM
310,659		
13Apr22		
		DRYWALL - notification: PAINTING- notification

CONCRETE AND DRAIN

Invoice	Qty. Description	
974	1	- THIS IS A WALK OUT BASEMENT WITH JULIETTE RAILING ACROSS MAIN FLOOR SLIDING PATIO DOOR
13Apr22 ** NoCat		Note: AS PER AMENDMENT DATED DEC 10, 2021

DECK

Invoice	Qty.	Description
974	1	- THIS IS A WALK OUT BASEMENT WITH JULIETTE RAILING ACROSS MAIN FLOOR SLIDING PATIO DOOR
13Apr22 ** NoCat		Note: AS PER AMENDMENT DATED DEC 10, 2021

DRYWALI

DKIW	DRYWALL		
Invoice	Qty.	Description	
974 310,658	1	- COFFERED CEILING - OPT. COFFERED CEILING - DINING ROOM	
13Apr22 **		DRYWALL - notification; PAINTING- notification	
974 310,659	1	- COFFERED CEILING - OPT. COFFERED CEILING - GREAT ROOM	
13Apr22 **		DRYWALL - notification; PAINTING- notification	

DisciplineMS.rpt 13dec21 Page 3 of 6

4 of 43



Lot: 3188B-9 Model: 20-1790 A The Dunmore

Project/Phase: Wallaceton / 3

ELECTRICAL

Invoice	Qty.	Description
974 314,224	1	GREAT ROOM - ELECTRICAL - CEILING ROUGH-IN (CAPPED)
13Apr22		TO BE INSTALLED IN THE CORNER OF THE ROOM- USE SEPARATE SWITCH SKETCH # 2
974 314,223	1	GREAT ROOM - ELECTRICAL - ADDITIONAL SWITCH
13Apr22		TO BE USED FOR THE R/I CAP LIGHT SEE SKETCH # 2
974 314,209	1	- ELECTRICAL - 200 AMP SERVICE (Upgrade for Towns; Standard for Singles)
13Apr22		

EXTERIOR BRICK

Invoice	Qty.	Description
974	1	- THIS IS A WALK OUT BASEMENT WITH JULIETTE RAILING ACROSS MAIN FLOOR SLIDING PATIO DOOR
13Apr22 ** NoCat		Note: AS PER AMENDMENT DATED DEC 10, 2021

EXTERIOR CAULKING

Invoice	Qty.	Description
974	1	- THIS IS A WALK OUT BASEMENT WITH JULIETTE RAILING ACROSS MAIN FLOOR SLIDING PATIO DOOR
13Apr22 ** NoCat		Note: AS PER AMENDMENT DATED DEC 10, 2021

EXTERIOR RAILINGS

Invoice	Qty. Description	
974	1	- THIS IS A WALK OUT BASEMENT WITH JULIETTE RAILING ACROSS MAIN FLOOR SLIDING PATIO DOOR
13Apr22 ** NoCat		Note: AS PER AMENDMENT DATED DEC 10, 2021

FORMING

1 0 1111	oralli (o			
Invoice	Qty.	Description		
974	1	- THIS IS A WALK OUT BASEMENT WITH JULIETTE RAILING ACROSS MAIN FLOOR SLIDING PATIO DOOR		
13Apr22 ** NoCat		Note: AS PER AMENDMENT DATED DEC 10, 2021		

FRAMING

Invoice	Qty.	Description
974	1	- THIS IS A WALK OUT BASEMENT WITH JULIETTE RAILING ACROSS MAIN FLOOR SLIDING PATIO DOOR
13Apr22 ** NoCat		Note: AS PER AMENDMENT DATED DEC 10, 2021

DisciplineMS.rpt 13dec21 Page 4 of 6

15 of 43 construction summary



Lot: 3188B-9 Model: 20-1790 A The Dunmore Project/Phase: Wallaceton / 3

HARDWOOD

Invoice	Qty.	Description
974 308,455	1	MAIN HALL - CERAMICS - FLOOR -MAIN HALLWAY
13Apr22 **		CHANGE HARDWOOD TO STD. CERAMIC FLOOR SEE SKETCH # 2 HARDWOOD - delete std hardwood
974 311,593 13Apr22	1	- HARDWOOD - VINTAGE - 5 INCH WHITE OAK SCULPTED - GREAT ROOM / DINING ROOM - UPG
974 311,595 13Apr22	1	- HARDWOOD - VINTAGE - 5 INCH WHITE OAK SCULPTED - LANDING(S) TO 2ND FLOOR - UPG
974 311,596 13Apr22	1	- HARDWOOD - VINTAGE - 5 INCH WHITE OAK SCULPTED - LANDING(S) TO BSMT - UPG

HEATING / AIR CONDITIONING

Invoice	Otv.	Description	

974	1	- THIS IS A WALK OUT BASEMENT WITH JULIETTE RAILING ACROSS MAIN FLOOR SLIDING PATIO DOOR
13Apr22 ** NoCat		Note: AS PER AMENDMENT DATED DEC 10, 2021

INTERIOR TRIM AND DOORS

Invoice	Qty.	Description

974	1	- THIS IS A WALK OUT BASEMENT WITH JULIETTE RAILING ACROSS MAIN FLOOR SLIDING PATIO DOOR
13Apr22 ** NoCat		Note: AS PER AMENDMENT DATED DEC 10, 2021

LUMBER

Invoice	Otv.	Description

974	1	- THIS IS A WALK OUT BASEMENT WITH JULIETTE RAILING ACROSS MAIN FLOOR SLIDING PATIO DOOR
13Apr22 ** NoCat		Note: AS PER AMENDMENT DATED DEC 10, 2021

PAINTING

Invoice	Qty.	Description
974	1	- COFFERED CEILING - OPT. COFFERED CEILING - DINING ROOM
310,658		
13Apr22		
**		DRYWALL - notification; PAINTING- notification
974	1	- COFFERED CEILING - OPT. COFFERED CEILING - GREAT ROOM
310,659		
13Apr22		
**		DRYWALL - notification; PAINTING- notification

DisciplineMS.rpt 13dec21 Page 5 of 6

Printed and Sent: 13-Apr-22

16 of 43



CONSTRUCTION SUMMARY

Lot: 3188B-9

Model: 20-1790 A The Dunmore Project/Phase: Wallaceton / 3

STEEL

Invoice Qty. Description

974 1

- THIS IS A WALK OUT BASEMENT WITH JULIETTE RAILING ACROSS MAIN FLOOR SLIDING PATIO DOOR

13Apr22 ** NoCat Note: AS PER AMENDMENT DATED DEC 10, 2021

WINDOWS

Invoice Qty. Description

974

- THIS IS A WALK OUT BASEMENT WITH JULIETTE RAILING ACROSS MAIN FLOOR SLIDING PATIO DOOR

13Apr22 ** NoCat Note: AS PER AMENDMENT DATED DEC 10, 2021

Printed and Sent: 13-Apr-22

Model: 20-1790 A The Dunmore

17 of 43

SKETCH #1

20-1790 ELEV. B


THE DUNMORE

ELEVATION B | 2,272 SQ. FT.

Includes 452 sq. ft. of Finished Lower Level

WALLACETON

WOB

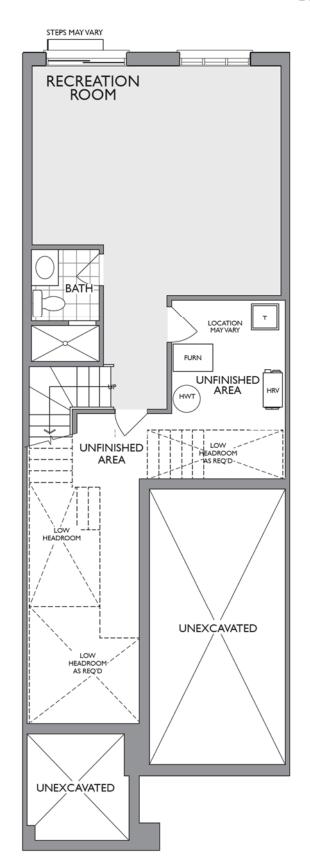

LOWER LEVEL **ELEVATION B**

Model: 20-1790 A The Dunmore

18 of 43

SKETCH #2

20-1790 ELEV. B


WOB


THE DUNMORE

ELEVATION B | 2,272 SQ. FT.

Includes 452 sq. ft. of Finished Lower Level

WALLACETON

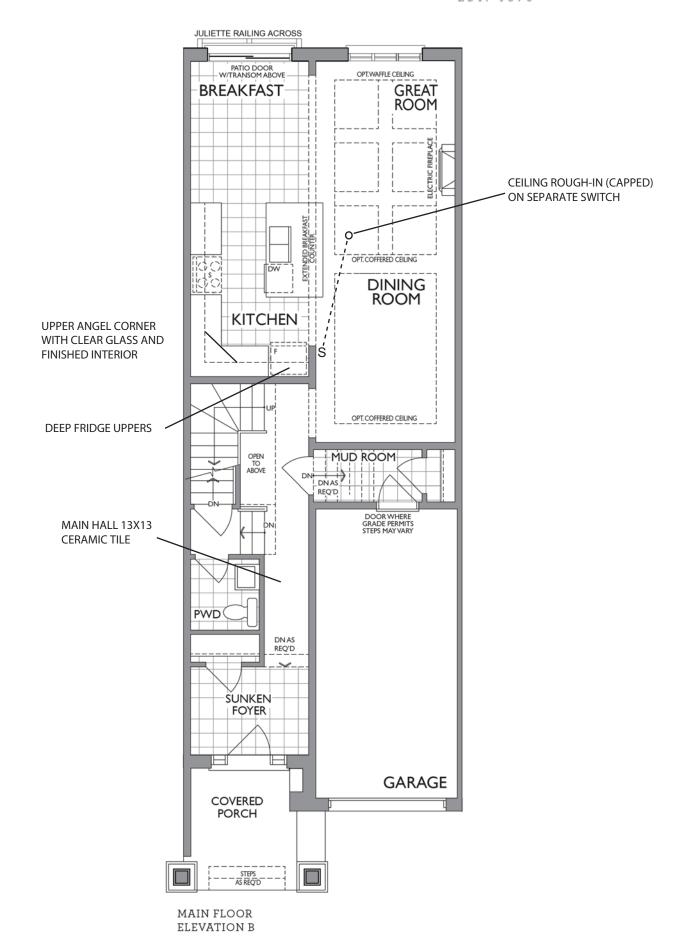

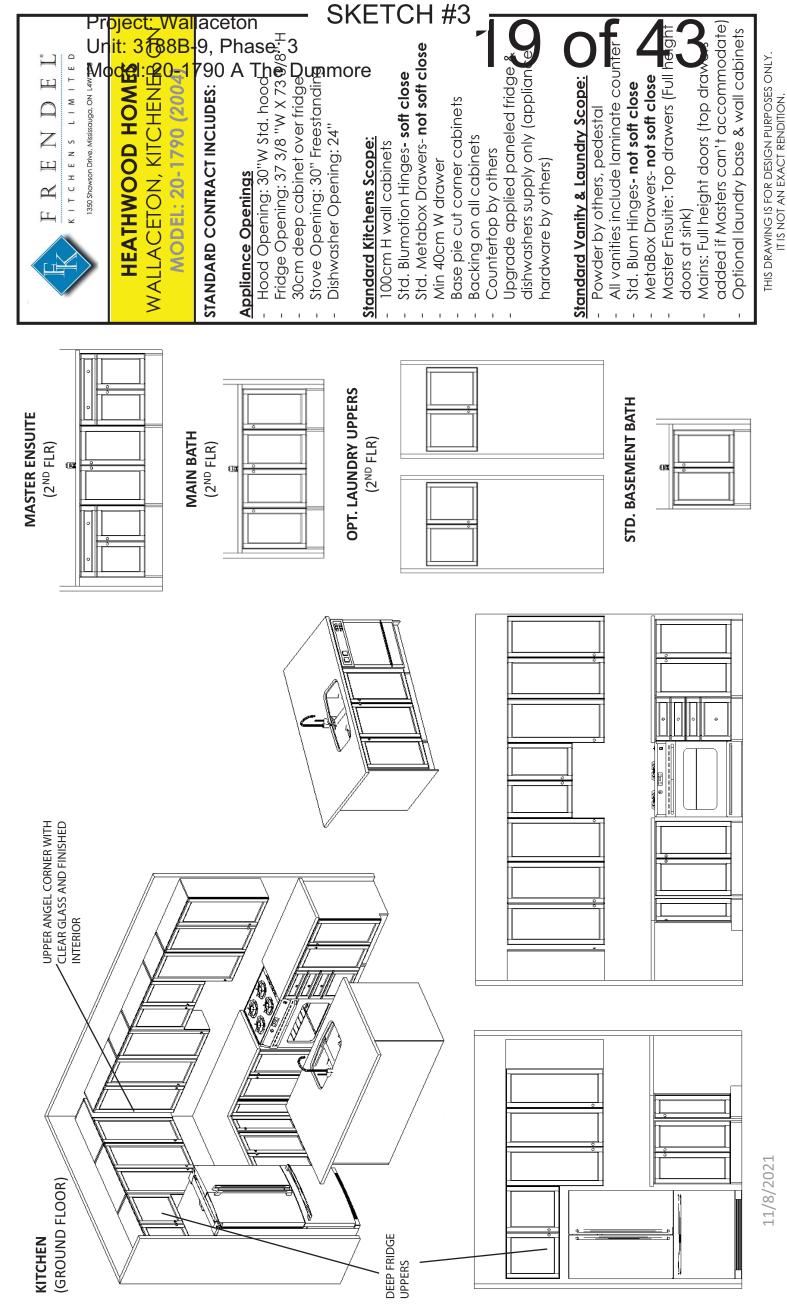

Model: 20-1790 A The Dunmore

20 of 43

SKETCH #4

20-1790 ELEV. B


WOB

THE DUNMORE

ELEVATION B | 2,272 SQ. FT.

Includes 452 sq. ft. of Finished Lower Level

WALLACETON

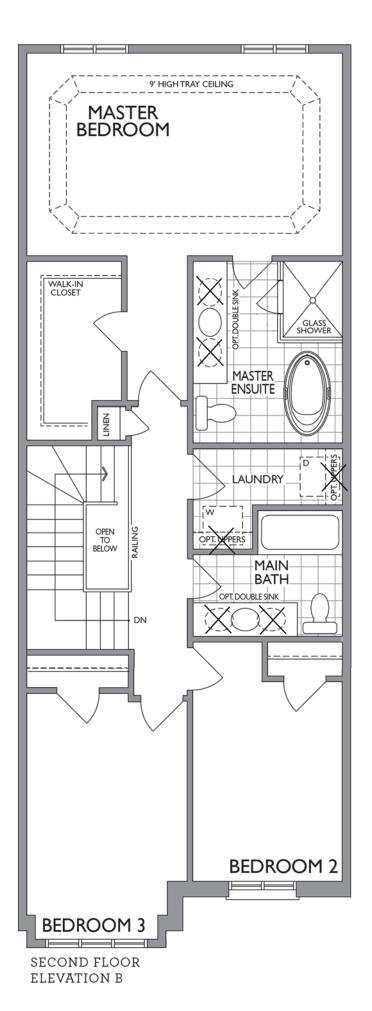

Legal Plan Dec. 3, 2020 WOB Revised Dec. 14, 2021 Project: Wallaceton Unit: 3188B-9, Phase: 3 Model: 20-1790 A The Dunmore

21 of 43





NFAS NF15 Mantel CABINET

Printed in Canada

Franke Kindred Canada Limited

Project: Wallaceton Unit: 3188B-9, Phase: 3


Model: 20-1790 A The Dunmore


22 of 43



ND1831UA/9







ND1831UA/9 SPECIFICATION

Model ND1831UA/9 is a double (two equal size) bowl undermount sink manufactured by Franke Kindred Canada Limited from 18 gauge stainless steel. Product has silk finished rims and linear brush finished bowls. Sink is fully undercoated. Basket strainer waste fittings (3 1/2", 89 mm) are included. Sink is backed with a limited lifetime warranty.

- O.D. 17 3/4" x 30 7/8" x 8 1/2" (45 x 78 x 22 cm)
- Recommended for minimum 36" cabinet

Franke Kindred Canada Limited

P.O. Box 190, 1000 Franke Kindred Road, Midland, Ontario, Canada, L4R 4K9 Phone: 866-687-7465 Fax: 800-361-8408

Project: Wallaceton Unit: 3188B-9, Phase: 3 Model: 20-1790 A The Dunmore

23 of 43

MOEN

FAUCET DESCRIPTION

- Reflex™ pulldown system offers smooth operation, easy movement and secure docking Power Clean™ spray technology Metal construction with various finishes identified by suffix

- Quick connect installation
- Pulldown spray with 68" braided hose Flexible supply lines with 3/8" compression fittings
- High arc spout provides height and reach to fill or clean large pots while pulldown wand provides the maneuverability for cleaning or rinsing 360° rotating spout
- Faucet designed for handle to be mounted on right side only

OPERATION

- Lever style handle
- Temperature controlled by 100° arc of handle travel
- Operates with less than 5 lbs. of force
- Operates in stream or spray mode in the pullout or retracted position **FLOW**

Flow is limited to 1.5 gpm (5.7 L/min) max at 60 psi

CARTRIDGE

• 1255™ Duralast™ cartridge

STANDARDS


- Third party certified to IAPMO Green, ASME A112.18.1/CSA B125.1 and all applicable requirements therein including NSF 61/9G & 372
- Meets CalGreen and Georgia SB370 requirements Complies with California Proposition 65 and with the Federal Safe Drinking
- The backflow protection system in the device consists of two independently operating check valves, a primary and a secondary which prevent backflow
- ADA 🖒 for lever handle

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the
- 10 year limited warranty when used in a multifamily installation
- 5 year limited warranty when used in a commercial installation

Visit www.moen.com/support for complete details and limitations

Specifications




ALIGN™ **Single Handle High Arc Pulldown Kitchen Faucet**

Models: 7565 series

NOTE: THIS FAUCET IS DESIGNED TO BE INSTALLED THROUGH 1 HOLE, 1-1/2" (38mm) MIN. DIA. (OPTIONAL 3-HOLE ESCUTCHEON 141002 AVAILABLE)



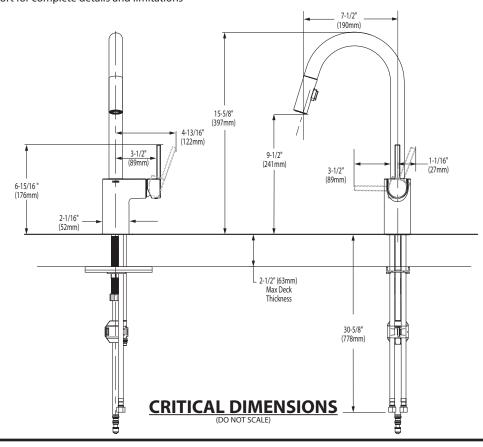

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN

www.moen.com

Rev. 6/20

Model: 20-1790 A The Dunmore



BOULEVARD® PEDESTAL SINK VITREOUS CHINA

BARRIER FREE (ABOVE COUNTER OR DROP-IN ONLY)

BOULEVARD® PEDESTAL SINK

☐ 0641.800 Faucet holes on 8" (203mm) centers (Illustrated)

STD • 0641.400 Faucet holes on 4" (102mm) centers

☐ 0641.100 Center hole only

- Classic styled rectangular pedestal lavatory
- · Vitreous china
- Rear overflow
- Supplied with mounting kit
- Right Height® for greater comfort during use
- Faucet ledge with large deck area (faucet not included)
- Design coordinates with Boulevard® Toilet
- Basin has flat bottom to also allow use as an **above counter** sink or a **drop-in** sink (with u-shaped cut out)

Nominal Dimensions:

24" x 19" x 35-1/2" (610 x 483 x 902mm)

- ☐ 0641.008 Pedestal top-8" (203mm) centers
- ☐ 0641.004 Pedestal top-4" (102mm) centers
- ☐ 0641.001 Pedestal top-center hole only
- ☐ 0010.000 Pedestal only

Bowl sizes:

17" (432mm) wide, 12-1/2" (318mm) front to back, 5" (127mm) deep

Compliance Certifications -

Meets or Exceeds the Following Specifications:

• ASME A112.19.2 - 2008/CSA B45.1-08

To Be Specified:

- ☐ Color: ☐ White ☐ Linen
- ☐ Faucet Finish:
- Supplies:
- ☐ 1-1/4" Trap:
- □ Nipple:



SEE REVERSE FOR ROUGHING-IN DIMENSIONS


^{*} See faucet section for additional models available

Project: Wallaceton Unit: 3188B-9, Phase: 3 Model: 20-1790 A The Dunmore

25 of 43

4merican tandard

BOULEVARD® PEDESTAL SINK

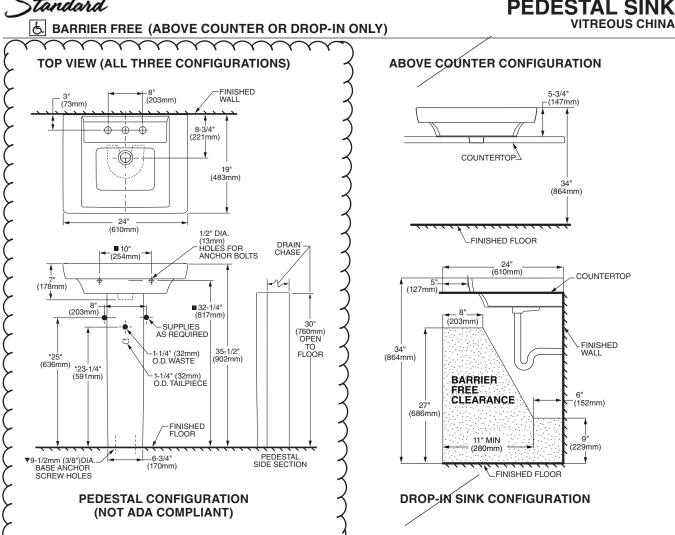

ABOVE COUNTER AND DROP-IN SINK CONFIGURATIONS MEET THE AMERICANS WITH DISABILITIES ACT GUIDELINES AND ANSI A117.1 ACCESSIBLE AND USABLE BUILDINGS AND FACILITIES - CHECK LOCAL CODES.

Top of sink installed at 34" (864mm) height from finished floor. Sink installed 5" (127mm) minimum from front edge of countertop. Provide 27" (686mm) knee clearance area.

NOTES:

* DIMENSIONS SHOWN FOR LOCATION OF SUPPLIES AND "P" TRAPS ARE SUGGESTED.

▼ PEDESTAL ANCHORING SCREWS NOT INCLUDED.

■ SUITABLE FOR REINFORCEMENT ONLY. ACTUAL DIMENSIONS MUST BE TAKEN FROM FIXTURE.

FITTING NOT INCLUDED AND MUST BE ORDERED SEPARATELY.

PROVIDE SUITABLE REINFORCEMENT FOR ALL WALL SUPPORTS. INSTALLATION INSTRUCTIONS SUPPLIED WITH LAVATORY.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerance established by ANSI Standard A112.19.2 These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

© 2018 AS America Inc.

Model: 20-1790 A The Dunmore

26 of 43

American Standard

BARRIER FREE

COLONY™ COUNTERTOP SINK

VITREOUS CHINA

COLONY COUNTERTOP SINK

- · Vitreous china
- Self-rimming
- · Front overflow
- · Supplied with template
- Faucet deck (Faucet shown not included)


☐ 0346 803 → Faucet hotes on 293mm (6"), cent	.T0/8~~
O346 403 (Illustrated) Faucet holes on 102mm (4") cer	ntres }
₩ <u>₽</u> 0346 001	
Centre hale only	


Nominal Dimensions: 521 x 448mm (20-1/2" x 17-5/8")


Bowl sizes:

422mm (16-5/8") wide, 279mm (11") front to back, 143mm (5-5/8") deep









COMPLIANCE CERTIFICATIONS -

Meets or exceeds the following Specifications:

- ASME A112.19.2M for Vitreous China Fixtures.
- · CAN/CSA B45 Series.

To Be Specified

- ☐ Colour: ☐ White ☐ Bone ☐ Silver Gray ☐ Linen
- □ Faucet*:
- □ Faucet Finish:
- Supplies & Stops:
- ☐ Trap 1-1/4" (32 mm):

NOTES:

* DIMENSIONS SHOWN FOR LOCATION OF SUPPLIES AND "P" TRAP ARE SUGGESTED. FOR COUNTERTOP CUTOUT AND INSTALLATION INSTRUCTIONS USE TEMPLATE SUPPLIED WITH SINK.

SUPPLIED WITH SINK.

FAUCETS NOT INCLUDED AND MUST BE ORDERED SEPARATELY.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard A112.19.2.

These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

BAS-198 .

^{*} See faucet section for additional models available

Model: 20-1790 A The Dunmore

27 of 43



DEMI™ **Product Specification Sheet**

Two Piece Freestanding Collection

CF2007 Two Piece Freestanding Soaker


Size: 60" x 32" x 22"

1524 mm x 813 mm x 559 mm




- Vacuum formed acrylic reinforced with fiberglass
- Scratch, stain and fade resistant high gloss finish
- Installation friendly two piece design
- Accepts deck mounted faucet
- Includes integral pop up drain and rectangular overflow
- Includes levelling feet


TWO PIECE ASSEMBLY

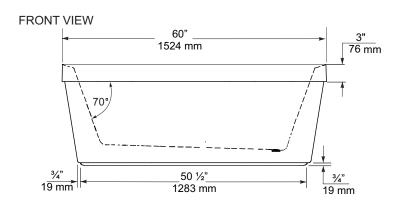

TOP VIEW

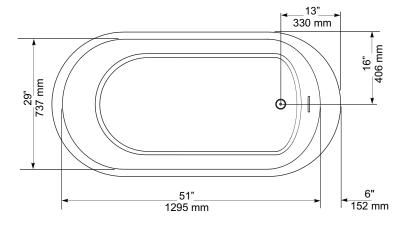

END VIEW



GENERAL SPECIFICATIONS

Average W	eight	90 lb	41 kg
Bathing We	ll at bottom	43"x 20"	1092 x 508 mm
Capacity D	rain to Overflow		195 litres
Water Dept	h Drain to Overflow	16"	406 mm
Drain Open	ing (dia.)	2"	51 mm
Overflow O	pening	2 ¼"x ½"	57 x 13 mm
Drain to Flo	or Clearance	3 1/4"	83 mm

NOTES: Please confirm measurements on actual product to ensure proper identification. Bathtub to be installed on the floor supported by 5 self levelling feet. Adjust if required to level the bathtub for adequate drainage. Refer to installation instructions for additional information.

IMPORTANT: Dimensions of fixtures are nominal and may vary \pm %" (6 mm). Weight may vary \pm 5 lb (2.3 kg). Drawing is not to scale. These measurements are subject to change at manufacturer's discretion.

Compliance Certifications -

Meets or Exceeds the following Specifications:

CAN/CSA - B45 Series





60 Shorncliffe Rd., Toronto, Ontario M8Z 5K1 Fax: 416.231.0929 www.mirolin.com

Customer Service: 416.231.5790 Canada, U.S.A.: 800.**MIROLIN**(647-6546) Fax, Canada: 800.463.2236

R0084162 25 Sep. 2018

Model: 20-1790 A The Dunmore

28 of 43

American Standard

Style That Works Better

FloWise™ DUAL FLUSH **ELONGATED TOILET**

VITREOUS CHINA


FloWise™ DUAL FLUSH ELONGATED TOILET

2476 216

- Vitreous china
- · Low-consumption Dual Flush Full flush 6.0 Lpf/1.3 gpf, Partial flush 3.0 Lpf/0.66 gpf.
- · Elongated wash down bowl
- · Internal trapway fully-glazed, 2-1/4" (57mm) ballpass
- · Concealed trapway bowl
- · Chrome-plated top mounted push button actuator
- Easy to clean sanitary dam on bowl
- Includes Elongated Slow Close Seat
- 100% factory flush tested
- · 2 bolt caps

Separate Component Parts:

- ☐ 3067 316 Elongated Bowl with Slow Close Seat
- **4035 216** Unlined Tank



- **☐** 3067 316 Elongated Bowl
- **4035 516** Lined Tank


Nominal Dimensions: 794 x 432 x 765mm (31-1/4" x 17" x 30-1/8")


Compliance Certifications -Meets or Exceeds the Following Specifications:

- ASME A112.19.2M (and 19.6M)
- · CAN/CSA B45 series

To Be Specified

- Colour: 020 White
- Supply with stop:





NOTES:
THIS TOILET IS DESIGNED TO ROUGH-IN AT A MINIMUM DIMENSION OF 305MM (12")
FROM FINISHED WALL TO C/L OF OUTLET.
SUPPLY NOT INCLUDED WITH FIXTURE AND MUST BE ORDERED SEPARATELY.
* DIMENSION SHOWN FOR LOCATION OF SUPPLY IS SUGGESTED.
FOR ADDITIONAL INFORMATION REFER TO INSTALLATION INSTRUCTIONS SUPPLIED.
IMPORTANT. Dimensions of fixture are peripaid and may use within the prepare of the present IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerance established by ANSI Standard A112.19.2

established by Ankist damagna (112.19.2). These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

UPGRADED VALUE ADDED FEATURES AT NO EXTRA CHARGE

TOI-284

© 2008 American Standard

Project: Wallaceton Unit: 3188B-9, Phase: 3 Model: 20-1790 A The Dunmore

29 of 43

MOEN[®]

DESCRIPTION

- Metal construction with various finishes identified by suffix
- 16" long 3/8" tubing connections Includes metal or 50/50 pop-up type waste assembly where noted **OPERATION**
- Pivot action lever style handle Temperature controlled through 180° degree arc of handle travel **FLOW**
- Flow is limited to 1.5 gpm max (5.7L/min) at 60 psi

CARTRIDGE

- 1225 cartridge design
- Nonmetallic/nonferrous and stainless steel material
- Can accommodate reversed piping and back to back installations

- Third party certified to WaterSense®, CSA B-125.1, ASME A112.18.1 and all applicable requirements referenced therein including NSF61/9
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act

 ADA for lever handle

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations

Specifications



CHATEAU® Single-Handle Lavatory Faucet

with Metal Waste Assembly Model: L4625 series L4631BC


Bulk Packed (12 per carton): L64624 series

with 50/50 Waste Assembly **Bulk Packed (12 per carton):** L64625 series

Less Waste **Bulk Packed (12 per carton):** L64600 series

NOTE: THIS FAUCET IS DESIGNED TO BE INSTALLED THRU 3-1" DIA. HOLES, 2" ON CENTER



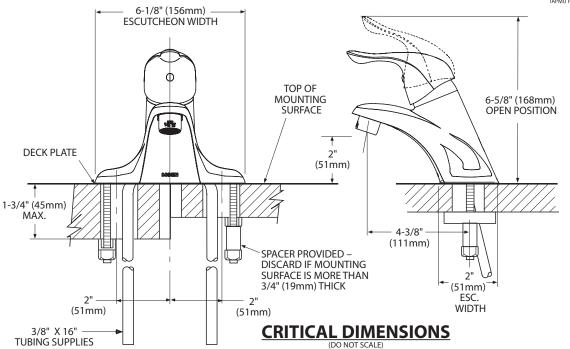

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN

www.moen.com

Rev 8/15

Model: 20-1790 A The Dunmore

30 of 43



Buy it for looks. Buy it for life.®

There is more than 1 version of this model. Page down to identify the version you have.

- Metal construction with various finishes identified by suffix
- Includes non-metalic showerhead, arm, flange and non-metalic diverter tub spout

OPERATION

- Handle operates counterclockwise through a 270° arc with off at 6 o'clock and maximum hot at the 9 o'clock position. Shut off in clockwise direction
- Adjustable temperature limit stop to control maximum hot water temperature
- Pressure balancing mechanism maintains selected discharge temperature to $\pm\,3^\circ$

- Showerhead is limited to 2.5 gpm (9.5 L/min) at 80 psi EP suffix models are limited to 1.75 gpm (6.6 L/min) at 80 psi
- NH suffix models contain no showerhead

CARTRIDGE

- 1222 cartridge design Accommodates back to back installations
- Nonmetallic/nonferrous and stainless steel material

STANDARDS

- Third party certified to meet ASME A112.18.1/CSA B125.1 and all applicable requirements referenced therein
- EP suffix models are third party certified to WaterSense®
- ADA (for lever handle

6.5" (165mm) ESC. DIAM.

WARRANTY

Lifetime limited warranty against leaks, drips and finish defects

2"CC (51mm) 1 7/8" IPS (48mm) MAX WALL

FINISHED WALL LINE

4-1/2" (114mm)

WALL OPENING

7-1/2" (190mm)

to the original consumer purchaser 5 year warranty if used in commercial installations

Specifications






CHATEAU° POSI-TEMP° **Single-Handle Tub/Shower Trim Kit**

Models: TL181 series - valve trim only (Bulk Packed 12 per carton) TL182 series - shower trim only

(Bulk Packed 12 per carton) TL183 series - tub/shower trim (Bulk Packed 12 per carton)

Valves: 62300 series 2500 series

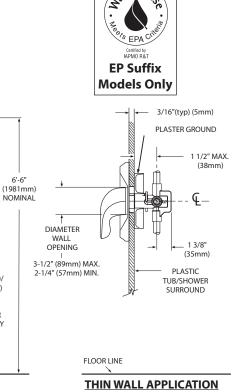

THICK WALL APPLICATION CRITICAL DIMENSIONS

FLOOR LINE

2 1/2" MAX. (63mm)

SHOWER

48" (1219mm) 32" (813mm) AND TUB ONLY

(DO NOT SCALE)

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN

www.moen.com

TL183sp: Rev. 5/13

Model: 20-1790 A The Dunmore

31 of 43

MOEN[®]

Specifications

DESCRIPTION

 Metal construction with various finishes identified by suffix OPERATION


- · Lever style handles with hot and cold color indicator
- Rotate hot side handle counterclockwise to open (clockwise to close) and the cold side handle (clockwise to open) and (counterclockwise to close)

STANDARDS

- Third party certified to: ASME A112.18.1/CSA B-125.1, and all applicable requirements referenced therein
- ADA 🕒 for lever handles

WARRANTY


- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
- 10 year limited warranty when used in a multi-family installation
- 5 year limited warranty when used in a commercial installation Visit www.moen.com/support for complete details and limitations




CHATEAU® Two-Handle Garden Tub Trim

Models: T994 series

Valves: 4792, 4793, 4794, 4796, 4797, 4798

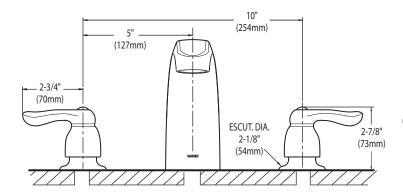



CRITICAL DIMENSIONS

(DO NOT SCALE)

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN

www.moen.com

Rev. 3/19

Model: 20-1790 A The Dunmore







180 CFM/7.0 Sones @ 0.10" SP. Horizontal 180 CFM/7.5 Sones @ 0.10" SP. Vertical

Dimensions

Overall bottom projection - 183/8" Overall top projection -12"

Available widths: 21", 24", 30", 36" & 42"

Hood Body

Stainless Steel: 24 gauge, grade 430 stainless steel. Painted: 23 gauge cold rolled commercial grade (CRCQ) steel, auto welded, coated with a baked enamel finish.

Motor

2 speed, single coil, thermally protected, permanently lubricated. Rated 120 volts, 60 hz. Complete with 200°C lead wires.

Single 60 watt cook light capacity (bulb not included).

Ducting Options


Horizontal ducting: 31/4"x10" (duct adapter and damper included). Vertical ducting: 31/4"x10" (duct adapter and damper included). Vertical ducting: 7" round (duct adapter and damper not included). Ductless: removable front vent (charcoal filter not included).

Fan Blade


One piece polymeric, electronically balanced blade. $6^{5/8}$ " diameter with 5 paddles.

Electrical connection

Hood top - 7/8" knockout hole for use with 1/2" cable clamp Hood back - 7/8" knockout hole for use with 1/2" cable clamp



AV SERIES



<u>Filters</u>

UL rated, class 2 filter. Grease Filter: RF35 - 87/8" x103/8" (included). Charcoal Filter: RF34 (not included). Combo Grease/Charcoal: RF55 (not included).

Available Finishes

White, Biscuit, Almond, Black & Stainless Steel.

EXPANDED PERFORMANCE										
		Static Pressure (inches of w.g.) Sono					Sones	Fan Speed	Power	
Air Flow - CFM	0	0.05	0.1	0.15	0.2	0.25	@ .1 SP	RPM	Watts	Apms
Vertical Ducting High	246	232	218	203	181	147	7.5	2973	87.0	2.1
Horizontal Ducting High	225	210	180	175	155	120	7.0	3024	87.0	2.1

PROJECT	PROJECT							ARCHITECT			
LOCATION							ENGINEER				
CONTRACTOR	R						SUBMITTI	ED BY	DATE		
FAN MO	ODEL IMBER	CFM	IN W.C.	RPM	WATTS	AMPS	SONES	QTY	OPTIONAL EQUIPMENT & REMARKS		





Air King: 820 Lincoln Avenue West Chester, Pennsylvania 19380-4466 Tel: (610) 692-7400 • 877-304-3785 Fax: (610) 696-8048

Canada: Brampton, Ontario

Tel: 905-456-2033 Fax: (905) 456-1015

Model: 20-1790 A The Dunmore

33 of 43



Whirtpool® 21 cu. ft. Top-Freezer Refrigerator WRT541SZD



Fingerprint-Resistant Stainless WRT541SZDZ

Also available in:

White	WRT541SZDW
Black	WRT541SZDB
Monochromatic Stainless Steel	WRT541SZDM

Capacity				
Total Capacity	21 cu. ft.			
Refrigerator Capacity	15 cu. ft.			
Freezer Capacity	6 cu. ft.			
General Features & Properti	es			
EZ Connect Icemaker Kit				
LED Interior Lighting				
ENERGY STAR® Certified				
Electronic Temperature Controls				
Freezer Temperature Controls				
Clear Door Bins				
Adjustable Door Bins				
Quiet Cooling				
Fingerprint Resistant				
Electrical Details				
Amps	6.5			
Volts	115			
Certifications				
ADA Compliant	Yes			
ENERGY STAR® Certified	Yes			

Technical Details	
Refrigerator Type	Top-Freezer
Number of Doors	2
Number of Interior Refrigerator Shelves	3
Number of Refrigerator Door Bins	1 Fixed, 4 Adjustable
Number of Interior Freezer Shelves	1
Number of Freezer Door Bins	2 Fixed
Lighting Type	LED
Ice Maker	Optional
Ice Maker Location	Freezer
Dispenser Type	N/A
Dimensions	
Product Dimensions (H x W x D)	66-1/4" x 32-3/4" x 34"
Depth with Door Open 90°	62-1/4"
Cutout Dimensions	Allow extra 1/2" on sides and top Allow extra 1" on rear
Reference Material	

Key Features & Benefits

Frameless Glass Shelves


Store more items on wall-to-wall shelves for greater storage flexibility.

Flexi-Slide™ Bin

Make space for tall items with the bin that quickly and easily moves side to side.

Humidity-Controlled Crispers

Store fruits and vegetables in their ideal environment.

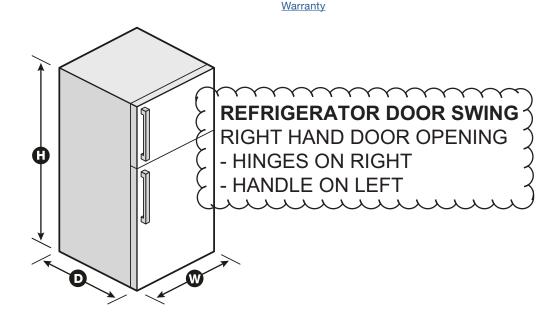

Dimension Guide Use & Care Guide

Energy Guide

NOTE: Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

®/™ © 2020. All rights reserved. Printed in the U.S.A. D200052XXC. WRT541SZDSPECSHEETV01.

Model: 20-1790 A The Dunmore

34 of 43



Top Mount Refrigerator

PRODUCT MODEL NUMBERS

WRT311FZD WRT511SZD WRT541SZD

Electrical: A 115-volt, 60-Hz, AC-only, 15-or 20-amp fused, grounded electrical supply is required. It is recommended that a separate circuit serving only your refrigerator be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.


NOTE: Before performing any type of installation, cleaning, or removing a light bulb, turn the control (Thermostat, Refrigerator or Freezer Control depending on the model) to OFF and then disconnect the refrigerator from the electrical source. When you are finished, reconnect the refrigerator to the electrical source and reset the control (Thermostat, Refrigerator or Freezer Control depending on the model) to the desired setting. See "Using the Controls."

Water: A cold water supply with water pressure between 30 and 120 psi (207 and 827 kPa) is required to operate ice maker and water dispenser. If you have questions about your water pressure, call a licensed, qualified plumber.

IMPORTANT: The pressure of the water coming out of a reverse osmosis system going to the water inlet valve of the refrigerator needs to be between 30 and 120 psi (207 and 827 kPa).


Reverse Osmosis Water Supply: If a reverse osmosis water filtration system is connected to your cold water supply, the water pressure to the reverse osmosis system needs to be a minimum of 40 to 60 psi (276 to 414 kPa).

PRODUCT DIMENSIONS

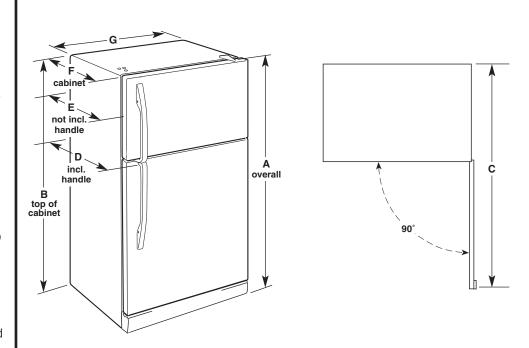

Model Number	Model Size	Reversible Door	Height - Overall "A"	Height - Top of Cabinet "B"	Depth - Door Open 90° "C"	Depth - With Handles "D"	Depth - Without Handles "E"	Depth - Cabinet Only "F"	Width - Cabinet "G"
WRT311FZD	20.5 cu. ft.	Yes	661/4" (168.3 cm)	65½" (166.4 cm)	62½" (158.1 cm)	32 ⁷ / ₈ " (83.5 cm)	30 ⁵ / ₈ " (77.8 cm)	28½" (72.4 cm)	32¾" (83.2 cm)
WRT511SZD WRT541SZD	21.3 cu. ft.	Yes	66½" (168.3 cm)	65½" (166.4 cm)	62½" (158.1 cm)	34" (86.4 cm)	32½" (82.3 cm)	28½" (72.4 cm)	32¾" (83.2 cm)

LOCATION REQUIREMENTS



To ensure proper ventilation for your refrigerator, allow for a $\frac{1}{2}$ " (1.25 cm) space on each and between overhead cabinets and refrigerator top. Allow at least 1" (2.5 cm) between back of cabinet and the wall. If your refrigerator has an ice maker, make sure you leave some extra space at the back for the water line connections.

If you are installing your refrigerator next to a fixed wall, leave 2" (5 cm) minimum on the hinge side (depending on your model) to allow for the door to swing open.

NOTE: This refrigerator is intended for use in a location where the temperature ranges from a minimum of 55°F (13°C) to a maximum of 110°F (43°C). The preferred room temperature range for optimum performance, which reduces electricity usage and provides superior cooling, is between 60°F (15°C) and 90°F (32°C). It is recommended that you do not install the refrigerator near a heat source, such as an oven or radiator.

Model: 20-1790 A The Dunmore

35 of 43





Available Finishes/Colours

YWFE515S0JB Black



YWFF515S0JS Stainless Steel



YWFE515S0JW White

Manuals & Literature:





<u> Warranty</u>

5.3 cu. ft. Whirlpool® electric range with Frozen Bake™ technology

YWFE515S0JS

This Whirlpool® electric range with a dual element stove top helps you get dinner to the table. Skip preheating for favorites like pizza with Frozen Bake™ technology. This self cleaning oven also prevents cooked food from getting cold with the Keep Warm setting. Closed door broiling helps keep the kitchen comfortable.

Top Features

FlexHeat™ Dual Radiant Element

Get two elements in one with a 6" inner ring that's great for smaller pots and pans and a 9" expandable outer ring that makes room for larger cookware.

Frozen Bake™ technology
Skip preheating and cook frozen favorites like pizza in fewer steps with preprogrammed settings that automatically adjust cooking times for you.

Keep Warm setting

Keep dishes from getting cold with this setting that delivers low heat to the oven.

Closed Door Broiling
Maintain the optimal cooking temperature for food while still keeping the kitchen comfortable and cool using this broiling temperature management system that helps prevent overheating.

Dimensions	
Depth	27 3/4
Height	36
Width	29 7/8

Configuration and Overview				
Range Type	Freestanding			
Fuel Type	Electric			
Size (IN,inches)	30			

Exterior	
Door Removable	Yes
Drawer Type	Storage Drawer
Oven Door	Glass Window
Oven Window Size	Extra Large
Handle Color	Stainless Steel
Handle Material	Metal

Exterior	
Handle Type	Reach-Through Handle
Features	
Hot Surface Indicator Light	Yes
Heating Element On	Yes


Indicator Light Power On Indicator Light Griddle NA Automatic Convection No Conversion Temperature Adjust Power Outage Compatible

Model: 20-1790 A The Dunmore

36 of 43

WHIRLPOOL 30" (76.0 CM) FREESTANDING ELECTRIC RANGES Model YWFE515S0JS

Product Dimensions



- A. 273/4" (70.5 cm) max. depth with handle
- B. 46⁷/₈" (119.1 cm) overall height (max.) with leveling legs screwed all the way in*
- C. 36" (91.4 cm) cooktop height (max.) with leveling legs screwed all the way in*
- D. 29⁷/₈" (75.9 cm) width
- E. 25⁵/₁₆" (64.3 cm) depth back of range to front of cooktop**
- F. Model/serial/rating plate (located on the frame behind a top corner of the door or either side of the drawer)

IMPORTANT: Range must be level after installation. Follow the instructions in the "Level Range" section. Using the cooktop as a reference for leveling the range is not recommended.


- *Range can be raised approximately 1" (2.5 cm) by adjusting the leveling legs.
- **Front of door and drawer may extend further forward depending on styling.

Cabinet Dimensions

Cabinet opening dimensions shown are for 25" (64.0 cm) countertop depth, 24" (61.0 cm) base cabinet depth and 36" (91.4 cm) countertop height.

IMPORTANT: If installing a range hood or microwave hood combination above the cooking surface, follow the range hood or microwave hood combination installation instructions for dimensional clearances above the cooktop surface.

A freestanding range may be installed next to combustible walls with zero clearance.



- A. 13" (33.0 cm) max. upper cabinet depth
- B. 30" (76.2 cm) min. opening width
- C. For minimum clearance to top of cooktop, see NOTE*
- D. 30" (76.2 cm) min. opening width
- E. Outlet 8" (20.3 cm) to 22" (55.9 cm) from either cabinet, 7" (17.8 cm) max. from floor.
- F. Cabinet door or hinges should not extend into the cutout.

*NOTE: 24" (61.0 cm) minimum when bottom of wood or metal cabinet is covered by not less than 1/4" (6.4 mm) flame retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015" (0.4 mm) stainless steel, 0.024" (0.6 mm) aluminum or 0.020" (0.5 mm) copper.

30" (76.2 cm) minimum clearance between the top of the cooking platform and the bottom of an uncovered wood or metal cabinet.

Model: 20-1790 A The Dunmore

37 of 43

WHIRLPOOL 30" (76.0 CM) FREESTANDING ELECTRIC RANGES Model YWFE515S0JS

Electrical Requirements - Canada Only

AWARNING



Electrical Shock Hazard

Electrically ground range.

Failure to do so can result in death, fire, or electrical shock.

If codes permit and a separate ground wire is used, it is recommended that a qualified electrical installer determine that the ground path is adequate and wire gauge are in accordance with local codes.

Be sure that the electrical connection and wire size are adequate and in conformance with CSA Standard C22.1, Canadian Electrical Code, Part 1 - latest edition, and all local codes and ordinances.

A copy of the above code standards can be obtained from:

Canadian Standards Association 178 Rexdale Blvd. Toronto, ON M9W 1R3 CANADA

 Check with a qualified electrical installer if you are not sure the range is properly grounded.

Range Rating*		Specified Rating of Power Supply Cord Kit and Circuit Protection		
120/240 V	120/208 V	Amps		
8.8 - 16.5 KW 16.6 - 22.5 KW	7.8 - 12.5 KW 12.6 - 18.5 KW	40 or 50** 50		

^{*}The NEC calculated load is less than the total connected load listed on the model/serial/rating plate.

- A time-delay fuse or circuit breaker is recommended.
- This range is equipped with a CSA International Certified Power Cord intended to be plugged into a standard 14-50R wall receptacle. Be sure the wall receptacle is within reach of range's final location.



Do not use an extension cord.

INSTALLATION INSTRUCTIONS


Unpack Range

AWARNING

Excessive Weight Hazard

Use two or more people to move and install range. Failure to do so can result in back or other injury.


- 1. Remove shipping materials, tape and film from range.
- 2. Remove oven racks and parts package from inside oven.
- 3. Do not remove the shipping base at this time.



A. Shipping base

4. On Ranges Equipped with a Storage Drawer:


Remove the storage drawer. See the "Storage Drawer" section. Use a 1/4" (6.4 mm) drive ratchet to lower the rear leveling legs one-half turn. Use a wrench or pliers to lower front leveling legs one-half turn.



- A. 1/4" (6.4 mm) drive ratchet
- B. Rear leveling leg
- C. Wrench or pliers
- D. Front leveling leg

On Ranges Equipped with a Warming Drawer or Premium Storage Drawer:

On ranges equipped with a warming drawer or premium storage drawer, the rear legs cannot be accessed by removing the warming drawer or premium storage drawer. It will be necessary to adjust the rear legs from outside the range. Use wrench or pliers to lower the front and rear leveling legs one half turn.



- A. Rear leveling leg
- B. Wrench or pliers
- C. Front leveling leg

^{**}If connecting to a 50 A circuit, use a 50 A rated cord with kit. For 50 A rated cord kits, use kits that specify use with a nominal 13/8" (3.5 cm) diameter connection opening.

Model: 20-1790 A The Dunmore

38 of 43

WHIRLPOOL 30" (76.0 CM) FREESTANDING ELECTRIC RANGES Model YWFE515S0JS

Install Anti-Tip Bracket

AWARNING



Tip Over Hazard

A child or adult can tip the range and be killed.

Install anti-tip bracket to floor or wall per installation instructions.

Slide range back so rear range foot is engaged in the slot of the anti-tip bracket.


Re-engage anti-tip bracket if range is moved.

Do not operate range without anti-tip bracket installed and engaged.

Failure to follow these instructions can result in death or serious burns to children and adults.

- Remove the anti-tip bracket from where it is taped inside the storage drawer or warming drawer.
- 2. Determine which mounting method to use: floor or wall.


 If you have a stone or masonry floor, you can use the wall mounting method. If you are installing the range in a mobile home, you must secure the range to the floor.
- 3. Determine and mark centerline of the cutout space. The mounting can be installed on either the left-side or right-side of the cutout. Position mounting bracket against the wall in the cutout so that the V-notch of the bracket is 129/16" (31.9 cm) from centerline as shown.



A. 129/16" (31.9 cm) B. Bracket V-notch

 Drill two 1/8" (3 mm) holes that correspond to the bracket holes of the determined mounting method. See the following illustrations.

Floor Mounting



Wall Mounting



- 5. Using the Phillips screwdriver, mount anti-tip bracket to the wall or floor with the two $\#12 \times 1^5/8$ " (4.1 cm) screws provided.
- **6.** Move range close enough to opening to allow for final electrical connections. Remove shipping base, cardboard or hardboard from under range.
- 7. Move range into its final location, making sure rear leveling leg slides into anti-tip bracket.



8. Move range forward onto shipping base, cardboard or hardboard to continue installing the range using the following installation instructions.

Model: 20-1790 A The Dunmore

39 of 43





Monochromatic Stainless Steel WDF540PADM

Also available in:

White	WDF540PADW
Black	WDF540PADB

Capacity		
Total Place Settings 15		
General Features & Properties		
Soil Sensor		
In-Door Silverware Basket		
Sani Rinse Option		
Normal Cycle		
Heavy Cycle		
High Temperature Wash Option		
Heated Dry Option		
ENERGY STAR® Certified		
Industry's Best Selling Dish	washer Brand†	
Electrical Details		
Amps	15	
Volts	120	
Hz	60	
Certifications		
ENERGY STAR® Certified	Yes	

Technical Details	
Dishwasher Type	Built-in
Control Location	Front
Control Type	Electronic
Number of Wash Cycles	5
Number of Options	5
dBA	53
Number of Racks	2
Tub Material	Plastic
Wash System	Filter
Wash System Type	Removable Filter
Number of Wash Arms	3
Dimensions	
Product Dimensions (H x W x D)	34-1/2" x 23-7/8" x 24-1/2"
Depth with Door Open 90°	49-1/2"
Reference Material	

Dimension Guide

Install Guide

Use & Care Guide

Energy Guide

Warranty

Key Features & Benefits

Sensor Cycle


Automatically get the right wash and dry settings for each load with two sensors that measure temperature, soil level and load size during prewash and the wash cycle.

1-Hour Wash Cycle

Clean the dishes you need fast with a cycle that thoroughly takes care of plates, pans and glasses in just an hour."

Cycle Memory

Quickly start your dishwasher with one button. It automatically remembers the last cycle you picked so it's stored and ready to go.



^{*}Per IEC standards. **Compared to Normal cycle with lightly soiled loads. †Based on 12-month average of unit sales. TraQline 2018. NOTE: Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.
®/™ © 2020. All rights reserved. Printed in the U.S.A. D200052XXA. WDF540PADSPECSHEETV01.

Model: 20-1790 A The Dunmore

40 of 43



PRODUCT MODEL NUMBERS

WDF110PAB	WDF310PLA	WDF530PSY
WDF111PAB	WDF320PAD	WDF540PAD
WDF120PAF	WDF510PAY	WDF730PAY
WDF121PAF	WDF520PAD	WDT710PAY
WDF310PAA	WDF530PAY	WDT720PAD
WDF310PCA	WDF530PLY	WDT770PAY

Electrical Requirements: 120-volt, 60-Hz, AC only, 15- or 20-amp. fused electrical supply. Copper wire only. A time delay fuse or circuit breaker and separate circuit is recommended.

If direct wiring dishwasher: Use flexible, armored,


or nonmetallic, sheathed copper wire with grounding wire that meets the wiring requirements for

your home and local codes and ordinances.

Use a UL listed or CSA approved conduit connector.

If connecting dishwasher with a power supply cord:

Use Power Supply Cord Kit (Part No. 4317824) marked for use with dishwashers. Follow the kit



instructions for installing the power supply cord. Power supply cord must plug into a grounded 3 prong, outlet, located in the cabinet next to the dishwasher opening. Outlet must meet all local codes and ordinances.



Water Supply Requirements: A hot water line with 20 to 120 psi (138 to 862 kPa) water pressure. Water temperature must be 120°F (49°C) water at dishwasher. Use 3/8" O.D. copper tubing with compression fitting or flexible braided water supply line (1/2" minimum plastic tubing is not recommended). Use a 90°elbow with ¾"N.P.T. external pipe threads on one end. Do not solderwithin 6" (15.2 cm) from water inlet valve.

Drain Requirements: A new drain hose is supplied with your dishwasher. If this is not long enough, use a new drain hose with a maximum length of 12' (3.7 m) (Part No. 3385556) that meets all current AHAM/IAPMO test standards, is resistant to heat and detergent, and fits the 1" (2.5 cm) drain connector of the dishwasher.

Make sure to connect the drain hose to waste tee or disposer inlet above drain trap in house plumbing and (50.8 cm) minimum above the floor. It is recommended




that the drain hose either be looped up and securely fastened to the underside of the counter or be connected to an air gap.

Make sure to use an air gap if the drain hose is connected to house plumbing lower than 20" (50.8 cm) above subfloor or floor.

Use ½" (1.3 cm) minimum I.D. drain line fittings. If required, the air gap should be installed in accordance with the air gap installation instructions. When connecting the air gap, a rubber hose (not provided) will be needed to connect to the waste tee or disposer inlet.

PRODUCT DIMENSIONS

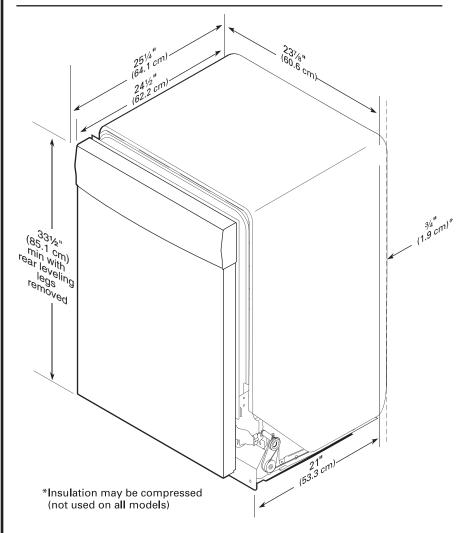


Project: Wallaceton Unit: 3188B-9, Phase: 3 Model: 20-1790 A The Dunmore

CABINET CUTOUT DIMENSIONS

NOTE: Shaded areas of cabinet walls show where utility connections may be installed.

- *Measure from the lowest point on the underside of the countertop. May be reduced to 33½" (85.1 cm) by removing the rear leveling legs from dishwasher.
- **Minimum, measured from narrowest point of opening.

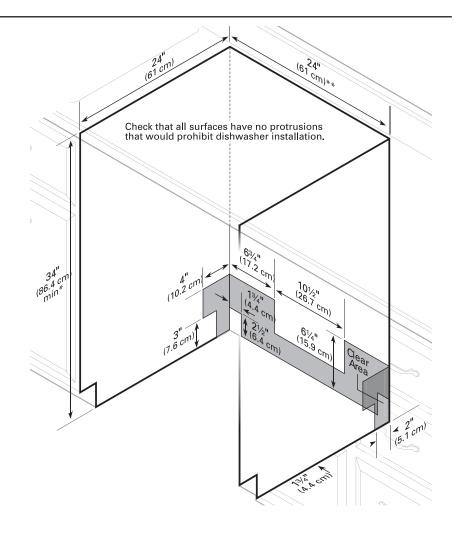

Model: 20-1790 A The Dunmore

42 of 43

WHIRLPOOL WASHER Model #: WFW5620HW

Whirlpool Brand Canada English | Washer and Dryers | Washers | Front Load Washers | WFW5620HW



5.2 cu. ft. I.E.C. Closet-Depth Front Load Washer with Load & Go™ Dispenser



Whirlpool*

5.2 cu. ft. I.E.C. Closet-Depth Front Load Washer with Load & Go™ Dispenser

Model #: WFW5620HW

Dimensions

Depth	80.17 cm, 31-9/16 in
Depth With Door Open 90 Degree	143.51 cm, 56-1/2 in
Minimum Height	98.11 cm, 38-5/8 in
Width	68.58 cm, 27.0 in
Appearance	
LCD Touch Screen	No
Window	Yes
Dataile	

Details

Drum Material	Stainless Steel	
		_

Cycles and Options

Number of Wash Cycles	37	

Electrical

Hz	60
Power Cord Included	Yes

Project: Wallaceton Unit: 3188B-9, Phase: 3 Model: 20-1790 A The Dunmore

43 of 43

WHIRLPOOL DRYER Model #: YWED5620HW

Whirlpool Brand Canada English | Washer and Dryers | Dryers | Electric Dryers | YWED5620HN



7.4 cu. ft. Front Load Electric
Dryer with Intuitive Touch
Controls



7.4 cu. ft. Front Load Electric Dryer with Intuitive Touch Controls

Model #: YWED5620HW

Dimensions

Difficusions	
Depth	78.74 cm, 31.0 in
Depth With Door Open 90 Degree	138.43 cm, 54-1/2 in
Height	98.42 cm, 38-3/4 in
Width	68.58 cm, 27.0 in
Configuration and Overview	
Fuel Type	Electric
Cycles and Options	
Cycle Time Remaining	Yes
Lint Filter Indicator	No
Number of Dryer Cycles	36
Number of Dryness Levels	3
Ventilation System	
Long Vent	No
Maximum Vent Length	64

Electrical

Venting Direction

Hz	60

Left, Right, Bottom, Rear

Power Cord Included Yes