### Sales Selection Sheet Checklist

1 of 44

Heathwood Homes (Huron) Limited

LOT 3189B-9 Model: 20-1790 A The Dunmore

PURCHASERS: MOHAMMAD, ALI KHAN/

VENDOR: Heathwood Homes (Huron) Limited

RELOCATE ELECTRIC FIREPLACE FROM GREAT ROOM TO DINING ROOM UPGRADE TO 4 X 8' INTERIOR DOORS ON MAIN FLOOR OPTIONAL DOUBLE SINKS IN MASTER ENSUITE BATHROOM FINISHED BASEMENT **COLD CELLAR** UPGRADED / MODIFIED ELEVATION **CORNER UPGRADE REAR UPGRADE CEILING UPGRADE - SMOOTH** MAIN FLOOR SECOND FLOOR **BASEMENT** ADDITIONAL ROUGH-INS 200 AMP SERVICE WET BAR ROUGH-IN **HUMIDIFIER** AIR CONDITIONING GAS ROUGH-IN **STOVE DRYER BBQ** ADDITIONAL FIREPLACE KITCHEN: HOODFAN VENTING SIZE **6 IN ROUND DUCT** 7 IN ROUND DUCT N/A **FULL BASEMENT STAIRS: UPPER BASEMENT STAIRS:** All Oak LOWER BASEMENT STAIRS: Carpet Grade MAIN STAIRS: All Oak MEDIA STAIRS (if applicable): N/A LOFT STAIRS (if applicable): N/A Mar 9, 2022 SONIA SHARIF Mar 9, 2022 Signature on file Date Purchaser: **Decor Consultant: Date** Mar 9, 2022 MARILYN ROSEN **Date** Purchaser:

> Date Approved

**Locked Date:** 

MOHAMMAD, ALI KHAN/ Project: Wallaceton Unit: 3189B-9, Phase: 3 Model: 20-1790 A The Dunmore



Locked: Closed:

Cabinet Colour/Style	9166	Viking III-CHARLESTON-ORCHID-3DL ***STD***
Countertop	9121	MSI Quartz GROUP 1 ICED WHITE 3/4 inch with double mitre edge ***1***
Countertop Edge	4005	DOUBLE MITRE 1 1/2 INCH ***UPG***
Cabinet Hardware	2086	9677-HARDWARE ***STD***
Island Cabinet Colour/Style	9166	Viking III-CHARLESTON-ORCHID-3DL ***STD***
Island Countertop	9121	MSI Quartz GROUP 1 ICED WHITE 3/4 inch with double mitre edge ***1***
Backsplash	8103	OD.ON.SWT.02.HEX.MT-ONTARIO HEXAGON MATTE-SNOW WHITE ***2***
Backsplash Grout	2225	Grout-(27) Silver ***STD***
Backsplash Tile Pattern	3120	VERTICAL HEX ***STD***
HoodFan	9393	SCB51930-CYCLONE 30 inch CANOPY CHIMNEY HOODFAN-SS
Appliance	9393	Purchasers have been advised: standard fridge opening is a minimum 37 3/8 x 73 3/8". Ice Waterline Rough-In is included.
Appliance	9393	Standard stove opening is 30" and standard dishwasher opening is 24". Any gas stove will require backsplash or stainless steel backing to avoid fire hazards.
Appliance	9393	Purchasers acknowledge: Heathwood Homes and its contractors will not be responsible for any kitchen cabinet

### Kitchen/Breakfast

Flooring	8913	UN.BL.BIA.1224-Biel-Bianco (White)-12 x 24 See Tile Direction on Sketch Page ***2***	S2P18
Floor Tile Grout	2225	Grout-(27) Silver ***STD***	
Floor Tile Pattern	3050	SIDE TO SIDE ***STD***	

MOHAMMAD, ALI KHAN/ Project: Wallaceton Unit: 3189B-9, Phase: 3 Model: 20-1790 A The Dunmore

Page 2 of 9

372 372 372 372 4 1 09:02 17

Locked:

		Ciosea.	
Comment			
Foyer			
Flooring	8913	UN.BL.BIA.1224-Biel-Bianco (White)-12 x 24 See Tile Direction on Sketch Page ***2***	S2P18
Floor Tile Grout	2225	Grout-(27) Silver ***STD***	
Floor Tile Pattern	3050	SIDE TO SIDE ***STD***	
Comment			
Laundry Room			
Flooring	8623	GE.CM.GRY.1313-Corte Milia-Grey-13 x 13 ***STD***	
Floor Tile Grout	2222	Grout-(105) Driftwood ***STD***	
Floor Tile Pattern	3000	STANDARD SQUARE ***STD***	
Comment			
Laundry Room Opt.			
Cabinet - Uppers	9111	VIKING III SIMCOE ORCHID 3DL ***1***	S4P20
Cabinet Hardware	2086	9677-HARDWARE ***STD***	
Comment			
Mud Room			
Floorina	8623	GE.CM.GRY.1313-Corte Milia-Grev-13 x 13 ***STD***	

MOHAMMAD, ALI KHAN/ Project: Wallaceton Unit: 3189B-9, Phase: 3 Model: 20-1790 A The Dunmore



Floor Tile Gro	out	2222	Grout-(105) Driftwood ***STD***	
Floor Tile Pat	tern	3000	STANDARD SQUARE ***STD***	
Comment				
Powder Room				
Flooring		8913	UN.BL.BIA.1224-Biel-Bianco (White)-12 x 24 See Tile Direction on Sketch Page ***2***	S2P18
Floor Tile Gro	nut	2225	Grout-(27) Silver ***STD***	
Floor Tile Pat	tern	3040	FRONT TO BACK ***STD***	
Plumbing Fix	ture (Colour)	1737	Plumbing Fixtures-WHITE ***STD***	
Comment				
Hall		_		
Flooring		9066	Vintage Red Oak : Solid Sawn Sculpted UVF-OPHELIA-3/4 inch x 5 inch ***5***	
Comment				
Dining Room				
Flooring		9066	Vintage Red Oak : Solid Sawn Sculpted UVF-OPHELIA-3/4 inch x 5 inch ***5***	
Comment				
Great Room				
Flooring		9066	Vintage Red Oak : Solid Sawn Sculpted UVF-OPHELIA-3/4 inch x 5 inch ***5***	
Comment				

MOHAMMAD, ALI KHAN/ Project: Wallaceton Unit: 3189B-9, Phase: 3 Model: 20-1790 A The Dunmore

Proving   Page   Province   Page   Province   Page   Pag				
Proving   Page   Province   Page   Province   Page   Pag				
Proving   Page   Province   Page   Province   Page   Pag				
Finished Basement (Rec) Room/Hall  Flooring  9252  DY 16787 - Dynasty Tex-MYSTIC BEIGE-40 oz Poly***STD***  Comment  Master Bedroom  Flooring  9252  DY 16787 - Dynasty Tex-MYSTIC BEIGE-40 oz Poly***STD***  Comment  Bedroom 2  Flooring  9252  DY 16787 - Dynasty Tex-MYSTIC BEIGE-40 oz Poly***STD***  Comment  Bedroom 3  Flooring  9252  DY 16787 - Dynasty Tex-MYSTIC BEIGE-40 oz Poly***STD***  Comment  Waster Ensuite  Cabinet Colour/Style  9111  ViKING III SIMCOE ORCHID 3DL ***STD***  Countertop  8822  4924-38-Countertop-WHITE CARRARA-Wilsonart ***STD***	Upper Hall			
Finished Basement (Rec) Room/Hall  Flooring  8252  DY 16787 - Dynasty Tex-MYSTIC BEIGE-40 oz Poly***STD***  Comment  Master Bedroom  Flooring  9252  DY 16787 - Dynasty Tex-MYSTIC BEIGE-40 oz Poly***STD***  Comment  Bedroom 2  Flooring  9252  DY 16787 - Dynasty Tex-MYSTIC BEIGE-40 oz Poly***STD***  Comment  Bedroom 3  Flooring  9252  DY 16787 - Dynasty Tex-MYSTIC BEIGE-40 oz Poly***STD***  Comment  Waster Ensuite  Cabinet Colour/Style  9111  ViKING III SIMCOE ORCHID 3DL ***STD***  Countertop  Master Ensuite  Countertop  4924-38-Countertop-WHITE CARRARA-Wilsonart ***STD***			0050	DV 16707 Duncety Tay MVCTIC DEICE 10 an
Finished Basement (Rec) Room/Hall  Flooring  9252  DY 16787 - Dynasty Tex-MYSTIC BEIGE-40 oz Poly***STD***  Master Bedroom  Flooring  9252  DY 16787 - Dynasty Tex-MYSTIC BEIGE-40 oz Poly***STD***  Comment  Bedroom 2  Flooring  9252  DY 16787 - Dynasty Tex-MYSTIC BEIGE-40 oz Poly***STD***  Comment  Bedroom 3  Flooring  9252  DY 16787 - Dynasty Tex-MYSTIC BEIGE-40 oz Poly***STD***  Comment  Master Ensuite  Cabinet Colour/Style  9111  VIKING III SIMCOE ORCHID 3DL ***STD***  VIKING III SIMCOE ORCHID 3DL ***STD***  Master Ensuite  Countertop  8822  4824-38-Countertop-WHITE CARRARA-Wilsonart ***STD***	Flooring		9252	Poly***STD***
Finished Basement (Rec) Room/Hall  Flooring  9252  DY 16787 - Dynasty Tex-MYSTIC BEIGE-40 oz Poly***STD***  Master Bedroom  Flooring  9252  DY 16787 - Dynasty Tex-MYSTIC BEIGE-40 oz Poly***STD***  Comment  Bedroom 2  Flooring  9252  DY 16787 - Dynasty Tex-MYSTIC BEIGE-40 oz Poly***STD***  Comment  Bedroom 3  Flooring  9252  DY 16787 - Dynasty Tex-MYSTIC BEIGE-40 oz Poly***STD***  Comment  Master Ensuite  Cabinet Colour/Style  9111  VIKING III SIMCOE ORCHID 3DL ***STD***  VIKING III SIMCOE ORCHID 3DL ***STD***  Master Ensuite  Countertop  8822  4824-38-Countertop-WHITE CARRARA-Wilsonart ***STD***				
Finished Basement (Rec) Room/Hall  Flooring  9252  DY 16787 - Dynasty Tex-MYSTIC BEIGE-40 oz Poly***STD***  Master Bedroom  Flooring  9252  DY 16787 - Dynasty Tex-MYSTIC BEIGE-40 oz Poly***STD***  Comment  Bedroom 2  Flooring  9252  DY 16787 - Dynasty Tex-MYSTIC BEIGE-40 oz Poly***STD***  Comment  Bedroom 3  Flooring  9252  DY 16787 - Dynasty Tex-MYSTIC BEIGE-40 oz Poly***STD***  Comment  Waster Ensuite  Cabinet Colour/Style  9111  VIKING III SIMCOE ORCHID 3DL ***STD***  Countertop  8822  4924-38-Countertop-WHITE CARRARA-Wilsonart ***STD***	Commont			
Flooring 9252 DY 16787 - Dynasty Tex-MYSTIC BEIGE-40 oz Poly**STD***  Master Bedroom  Flooring 9252 DY 16787 - Dynasty Tex-MYSTIC BEIGE-40 oz Poly**STD***  Comment  Bedroom 2  Flooring 9252 DY 16787 - Dynasty Tex-MYSTIC BEIGE-40 oz Poly**STD***  Comment  Bedroom 3  Flooring 9252 DY 16787 - Dynasty Tex-MYSTIC BEIGE-40 oz Poly**STD***  Comment  Waster Ensuite  Cabinet Colour/Style 9111 VIKING III SIMCOE ORCHID 3DL ***STD***  Countertop 8822 4924-38-Countertop-WhitTE CARRARA-Wilsonart **STD***	Comment			
Flooring 9252 DY 16787 - Dynasty Tex-MYSTIC BEIGE-40 oz Poly**STD***  Master Bedroom  Flooring 9252 DY 16787 - Dynasty Tex-MYSTIC BEIGE-40 oz Poly**STD***  Comment  Bedroom 2  Flooring 9252 DY 16787 - Dynasty Tex-MYSTIC BEIGE-40 oz Poly**STD***  Comment  Bedroom 3  Flooring 9252 DY 16787 - Dynasty Tex-MYSTIC BEIGE-40 oz Poly**STD***  Comment  Waster Ensuite  Cabinet Colour/Style 9111 VIKING III SIMCOE ORCHID 3DL ***STD***  Countertop 8822 4924-38-Countertop-WhitTE CARRARA-Wilsonart **STD***				
Flooring 9252 DY 16787 - Dynasty Tex-MYSTIC BEIGE-40 oz Poly**STD***  Master Bedroom  Flooring 9252 DY 16787 - Dynasty Tex-MYSTIC BEIGE-40 oz Poly**STD***  Comment  Bedroom 2  Flooring 9252 DY 16787 - Dynasty Tex-MYSTIC BEIGE-40 oz Poly**STD***  Comment  Bedroom 3  Flooring 9252 DY 16787 - Dynasty Tex-MYSTIC BEIGE-40 oz Poly**STD***  Comment  Waster Ensuite  Cabinet Colour/Style 9111 VIKING III SIMCOE ORCHID 3DL ***STD***  Countertop 8822 4924-38-Countertop-WhitTE CARRARA-Wilsonart **STD***				
Poly***STD***  Master Bedroom  Flooring  9252  DY 16787 -Dynasty Tex-MYSTIC BEIGE-40 oz Poly***STD***  Comment  Bedroom 2  Flooring  9252  DY 16787 -Dynasty Tex-MYSTIC BEIGE-40 oz Poly***STD***  Comment  Bedroom 3  Flooring  9252  DY 16787 -Dynasty Tex-MYSTIC BEIGE-40 oz Poly***STD***  Comment  Waster Ensuite  Cabinet Colour/Style  9111  VIKING III SIMCOE ORCHID 3DL ***STD***  Countertop  8822  4924-38-Countertop-WHITE CARRARA-Wilsonart ***STD****	Finished Basem	ent (Rec) Room/Hall		
Poly***STD***  Master Bedroom  Flooring  9252  DY 16787 - Dynasty Tex-MYSTIC BEIGE-40 oz Poly***STD***  Comment  Bedroom 2  Flooring  9252  DY 16787 - Dynasty Tex-MYSTIC BEIGE-40 oz Poly***STD***  Comment  Bedroom 3  Flooring  9252  DY 16787 - Dynasty Tex-MYSTIC BEIGE-40 oz Poly***STD***  Comment  Waster Ensuite  Cabinet Colour/Style  9111  VIKING III SIMCOE ORCHID 3DL ***STD***  Countertop  8822  4924-38-Countertop-WHITE CARRARA-Wilsonart ***STD****	_,		0050	DV 40707 D 4 T MVOTIO DEIOE 40
Master Bedroom  Flooring    DY 16787 - Dynasty Tex-MYSTIC BEIGE-40 oz Poly***STD***    Poly***STD***   Poly***STD***   Poly***STD***   Poly***STD***   Poly***STD***   Poly***STD***   Poly***STD***   Poly***STD***   Poly***STD***   Poly***STD***   Poly***STD***   Poly***STD***   Poly***STD***   Poly***STD***   Poly***STD***   Poly***STD***   Poly***STD***   Poly***STD***   Poly***STD***   Poly***STD***   Poly***STD***   Poly***STD***   Poly***STD***   Poly***STD***   Poly***STD***   Poly***STD***   Poly***STD***   Poly***STD***   Poly***STD***   Poly***STD***   Poly***STD***   Poly***STD***   Poly***STD***   Poly***STD***   Poly***STD***   Poly***STD***   Poly***STD***   Poly***STD***   Poly***STD***   Poly***STD***   Poly***STD***   Poly***STD***   Poly***STD***   Poly***STD***   Poly***STD***   Poly***STD***   Poly***STD***   Poly***STD***   Poly***STD***   Poly***STD***   Poly***STD***   Poly***STD***   Poly***STD***   Poly***STD***   Poly***STD***   Poly***STD***   Poly***STD***   Poly***STD***   Poly***STD***   Poly***STD***   Poly***STD***   Poly***STD***   Poly***STD***   Poly***STD***   Poly***STD***   Poly***STD***   Poly***STD***   Poly***STD***   Poly***STD***   Poly***STD***   Poly***STD***   Poly***STD***   Poly***STD***	Flooring		9252	Poly***STD***
Flooring   9252   DY 16787 - Dynasty Tex-MYSTIC BEIGE-40 oz Poly***STD***  Comment   9252   DY 16787 - Dynasty Tex-MYSTIC BEIGE-40 oz Poly***STD***  Flooring   9252   DY 16787 - Dynasty Tex-MYSTIC BEIGE-40 oz Poly***STD***  Comment   9252   DY 16787 - Dynasty Tex-MYSTIC BEIGE-40 oz Poly***STD***  Comment   Poly***STD***  Master Ensuite   9111   VIKING III SIMCOE ORCHID 3DL ***STD***  Countertop   8822   4924-38-Countertop-WHITE CARRARA-Wilsonart ***STD***				
Flooring 9252 DY 16787 -Dynasty Tex-MYSTIC BEIGE-40 oz Poly***STD***  Comment  Bedroom 2  Flooring 9252 DY 16787 -Dynasty Tex-MYSTIC BEIGE-40 oz Poly***STD***  Comment  Bedroom 3  Flooring 9252 DY 16787 -Dynasty Tex-MYSTIC BEIGE-40 oz Poly***STD***  Comment  Waster Ensuite  Cabinet Colour/Style 9111 VIKING III SIMCOE ORCHID 3DL ***STD***  Countertop 8822 4924-38-Countertop-WHITE CARRARA-Wilsonart ***STD***	Comment			7
Poly***STD***   Poly**STD***   Poly**STD***   Poly**STD***   Poly**STD***   Poly**STD***   Poly**STD***   Poly**STD***   Poly**STD***	Comment			
Poly***STD***   Poly**STD***   Poly**STD***				
Poly***STD***   Poly**STD***   Poly**STD***   Poly**STD***   Poly**STD***   Poly**STD***   Poly**STD***   Poly**STD***   Poly**STD***				
Ediroom 2  Flooring  9252  DY 16787 - Dynasty Tex-MYSTIC BEIGE-40 oz Poly***STD***  Comment  Bedroom 3  Flooring  9252  DY 16787 - Dynasty Tex-MYSTIC BEIGE-40 oz Poly***STD***  Comment  Master Ensuite  Cabinet Colour/Style  9111  VIKING III SIMCOE ORCHID 3DL ***STD***  Countertop  8822  4924-38-Countertop-WHITE CARRARA-Wilsonart ***STD***	Master Bedroom	1		
Ediroom 2  Flooring  9252  DY 16787 - Dynasty Tex-MYSTIC BEIGE-40 oz Poly***STD***  Comment  Bedroom 3  Flooring  9252  DY 16787 - Dynasty Tex-MYSTIC BEIGE-40 oz Poly***STD***  Comment  Master Ensuite  Cabinet Colour/Style  9111  VIKING III SIMCOE ORCHID 3DL ***STD***  Countertop  8822  4924-38-Countertop-WHITE CARRARA-Wilsonart ***STD***				
Ediroom 2  Flooring  9252  DY 16787 - Dynasty Tex-MYSTIC BEIGE-40 oz Poly***STD***  Comment  Bedroom 3  Flooring  9252  DY 16787 - Dynasty Tex-MYSTIC BEIGE-40 oz Poly***STD***  Comment  Master Ensuite  Cabinet Colour/Style  9111  VIKING III SIMCOE ORCHID 3DL ***STD***  Countertop  8822  4924-38-Countertop-WHITE CARRARA-Wilsonart ***STD***	Flooring		9252	DY 16787 -Dynasty Tex-MYSTIC BEIGE-40 oz Poly***STD***
Flooring  9252  PY 16787 - Dynasty Tex-MYSTIC BEIGE-40 oz Poly***STD***  Comment  Proving  9252  DY 16787 - Dynasty Tex-MYSTIC BEIGE-40 oz Poly***STD***  Comment  Master Ensuite  Cabinet Colour/Style  9111  VIKING III SIMCOE ORCHID 3DL ***STD***  Countertop  8822  4924-38-Countertop-WHITE CARRARA-Wilsonart ***STD***				,
Flooring  9252  PY 16787 - Dynasty Tex-MYSTIC BEIGE-40 oz Poly***STD***  Comment  Proving  9252  DY 16787 - Dynasty Tex-MYSTIC BEIGE-40 oz Poly***STD***  Comment  Master Ensuite  Cabinet Colour/Style  9111  VIKING III SIMCOE ORCHID 3DL ***STD***  Countertop  8822  4924-38-Countertop-WHITE CARRARA-Wilsonart ***STD***	2			
Flooring  9252  DY 16787 - Dynasty Tex-MYSTIC BEIGE-40 oz Poly***STD***  Comment  Bedroom 3  Flooring  9252  DY 16787 - Dynasty Tex-MYSTIC BEIGE-40 oz Poly***STD***  Comment  Comment  Master Ensuite  Cabinet Colour/Style  9111  VIKING III SIMCOE ORCHID 3DL ***STD***  Countertop  8822  4924-38-Countertop-WHITE CARRARA-Wilsonart ***STD****	Comment			
Flooring  9252  DY 16787 - Dynasty Tex-MYSTIC BEIGE-40 oz Poly***STD***  Comment  Bedroom 3  Flooring  9252  DY 16787 - Dynasty Tex-MYSTIC BEIGE-40 oz Poly***STD***  Comment  Comment  Master Ensuite  Cabinet Colour/Style  9111  VIKING III SIMCOE ORCHID 3DL ***STD***  Countertop  8822  4924-38-Countertop-WHITE CARRARA-Wilsonart ***STD****				
Flooring  9252  DY 16787 - Dynasty Tex-MYSTIC BEIGE-40 oz Poly***STD***  Comment  Bedroom 3  Flooring  9252  DY 16787 - Dynasty Tex-MYSTIC BEIGE-40 oz Poly***STD***  Comment  Comment  Master Ensuite  Cabinet Colour/Style  9111  VIKING III SIMCOE ORCHID 3DL ***STD***  Countertop  8822  4924-38-Countertop-WHITE CARRARA-Wilsonart ***STD****				
Poly***STD***  Comment  Bedroom 3  Flooring  9252  DY 16787 -Dynasty Tex-MYSTIC BEIGE-40 oz Poly***STD***  Comment  Master Ensuite  Cabinet Colour/Style  9111  VIKING III SIMCOE ORCHID 3DL ***STD***  Countertop  8822  4924-38-Countertop-WHITE CARRARA-Wilsonart ***STD***	Bedroom 2			
Comment  Bedroom 3  Flooring  9252  DY 16787 - Dynasty Tex-MYSTIC BEIGE-40 oz Poly***STD***  Comment  Master Ensuite  Cabinet Colour/Style  9111  VIKING III SIMCOE ORCHID 3DL ***STD***  Countertop  8822  4924-38-Countertop-WHITE CARRARA-Wilsonart ***STD****				
Comment  Bedroom 3  Flooring  9252  DY 16787 - Dynasty Tex-MYSTIC BEIGE-40 oz Poly***STD***  Comment  Master Ensuite  Cabinet Colour/Style  9111  VIKING III SIMCOE ORCHID 3DL ***STD***  Countertop  8822  4924-38-Countertop-WHITE CARRARA-Wilsonart ***STD****	Flooring		9252	DY 16787 -Dynasty Tex-MYSTIC BEIGE-40 oz Polv***STD***
Flooring  9252  DY 16787 -Dynasty Tex-MYSTIC BEIGE-40 oz Poly***STD***  Comment  Master Ensuite  Cabinet Colour/Style  9111  VIKING III SIMCOE ORCHID 3DL ***STD***  Countertop  8822  4924-38-Countertop-WHITE CARRARA-Wilsonart ***STD****				
Flooring  9252  DY 16787 -Dynasty Tex-MYSTIC BEIGE-40 oz Poly***STD***  Comment  Master Ensuite  Cabinet Colour/Style  9111  VIKING III SIMCOE ORCHID 3DL ***STD***  Countertop  8822  4924-38-Countertop-WHITE CARRARA-Wilsonart ***STD****				
Flooring  9252  DY 16787 -Dynasty Tex-MYSTIC BEIGE-40 oz Poly***STD***  Comment  Master Ensuite  Cabinet Colour/Style  9111  VIKING III SIMCOE ORCHID 3DL ***STD***  Countertop  8822  4924-38-Countertop-WHITE CARRARA-Wilsonart ***STD****	Comment			
Flooring  9252  DY 16787 -Dynasty Tex-MYSTIC BEIGE-40 oz Poly***STD***  Comment  Master Ensuite  Cabinet Colour/Style  9111  VIKING III SIMCOE ORCHID 3DL ***STD***  Countertop  8822  4924-38-Countertop-WHITE CARRARA-Wilsonart ***STD***				
Flooring  9252  DY 16787 -Dynasty Tex-MYSTIC BEIGE-40 oz Poly***STD***  Comment  Master Ensuite  Cabinet Colour/Style  9111  VIKING III SIMCOE ORCHID 3DL ***STD***  Countertop  8822  4924-38-Countertop-WHITE CARRARA-Wilsonart ***STD***				
Comment  Master Ensuite  Cabinet Colour/Style  9111  VIKING III SIMCOE ORCHID 3DL ***STD***  Countertop  8822  4924-38-Countertop-WHITE CARRARA-Wilsonart ***STD***	Bedroom 3			
Comment  Master Ensuite  Cabinet Colour/Style  9111  VIKING III SIMCOE ORCHID 3DL ***STD***  Countertop  8822  4924-38-Countertop-WHITE CARRARA-Wilsonart ***STD***				DV 40707 D
Comment  Master Ensuite  Cabinet Colour/Style  9111  VIKING III SIMCOE ORCHID 3DL ***STD***  Countertop  8822  4924-38-Countertop-WHITE CARRARA-Wilsonart ***STD***	Flooring		9252	DY 16787 -Dynasty Tex-MYSTIC BEIGE-40 oz Polv***STD***
Master Ensuite  Cabinet Colour/Style 9111 VIKING III SIMCOE ORCHID 3DL ***STD***  Countertop 8822 4924-38-Countertop-WHITE CARRARA-Wilsonart ***STD***				_
Master Ensuite  Cabinet Colour/Style 9111 VIKING III SIMCOE ORCHID 3DL ***STD***  Countertop 8822 4924-38-Countertop-WHITE CARRARA-Wilsonart ***STD***	•			
Cabinet Colour/Style  9111  VIKING III SIMCOE ORCHID 3DL ***STD***  Countertop  8822  4924-38-Countertop-WHITE CARRARA-Wilsonart  ***STD***	Comment			
Cabinet Colour/Style  9111  VIKING III SIMCOE ORCHID 3DL ***STD***  Countertop  8822  4924-38-Countertop-WHITE CARRARA-Wilsonart  ***STD***				
Cabinet Colour/Style  9111  VIKING III SIMCOE ORCHID 3DL ***STD***  Countertop  8822  4924-38-Countertop-WHITE CARRARA-Wilsonart  ***STD***		_		
Countertop 8822 4924-38-Countertop-WHITE CARRARA-Wilsonart ***STD***	Master Ensuite			
Countertop 8822 4924-38-Countertop-WHITE CARRARA-Wilsonart ***STD***				
***STD***	Cabinet Col	our/Style	9111	VIKING III SIMCOE ORCHID 3DL ***STD***
***STD***				
	Countertop		8822	4924-38-Countertop-WHITE CARRARA-Wilsonart
Page 4 of 9	Page 4 of 9			טופ

MOHAMMAD, ALI KHAN/ Project: Wallaceton Unit: 3189B-9, Phase: 3 Model: 20-1790 A The Dunmore



Countertop Edge	1111	N/A *****	
Cabinet Hardware	2086	9677-HARDWARE ***STD***	
Floor Tile	8913	UN.BL.BIA.1224-Biel-Bianco (White)-12 x 24 See Tile Direction on Sketch Page ***2***	S4P20
Floor Tile Grout	2225	Grout-(27) Silver ***STD***	
Floor Tile Pattern	3040	FRONT TO BACK ***STD***	
Shower Floor Tile	8661	OD.ON.SWT.0202.MT.N-Ontario Series Mosaic-Snow White Matte-2 x 2 ***STD***	
Shower Floor Tile Grout	2226	Grout-(00) White ***STD***	
Shower Floor Tile Pattern	3000	STANDARD SQUARE ***STD***	
Shower Wall Tile	9020	QT.WV.WHT.0810-Weave-White-8 x 10 ***STD***	
Shower Wall Tile Grout	2226	Grout-(00) White ***STD***	
Shower Wall Tile Pattern	3070	HORIZONTAL STACKED ***STD***	
Shower Jamb(s) and Sill(s)	8923	Shower Jamb / Sill-Thassos White ***STD***	
Plumbing Fixture (colour)	1737	Plumbing Fixtures-WHITE ***STD***	
Comment			
lain Bathroom			
Cabinet Colour/Style	9111	VIKING III SIMCOE ORCHID 3DL ***STD***	
Countertop	8822	4924-38-Countertop-WHITE CARRARA-Wilsonart ***STD***	
Countertop Edge	1111	N/A *****	

MOHAMMAD, ALI KHAN/ Project: Wallaceton Unit: 3189B-9, Phase: 3 Model: 20-1790 A The Dunmore

Page 6 of 9



Cabinet Hardware	2086	9677-HARDWARE ***STD***			
Flooring	8913	UN.BL.BIA.1224-Biel-Bianco (White)-12 x 24 See Tile Direction on Sketch Page ***2***			
Floor Tile Grout	2225	Grout-(27) Silver ***STD***			
Floor Tile Pattern	3050	SIDE TO SIDE ***STD***			
Wall Tile	9020	QT.WV.WHT.0810-Weave-White-8 x 10 ***STD***			
Wall Tile Grout	2226	Grout-(00) White ***STD***			
Main Bathroom Tile Pattern	3070	HORIZONTAL STACKED ***STD***			
Plumbing Fixture (Colour)  Comment	1737	Plumbing Fixtures-WHITE ***STD***			
inished Basement Bathroom					
Cabinet Colour/Style	9111	VIKING III SIMCOE ORCHID 3DL ***STD***			
Countertop	8822	4924-38-Countertop-WHITE CARRARA-Wilsonart ***STD***			
Countertop Edge	1111	N/A *****			
Cabinet Hardware	2086	9677-HARDWARE ***STD***			
Flooring	8916	OV.CH.WHT.1224-Chambray-White-12 x 24 See Tile Direction on Sketch Page ***2***	S1P17		
Floor Tile Grout	2225	Grout-(27) Silver ***STD***			
Floor Tile Pattern	3040	FRONT TO BACK ***STD***			
Shower Floor Tile	8661	OD.ON.SWT.0202.MT.N-Ontario Series Mosaic-Snow White Matte-2 x 2 ***STD***			

MOHAMMAD, ALI KHAN/ Project: Wallaceton Unit: 3189B-9, Phase: 3 Model: 20-1790 A The Dunmore

Page 7 of 9



Shower Floor Tile Grout	2226	Grout-(00) White ***STD***
Shower Floor Tile Pattern	3000	STANDARD SQUARE ***STD***
Shower Wall Tile	9020	QT.WV.WHT.0810-Weave-White-8 x 10 ***STD***
Shower Wall Tile Grout	2226	Grout-(00) White ***STD***
Shower Wall Tile Pattern	3070	HORIZONTAL STACKED ***STD***
Shower Jamb(s)	8923	Shower Jamb / Sill-Thassos White ***STD***
Plumbing Fixture (Colour)	1737	Plumbing Fixtures-WHITE ***STD***
Comment  Great Room Fireplace		
Туре	8865	Dimplex-Electric Fireplace-PF3033HL ***STD***
Mantle	8891	NF-17-Paint Grade Mantle- Cabinet (Per Plan)-WHITE ***STD***
Surround Opt.	1111	N/A *****
Disclaimer	1111	Purchasers have been advised: heat from the FP can damage TV above a FP and items placed on mantle.
Disclaimer	1111	Heathwood and its contractors will not be liable for any damage on items placed/installed above a FP after closing.
Comment RELOCATED TO D	INING ROOM	1 SEE SKETCH #2 PAGE 18
Basement Stairs		
Туре	1714	Carpet Grade Stairs ***STD BASEMENT STAIRS***
Colour	7940	Sambucca STAIN TO COMPLIMENT HARDWOOD AND WILL VARY FROM FLOORING ***99***
Carpet Runner	1111	N/A *****
Handrail/Pickets/Post Type	9119	Handrail only on closed walls (one or two sides per building

MOHAMMAD, ALI KHAN/ Project: Wallaceton Unit: 3189B-9, Phase: 3 Model: 20-1790 A The Dunmore Ged: 11422021 09:02 17

Locked: Closed:

		0000/ 015
Haradus II/Distrato /Dast Oalasus	4700	Open at Out to Other boundary with the ative and on the other of the o
Handrail/Pickets/Post Colours	1729	Carpet Grade-Stain handrail, pickets, stringers, nosing _post
Carpet	9252	DY 16787 -Dynasty Tex-MYSTIC BEIGE-40 oz
Carpor	0202	Poly***STD***
Custom Stain/Paint	1111	N/A *****
Comment		
Comment		
Basement Stairs Landings (Upper a	nd Lo	
Flooring	8906	Red Oak-Vintage 5 inch Pre-Sanded Smooth Unfinished
Flooring	0900	Red Oak-Village 3 inch Fre-Sanded Smooth Offinished  Red Oak-Unfinished-3/4 inch x 5 inch ***4***
Comment		
Main Stairs		
Туре	1712	Oak Stairs ***STD MAIN STAIRS***
Colour	7940	Sambucca STAIN TO COMPLIMENT HARDWOOD AND
		WILL VARY FROM FLOORING ***99***
Carnet Bunner	1111	N/A *****
Carpet Runner	1111	
Handrail/Pickets/Posts Type	7652	1 5/16 inch Square pickets with 3 1/2" Square/Cap
		Post(s)-ALL OAK ***STD***
Handrail/Pickets/Posts Colour	1728	Oak Grade-Stain handrail,oak pickets,stringers,treads,risers
Handrail/Fickets/Fosts Coloui	1720	Oak Grade-Glaiir Handraii, Oak pickets, stringers, treads, risers
Custom Stain/Paint	1111	N/A *****
ouctom otamin ann		
Comment		
Main Stairs Landing(s)		
Flooring	8906	Red Oak-Vintage 5 inch Pre-Sanded Smooth Unfinished
		Red Oak-Unfinished-3/4 inch x 5 inch ***1***
-		
Comment		

Throughout

MOHAMMAD, ALI KHAN/ Project: Wallaceton Unit: 3189B-9, Phase: 3 Model: 20-1790 A The Dunmore



Purchaser:			 Date	Wallaceton	 Date Approved
	MOHAMMAD, ALI KHAN		Date	Decor Consultant	Date
Purchaser:					
Comme	nt				
Trim - P	aint Colour	1716	Trim-WHIT	E ***STD***	
Trim Siz	re	8705	4 ¼ Basebo	pard and 2 ¾ Casings ***ST[	)***
Switche	s and Plug	5796	Decora Wh	ite Switches and Plugs ***S	TD***
Thresho	olds	2232	Metal Thres	sholds ***STD***	
Underpa	ad	1079	500 Series-	Underpad ***STD***	
Walls - F	Paint Colour	1717	22-Wall-WA	ARM GREY ***STD***	

# construction summary Of 44



Lot: 3189B-9 Model: 20-1790 A The Dunmore

Project/Phase: Wallaceton / 3

Offer	Five Appliances: SS Fridge, Stove, Dishwasher: White Front Loader Washer/Dryer - Townhomes
Worksheet	Note:
Offer	The Purchaser(s) acknowledge that they have NOT been referred by an existing Heathwood Homeowner and therefor are not
	entitled to a referral fee under Heathwood Homes Referral program.
Worksheet	Note:

DisciplineMS.rpt 13dec21 Page 1 of 6

# 12 of 44 construction summary



Lot: 3189B-9

Model: 20-1790 A The Dunmore Project/Phase: Wallaceton / 3

### **APPLIANCES**

invoice	Qty.	Description
966	1	KITCHEN - APPLIANCES - CYCLONE 30 INCH WALL MOUNT CHIMNEY HOOD SS - SCB51930
313,484		
04Apr22		
		CABINETRY - delete stove uppers; ELECTRICAL - delete std range hood; HEATING/AIR CONDITIONING - Du
		change to 6"

CABIN	CABINETRY		
Invoice	Qty.	Description	
966 306,568 04Apr22	1	KITCHEN - CABINETRY - OPT LIGHT VALANCE (TRIM ONLY) - KITCHEN (ALL DOOR STYLES) - UPG	
966 306,584 04Apr22	1	LAUNDRY ROOM - CABINETRY - VIKING I/II/III - OPT. LAUNDRY ROOM UPPERS - UPG SKETCH # 3 AND 4	
966 313,768 04Apr22	1	KITCHEN - 11A-Upper angle corner per unit Viking SKETCH# 3	
966 313,484 04Apr22 **	1	KITCHEN - APPLIANCES - CYCLONE 30 INCH WALL MOUNT CHIMNEY HOOD SS - SCB51930  CABINETRY - delete stove uppers; ELECTRICAL - delete std range hood; HEATING/AIR CONDITIONING - Du change to 6"	
966 334,723 04Apr22 **	1	MASTER ENSUITE - PLUMBING - OPTION FROM ONE SINK TO DOUBLE SINKS INCLUDING STD CHATEAU FAUCET OVERMOUNT COLONY SINK ONE EXTRA VANITY LIGHT AND CABINET CONVERSION 2D VIKING  SKETCH # 3 AND 4  CABINETRY-2D Convert Cabinetry Viking; Eletrical-Additional Vanity Light	
966 313,624 04Apr22	1	KITCHEN - 04H-66cm deep fridge enclosure (counter depth) with (1) wall ([1] 66cm deep gable and [1] 66cm deep cabinet) (This is not a zero clearance enclosure. Standard heights and widths will be used.) Viking  SKETCH # 3	
966 313,796 04Apr22	1	KITCHEN - 12B-Pots and pans drawers (width min. 60cm/max. 90cm) (size subject to floor plan) Viking  SKETCH # 3	

DisciplineMS.rpt 13dec21 Page 2 of 6

# 13 of 44 construction summary



Lot: 3189B-9 Model: 20-1790 A The Dunmore Project/Phase: Wallaceton / 3

**CERAMICS** 

Invoice	Qty.	Description
966 308,448 04Apr22	1	KITCHEN - CERAMICS - BACKSPLASH - KITCHEN - UPGRADE 2
966 314,179 04Apr22	1	KITCHEN - CERAMICS - ADDITIONAL BACKSPLASH DUE TO INSTALL CHIMENEY HOODFAN IN KITCHEN - KITCHEN - UPGRADE 2
966 308,470 04Apr22	1	FOYER - CERAMICS - FLOOR - FOYER - UPGRADE 2
966 308,485 04Apr22	1	KITCHEN/BREAKFAST - CERAMICS - FLOOR - KITCHEN - UPGRADE 2
966 308,513 04Apr22	1	POWDER ROOM - CERAMICS - FLOOR - POWDER ROOM - UPGRADE 2
966 308,499 04Apr22	1	MAIN BATHROOM - CERAMICS - FLOOR - MAIN BATHROOM - UPGRADE 2
966 308,463 04Apr22	1	MASTER ENSUITE - CERAMICS - FLOOR - ENSUITE MASTER - UPGRADE 2
966 308,456 04Apr22	1	FINISHED BASEMENT BATHROOM - CERAMICS - FLOOR - BASEMENT BATHROOM - UPGRADE 2

DRYW	DRYWALL			
Invoice	Qty.	Description		
966 314,251	1	DINING ROOM - FIREPLACE AND MANTLE - RELOCATE ELECTRICAL FIREPLACE		
04Apr22 **		RELOCATE TO DINING ROOM SEE SKETCH # 2  DRYWALL-notify; ELECTRICAL-notify; FRAMING-notify; HEATING/AIR CONDITIONING-notify; INTERIO  TRIM-notify; PAINTING-notify		
966 314,346	4	- INTERIOR TRIM - UPGRADE FROM STANDARD 6 FT 8 INCH 2 PANEL HOLLOW CORE SINGLE DOOR TO 8 FT 2 PANEL HOLLOW CORE SINGLE DOOR		
04Apr22 **		1) CLOSET DOOR IN FOYER 2) POWDER ROOM 3) DOOR TO MUDROOM 4) DOOR TO BASEMENT Sketch #4  DRYWALL-Notify; FRAMING-Notify; PAINTING-paint upgraded door and frame		

DisciplineMS.rpt 13dec21 Page 3 of 6

# 14 of 44



CONSTRUCTION SUMMARY

Lot: 3189B-9 Model: 20-1790 A The Dunmore

Project/Phase: Wallaceton / 3

### ELECTRICAL

Invoice	Qty.	Description
966 314,223	1	KITCHEN - ELECTRICAL - ADDITIONAL SWITCH
04Apr22		KITCHEN TO BE USED FOR R/I CAPPED LIGHT ABOVE ISLAND
966 314,224	2	- ELECTRICAL - CEILING ROUGH-IN (CAPPED)
04Apr22		1) ABOVE BREAKFAST BAR +/- TO BE CENTRED 2)TO BE CENTERED IN GREAT ROOM SEE SKETCH # 2
966 314,340 04Apr22 **	1	KITCHEN - HEATING/AIR - ROUGH-IN GAS LINE FOR GAS STOVE AT MAIN FLOOR (SEE SPECS) (HOOK-UP NOT INCLUDED) LEAVE STANDARD 120 VOLT ELECTRICAL OUTLET ON A SEPARATE CIRCUIT. * STANDARD 220V WILL STAY SKETCH # 3 ELECTRICAL - notification
966 314,251	1	DINING ROOM - FIREPLACE AND MANTLE - RELOCATE ELECTRICAL FIREPLACE
04Apr22 **		RELOCATE TO DINING ROOM SEE SKETCH # 2 DRYWALL-notify; ELECTRICAL-notify; FRAMING-notify; HEATING/AIR CONDITIONING-notify; INTERIO TRIM-notify; PAINTING-notify
966 314,232	2	- ELECTRICAL - EXTRA WALL INTERIOR OUTLET ON EXISTING CIRCUIT (DOES NOT INCLUDE KITCHEN OUTLETS)
04Apr22		1) DINING ROOM +/- TO BE CENTERED ABOVE FIRE PLACE, +/- 70" FROM FLOOR SEE SKETCH # 2 2) MASTER BEDROOM- +/- 70" FROM FLOOR SEE SKETCH # 4
966 313,484 04Apr22	1	KITCHEN - APPLIANCES - CYCLONE 30 INCH WALL MOUNT CHIMNEY HOOD SS - SCB51930
**		CABINETRY - delete stove uppers; ELECTRICAL - delete std range hood; HEATING/AIR CONDITIONING - Du change to 6"
966 334,723	1	MASTER ENSUITE - PLUMBING - OPTION FROM ONE SINK TO DOUBLE SINKS INCLUDING STD CHATEAU FAUCET OVERMOUNT COLONY SINK ONE EXTRA VANITY LIGHT AND CABINET CONVERSION 2D VIKING
04Apr22		SKETCH# 3 AND 4 CABINETRY-2D Convert Cabinetry Viking; Eletrical-Additional Vanity Light

### FIREPLACE AND MANTLE

Invoice	Qty.	Description
966	1	DINING ROOM - FIREPLACE AND MANTLE - RELOCATE ELECTRICAL FIREPLACE
314,251		
04Apr22		RELOCATE TO DINING ROOM SEE SKETCH # 2
		DRYWALL-notify; ELECTRICAL-notify; FRAMING-notify; HEATING/AIR CONDITIONING-notify; INTERIO
		TRIM-notify: PAINTING-notify

### **FRAMING**

Invoice	Qty.	Description	
966 314,251	1	DINING ROOM - FIREPLACE AND MANTLE - RELOCATE ELECTRICAL FIREPLACE	
04Apr22 **		RELOCATE TO DINING ROOM SEE SKETCH # 2  DRYWALL-notify; ELECTRICAL-notify; FRAMING-notify; HEATING/AIR CONDITIONING-notify; INTERIO TRIM-notify; PAINTING-notify	
966 314,346	4	- INTERIOR TRIM - UPGRADE FROM STANDARD 6 FT 8 INCH 2 PANEL HOLLOW CORE SINGLE DOOR TO 8 FT 2 PANEL HOLLOW CORE SINGLE DOOR	
04Apr22		1) CLOSET DOOR IN FOYER 2) POWDER ROOM 3) DOOR TO MUDROOM 4) DOOR TO BASEMENT Sketch #4  DRYWALL-Notify; FRAMING-Notify; PAINTING-paint upgraded door and frame	

DisciplineMS.rpt 13dec21 Page 4 of 6

# 15 of 44 construction summary



Lot: 3189B-9

Model: 20-1790 A The Dunmore Project/Phase: Wallaceton / 3

### **GRANITE**

Invoice	Qty.	Description
966	1	KITCHEN - GRANITE - COUNTERTOP - 3/4 INCH GROUP 1 WITH MITRE EDGE - KITCHEN / ISLAND - UPG
310,902		
04Apr22		

### **HARDWOOD**

HARDWOOD		
Invoice	Qty.	Description
966 311,571 04Apr22	1	GREAT ROOM / DINING ROOM - HARDWOOD - VINTAGE - 5 INCH RED OAK SCULPTED - GREAT ROOM / DINING ROOM - UPG
966 311,575 04Apr22	1	MAIN HALL - HARDWOOD - VINTAGE - 5 INCH RED OAK SCULPTED - MAIN HALL - UPG
966 314,352 04Apr22 **	2	- PAINT - STAIN STAIR LANDING IN SAMBUCCA. LANDING UNDER 25 SQ.FT. EACH  FOR FINISHED BASEMENT LANDING AND MAIN STAIR LANDING  HARDWOOD - Supply and Install smooth unfinished pre-sanded red oak at stair landing(s)
966 311,587 04Apr22	1	LANDING(S) TO 2ND FLOOR - HARDWOOD - VINTAGE - 5 INCH UNFINISHED RED OAK SCULPTED - LANDING(S) TO 2ND FLOOR - UPG
966 311,588 04Apr22	1	LANDING(S) TO BSMT - HARDWOOD - VINTAGE - 5 INCH UNFINISHED RED OAK SCULPTED - LANDING(S) TO BSMT - UPG

### **HEATING / AIR CONDITIONING**

Invoice	Qty.	Description
966 314,340	1	KITCHEN - HEATING/AIR - ROUGH-IN GAS LINE FOR GAS STOVE AT MAIN FLOOR (SEE SPECS) (HOOK-UP NOT INCLUDED) LEAVE STANDARD 120 VOLT ELECTRICAL OUTLET ON A SEPARATE CIRCUIT. * STANDARD 220V WILL STAY
04Apr22		SKETCH# 3 ELECTRICAL - notification
966 314,251	1	DINING ROOM - FIREPLACE AND MANTLE - RELOCATE ELECTRICAL FIREPLACE
04Apr22 **		RELOCATE TO DINING ROOM SEE SKETCH # 2  DRYWALL-notify; ELECTRICAL-notify; FRAMING-notify; HEATING/AIR CONDITIONING-notify; INTERIO  TRIM-notify; PAINTING-notify
966 313,484	1	KITCHEN - APPLIANCES - CYCLONE 30 INCH WALL MOUNT CHIMNEY HOOD SS - SCB51930
04Apr22 **		CABINETRY - delete stove uppers; ELECTRICAL - delete std range hood; HEATING/AIR CONDITIONING - Du change to 6"

DisciplineMS.rpt 13dec21 Page 5 of 6

# 16 of 44 construction summary



Lot: 3189B-9

Model: 20-1790 A The Dunmore Project/Phase: Wallaceton / 3

### INTERIOR TRIM AND DOORS

Invoice	Qty.	Description
966	1	DINING ROOM - FIREPLACE AND MANTLE - RELOCATE ELECTRICAL FIREPLACE
314,251		
04Apr22		RELOCATE TO DINING ROOM SEE SKETCH # 2
**		DRYWALL-notify; ELECTRICAL-notify; FRAMING-notify; HEATING/AIR CONDITIONING-notify; INTERIO
		TRIM-notify; PAINTING-notify
966	4	- INTERIOR TRIM - UPGRADE FROM STANDARD 6 FT 8 INCH 2 PANEL HOLLOW CORE SINGLE DOOR TO 8 FT 2
314,346		PANEL HOLLOW CORE SINGLE DOOR
04Apr22		1) CLOSET DOOR IN FOYER 2) POWDER ROOM 3) DOOR TO MUDROOM 4) DOOR TO BASEMENT Sketch #4
		DRYWALL-Notify; FRAMING-Notify; PAINTING-paint upgraded door and frame

### **MODIFICATIONS**

_		
Invoice	Qty.	Description
966	1	DINING ROOM - FIREPLACE AND MANTLE - RELOCATE ELECTRICAL FIREPLACE
314,251		
04Apr22		RELOCATE TO DINING ROOM SEE SKETCH # 2
**		DRYWALL-notify; ELECTRICAL-notify; FRAMING-notify; HEATING/AIR CONDITIONING-notify; INTERIO
	I	TRIM-notify: PAINTING-notify

### **PAINTING**

Invoice	Qty.	Description
966 314,251	1	DINING ROOM - FIREPLACE AND MANTLE - RELOCATE ELECTRICAL FIREPLACE
04Apr22 **		RELOCATE TO DINING ROOM SEE SKETCH # 2 DRYWALL-notify; ELECTRICAL-notify; FRAMING-notify; HEATING/AIR CONDITIONING-notify; INTERIO TRIM-notify; PAINTING-notify
966 314,346	4	- INTERIOR TRIM - UPGRADE FROM STANDARD 6 FT 8 INCH 2 PANEL HOLLOW CORE SINGLE DOOR TO 8 FT 2 PANEL HOLLOW CORE SINGLE DOOR
04Apr22 **		1) CLOSET DOOR IN FOYER 2) POWDER ROOM 3) DOOR TO MUDROOM 4) DOOR TO BASEMENT Sketch #4  DRYWALL-Notify; FRAMING-Notify; PAINTING-paint upgraded door and frame
966 314,352	2	- PAINT - STAIN STAIR LANDING IN SAMBUCCA. LANDING UNDER 25 SQ.FT. EACH
04Apr22		FOR FINISHED BASEMENT LANDING AND MAIN STAIR LANDING  HARDWOOD - Supply and Install smooth unfinished pre-sanded red oak at stair landing(s)

<b>PLUM</b>	BIN	$\mathbf{G}$
Invoice	Qty.	Description
966 334,723		MASTER ENSUITE - PLUMBING - OPTION FROM ONE SINK TO DOUBLE SINKS INCLUDING STD CHATEAU FAUCET OVERMOUNT COLONY SINK ONE EXTRA VANITY LIGHT AND CABINET CONVERSION 2D VIKING
04Apr22	l	SKETCH # 3 AND 4 CABINETRY-2D Convert Cabinetry Viking: Eletrical-Additional Vanity Light

### STRUCTURED WIRING

Invoice	Qty.	Description
1061 314,546		DINING ROOM - STRUCTURED WIRING - RELOCATION OF TV/PHONE- RELOCATE STANDARD RG6 CABLE ROUGH-IN FROM GREAT ROOM TO ABOVE NEW LOCATION OF ELECTRIC FIREPLACE IN DINING ROOM. LOCATE 70" +/- ABOVE FIREPLACE BESIDE ELECTRICAL PLUG
16May22		SKETCH # 2

DisciplineMS.rpt 13dec21 Page 6 of 6

17 of 44

### THE DUNMORE

SKETCH #1


20-1790 ELEV. A

DIRECTION

ELEVATION A | 2,242 SQ. FT.

Includes 452 sq. ft. of Finished Lower Level

WALLACETON

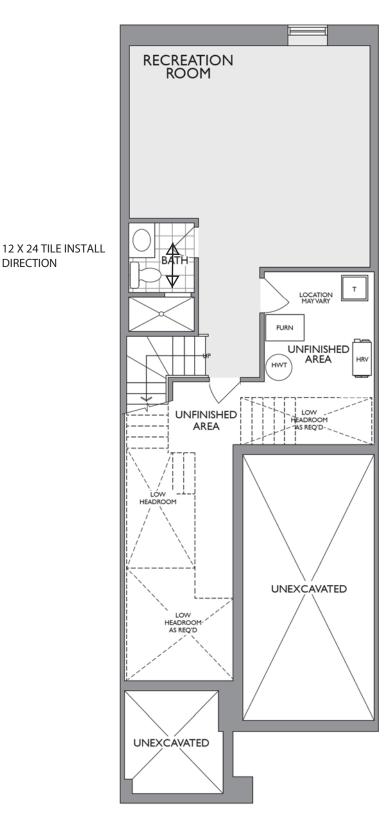

LOWER LEVEL ELEVATION A

Model: 20-1790 A The Dunmore

### 18 of 44

### THE DUNMORE


SKETCH #2


20-1790 ELEV. A

ELEVATION A | 2,242 SQ. FT.

Includes 452 sq. ft. of Finished Lower Level

WALLACETON

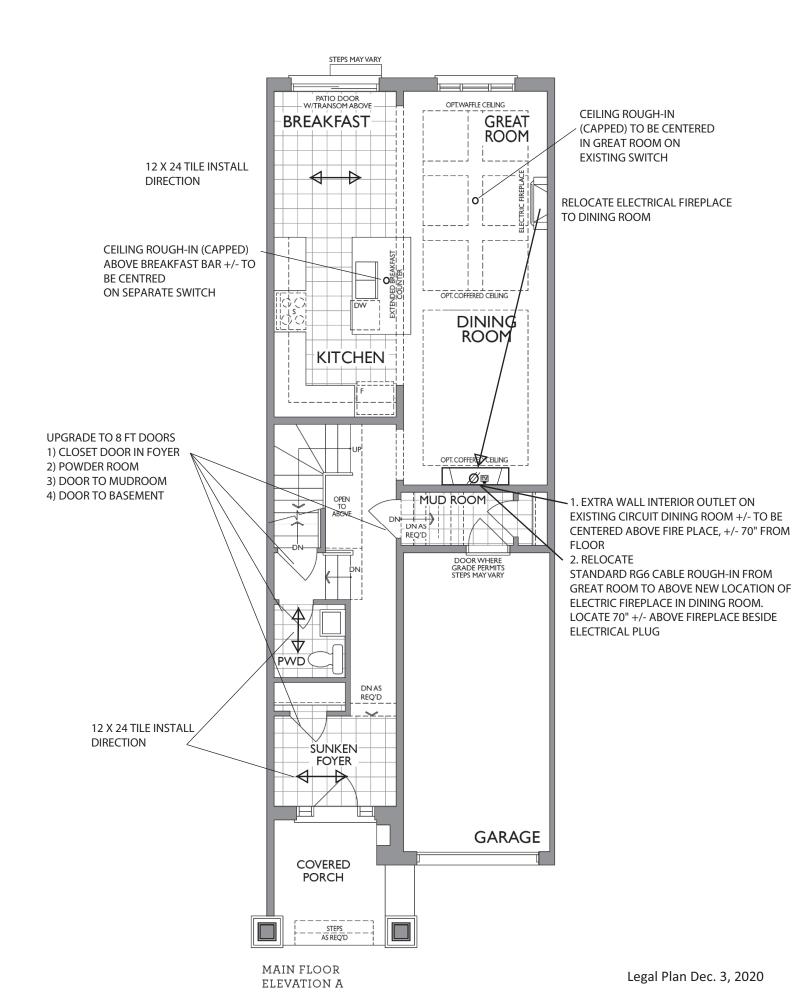

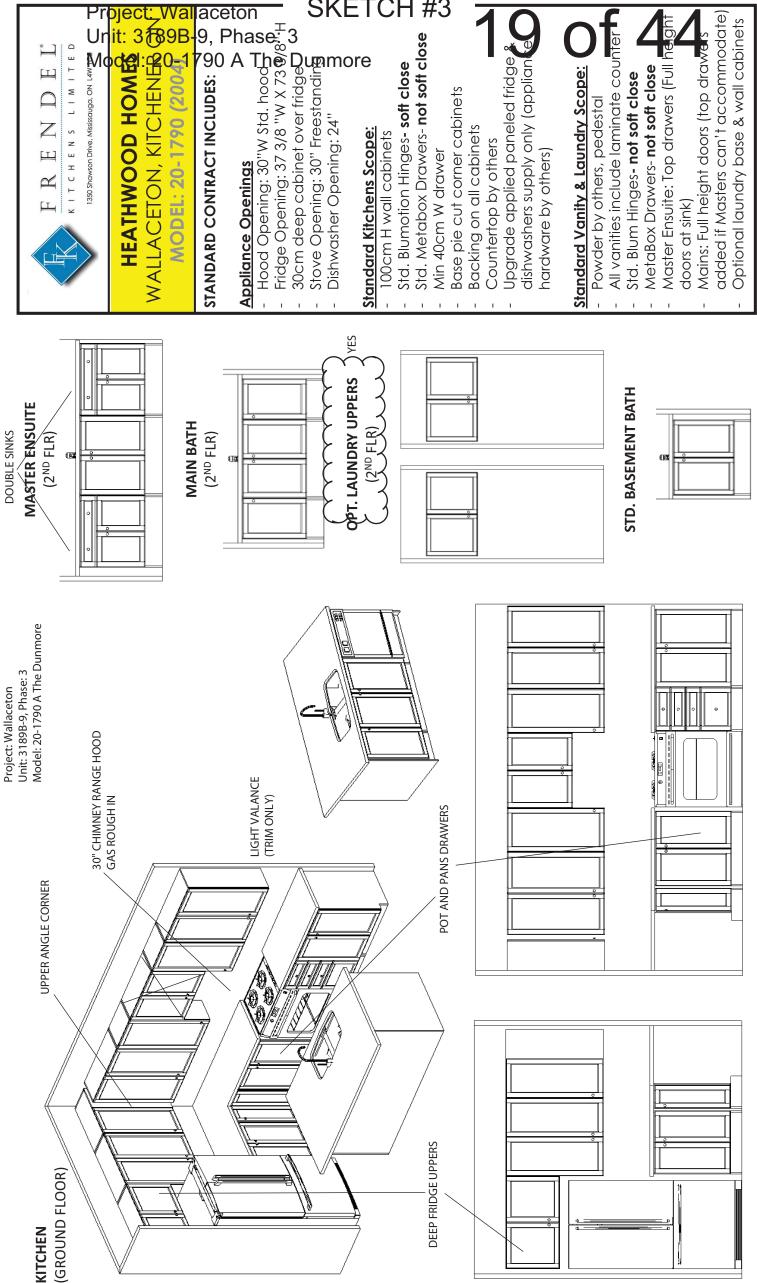

SKETCH #3

aceton

3<del>78</del>9B

this drawing is for design purposes only. It is not an exact rendition.

20 of 44

### THE DUNMORE

SKETCH #4


ELEVATION A | 2,242 SQ. FT.

Includes 452 sq. ft. of Finished Lower Level

WALLACETON

20-1790 ELEV. A

EXTRA WALL INTERIOR
OUTLET ON EXISTING
CIRCUIT MASTER BEDROOM
+/- 70" FROM FLOOR

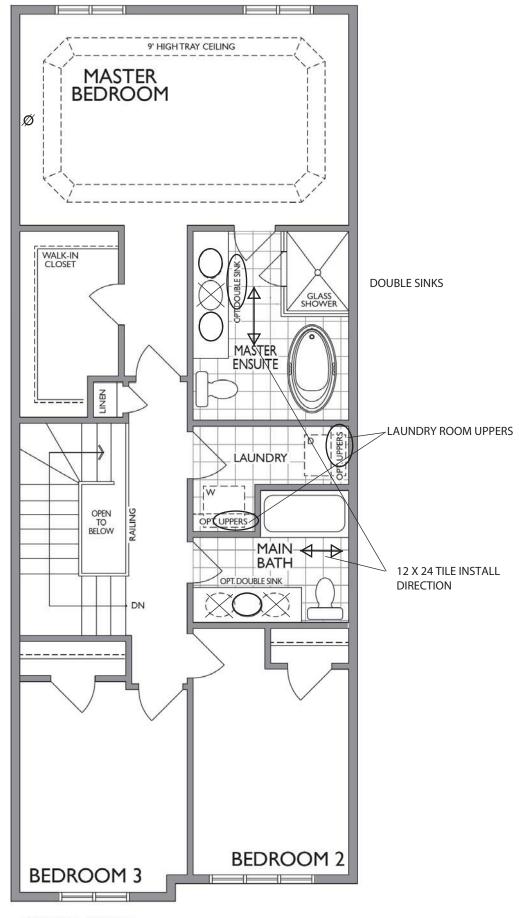

21 of 44





NFAS NF17 Mantel

Plumbing Fixture / Kitchen Sinks 15410

Project: Wallaceton Unit: 3189B-9, Phase: 3


Model: 20-1790 A The Dunmore

# Reginox


### ND1831UA/9

22 of 44





- 30 7/8" (78cm)



### ND1831UA/9 SPECIFICATION

Model ND1831UA/9 is a double (two equal size) bowl undermount sink manufactured by Franke Kindred Canada Limited from 18 gauge stainless steel. Product has silk finished rims and linear brush finished bowls. Sink is fully undercoated. Basket strainer waste fittings (3 1/2", 89 mm) are included. Sink is backed with a limited lifetime warranty.

- O.D. 17 3/4" x 30 7/8" x 8 1/2" (45 x 78 x 22 cm)
- Recommended for minimum 36" cabinet

Franke Kindred Canada Limited

P.O. Box 190, 1000 Franke Kindred Road, Midland, Ontario, Canada, L4R 4K9 Phone: 866-687-7465 Fax: 800-361-8408

23 of 44 Model: 20-1790 A The Dunmore

### MOEN

### **FAUCET DESCRIPTION**

Reflex™ pulldown system offers smooth operation, easy movement and secure docking Power Clean™ spray technology Metal construction with various finishes identified by suffix

Quick connect installation

- Pulldown spray with 68" braided hose Flexible supply lines with 3/8" compression fittings
- High arc spout provides height and reach to fill or clean large pots while pulldown wand provides the maneuverability for cleaning or rinsing 360° rotating spout

Faucet designed for handle to be mounted on right side only

### **OPERATION**

Lever style handle

Temperature controlled by 100° arc of handle travel

Operates with less than 5 lbs. of force

• Operates in stream or spray mode in the pullout or retracted position **FLOW** 

Flow is limited to 1.5 gpm (5.7 L/min) max at 60 psi

CARTRIDGE

• 1255™ Duralast™ cartridge

### **STANDARDS**


Third party certified to IAPMO Green, ASME A112.18.1/CSA B125.1 and all applicable requirements therein including NSF 61/9G & 372

- Meets CalGreen and Georgia SB370 requirements Complies with California Proposition 65 and with the Federal Safe Drinking
- The backflow protection system in the device consists of two independently operating check valves, a primary and a secondary which prevent backflow
- ADA 🖒 for lever handle

### WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the
- 10 year limited warranty when used in a multifamily installation
- 5 year limited warranty when used in a commercial installation Visit www.moen.com/support for complete details and limitations

### Specifications




ALIGN™ **Single Handle High Arc Pulldown Kitchen Faucet** 

Models: 7565 series

**NOTE:** THIS FAUCET IS DESIGNED TO BE INSTALLED THROUGH 1 HOLE, 1-1/2" (38mm) MIN. DIA. (OPTIONAL 3-HOLE ESCUTCHEON 141002 AVAILABLE)



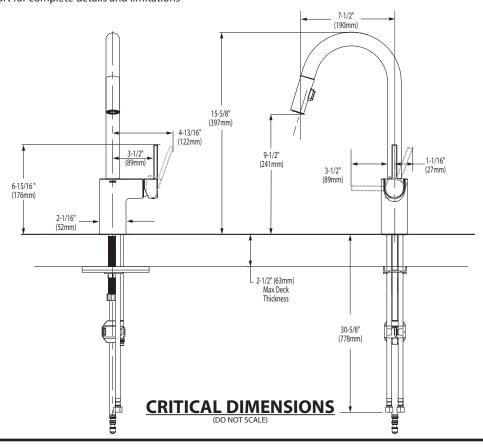

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN

www.moen.com

Rev. 6/20



### BOULEVARD® PEDESTAL SINK VITREOUS CHINA

**BARRIER FREE (ABOVE COUNTER OR DROP-IN ONLY)** 

### **BOULEVARD® PEDESTAL SINK**

☐ 0641.800 Faucet holes on 8" (203mm) centers (Illustrated)

STD • 0641.400 Faucet holes on 4" (102mm) centers

### ☐ 0641.100 Center hole only

- Classic styled rectangular pedestal lavatory
- · Vitreous china
- Rear overflow
- Supplied with mounting kit
- Right Height® for greater comfort during use
- Faucet ledge with large deck area (faucet not included)
- Design coordinates with Boulevard® Toilet
- Basin has flat bottom to also allow use as an above counter sink or a drop-in sink (with u-shaped cut out)

### **Nominal Dimensions:**

24" x 19" x 35-1/2" (610 x 483 x 902mm)

- ☐ 0641.008 Pedestal top-8" (203mm) centers
- ☐ 0641.004 Pedestal top-4" (102mm) centers
- ☐ 0641.001 Pedestal top-center hole only
- ☐ 0010.000 Pedestal only

### Bowl sizes:

17" (432mm) wide, 12-1/2" (318mm) front to back, 5" (127mm) deep

### **Compliance Certifications -**

### Meets or Exceeds the Following Specifications:

• ASME A112.19.2 - 2008/CSA B45.1-08

### To Be Specified:

- ☐ Color: ☐ White ☐ Linen
- ☐ Faucet Finish:
- Supplies:
- ☐ 1-1/4" Trap:
- □ Nipple:



SEE REVERSE FOR ROUGHING-IN DIMENSIONS

<sup>\*</sup> See faucet section for additional models available

25 of 44

4merican tandard

### **BOULEVARD®** PEDESTAL SINK

VITREOUS CHINA **barrier free (above counter or drop-in only)** ABOVE COUNTER CONFIGURATION **TOP VIEW (ALL THREE CONFIGURATIONS)** FINISHED WALL - o (203mm) 8-3/4" (221mm COUNTERTOP \_ 24" \_ (610mm) 1/2" DIA FINISHED FLOOR (13mm) HOLES FOR ANCHOR BOLTS DRAIN (178mm) 34" (864r FINISHED WALL 35-1/2" (902mm) 1-1/4" (32mm) O.D. WASTE \*23-1/4" (591mm) BARRIER FREE 1-1/4" (32mm) O.D. TAILPIECE 27 (686 CLEARANCE 6" (152mm) FINISHED FLOOR 11" MIN (280mm) 9-1/2mm (3/8")DIA BASE ANCHOR SCREW HOLES ---6-3/4" (170mm) PEDESTAL SIDE SECTION \_FINISHED FLOOR **DROP-IN SINK CONFIGURATION** PEDESTAL CONFIGURATION (NOT ADA COMPLIANT)

ABOVE COUNTER AND DROP-IN SINK CONFIGURATIONS MEET THE AMERICANS WITH DISABILITIES ACT GUIDELINES AND ANSI A117.1 ACCESSIBLE AND USABLE BUILDINGS AND FACILITIES - CHECK LOCAL CODES.

Top of sink installed at 34" (864mm) height from finished floor. Sink installed 5" (127mm) minimum from front edge of countertop. Provide 27" (686mm) knee clearance area.

NOTES:

\* DIMENSIONS SHOWN FOR LOCATION OF SUPPLIES AND "P" TRAPS ARE SUGGESTED.

▼ PEDESTAL ANCHORING SCREWS NOT INCLUDED.

■ SUITABLE FOR REINFORCEMENT ONLY. ACTUAL DIMENSIONS MUST BE TAKEN FROM FIXTURE.

FITTING NOT INCLUDED AND MUST BE ORDERED SEPARATELY.

PROVIDE SUITABLE REINFORCEMENT FOR ALL WALL SUPPORTS. INSTALLATION INSTRUCTIONS SUPPLIED WITH LAVATORY.

**IMPORTANT:** Dimensions of fixtures are nominal and may vary within the range of tolerance established by ANSI Standard A112.19.2 These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

© 2018 AS America Inc.

Model: 20-1790 A The Dunmore

# 26 of 44

### American Standard

### **BARRIER FREE**

### **COLONY™ COUNTERTOP SINK**

VITREOUS CHINA


### **COLONY COUNTERTOP SINK**


- · Vitreous china
- Self-rimming
- · Front overflow
- · Supplied with template
- Faucet deck (Faucet shown not included)


☐ 0346 803 → Faucet holes on 203 mm (6"), centres	$\mathcal{L}$
O346 403 (Illustrated) Faucet holes on 102mm (4") centres	3
₩ <u>₽</u> <del>0346 001</del>	)
Centre hole only	

Nominal Dimensions: 521 x 448mm (20-1/2" x 17-5/8")

Bowl sizes: 422mm (16-5/8") wide, 279mm (11") front to back, 143mm (5-5/8") deep







### COMPLIANCE CERTIFICATIONS -

Meets or exceeds the following Specifications:

- ASME A112.19.2M for Vitreous China Fixtures.
- · CAN/CSA B45 Series.

### To Be Specified

- ☐ Colour: ☐ White ☐ Bone ☐ Silver Gray ☐ Linen
- □ Faucet\*:
- □ Faucet Finish:
- ☐ Supplies & Stops:
- ☐ Trap 1-1/4" (32 mm):

NOTES:

\* DIMENSIONS SHOWN FOR LOCATION OF SUPPLIES AND "P" TRAP ARE SUGGESTED. FOR COUNTERTOP CUTOUT AND INSTALLATION INSTRUCTIONS USE TEMPLATE SUPPLIED WITH SINK.

SUPPLIED WITH SINK.

FAUCETS NOT INCLUDED AND MUST BE ORDERED SEPARATELY.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard A112.19.2.

These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

BAS-198 .

<sup>\*</sup> See faucet section for additional models available

Model: 20-1790 A The Dunmore

# 27 of 44



### DEMI™ **Product Specification Sheet**

### Two Piece Freestanding Collection

CF2007 Two Piece Freestanding Soaker


Size: 60" x 32" x 22"

1524 mm x 813 mm x 559 mm




- Vacuum formed acrylic reinforced with fiberglass
- Scratch, stain and fade resistant high gloss finish
- Installation friendly two piece design
- Accepts deck mounted faucet
- Includes integral pop up drain and rectangular overflow
- Includes levelling feet


### TWO PIECE ASSEMBLY

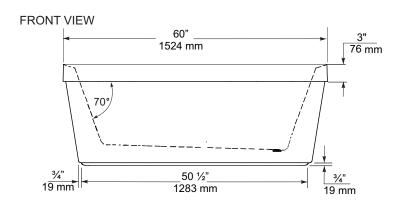

### **TOP VIEW**

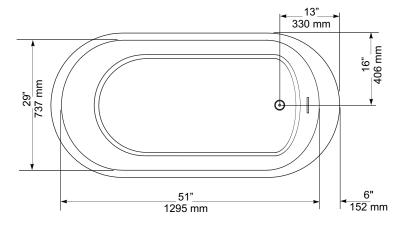

### **END VIEW**



### **GENERAL SPECIFICATIONS**

Average Weight	90 lb	41 kg
Bathing Well at bottom	43"x 20"	1092 x 508 mm
Capacity Drain to Overflow		195 litres
Water Depth Drain to Overflow	16"	406 mm
Drain Opening (dia.)	2"	51 mm
Overflow Opening	2 ¼"x ½"	57 x 13 mm
Drain to Floor Clearance	3 1/4"	83 mm

NOTES: Please confirm measurements on actual product to ensure proper identification. Bathtub to be installed on the floor supported by 5 self levelling feet. Adjust if required to level the bathtub for adequate drainage. Refer to installation instructions for additional information.

**IMPORTANT:** Dimensions of fixtures are nominal and may vary  $\pm$  %" (6 mm). Weight may vary  $\pm$  5 lb ( 2.3 kg). Drawing is not to scale. These measurements are subject to change at manufacturer's discretion.

**Compliance Certifications -**

Meets or Exceeds the following Specifications:

CAN/CSA - B45 Series





Fax: 416.231.0929 www.mirolin.com

*Customer Service:* 416.231.5790 Canada, U.S.A.: 800.**MIROLIN**(647-6546) Fax, Canada: 800.463.2236

R0084162 25 Sep. 2018

© 2018 Mirolin Industries Corp.

Model: 20-1790 A The Dunmore

# 28 of 44

### American Standard

Style That Works Better

### FloWise™ DUAL FLUSH **ELONGATED TOILET**

VITREOUS CHINA


### FloWise™ DUAL FLUSH ELONGATED TOILET

### **2476 216**

- Vitreous china
- · Low-consumption Dual Flush Full flush 6.0 Lpf/1.3 gpf, Partial flush 3.0 Lpf/0.66 gpf.
- · Elongated wash down bowl
- · Internal trapway fully-glazed, 2-1/4" (57mm) ballpass
- · Concealed trapway bowl
- · Chrome-plated top mounted push button actuator
- Easy to clean sanitary dam on bowl
- Includes Elongated Slow Close Seat
- 100% factory flush tested
- · 2 bolt caps

### **Separate Component Parts:**

- ☐ 3067 316 Elongated Bowl with Slow Close Seat
- **4035 216** Unlined Tank



**☐** 3067 316 Elongated Bowl

**4035 516** Lined Tank

Nominal Dimensions: 794 x 432 x 765mm (31-1/4" x 17" x 30-1/8")


### **Compliance Certifications -**Meets or Exceeds the Following Specifications:


- ASME A112.19.2M (and 19.6M)
- · CAN/CSA B45 series

### To Be Specified

Colour: 020 White

Supply with stop:





NOTES:
THIS TOILET IS DESIGNED TO ROUGH-IN AT A MINIMUM DIMENSION OF 305MM (12")
FROM FINISHED WALL TO C/L OF OUTLET.
SUPPLY NOT INCLUDED WITH FIXTURE AND MUST BE ORDERED SEPARATELY.
\* DIMENSION SHOWN FOR LOCATION OF SUPPLY IS SUGGESTED.
FOR ADDITIONAL INFORMATION REFER TO INSTALLATION INSTRUCTIONS SUPPLIED.
IMPORTANT. Dimensions of fixture are perimenal and may use within the prepare of the present IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerance established by ANSI Standard A112.19.2

established by And Statillation 112.19.2. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

### UPGRADED VALUE ADDED FEATURES AT NO EXTRA CHARGE

TOI-284 © 2008 American Standard 08/08

29 of 44

### **MOEN**<sup>®</sup>

### DESCRIPTION

- Metal construction with various finishes identified by suffix
- 16" long 3/8" tubing connections Includes metal or 50/50 pop-up type waste assembly where noted **OPERATION**
- Pivot action lever style handle Temperature controlled through 180° degree arc of handle travel **FLOW**

Flow is limited to 1.5 gpm max (5.7L/min) at 60 psi

### CARTRIDGE

- 1225 cartridge design
- Nonmetallic/nonferrous and stainless steel material
- Can accommodate reversed piping and back to back installations


- Third party certified to WaterSense®, CSA B-125.1, ASME A112.18.1 and all applicable requirements referenced therein including NSF61/9
- Complies with California Proposition 65 and with the Federal Safe
- Drinking Water Act

  ADA for lever handle

### WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations

### Specifications



**CHATEAU® Single-Handle Lavatory Faucet** 

### with Metal Waste Assembly Model: L4625 series


L4631BC **Bulk Packed (12 per carton):** L64624 series

with 50/50 Waste Assembly **Bulk Packed (12 per carton):** L64625 series

Less Waste **Bulk Packed (12 per carton):** L64600 series

**NOTE:** THIS FAUCET IS DESIGNED TO BE INSTALLED THRU 3-1" DIA. HOLES, 2" ON CENTER



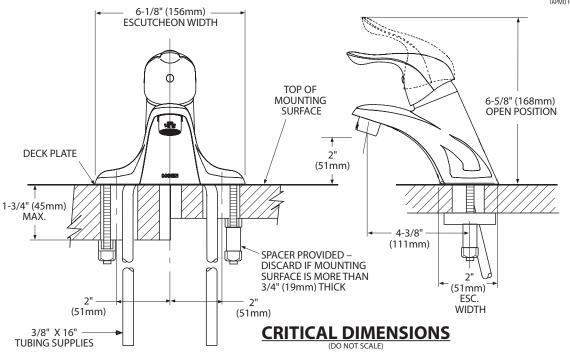

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN

www.moen.com

Rev 8/15

30 of 44



Buy it for looks. Buy it for life.®

There is more than 1 version of this model. Page down to identify the version you have.

- Metal construction with various finishes identified by suffix
- Includes non-metalic showerhead, arm, flange and non-metalic diverter tub spout

### **OPERATION**

- Handle operates counterclockwise through a 270° arc with off at 6 o'clock and maximum hot at the 9 o'clock position. Shut off in clockwise direction
- Adjustable temperature limit stop to control maximum hot water temperature
- Pressure balancing mechanism maintains selected discharge temperature to  $\pm\,3^\circ$

- Showerhead is limited to 2.5 gpm (9.5 L/min) at 80 psi EP suffix models are limited to 1.75 gpm (6.6 L/min) at 80 psi
- NH suffix models contain no showerhead

### **CARTRIDGE**

- 1222 cartridge design Accommodates back to back installations
- Nonmetallic/nonferrous and stainless steel material

### **STANDARDS**

- Third party certified to meet ASME A112.18.1/CSA B125.1 and all applicable requirements referenced therein
- EP suffix models are third party certified to WaterSense®

### ADA ( for lever handle

6.5" (165mm) ESC. DIAM.

### **WARRANTY**

Lifetime limited warranty against leaks, drips and finish defects

2"CC (51mm) 1 7/8" IPS (48mm) MAX WALL

FINISHED WALL LINE

4-1/2" (114mm)

WALL OPENING

7-1/2" (190mm)

to the original consumer purchaser 5 year warranty if used in commercial installations

### **Specifications**






### CHATEAU° POSI-TEMP° **Single-Handle Tub/Shower Trim Kit**

Models: TL181 series - valve trim only (Bulk Packed 12 per carton) TL182 series - shower trim only (Bulk Packed 12 per carton) TL183 series - tub/shower trim

(Bulk Packed 12 per carton)

Valves: 62300 series 2500 series





**THIN WALL APPLICATION** 



— 1/2" MIN. CC (13mm) 5/8" MIN. IPS (16mm)

2 1/2" MAX. (63mm)

SHOWER

48" (1219mm) 32" (813mm) AND TUB ONLY

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN

www.moen.com

TL183sp: Rev. 5/13

Model: 20-1790 A The Dunmore

### 31 of 44

### **MOEN**<sup>®</sup>

### DESCRIPTION

 Metal construction with various finishes identified by suffix OPERATION

### · Lever style handles with hot and cold color indicator

 Rotate hot side handle counterclockwise to open (clockwise to close) and the cold side handle (clockwise to open) and (counterclockwise to close)


### **STANDARDS**

- Third party certified to: ASME A112.18.1/CSA B-125.1, and all applicable requirements referenced therein
- ADA 🕒 for lever handles

### **WARRANTY**

- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
- 10 year limited warranty when used in a multi-family installation
- 5 year limited warranty when used in a commercial installation Visit www.moen.com/support for complete details and limitations


### Specifications




### **CHATEAU®**Two-Handle Garden Tub Trim

Models: T994 series

**Valves:** 4792, 4793, 4794, 4796, 4797, 4798

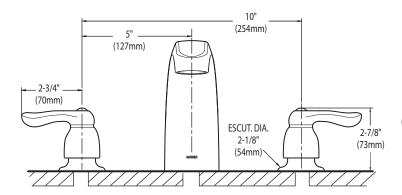

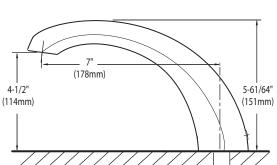

### CRITICAL DIMENSIONS

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN

www.moen.com

Rev. 3/19

Model: 20-1790 A The Dunmore

# 32 of 44

### SC(B)519 | ALITO Collection





### **Wall Mount**

Strong and sturdy with attractive lines and an imposing frame, the SC(B)519 is fitted with a time-delay OFF feature up to nine minutes, a 550 CFM fan, two bright front mounted LED lights and a digital three-speed push button control panel.

### **Green Features**



3 Speed Push Button Control Panel



Time-Delay OFF Feature



Long-Lasting LED Lights



Grease Cup



Model	Colour	Ducting	Filters	Size	CFM

SCB51930 Stainless S	eel 6"	Baffle	30"	550
----------------------	--------	--------	-----	-----

Model: 20-1790 A The Dunmore


# 33 of 44

### SC(B)519 | ALITO Collection



### **Features**

- · Wall mount range hood
- 6" round duct adapter
- Non-stick aluminum fan blades
- 3 speed push button control
- 2 LED lights (2 x 1.4W, 4000K)
- · Quick release aluminum mesh filters
- · Standard chimney fits up to 9 ft. ceiling
- · Up to 9 minutes time-delay OFF feature
- · Plug-in connection

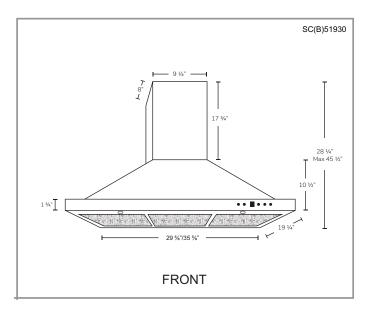

### **Options**

• Filters:

SCB519 - Quick Release Stainless Steel Baffle Filters

Chimney Flues:

A1.CH10 - short (7'-8' ceilings)

A1.CH18 - standard (8'-9' ceilings)

A1.CH30 - extended (9'-11' ceilings)

• Widths: 24", 30") 36"

### **Specifications**

Air Flow Volume: 550 CFM

Electrical Connection: 120 V/60 Hz

Power Consumption: 300 Watts

Current: 2.5 Amps

Fan Speed: 1599 RPM

Fan Type: Centrifugal Blower

· Finishes: Stainless Steel

Ducting: 6" Round

Noise Level: Min. 2 Sones

Max. 6 Sones



Model: 20-1790 A The Dunmore

# 34 of 44



# Whirtpool® 21 cu. ft. Top-Freezer Refrigerator WRT541SZD



Fingerprint-Resistant Stainless WRT541SZDZ

### Also available in:

White	WRT541SZDW
Black	WRT541SZDB
Monochromatic Stainless Steel	WRT541SZDM

Capacity				
Total Capacity	21 cu. ft.			
Refrigerator Capacity	15 cu. ft.			
Freezer Capacity	6 cu. ft.			
General Features & Properti	es			
EZ Connect Icemaker Kit				
LED Interior Lighting				
ENERGY STAR® Certified				
Electronic Temperature Controls				
Freezer Temperature Controls				
Clear Door Bins				
Adjustable Door Bins				
Quiet Cooling				
Fingerprint Resistant				
Electrical Details				
Amps	6.5			
Volts	115			
Certifications				
ADA Compliant	Yes			
ENERGY STAR® Certified	Yes			

Technical Details	
Refrigerator Type	Top-Freezer
Number of Doors	2
Number of Interior Refrigerator Shelves	3
Number of Refrigerator Door Bins	1 Fixed, 4 Adjustable
Number of Interior Freezer Shelves	1
Number of Freezer Door Bins	2 Fixed
Lighting Type	LED
Ice Maker	Optional
Ice Maker Location	Freezer
Dispenser Type	N/A
Dimensions	
Product Dimensions (H x W x D)	66-1/4" x 32-3/4" x 34"
Depth with Door Open 90°	62-1/4"
Cutout Dimensions	Allow extra 1/2" on sides and top Allow extra 1" on rear

### Reference Material

**Dimension Guide** 

Use & Care Guide

**Energy Guide** 

Warranty

### Key Features & Benefits

### Frameless Glass Shelves


Store more items on wall-to-wall shelves for greater storage flexibility.

### Flexi-Slide™ Bin

Make space for tall items with the bin that quickly and easily moves side to side.

### **Humidity-Controlled Crispers**

Store fruits and vegetables in their ideal environment.

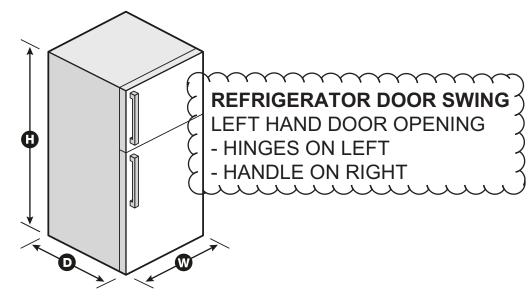

NOTE: Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

®/™ © 2020. All rights reserved. Printed in the U.S.A. D200052XXC. WRT541SZDSPECSHEETV01.

Model: 20-1790 A The Dunmore

# 35 of 44



### **Top Mount Refrigerator**

### **PRODUCT MODEL NUMBERS**

WRT311FZD WRT511SZD WRT541SZD

**Electrical:** A 115-volt, 60-Hz, AC-only, 15-or 20-amp fused, grounded electrical supply is required. It is recommended that a separate circuit serving only your refrigerator be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.


NOTE: Before performing any type of installation, cleaning, or removing a light bulb, turn the control (Thermostat, Refrigerator or Freezer Control depending on the model) to OFF and then disconnect the refrigerator from the electrical source. When you are finished, reconnect the refrigerator to the electrical source and reset the control (Thermostat, Refrigerator or Freezer Control depending on the model) to the desired setting. See "Using the Controls."

**Water:** A cold water supply with water pressure between 30 and 120 psi (207 and 827 kPa) is required to operate ice maker and water dispenser. If you have questions about your water pressure, call a licensed, qualified plumber.

**IMPORTANT:** The pressure of the water coming out of a reverse osmosis system going to the water inlet valve of the refrigerator needs to be between 30 and 120 psi (207 and 827 kPa).


**Reverse Osmosis Water Supply:** If a reverse osmosis water filtration system is connected to your cold water supply, the water pressure to the reverse osmosis system needs to be a minimum of 40 to 60 psi (276 to 414 kPa).

### PRODUCT DIMENSIONS

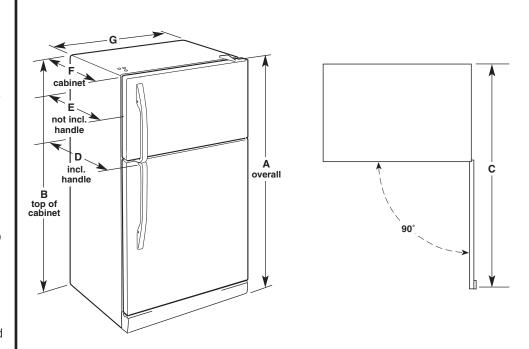

Model Number	Model Size	Reversible Door	Height - Overall "A"	Height - Top of Cabinet "B"	Depth - Door Open 90° "C"	Depth - With Handles "D"	Depth - Without Handles "E"	Depth - Cabinet Only "F"	Width - Cabinet "G"
WRT311FZD	20.5 cu. ft.	Yes	661/4" (168.3 cm)	65½" (166.4 cm)	621/4" (158.1 cm)	32 <sup>7</sup> / <sub>8</sub> " (83.5 cm)	30 <sup>5</sup> %" (77.8 cm)	28½" (72.4 cm)	32¾" (83.2 cm)
WRT511SZD WRT541SZD	21.3 cu. ft.	Yes	66½" (168.3 cm)	65½" (166.4 cm)	62½" (158.1 cm)	34" (86.4 cm)	32½" (82.3 cm)	28½" (72.4 cm)	32¾" (83.2 cm)

### LOCATION REQUIREMENTS

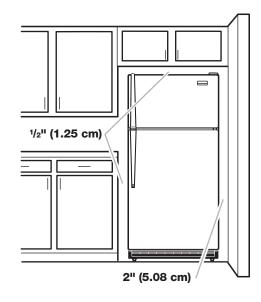

To ensure proper ventilation for your refrigerator, allow for a  $\frac{1}{2}$ " (1.25 cm) space on each and between overhead cabinets and refrigerator top. Allow at least 1" (2.5 cm) between back of cabinet and the wall. If your refrigerator has an ice maker, make sure you leave some extra space at the back for the water line connections.

If you are installing your refrigerator next to a fixed wall, leave 2" (5 cm) minimum on the hinge side (depending on your model) to allow for the door to swing open.

**NOTE:** This refrigerator is intended for use in a location where the temperature ranges from a minimum of 55°F (13°C) to a maximum of 110°F (43°C). The preferred room temperature range for optimum performance, which reduces electricity usage and provides superior cooling, is between 60°F (15°C) and 90°F (32°C). It is recommended that you do not install the refrigerator near a heat source, such as an oven or radiator.

Model: 20-1790 A The Dunmore





### Available Finishes/Colours

YWFE515S0JB Black



YWFF515S0JS Stainless Steel



YWFE515S0JW White

### Manuals & Literature:





### <u> Warranty</u>

### 5.3 cu. ft. Whirlpool® electric range with Frozen Bake™ technology

### YWFE515S0JS

This Whirlpool® electric range with a dual element stove top helps you get dinner to the table. Skip preheating for favorites like pizza with Frozen Bake™ technology. This self cleaning oven also prevents cooked food from getting cold with the Keep Warm setting. Closed door broiling helps keep the kitchen comfortable.

### **Top Features**

### FlexHeat™ Dual Radiant Element

Get two elements in one with a 6" inner ring that's great for smaller pots and pans and a 9" expandable outer ring that makes room for larger cookware.

Frozen Bake™ technology
Skip preheating and cook frozen favorites like pizza in fewer steps with preprogrammed settings that automatically adjust cooking times for you.

### Keep Warm setting

Keep dishes from getting cold with this setting that delivers low heat to the oven.

Closed Door Broiling
Maintain the optimal cooking temperature for food while still keeping the kitchen comfortable and cool using this broiling temperature management system that helps prevent overheating.

Dimensions	
Depth	27 3/4
Height	36
Width	29 7/8

Configuration and Overview				
Range Type	Freestanding			
Fuel Type	Electric			
Size (IN,inches)	30			
Evtorior				

Exterior	
Door Removable	Yes
Drawer Type	Storage Drawer
Oven Door	Glass Window
Oven Window Size	Extra Large
Handle Color	Stainless Steel
Handle Material	Metal

Exterior	
Handle Type	Reach-Through Handle
Features	
Hot Surface Indicator Light	Yes


Features	
Hot Surface Indicator Light	Yes
Heating Element On Indicator Light	Yes
Power On Indicator Light	No
Griddle	NA
Automatic Convection Conversion Temperature Adjust	No
Power Outage Compatible	No

Model: 20-1790 A The Dunmore

# 37 of 44

### WHIRLPOOL 30" (76.0 CM) FREESTANDING ELECTRIC RANGES Model YWFE515S0JS

### **Product Dimensions**



- A. 273/4" (70.5 cm) max. depth with handle
- B. 46<sup>7</sup>/<sub>8</sub>" (119.1 cm) overall height (max.) with leveling legs screwed all the way in\*
- C. 36" (91.4 cm) cooktop height (max.) with leveling legs screwed all the way in\*
- D. 29<sup>7</sup>/<sub>8</sub>" (75.9 cm) width
- E. 255/16" (64.3 cm) depth back of range to front of cooktop\*\*
- F. Model/serial/rating plate (located on the frame behind a top corner of the door or either side of the drawer)

**IMPORTANT:** Range must be level after installation. Follow the instructions in the "Level Range" section. Using the cooktop as a reference for leveling the range is not recommended.


- \*Range can be raised approximately 1" (2.5 cm) by adjusting the leveling legs.
- \*\*Front of door and drawer may extend further forward depending on styling.

### **Cabinet Dimensions**

Cabinet opening dimensions shown are for 25" (64.0 cm) countertop depth, 24" (61.0 cm) base cabinet depth and 36" (91.4 cm) countertop height.

**IMPORTANT:** If installing a range hood or microwave hood combination above the cooking surface, follow the range hood or microwave hood combination installation instructions for dimensional clearances above the cooktop surface.

A freestanding range may be installed next to combustible walls with zero clearance.



- A. 13" (33.0 cm) max. upper cabinet depth
- B. 30" (76.2 cm) min. opening width
- C. For minimum clearance to top of cooktop, see NOTE\*
- D. 30" (76.2 cm) min. opening width
- E. Outlet 8" (20.3 cm) to 22" (55.9 cm) from either cabinet, 7" (17.8 cm) max. from floor.
- F. Cabinet door or hinges should not extend into the cutout.

\*NOTE: 24" (61.0 cm) minimum when bottom of wood or metal cabinet is covered by not less than 1/4" (6.4 mm) flame retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015" (0.4 mm) stainless steel, 0.024" (0.6 mm) aluminum or 0.020" (0.5 mm) copper.

30" (76.2 cm) minimum clearance between the top of the cooking platform and the bottom of an uncovered wood or metal cabinet.

Model: 20-1790 A The Dunmore

# 38 of 44

### WHIRLPOOL 30" (76.0 CM) FREESTANDING ELECTRIC RANGES Model YWFE515S0JS

**Electrical Requirements - Canada Only** 

### AWARNING



**Electrical Shock Hazard** 

Electrically ground range.

Failure to do so can result in death, fire, or electrical shock.

If codes permit and a separate ground wire is used, it is recommended that a qualified electrical installer determine that the ground path is adequate and wire gauge are in accordance with local codes.

Be sure that the electrical connection and wire size are adequate and in conformance with CSA Standard C22.1, Canadian Electrical Code, Part 1 - latest edition, and all local codes and ordinances.

A copy of the above code standards can be obtained from:

Canadian Standards Association 178 Rexdale Blvd. Toronto, ON M9W 1R3 CANADA

 Check with a qualified electrical installer if you are not sure the range is properly grounded.

Range Rating*		Specified Rating of Power Supply Cord Kit and Circuit Protection
120/240 V	120/208 V	Amps
8.8 - 16.5 KW 16.6 - 22.5 KW	7.8 - 12.5 KW 12.6 - 18.5 KW	40 or 50** 50

<sup>\*</sup>The NEC calculated load is less than the total connected load listed on the model/serial/rating plate.

- A time-delay fuse or circuit breaker is recommended.
- This range is equipped with a CSA International Certified Power Cord intended to be plugged into a standard 14-50R wall receptacle. Be sure the wall receptacle is within reach of range's final location.



Do not use an extension cord.

### **INSTALLATION INSTRUCTIONS**


**Unpack Range** 

### AWARNING

**Excessive Weight Hazard** 

Use two or more people to move and install range. Failure to do so can result in back or other injury.


- 1. Remove shipping materials, tape and film from range.
- 2. Remove oven racks and parts package from inside oven.
- 3. Do not remove the shipping base at this time.



A. Shipping base

### 4. On Ranges Equipped with a Storage Drawer:


Remove the storage drawer. See the "Storage Drawer" section. Use a 1/4" (6.4 mm) drive ratchet to lower the rear leveling legs one-half turn. Use a wrench or pliers to lower front leveling legs one-half turn.



- A. 1/4" (6.4 mm) drive ratchet
- B. Rear leveling leg
- C. Wrench or pliers
- D. Front leveling leg

### On Ranges Equipped with a Warming Drawer or Premium Storage Drawer:

On ranges equipped with a warming drawer or premium storage drawer, the rear legs cannot be accessed by removing the warming drawer or premium storage drawer. It will be necessary to adjust the rear legs from outside the range. Use wrench or pliers to lower the front and rear leveling legs one half turn.



- A. Rear leveling leg
- B. Wrench or pliers
- C. Front leveling leg

<sup>\*\*</sup>If connecting to a 50 A circuit, use a 50 A rated cord with kit. For 50 A rated cord kits, use kits that specify use with a nominal 13/8" (3.5 cm) diameter connection opening.

Model: 20-1790 A The Dunmore

# 39 of 44

### WHIRLPOOL 30" (76.0 CM) FREESTANDING ELECTRIC RANGES Model YWFE515S0JS

### **Install Anti-Tip Bracket**

### AWARNING



**Tip Over Hazard** 

A child or adult can tip the range and be killed.

Install anti-tip bracket to floor or wall per installation instructions.


Slide range back so rear range foot is engaged in the slot of the anti-tip bracket.

Re-engage anti-tip bracket if range is moved.

Do not operate range without anti-tip bracket installed and engaged.

Failure to follow these instructions can result in death or serious burns to children and adults.


- Remove the anti-tip bracket from where it is taped inside the storage drawer or warming drawer.
- 2. Determine which mounting method to use: floor or wall. If you have a stone or masonry floor, you can use the wall mounting method. If you are installing the range in a mobile home, you must secure the range to the floor.
- 3. Determine and mark centerline of the cutout space. The mounting can be installed on either the left-side or right-side of the cutout. Position mounting bracket against the wall in the cutout so that the V-notch of the bracket is 129/16" (31.9 cm) from centerline as shown.



A. 129/16" (31.9 cm) B. Bracket V-notch

 Drill two 1/8" (3 mm) holes that correspond to the bracket holes of the determined mounting method. See the following illustrations.

### Floor Mounting



### **Wall Mounting**



- 5. Using the Phillips screwdriver, mount anti-tip bracket to the wall or floor with the two  $\#12 \times 1^5/8$ " (4.1 cm) screws provided.
- **6.** Move range close enough to opening to allow for final electrical connections. Remove shipping base, cardboard or hardboard from under range.
- Move range into its final location, making sure rear leveling leg slides into anti-tip bracket.



**8.** Move range forward onto shipping base, cardboard or hardboard to continue installing the range using the following installation instructions.

40 of 44



# Whirlpool 53 dBA\* Front Control Dishwasher WDF540PAD



Monochromatic Stainless Steel WDF540PADM

### Also available in:

White	WDF540PADW	
Black	WDF540PADB	

Capacity	
Total Place Settings	15
General Features & Properti	es
Soil Sensor	
In-Door Silverware Basket	
Sani Rinse Option	
Normal Cycle	
Heavy Cycle	
High Temperature Wash Option	
Heated Dry Option	
ENERGY STAR® Certified	
Industry's Best Selling Dish	washer Brand†
Electrical Details	
Amps	15
Volts	120
Hz	60
Certifications	
ENERGY STAR® Certified	Yes

Technical Details	
Dishwasher Type	Built-in
Control Location	Front
Control Type	Electronic
Number of Wash Cycles	5
Number of Options	5
dBA	53
Number of Racks	2
Tub Material	Plastic
Wash System	Filter
Wash System Type	Removable Filter
Number of Wash Arms	3
Dimensions	
Product Dimensions (H x W x D)	34-1/2" x 23-7/8" x 24-1/2"
Depth with Door Open 90°	49-1/2"
Reference Material	

### **Dimension Guide**

Install Guide

Use & Care Guide

**Energy Guide** 

Warranty

### Key Features & Benefits

### **Sensor Cycle**


Automatically get the right wash and dry settings for each load with two sensors that measure temperature, soil level and load size during prewash and the wash cycle.

### 1-Hour Wash Cycle

Clean the dishes you need fast with a cycle that thoroughly takes care of plates, pans and glasses in just an hour."

### **Cycle Memory**

Quickly start your dishwasher with one button. It automatically remembers the last cycle you picked so it's stored and ready to go.

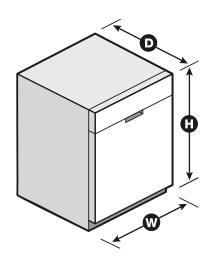

<sup>\*</sup>Per IEC standards. \*\*Compared to Normal cycle with lightly soiled loads. †Based on 12-month average of unit sales. TraQline 2018. NOTE: Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice. 

®/™ © 2020. All rights reserved. Printed in the U.S.A. D200052XXA. WDF540PADSPECSHEETV01.

Model: 20-1790 A The Dunmore

# 41 of 44



### PRODUCT MODEL NUMBERS

WDF110PAB	WDF310PLA	WDF530PSY
WDF111PAB	WDF320PAD	WDF540PAD
WDF120PAF	WDF510PAY	WDF730PAY
WDF121PAF	WDF520PAD	WDT710PAY
WDF310PAA	WDF530PAY	WDT720PAD
WDF310PCA	WDF530PLY	WDT770PAY

Electrical Requirements: 120-volt, 60-Hz, AC only, 15- or 20-amp. fused electrical supply. Copper wire only. A time delay fuse or circuit breaker and separate circuit is recommended.

If direct wiring dishwasher: Use flexible, armored,


or nonmetallic, sheathed copper wire with grounding wire that meets the wiring requirements for

your home and local codes and ordinances.

Use a UL listed or CSA approved conduit connector.

### If connecting dishwasher with a power supply cord:

Use Power Supply Cord Kit (Part No. 4317824) marked for use with dishwashers. Follow the kit



instructions for installing the power supply cord. Power supply cord must plug into a grounded 3 prong, outlet, located in the cabinet next to the dishwasher opening. Outlet must meet all local codes and ordinances.



Water Supply Requirements: A hot water line with 20 to 120 psi (138 to 862 kPa) water pressure. Water temperature must be 120°F (49°C) water at dishwasher. Use 3/8" O.D. copper tubing with compression fitting or flexible braided water supply line (1/2" minimum plastic tubing is not recommended). Use a 90°elbow with ¾"N.P.T. external pipe threads on one end. Do not solderwithin 6" (15.2 cm) from water inlet valve.

Drain Requirements: A new drain hose is supplied with your dishwasher. If this is not long enough, use a new drain hose with a maximum length of 12' (3.7 m) (Part No. 3385556) that meets all current AHAM/IAPMO test standards, is resistant to heat and detergent, and fits the 1" (2.5 cm) drain connector of the dishwasher.

Make sure to connect the drain hose to waste tee or disposer inlet above drain trap in house plumbing and (50.8 cm) minimum above the floor. It is recommended




that the drain hose either be looped up and securely fastened to the underside of the counter or be connected to an air gap.

Make sure to use an air gap if the drain hose is connected to house plumbing lower than 20" (50.8 cm) above subfloor or floor.

Use ½" (1.3 cm) minimum I.D. drain line fittings. If required, the air gap should be installed in accordance with the air gap installation instructions. When connecting the air gap, a rubber hose (not provided) will be needed to connect to the waste tee or disposer inlet.


### PRODUCT DIMENSIONS

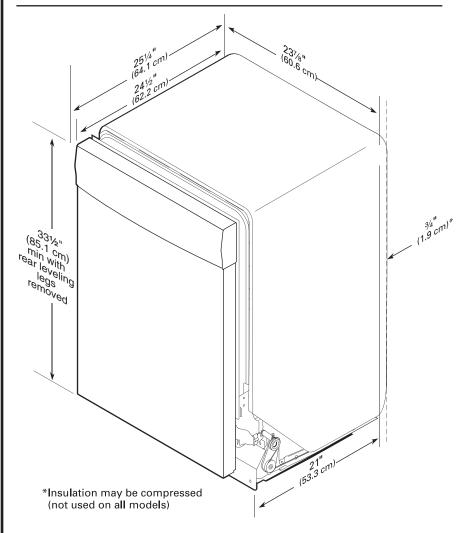

### **CABINET CUTOUT DIMENSIONS**

**NOTE**: Shaded areas of cabinet walls show where utility connections may be installed.

- \*Measure from the lowest point on the underside of the countertop. May be reduced to 33½" (85.1 cm) by removing the rear leveling legs from dishwasher.
- \*\*Minimum, measured from narrowest point of opening.

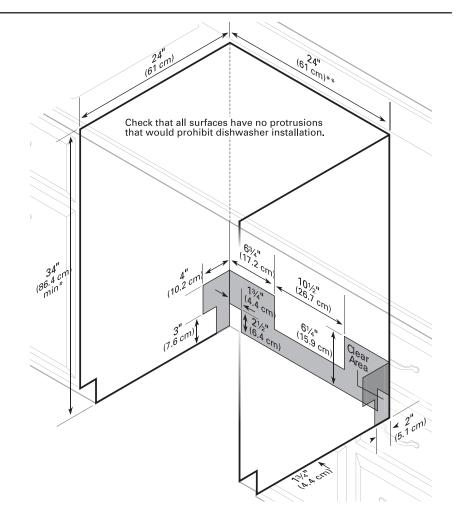

Model: 20-1790 A The Dunmore

43 of 44

### WHIRLPOOL WASHER Model #: WFW5620HW

Whirlpool Brand Canada English | Washer and Dryers | Washers | Front Load Washers | WFW5620HW



5.2 cu. ft. I.E.C. Closet-Depth Front Load Washer with Load & Go™ Dispenser



Whirlpool\*

5.2 cu. ft. I.E.C. Closet-Depth Front Load Washer with Load & Go™ Dispenser

Model #: WFW5620HW

### Dimensions

Depth	80.17 cm, 31-9/16 in
Depth With Door Open 90 Degree	143.51 cm, 56-1/2 in
Minimum Height	98.11 cm, 38-5/8 in
Width	68.58 cm, 27.0 in
Appearance	
Appearance  LCD Touch Screen	No
	No Yes

### Details

Drum Material Stainless Steel
-------------------------------

### **Cycles and Options**

Number of Wash Cycles	37	

### Electrical

Hz	60
Power Cord Included	Yes

44 of 44

### WHIRLPOOL DRYER Model #: YWED5620HW

Whirlpool Brand Canada English | Washer and Dryers | Dryers | Electric Dryers | YWED5620HW



Define Your Style

7.4 cu. ft. Front Load Electric Dryer with Intuitive Touch Controls



7.4 cu. ft. Front Load Electric Dryer with Intuitive Touch Controls

Model #: YWED5620HW

### Dimensions

Depth	78.74 cm, 31.0 in
Depth With Door Open 90 Degree	138.43 cm, 54-1/2 in
Height	98.42 cm, 38-3/4 in
Width	68.58 cm, 27.0 in
WIGH	55.55 5, 25
Configuration and Overview	
	Electric
Configuration and Overview	
Configuration and Overview Fuel Type	

### Ventilation System

Number of Dryer Cycles

Number of Dryness Levels

Long Vent	No
Maximum Vent Length	64
Venting Direction	Left, Right, Bottom, Rear

36

3

### Electrical

Hz	60

Power Cord Included Ye