Sales Selection Sheet Checklist



LOT 3183A-4 Model: 20-1606 B The Grassfield

PURCHASERS: RANA ALMUSTAFA/MAMOUN YANES // MAISSAA ALMUSTAFA

VENDOR: Heathwood Homes (Huron) Limited

OPTIONAL	L DOUBLE SINKS IN	MASTER ENSUI	ΓΕ BATHROOM		•
FINISHED COLD CEI	BASEMENT LLAR				
	DDIFIED ELEVATION UPGRADE GRADE	and a second of the second of			3
CEILING UPGRA MAIN FLO SECOND BASEMEN	OOR FLOOR				is se
ADDITIONAL RO 200 AMP S WET BAR HUMIDIFIE AIR COND	SERVICE ROUGH-IN ER			e e	
GAS ROUGH-IN STOVE DRYER BBQ ADDITION	IAL FIREPLACE				14
KITCHEN: HOOD 6 IN ROUN 7 IN ROUN					
FULL BASEMENT UPPER BASEME LOWER BASEME MAIN STAIRS: MEDIA STAIRS (if LOFT STAIRS (if	NT STAIRS: ENT STAIRS: A f applicable):	N/A All Oak Carpet Grade All Oak N/A			
FCB 22/22 Date P	Lignatures urchaser)	s Le _		Decor Consultant:	EFUR
	urchaser:		-02- 2 2 202 Date	22 Heathwood Homes (Huron) Limited
Locked Date:		-		and the value	

RANA ALMUSTAFA/MAMOUN YANES // MAISSAA ALMUSTAFA Project: Wallaceton Unit: 3183A-4, Phase: 3 Model: 20-1606 B The Grassfield

Created: 11/16/2021 10:15:12

Locked:

Closed:



tchen		
Cabinet Colour/Style	9111	VIKING III SIMCOE ORCHID 3DL ***STD***
Countertop	8595	Group 2-Quartz-Caesarstone-OCEAN FOAM #6141-3/4 inch with built-up edge ***2***
Countertop Edge	4005	DOUBLE MITRE 1 1/2 INCH ***UPG***
Cabinet Hardware	2086	9677-HARDWARE ***STD***
Island Cabinet Colour/Style	9111	VIKING III SIMCOE ORCHID 3DL ***STD***
Island Countertop	8595	Group 2-Quartz-Caesarstone-OCEAN FOAM #6141-3/4 inch with built-up edge ***2***
Backsplash	1111	N/A *****
Backsplash Grout	1111	N/A *****
Backsplash Tile Pattern	1111	N/A *****
HoodFan	9904	YWMH31017HZ-Whirlpool Over-The-Range Microwave Hood Combination-SS-30 inch
HoodFan	9904	Hood Combination-SS-30 inch
Appliance	9904	Purchasers have been advised: standard fridge opening is a minimum 37 3/8 x 73 3/8". Ice Waterline Rough-In is included. Standard stave exempts is 30" and standard dishwasher.
Appliance	9904	Standard stove opening is 30" and standard dishwasher opening is 24". Any gas stove will require backsplash or stainless steel backing to avoid fire hazards.
Appliance	9904	Purchasers acknowledge: Heathwood Homes and its contractors will not be responsible for any kitchen cabinet changes due to appliances dimension changes after
Comment		
tchen/Breakfast		
Flooring	9904	GE.MD.WHT.1818.MT Madison Series White Matte 18
Floor Tile Grout	2225	Grout-(27) Silver ***STD***
Floor Tile Pattern	3000	STANDARD SQUARE ***STD***

RANA ALMUSTAFA/MAMOUN YANE Project: Wallaceton Unit: 3183A-4, Phase: 3 Model: 20-1606 B The Grassfield	S // MAISSAA ALMUSTAFA	Created: 11/16/2021 10:15:12. Locked:
Comment		
Foyer		
Flooring	3000 GE.MD.WHT.	1818.MT Madison Series White Matte 18
Floor Tile Grout	2225 Grout-(27) Sil	ver ***STD***
Floor Tile Pattern	3000 STANDARD S	SQUARE ***STD***
ricor rue rationi		
Comment		
Laundry Room		
Flooring	3000 GE.BY.AZR.1	313 New Byzantine Azzuro 13
Floor Tile Grout	2225 Grout-(27) Sil	ver ***STD***
Floor Tile Pattern	3000 STANDARD S	SQUARE ***STD***
Comment		
Mud Room		
Flooring	3000 GE.MD.WHT.	1818.MT Madison Series White Matte 18
Floor Tile Grout	2225 Grout-(27) Sil	ver ***STD***
Floor Tile Pattern	3000 STANDARD S	SQUARE ***STD***
Comment		

RANA ALMUSTAFA/MAMOUN Y Project: Wallaceton Jnit: 3183A-4, Phase: 3	'ANES // MAISSAA ALMUST	AFA Created: 11/16/2021 10:15:12 Locked:
Model: 20-1606 B The Grassfield	d	Closed: OF
ndes sed datable o excellente es establic		
Powder Room		
Flooring	3000	GE.MD.WHT.1818.MT Madison Series White Matte 18
Floor Tile Grout	2225	Grout-(27) Silver ***STD***
Floor Tile Pattern	3000	STANDARD SQUARE ***STD***
Plumbing Fixture (Colou	ur) 1737	Plumbing Fixtures-WHITE ***STD***
Comment		
Halí	The state of the s	
Flooring	1737	GE.MD.WHT.1818.MT Madison Series White Matte 18
Grout	2225	Grout-(27) Silver ***STD***
Floor Tile Pattern	3000	STANDARD SQUARE ***STD***
Comment		
Great Room	THE PARTY OF THE P	
Flooring	7502	Red Oak Pearl-Vintage Engineered-PEWTER/ECLIPSE-3/4 inch x 3 1/4 inch
Comment		
Upper Hali		
Flooring	9246_	DY 84558 -Dynasty Tex-BEACH SHELL-40 oz Poly***STD***
Comment		

RANA ALMUSTAFA/MAMOUN YANES // MAISSAA ALMUSTAFA Project: Wallaceton Unit: 3183A-4, Phase: 3 Model: 20-1606 B The Grassfield

Created: 11/16/2021 10:15:12 Locked: Closed:

Finished Basement (Rec) Ro	om/Hall	
Flooring	9246	DY 84558 -Dynasty Tex-BEACH SHELL-40 oz Poly***STD***
Comment		
laster Bedroom		
Flooring	9246	DY 84558 -Dynasty Tex-BEACH SHELL-40 oz Poly***STD***
Comment		
edroom 2		v v
Flooring	9246	DY 84558 -Dynasty Tex-BEACH SHELL-40 oz Poly***STD***
Comment		
edroom 3		
Flooring	9246	DY 84558 -Dynasty Tex-BEACH SHELL-40 oz Poly***STD***
Comment		
aster Ensuite	Anna ann an t-anna an t-anna ann an t-anna ann an t-anna ann an t-anna ann an t-anna an t-anna ann an t-anna an t-an	,
Cabinet Colour/Style	9111	VIKING III SIMCOE ORCHID 3DL ***STD***
Countertop	8796	6698-46-Countertop-PALOMA POLAR ETCHINGS FINISH-Formica ***STD***
Countertop Edge	1111	N/A *****
Cabinet Hardware	7672	135-HARDWARE ***STD***
Floor Tile	7672	GE.BY.AZR.1313 New Byzantine Azzuro 13
Floor Tile Grout	2225	Grout-(27) Silver ***STD***

ustomer Colours		375
NA ALMUSTAFA/MAMOUN YANES // oject: Wallaceton it: 3183A-4, Phase: 3 odel: 20-1606 B The Grassfield	MAISSAA ALMU	Created: 11/16/2021 10:19 Locked: Closed:
	akalinda sa dina	
Floor Tile Pattern	3000	STANDARD SQUARE ***STD***
Shower Floor Tile	8661	OD.ON.SWT.0202.MT.N-Ontario Series Mosaic-Snow White Matte-2 x 2 ***STD***
Shower Floor Tile Grout	2226	Grout-(00) White ***STD***
Shower Floor Tile Pattern	3000	STANDARD SQUARE ***STD***
Shower Wall Tile	9020	QT.WV.WHT.0810-Weave-White-8 x 10 ***STD***
Shower Wall Tile Grout	2226	Grout-(00) White ***STD***
Shower Wall Tile Pattern	3070	HORIZONTAL STACKED ***STD***
Shower Jamb(s) and Sill(s)	8923	Shower Jamb / Sill-Thassos White ***STD***
Plumbing Fixture (colour)	1737	Plumbing Fixtures-WHITE ***STD***

Main Bathroom

		of the state of th
Cabinet Colour/Style	9111	VIKING III SIMCOE ORCHID 3DL ***STD***
Countertop	8796	6698-46-Countertop-PALOMA POLAR ETCHINGS FINISH-Formica ***STD***
Countertop Edge	1111	N/A ******
Cabinet Hardware	7672	135-HARDWARE ***STD***
Flooring	7672	GE.BY.AZR.1313 New Byzantine Azzuro 13
Floor Tile Grout	2225	Grout-(27) Silver ***STD***
Floor Tile Pattern	3000	STANDARD SQUARE ***STD***

RANA ALMUSTAFA/MAMOUN YANES // MAI Project: Wallaceton Unit: 3183A-4, Phase: 3 Model: 20-1606 B The Grassfield	SSAA ALMU:	Created: 11/16/2021 10:15:12 Locked: Closed:
Wall Tile	9020	QT.WV.WHT.0810-Weave-White-8 x 10 ***STD***
Wall Tile Grout	2226	Grout-(00) White ***STD***
Main Bathroom Tile Pattern	3070	HORIZONTAL STACKED ***STD***
Plumbing Fixture (Colour)	1737	Plumbing Fixtures-WHITE ***STD***
Comment		
Finished Basement Bathroom		
Cabinet Colour/Style	9111	VIKING III SIMCOE ORCHID 3DL ***STD***
Countertop	8796	6698-46-Countertop-PALOMA POLAR ETCHINGS FINISH-Formica ***STD***
Countertop Edge	1111	N/A ****
Cabinet Hardware	7672	135-HARDWARE ***STD***
Flooring	7672	GE.BY.AZR.1313 New Byzantine Azzuro 13
Floor Tile Grout	2225	Grout-(27) Silver ***STD***
Floor Tile Pattern	3000	STANDARD SQUARE ***STD***
Shower Floor Tile	8661	OD.ON.SWT.0202.MT.N-Ontario Series Mosaic-Snow White Matte-2 x 2 ***STD***
Shower Floor Tile Grout	2226	Grout-(00) White ***STD***
Shower Floor Tile Pattern	3000	STANDARD SQUARE ***STD***
Shower Wall Tile	9020	QT.WV.WHT.0810-Weave-White-8 x 10 ***STD***

Suctomor Sciours		3/3
RANA ALMUSTAFA/MAMOUN YANES // M/ Project: Wallaceton Jnit: 3183A-4, Phase: 3 Model: 20-1606 B The Grassfield	AISSAA ALMU	USTAFA Created: 11/16/2021 10:15:12 Locked: Closed:
Shower Wall Tile Grout	2226	Grout-(00) White ***STD***
Shower Wall Tile Pattern	3070	HORIZONTAL STACKED ***STD***
Shower Jamb(s)	8923	Shower Jamb / Sill-Thassos White ***STD***
Plumbing Fixture (Colour)	1737	Plumbing Fixtures-WHITE ***STD***
Comment		
Great Room Fireplace		
Туре	8865	Dimplex-Electric Fireplace-PF3033HL ***STD***
Mantle	8891	NF-17-Paint Grade Mantle- Cabinet (Per Plan)-WHITE
Surround Opt.	1111	N/A *****
Disclaimer	1111	Purchasers have been advised: heat from the FP can damage TV above a FP and items placed on mantle.
Disclaimer	1111	Heathwood and its contractors will not be liable for any damage on items placed/installed above a FP after closing.
Comment		
Basement Stairs		
	1714	Carpet Grade Stairs ***STD BASEMENT STAIRS***
Type Colour	7922	Eclipse (Pewter) STAIN TO COMPLIMENT HARDWOOD
Coloui	1322	AND WILL VARY FROM FLOORING ***99***
Carpet Runner	1111	N/A *****
Handrail/Pickets/Post Type	9119	Handrail only on closed walls (one or two sides per building code) ***STD***
Handrail/Pickets/Post Colours	1729	Carpet Grade-Stain handrail, pickets, stringers, nosing _pos
Carpet	9246	DY 84558 -Dynasty Tex-BEACH SHELL-40 oz Poly***STD***
Custom Stain/Paint	1111	N/A *****

Comment

RANA ALMUSTAFA/MAMOUN YANES // M/ Project: Wallaceton Unit: 3183A-4, Phase: 3 Model: 20-1606 B The Grassfield	AISSAA ALMU	USTAFA Created: 11/16/2021 10:15:12 Locked: Closed:
Basement Stairs Landings (Upper ar	nd Lo	
Flooring	7501	Red Oak Pearl-Vintage Engineered-NATURAL-3/4 inch x 3 1/4 inch ***3***
Comment		
Main Stairs		
Туре	1712	Oak Stairs ***STD MAIN STAIRS***
Colour	7922	Eclipse (Pewter) STAIN TO COMPLIMENT HARDWOOD AND WILL VARY FROM FLOORING ***99***
Carpet Runner	1111	N/A *****
Handrail/Pickets/Posts Type	7652	1 5/16 inch Square pickets with 3 1/2" Square/Cap Post(s)-ALL OAK ***STD***
Handrail/Pickets/Posts Colour	1728	Oak Grade-Stain handrail,oak pickets,stringers,treads,risers
Custom Stain/Paint	1111	N/A *****
Comment		
Main Stairs Landing(s)		
Flooring	7502	Red Oak Pearl-Vintage Engineered-PEWTER/ECLIPSE-3/4 inch x 3 1/4 inch
Comment		
Throughout		
Walls - Paint Colour	1717	22-Wall-WARM GREY ***STD***
Underpad	1079	500 Series-Underpad ***STD***
Thresholds	2232	Metal Thresholds ***STD***
Switches and Plug	5796	Decora White Switches and Plugs ***STD***
Trim Size	8705	4 1/4 Baseboard and 2 3/4 Casings ***STD***
Time Paint Colors	1-40	

RANA ALMUSTAFA/MAMOUN YANES // MAISSAA ALMUSTAFA

Project: Wallaceton Unit: 3183A-4, Phase: 3 Model: 20-1606 B The Grassfield Created: 11/16/2021 10:15:12

Locked:

Closed:

16/2021 10:15:12 OF

rrim - Pain	r Colour	[ITTIO] [ITTIM=VVHI] E	יעוסיי:	
Comment				
			11	
	- \ /			- 4/
Purchaser:	ANA ALMUSTAFA	Nov 30, 2021 Date	Decor Consultant	// <u>/</u> /Date/
			-	C MARKETE?
Purchaser:	Live	Nov39,2021	MKosen	~ <mark>02- 2 2 2022</mark>
M	AMOUN YANES // MAIS	\mathcal{K} $\mathcal{A}_{\mathbf{k}}$.	Wallaceton	Date Approved
	Alm	merch		



CONSTRUCTION SUMMARY

Lot: 3183A-4

Model: 20-1606 B The Grassfield Project/Phase: Wallaceton / 3

Offer Five Appliances: SS Fridge, Stove, Dishwasher: White Front Loader Washer/Dryer - Townhomes
Worksheet Note:

DisciplineMS.rpt 13dec21

Page 1 of 4

Printed and Sent: 29-Sep-22



CONSTRUCTION SUMMARY

Lot: 3183A-4 Model: 20-1606 B The Grassfield Project/Phase: Wallaceton / 3

APPLIANCES

invoice	Qıy.	Description
929	1	KITCHEN - APPLIANCES - WHIRLPOOL OTR SS - YWMH31017HZ
313,492		
22Feb22		SPECS PAGES 28-30
		CABINETRY - notification; ELECTRICAL - delete std range hood; HEATING/AIR CONDITIONING - Duct Size
		to 6"

CABINETRY

Invoice	Qty.	Description		
929 313,492	1	CITCHEN - APPLIANCES - WHIRLPOOL OTR SS - YWMH31017HZ		
22Feb22 **		SPECS PAGES 28-30 CABINETRY - notification; ELECTRICAL - delete std range hood; HEATING/AIR CONDITIONING - Duct Size to 6"		
929 313,624 22Feb22	1	KITCHEN - 04H-66cm deep fridge enclosure (counter depth) with (1) wall ([1] 66cm deep gable and [1] 66cm deep cabinet) (This is not a zero clearance enclosure. Standard heights and widths will be used.) Viking SKETCH # 3 DRYWAL-Notify; FRAMING-Modify Bulkhead; PAINTING-Notify		
929 313,768 22Feb22	1	KITCHEN - 11A-Upper angle corner per unit Viking SKETCH # 3 DRYWAL-Notify; FRAMING-Modify Bulkhead; PAINTING-Notify		
929 334,723 22Feb22 **	1	MASTER ENSUITE - PLUMBING - OPTION FROM ONE SINK TO DOUBLE SINKS INCLUDING STD CHATEAU FAUCET OVERMOUNT COLONY SINK ONE EXTRA VANITY LIGHT AND CABINET CONVERSION 2D VIKING SKETCH # 4 CABINETRY-2D Convert Cabinetry Viking; Eletrical-Additional Vanity Light		

CERAMICS

Invoice		Description
929 308,333 22Feb22	1	- CERAMICS - FLOOR - KITCHEN - UPGRADE 1
929 308,317 22Feb22	1	- CERAMICS - FLOOR - FOYER - UPGRADE 1
929 308,368 22Feb22	1	- CERAMICS - FLOOR - POWDER ROOM - UPGRADE 1
929 308,354 22Feb22	1	- CERAMICS - FLOOR - MAIN HALL - UPGRADE 1
929 308,361 22Feb22	1	- CERAMICS - FLOOR - MUD ROOM - UPGRADE 1

DisciplineMS.rpt 13dec21 Page 2 of 4 Printed and Sent: 29-Sep-22



CONSTRUCTION SUMMARY

Lot: 3183A-4

Model: 20-1606 B The Grassfield Project/Phase: Wallaceton / 3

DRYWALL

Invoice	Qty.	Description	
929 313,624	1	XITCHEN - 04H-66cm deep fridge enclosure (counter depth) with (1) wall ([1] 66cm deep gable and [1] 66cm deep cabinet) (This is not a zero clearance enclosure. Standard heights and widths will be used.) Viking	
22Feb22 **		SKETCH # 3 DRYWAL-Notify; FRAMING-Modify Bulkhead; PAINTING-Notify	
929 313,768	1	KITCHEN - 11A-Upper angle corner per unit Viking	
22Feb22 **		SKETCH # 3 DRYWAL-Notify; FRAMING-Modify Bulkhead; PAINTING-Notify	

ELECTRICAL

Invoice	Qty.	Description	
929 313,492 22Feb22 **	1	PECS PAGES 28-30 CABINETRY - notification; ELECTRICAL - delete std range hood; HEATING/AIR CONDITIONING - Duct Size to 6"	
929 314,224 22Feb22	3	ELECTRICAL - CEILING ROUGH-IN (CAPPED) 2X ON GREAT ROOM CEILING ON SEPERATE SWITCH 2) 1 X CENTERED +/- ON ISLAND WITH EPERATE SWITCH SKETCH # 2	
929 314,223 22Feb22	3	- ELECTRICAL - ADDITIONAL SWITCH 1) 2X IN GREAT ROOM WITH CAPPED ELECTRICAL 2) 1 X WITH CAPPED ELECTRICAL CENTERED +/- IN ISLAND SKETCH # 2	
929 314,232 22Feb22	1	GREAT ROOM - ELECTRICAL - EXTRA WALL INTERIOR OUTLET ON EXISTING CIRCUIT (DOES NOT INCLUDE KITCHEN OUTLETS) TO BE CENTERED +/- ABOVE THE FIREPLACE APPROX 70" +/- FROM THE FLOOR SKETCH # 2	
929 334,723 22Feb22 **	1	MASTER ENSUITE - PLUMBING - OPTION FROM ONE SINK TO DOUBLE SINKS INCLUDING STD CHATEAU FAUCET OVERMOUNT COLONY SINK ONE EXTRA VANITY LIGHT AND CABINET CONVERSION 2D VIKING SKETCH # 4 CABINETRY-2D Convert Cabinetry Viking: Eletrical-Additional Vanity Light	

FRAMING

2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2		
Invoice	Qty.	Description
929 313,624		KITCHEN - 04H-66cm deep fridge enclosure (counter depth) with (1) wall ([1] 66cm deep gable and [1] 66cm deep cabinet) (This is not a zero clearance enclosure. Standard heights and widths will be used.) Viking
22Feb22 **		SKETCH # 3 DRYWAL-Notify; FRAMING-Modify Bulkhead; PAINTING-Notify
929 313,768	1	KITCHEN - 11A-Upper angle corner per unit Viking
22Feb22 **		SKETCH # 3 DRYWAL-Notify; FRAMING-Modify Bulkhead; PAINTING-Notify

GRANITE

Invoice	Qty.	Description		
929	1	- GRANITE - COUNTERTOP - 3/4 INCH GROUP 2 WITH MITRE EDGE - KITCHEN / ISLAND - UPG		
310,872				
22Feb22				

Printed and Sent: 29-Sep-22



CONSTRUCTION SUMMARY

Lot: 3183A-4

Model: 20-1606 B The Grassfield Project/Phase: Wallaceton / 3

HEATING / AIR CONDITIONING

Invoice	Qty.	Description
929	1	KITCHEN - APPLIANCES - WHIRLPOOL OTR SS - YWMH31017HZ
313,492		
22Feb22		SPECS PAGES 28-30
**		CABINETRY - notification; ELECTRICAL - delete std range hood; HEATING/AIR CONDITIONING - Duct Size
		to 6"

PAINTING

Invoice	Qty.	Description	
929 313,624		XITCHEN - 04H-66cm deep fridge enclosure (counter depth) with (1) wall ([1] 66cm deep gable and [1] 66cm deep cabinet) (This is not a zero clearance enclosure. Standard heights and widths will be used.) Viking	
22Feb22 **		SKETCH # 3 DRYWAL-Notify; FRAMING-Modify Bulkhead; PAINTING-Notify	
929	1	KITCHEN - 11A-Upper angle corner per unit Viking	
313,768			
22Feb22 **		SKETCH # 3 DRYWAL-Notify; FRAMING-Modify Bulkhead; PAINTING-Notify	

22Feb22 **		SKETCH # 3 DRYWAL-Notify; FRAMING-Modify Bulkhead; PAINTING-Notify
PLUM	BIN	G
Invoice	Qty.	Description
929 334,723	_	MASTER ENSUITE - PLUMBING - OPTION FROM ONE SINK TO DOUBLE SINKS INCLUDING STD CHATEAU FAUCET OVERMOUNT COLONY SINK ONE EXTRA VANITY LIGHT AND CABINET CONVERSION 2D VIKING
22Feb22		SKETCH # 4 CABINETRY-2D Convert Cabinetry Viking; Eletrical-Additional Vanity Light

20-1606 ELEV. B

140F46

THE GRASSFIELD

Sketch #1

ELEVATION B | 1,986 SQ. FT. Includes 380 sq. ft. of Finished Lower Level

WALLACETON EST. 1870

RECREATION ROOM HWT UNFINISHED AREA LOCATION MAY VARY HEADROOM AS REO'D **UNEXCAVATED** UNEXCAVATED

LOWER LEVEL **ELEVATION A & B**

Legal Plan Dec. 3, 2020




THE GRASSFIELD

Sketch #2

ELEVATION B | 1,986 SQ. FT.


Includes 380 sq. ft. of Finished Lower Level

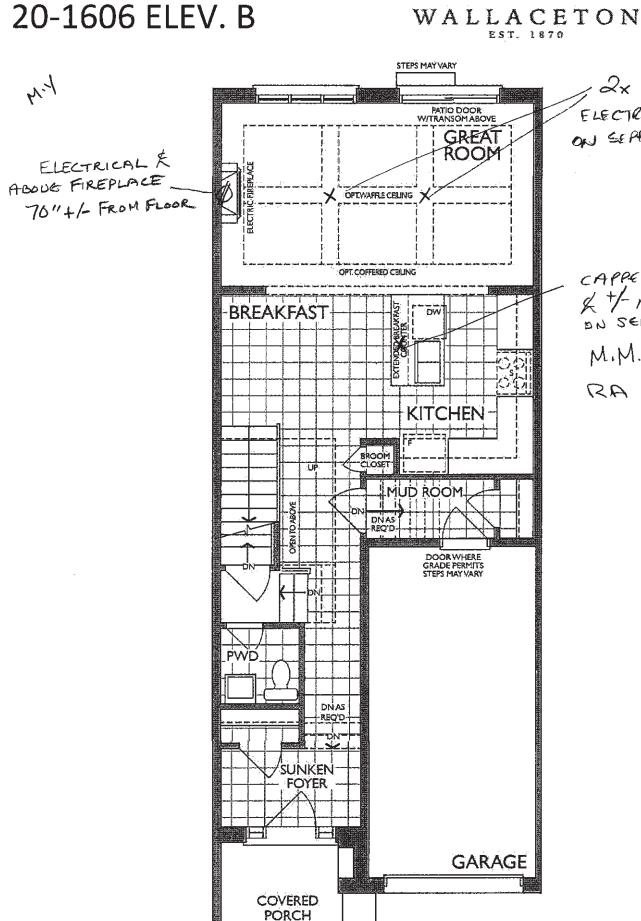

MAIN FLOOR ELEVATION B

, 2x CAPPED ELECTRICAL-EACH ON SEPERATE SUITCH

CAPPED ELECTRICAL of the ABOVE ISLAND DN SEPARATE SWITCH M.M.

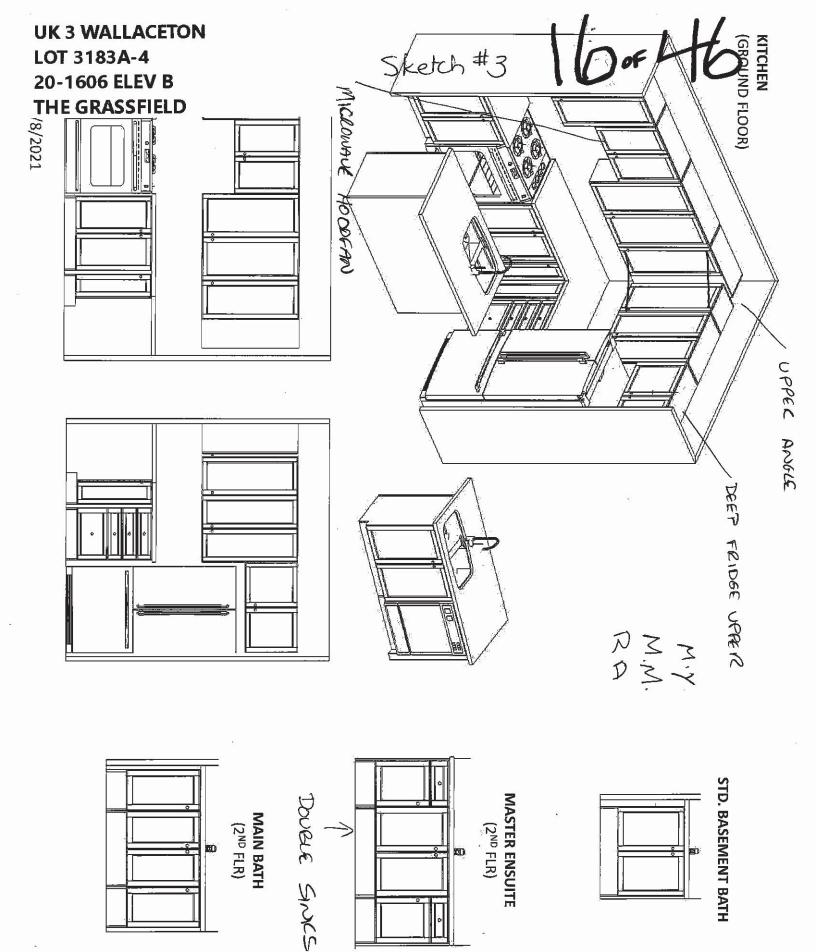



HEATHWOOD HOMES

WALLACETON, KITCHENER ON

MODEL: 20-1606 (2003)

STANDARD CONTRACT INCLUDES:

Appliance Openings

- Hood Opening: 30"W Std. hood
- Fridge Opening: 37 3/8 "W X 73 3/8" H
- 30cm deep cabinet over tridge
- Stove Opening: 30" Freestanding Dishwasher Opening: 24"

Standard Kitchens Scope

- 100cm H wall cabinets
- Std. Blumotion Hinges-soft close
- Std. Metabox Drawers- not soft close
- Base pie cut corner cabinets Min 40cm W drawer
- Backing on all cabinets
- Countertop by others
- Upgrade applied paneled fridge & hardware by others) dishwashers supply only (appliance

Standard Vanity & Laundry Scope:


- Powder by others, pedestal
- All vanities include laminate counter
- Std. Blum Hinges- not soft close
- Tandem Box Drawers-soft close

Master Ensuite: Top drawers (Full height

doors at sink)

Mains: Full height doors (top drawers added if Masters can't accommodate Optional laundry base & wall cabinets

20-1606 ELEV. B




Sketch #4 THE GRASSFIELD

ELEVATION B | 1,986 SQ. FT.

Includes 380 sq. ft. of Finished Lower Level


WALLACETON

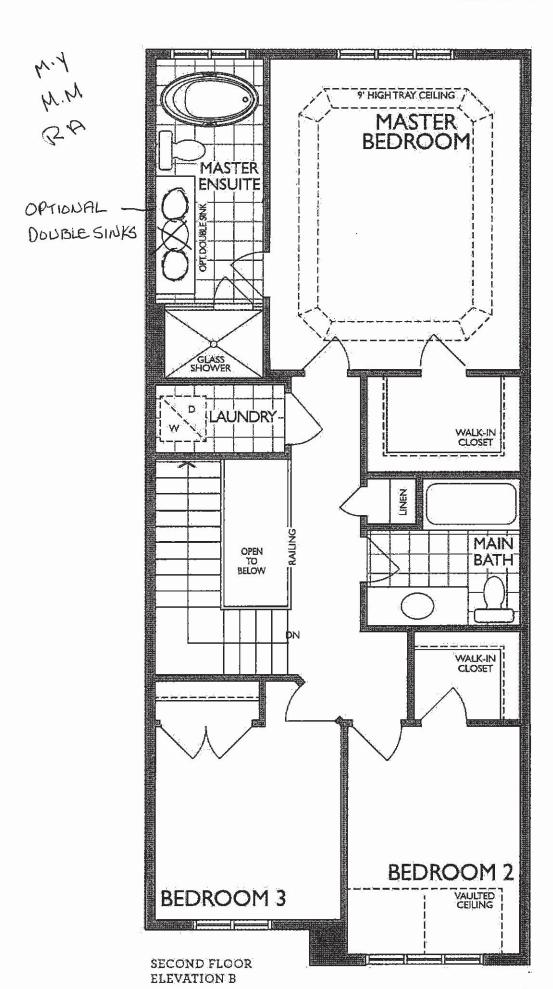

W.W.

UK 3 WALLACETON LOT 3183A-4 20-1606 ELEV B THE GRASSFIELD 18 of 46



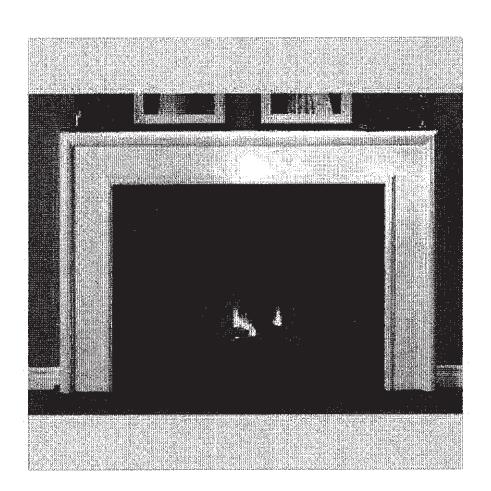

NFAS NF17 Mantel - Cabinet

Printed in Canada


Franke Kindred Canada Limited


UK 3 WALLACETON
LOT 3183A-4
20-1606 ELEV B
THE GRASSFIELD






NDAESCALUMANA)

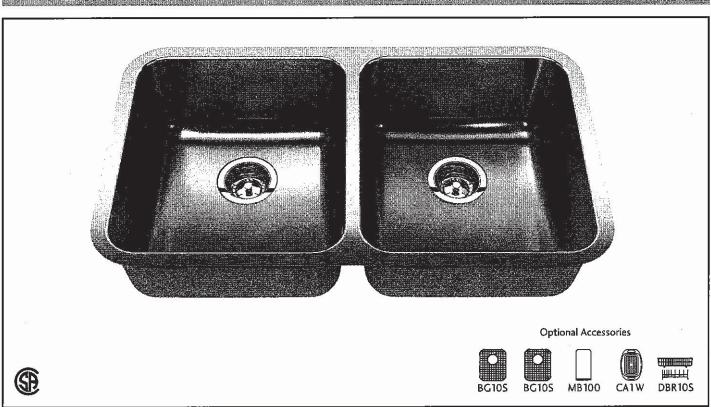





ND1831UA/9 SPECIFICATION

Model ND1831UA/9 is a double (two equal size) bowl undermount sink manufactured by Franke Kindred Canada Limited from 18 gauge stainless steel. Product has silk finished rims and linear brush finished bowls. Sink is fully undercoated. Basket strainer waste fittings (3 1/2", 89 mm) are included. Sink is backed with a limited lifetime warranty.

- O.D. 17 3/4" x 30 7/8" x 8 1/2" (45 x 78 x 22 cm)
- Recommended for minimum 36" cabinet

Franke Kindred Canada Limited

P.O. Box 190, 1000 Franke Kindred Road, Midland, Ontario, Canada, L4R 4K9 Phone: 866-687-7465 Fax: 800-361-8408





Page down to identify the version you have.

FAUCET DESCRIPTION

- Reflex™ pulldown system offers smooth operation, easy movement and secure docking
 Power Clean™ spray technology
 Metal construction with various finishes identified by suffix
 Duralock™ connect installation

- Pulldown spray with 68" braided hose Flexible supply lines with 3/8" compression fittings
- High arc spout provides height and reach to fill or clean large pots while pulldown wand provides the maneuverability for cleaning or rinsing 360° rotating spout
- Faucet designed for handle to be mounted on right side only

- Lever style handle
 Temperature controlled by 100° arc of handle travel
 Operates with less than 5 lbs. of force
- Operates in stream or spray mode in the pullout or retracted position
 FLOW

Flow is limited to 1.5 gpm (5.7 L/min) max at 60 psi CARTRIDGE

1255™ Duralast™ cartridge


STANDARDS


- Third party certified to IAPMO Green, ASME A112.18.1/CSA B125.1 and all
- applicable requirements therein including NSF 61/9G & 372 Meets CalGreen and Georgia SB370 requirements Complies with California Proposition 65 and with the Federal Safe Drinking
- The backflow protection system in the device consists of two independently operating check valves, a primary and a secondary which prevent backflow

ADA (5) for lever handle


WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
- 10 year limited warranty when used in a multifamily installation





Specifications




ALIGN™ **Single Handle High Arc Pulldown Kitchen Faucet**


Models: 7565 series

NOTE: THIS FAUCET IS DESIGNED TO BE INSTALLED THROUGH 1 HOLE, 1-1/2" (38mm) MIN. DIA. (OPTIONAL 3-HOLE ESCUTCHEON 141002 AVAILABLE)



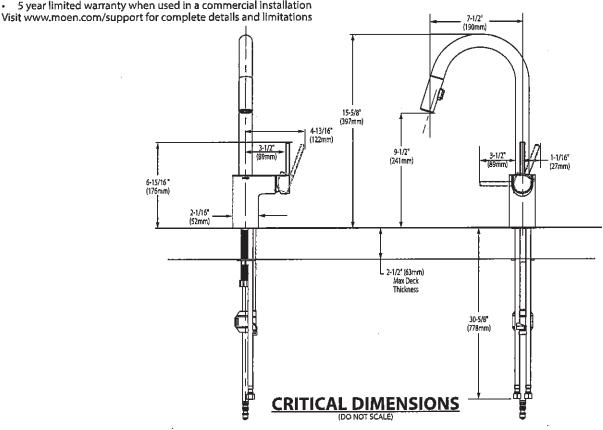

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN www.moen.com





BARRIER FREE (ABOVE COUNTER OR DROP-IN ONLY)

BOULEVARD® VITREOUS CHINA

BOULEVARD® PEDESTAL SINK

□ ,0641.800 Faucet holes on 8" (203mm) centers (Illustrated) STD 🗹 0641.400 Faucet holes on 4" (102mm) centers

- □ 0641.100 Center hole only
 - · Classic styled rectangular pedestal lavatory
 - · Vitreous china
 - Rear overflow
 - · Supplied with mounting kit
 - · Right Height® for greater comfort during use
 - Faucet ledge with large deck area (faucet not included)
 - Design coordinates with Boulevard® Toilet
 - · Basin has flat bottom to also allow use as an above counter sink or a drop-in sink (with u-shaped cut out)

Nominal Dimensions:

24" x 19" x 35-1/2" (610 x 483 x 902mm)

0641.008 Pedestal top-8" (203mm) centers
0641.004 Pedestal top-4" (102mm) centers
0641.001 Pedestal top-center hole only
0010.000 Pedestal only

Bowl sizes:

17" (432mm) wide, 12-1/2" (318mm) front to back,

Compliance Certifications -

Meets or Exceeds the Following Specifications:

ASME A112.19.2 - 2008/CSA B45.1-08

5" (127mm) deep

To Be Specified:

- □ Color: □ White □ Linen
- ☐ Faucet Finish:
- Supplies:
- ☐ 1-1/4" Trap:
- □ Nipple:

	į

SEE REVERSE FOR ROUGHING-IN DIMENSIONS

See faucet section for additional models available



American Standard

BARRIER FREE

COLONY™ COUNTERTOP SINK

VITREOUS CHINA

COLONY COUNTERTOP SINK

- · Vitreous china
- · Self-rimming
- · Front overflow
- · Supplied with template
- Faucet deck (Faucet shown not included)

0346	803

Faucet holes on 203mm (8") centres



0346 403 (Illustrated)

Faucet holes on 102mm (4") centres

0346 001


Centre hole only

Nominal Dimensions: 521 x 448mm (20-1/2" x 17-5/8")

Bowl sizes:

422mm (16-5/8") wide, 279mm (11") front to back, 143mm (5-5/8") deep



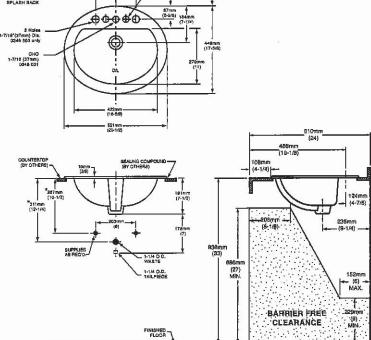

g standin deficies de la

COMPLIANCE CERTIFICATIONS -

Meets or exceeds the following Specifications:

- ASME A112.19.2M for Vitreous China Fixtures.
- · CAN/CSA B45 Series.

To Be Specified

- ☐ Colour: ☐ White ☐ Bone ☐ Silver Gray
 - Linen
- ☐ Faucet*:
- □ Faucet Finish:
- □ Supplies & Stops:
- ☐ Trap 1-1/4" (32 mm):

BAS-198 -

NOTES:* DIMENSIONS SHOWN FOR LOCATION OF SUPPLIES AND "P" TRAP ARE SUGGESTED. FOR COUNTERTOP CUTOUT AND INSTALLATION INSTRUCTIONS USE TEMPLATE SUPPLIED WITH SINK.

FAUCETS NOT INCLUDED AND MUST BE ORDERED SEPARATELY.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard A112.19.2.

These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

^{*} See faucet section for additional models available







DEMI™ Product Specification Sheet

Two Piece Freestanding Collection

CF2007

Two Piece Freestanding Soaker

60" x 32" x 22"


1524 mm x 813 mm x 559 mm




- Vacuum formed acrylic reinforced with fiberglass
- Scratch, stain and fade resistant high gloss finish
- Installation friendly two piece design
- Accepts deck mounted faucet
- Includes integral pop up drain and rectangular overflow
- Includes levelling feet

TWO PIECE ASSEMBLY

TOP VIEW

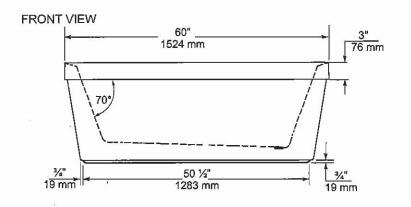

END VIEW



	330 mm	
1		16"
29° 737 mm]	•
7 2 3	9))	

51"

1295 mm

GENERAL SPECIFICATIONS Average Weight 90 lb 41 kg 1092 x 508 mm Bathing Well at bottom 43"x 20" Capacity Drain to Overflow 195 litres Water Depth Drain to Overflow 406 mm 16" Drain Opening (dia.) 51 mm Overflow Opening 2 1/4"x 1/4" 57 x 13 mm Drain to Floor Clearance 3 1/4" 83 mm

NOTES: Please confirm measurements on actual product to ensure proper Identification. Bathtub to be Installed on the floor supported by 5 self levelling feet. Adjust if required to level the bathtub for adequate drainage. Refer to installation instructions for additional information.

IMPORTANT: Dimensions of fixtures are nominal and may vary \pm %" (6 mm). Weight may vary \pm 5 lb (2.3 kg). Drawing is not to scale. These measurements are subject to change at manufacturer's discretion.

Compliance Certifications -

Meets or Exceeds the following Specifications: CAN/CSA - B45 Series





mirolin. 60 Shomeliffe Rd., Toronto, Ontario M8Z 5K1
Telephone: 416.231.9030 Fax: 416.231.0929 Fax: 416.231.0929 www.mirolin.com

152 mm

Customer Service: 416.231.5790 Canada, U.S.A.: 800.MIROLIN(647-6546) Fax, Canada: 800.463.2236

R0084162 25 Sep. 2018





American Standard

Style That Works Better

FloWise™ DUAL FLUSH **ELONGATED TOILET**

VITREOUS CHINA


FloWise™ DUAL FLUSH ELONGATED TOILET

2476 216

- · Vitreous china
- · Low-consumption Dual Flush Full flush 6.0 Lpf/1.3 gpf, Partial flush 3.0 Lpf/0.66 gpf.
- · Elongated wash down bowl
- · Internal trapway fully-glazed, 2-1/4" (57mm) ballpass
- · Concealed trapway bowl
- · Chrome-plated top mounted push button actuator
- · Easy to clean sanitary dam on bowl
- Includes Elongated Slow Close Seat
- · 100% factory flush tested
- · 2 bolt caps

Separate Component Parts:

- 3067 316 Elongated Bowl with Slow Close Seat
- 4035 216 Unlined Tank



- ☐ 3067 316 Elongated Bowl
- 4035 516 Lined Tank


Nominal Dimensions: 794 x 432 x 765mm (31-1/4" x 17" x 30-1/8")


Compliance Certifications -Meets or Exceeds the Following Specifications:

- ASME A112.19.2M (and 19.6M)
- · CAN/CSA B45 series

To Be Specified

- Colour: 020 White
- Supply with stop:






NOTES:
THIS TOILET IS DESIGNED TO ROUGH-IN AT A MINIMUM DIMENSION OF 305MM (12")
FROM FINISHED WALL TO C/L OF OUTLET.
SUPPLY NOT INCLUDED WITH FIXTURE AND MUST BE ORDERED SEPARATELY.
* DIMENSION SHOWN FOR LOCATION OF SUPPLY IS SUGGESTED.
FOR ADDITIONAL INFORMATION REFER TO INSTALLATION INSTRUCTIONS SUPPLIED.
IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerance established by ANSI Standard A112.19.2
These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

UPGRADED VALUE ADDED FEATURES AT NO EXTRA CHARGE

TOI-284	SHA	
•	© 2008 American Standard	08/0



MOEN

There is more than 1 version of this model. Page down to identify the version you have.

DESCRIPTION

- Metal construction with various finishes identified by suffix Flexible supplies with 3/8" compression fittings
- Includes metal or 50/50 pop-up type waste assembly where noted

OPERATION

- Pivot action lever style handle
- Temperature controlled through 100° degree arc of handle travel

FLOW

- · Water usage is limited to these maximum flow rates as indicated by the corresponding product markings
- ° 1.2 gpm max (4.5L/min) at 60 psi ° 1.5 gpm max (5.7L/min) at 60 psi CARTRIDGE

- 1255™ Duralast™ cartridge Nonmetallic/nonferrous and stainless steel material

- Third party certified to WaterSense®, ASME A112.18.1/CSA B125.1 and all applicable requirements referenced therein
- Certified to NSF 61/9 & 372
- Products marked with 1.2 gpm are compliant with California water efficiency regulations
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act

 ADA

 for lever handle

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects
- to the original consumer purchaser 5 year warranty if used in commercial installations

Specifications



CHATEAU® Single-Handle Lavatory Faucet

with Metal Waste Assembly

Model: L4625 series L4631BC

Bulk Packed (12 per carton):


L64624 series

with 50/50 Waste Assembly Bulk Packed (12 per carton): L64625 series


Less Waste Bulk Packed (12 per carton):

L64600 series

NOTE: THIS FAUCET IS DESIGNED TO BE INSTALLED THRU 3-1" DIA. HOLES, 2" ON CENTER

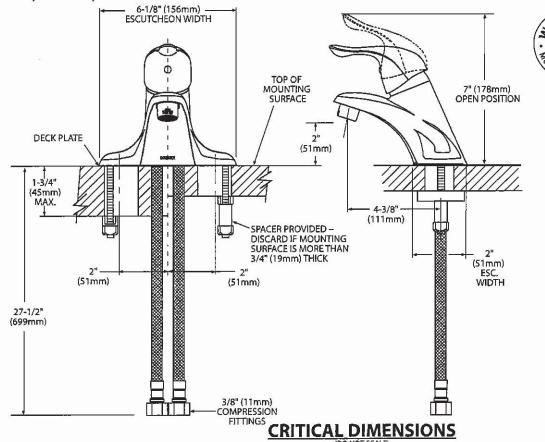

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN www.moen.com





Buy it for looks. Buy it for life.®

There is more than 1 version of this model. Page down to identify the version you have.

- Metal construction with various finishes identified by suffix
- Includes non-metalic showerhead, arm, flange and non-metalic diverter tub spout

OPERATION

- Handle operates counterclockwise through a 270° arc with off at 6 o'clock and maximum hot at the 9 o'clock position. Shut off in clockwise direction
- Adjustable temperature limit stop to control maximum hot water temperature
- Pressure balancing mechanism maintains selected discharge temperature to $\pm 3^{\circ}$

- Showerhead is limited to 2.5 gpm (9.5 L/min) at 80 psi EP suffix models are limited to 1.75 gpm (6.6 L/min) at 80 psi
- NH suffix models contain no showerhead

CARTRIDGE

- 1222 cartridge design Accommodates back to back installations
- Nonmetallic/nonferrous and stainless steel material

STANDARDS

- Third party certified to meet ASME A112.18.1/CSA B125.1 and all applicable requirements referenced therein
- EP suffix models are third party certified to WaterSense®
- ADA (for lever handle

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects
- to the original consumer purchaser 5 year warranty if used in commercial installations

Specifications







CHATEAU' POSI-TEMP' Single-Handle Tub/Shower Trim Kit

Models: TL181 series - valve trim only (Bulk Packed 12 per carton) TL182 series - shower trim only (Bulk Packed 12 per carton) TL183 series - tub/shower trim


(Bulk Packed 12 per carton)

Valves: 62300 series 2500 series

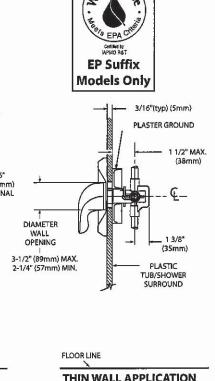

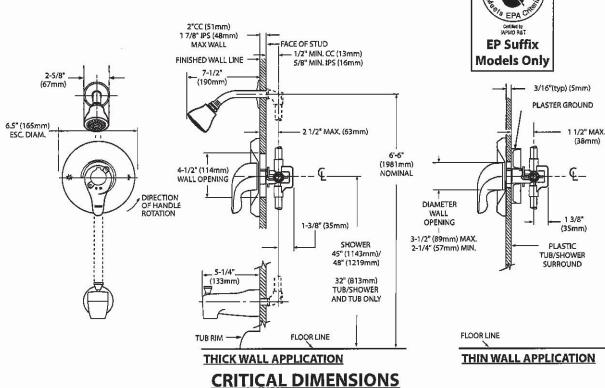

(DO NOT SCALE)



MOEN[®]

Specifications

DESCRIPTION

Metal construction with various finishes identified by suffix

OPERATION


- · Lever style handles with hot and cold color indicator
- Rotate hot side handle counterclockwise to open (clockwise to close) and the cold side handle (clockwise to open) and (counterclockwise to close)

STANDARDS

- Third party certified to: ASME A112.18.1/CSA B-125.1, and all applicable requirements referenced therein
- ADA 🔥 for lever handles

WARRANTY


- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
- 10 year limited warranty when used in a multi-family installation
- 5 year limited warranty when used in a commercial installation
 Visit www.moen.com/support for complete details and limitations




CHATEAU® Two-Handle Garden Tub Trim

Models: T994 series

Valves: 4792, 4793, 4794, 4796, 4797, 4798

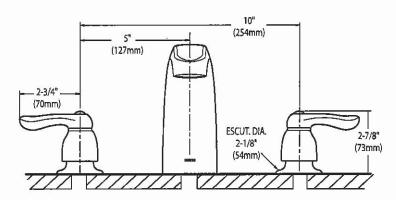




CRITICAL DIMENSIONS
(DO NOT SCALE)






WMH31017H OVER-THE-RANGE MICROWAVE



DISHWASHER-SAFE TURNTABLE PLATE



Clean up spills on the turntable by simply putting it in the dishwasher.

2-SPEED, 300 CFM MOTOR CLASS^{*}



Match the right amount of ventilation to the dish being prepared and quickly get rid of cooking odors with two different fan speed settings.

MICROWAVE PRESETS



Get just the right amount of heat and time, whether you're cooking or defrosting, with specific preset options.

OTHER FEATURES

- Add 30 seconds option
- Electronic touch controls
- Adjustable cooktop
 lighting

7HS
y
The state of the s



^{*}Performance varies based on installation. ®/™ ©2018 Whiripool. All rights reserved. 1/18. WC170107A





VENTING DESIGN SPECIFICATIONS

This section is intended for architectural designer and builder/ contractor reference only.


- Vent materials needed for installation are not provided with microwave hood combination.
- We do not recommend using a flexible metal vent.
- To avoid possible product damage, be sure to vent air outside, unless using recirculation installation. Do not vent exhaust air into concealed spaces, such as spaces within walls or ceilings, attics, crawl spaces, or garages.

For optimal venting installation, we recommend:

- Using roof or wall caps that have backdraft dampers
- Using a rigid metal vent
- Using the most direct route by minimizing the length of the vent and number of elbows to provide efficient performance
- Using uniformly sized vents
- Using duct tape to seal all joints in the vent system
- Using caulking compound to seal exterior wall or roof opening around cap
- Not installing 2 elbows together for optimal hood performance


If venting through the wall, be sure that there is proper clearance within the wall for the damper to open fully.

If venting through the roof, and rectangular-to-round transition is used, be sure there are at least 3" (7.6 cm) of clearance between the top of the microwave oven and the transition piece. See "Rectangular-to-Round Transition" illustration.



Rectangular-to-Round Transition


NOTE: The minimum 3" (7.6 cm) clearance must exist between the top of the microwave oven and the rectangular to round transition piece so that the damper can open freely and fully.



- A. Roof cap
- B. 6" (15.2 cm) min. diameter round vent
- C. Elbow (for wall venting only)
- D. Wall cap
- 31/4" x 10" to 6" (8.3 x 25.4 cm to 15.2 cm) rectangular to round transition piece E.
- F. Vent extension piece, at least 3" (7.6 cm) high

Recommended Standard Fittings

The following length equivalents are for use when figuring vent length. See the examples in "Recommended Vent Length".



- A. Rectangular-to-round transition piece: 3½" x 10" to 6" = 5 ft (8.3 x 25.4 cm to 15.2 cm = 1.5 m)
- B. Roof cap: 3¼" x 10" = 24 ft (8.3 x 25.4 cm = 7.3 m) C. 90° elbow: 3¼" x 10" = 25 ft (8.3 x 25.4 cm = 7.6 m)
- D. 90° elbow: 6" = 10 ft (15.2 cm = 3 m)
- E. Wall cap: $3\frac{1}{4}$ " x 10" = 40 ft (8.3 x 25.4 cm = 12.2 m)
- 45° elbow: 6" = 5 ft (15.2 cm = 1.5 m)
- G. 90° flat elbow; $3\frac{1}{4}$ " x 10" = 10 ft (8.3 x 25.4 cm = 3 m)





Recommended Vent Length


A 31/4" \times 10" (8.3 \times 25.4 cm) rectangular or 6" (15.2 cm) round vent should be used.

The total length of the vent system including straight vent, elbow(s), transitions, and wall or roof caps must not exceed the equivalent of 140 ft (42.7 m) for either type of vent. See the "Recommended Standard Fittings" section for equivalent lengths.

For best performance, use no more than three 90° elbows.


To calculate the length of the system you need, add the equivalent lengths of each vent piece used in the system. See the following examples:

31/4" x 10" (8.3 x 25.4 cm) vent system = 73 ft (22.2 m) total



- A. One 31/4" x 10" (8.3 x 25.4 cm) 90° elbow = 25 ft (7.6 m)
- B. 1 wall cap = 40 ft (12.2 m)
- C. 2 ft (0.6 m) + 6 ft (1.8 m) straight = 8 ft (2.4 m)


6" (15.2 cm) vent system = 73 ft (22.2 m) total




- A. Two 90° elbows = 20 ft (6.1 m)
- B. 1 wall cap = 40 ft (12.2 m)
- C. 1 rectangular-to-round transition piece = 5 ft (1.5 m)
- D. 2 ft (0.6 m) + 6 ft (1.8 m) straight = 8 ft (2.4 m)

If the existing vent is round, a rectangular-to-round transition piece must be used. In addition, a rectangular 3" (7.6 cm) extension vent between the damper assembly and rectangular-to-round transition piece must be installed to keep the damper from sticking.





Whirtpool 21 cu. ft. Top-Freezer Refrigerator WRT541SZD



Fingerprint-Resistant Stainless WRT541SZDZ

Also available in:

White	WRT541SZDW
Black	WRT541SZDB
Monochromatic Stainless Steel	WRT541SZDM

Key Features & Benefits	

Stainless Steel

Frameless Glass Shelves

Store more items on wall-to-wall shelves for greater storage flexibility.


FlexI-Slide™ Bin

Make space for tall items with the bin that quickly and easily moves side to side.

Humidity-Controlled Crispers

Store fruits and vegetables in their ideal environment.



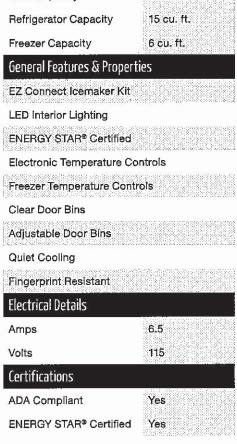

Technical Details	
Refrigerator Type	Top-Freezer
Number of Doors	2
Number of Interior Refrigerator Shelves	3
Number of Refrigerator Door Bins	1 Fixed, 4 Adjustable
Number of Interior Freezer Shelves	1
Number of Freezer Door Bins	2 Fixed
Lighting Type	LED
Ice Maker	Optional
Ice Maker Location	Freezer
Dispenser Type	N/A
Dimensions	
Product Dimensions (H x W x D)	66-1/4" x 32-3/4" x 34"
Depth with Door Open 90°	62-1/4"

Dimensions	
Product Dimensions (H x W x D)	66-1/4" x 32-3/4" x 34"
Depth with Door Open 90°	62-1/4"
Cutout Dimensions	Allow extra 1/2" on sides and top Allow extra 1" on rear


Reference Material

Dimension Gulde

Use & Care Guide

Energy Guide

Warranty



NOTE: Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

®/™ © 2020. All rights reserved, Printed in the U.S.A. D200052XXC, WRT541SZDSPECSHEETV01.







Top Mount Refrigerator

PRODUCT MODEL NUMBERS

WRT311FZD WRT511SZD WRT541SZD

Electrical: A 115-volt, 60-Hz, AC-only, 15or 20-amp fused, grounded electrical supply is required. It is recommended that a separate circuit serving only your refrigerator be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.


NOTE: Before performing any type of installation, cleaning, or removing a light bulb, turn the control (Thermostat, Refrigerator or Freezer Control depending on the model) to OFF and then disconnect the refrigerator from the electrical source. When you are finished, reconnect the refrigerator to the electrical source and reset the control (Thermostat, Refrigerator or Freezer Control depending on the model) to the desired setting. See "Using the Controls."

Water: A cold water supply with water pressure between 30 and 120 psi (207 and 827 kPa) is required to operate ice maker and water dispenser. If you have questions about your water pressure, call a licensed, qualified plumber.

IMPORTANT: The pressure of the water coming out of a reverse osmosis system going to the water inlet valve of the refrigerator needs to be between 30 and 120 psi (207 and 827 kPa).


Reverse Osmosis Water Supply: If a reverse osmosis water filtration system is connected to your cold water supply, the water pressure to the reverse osmosis system needs to be a minimum of 40 to 60 psi (276 to 414 kPa).

PRODUCT DIMENSIONS

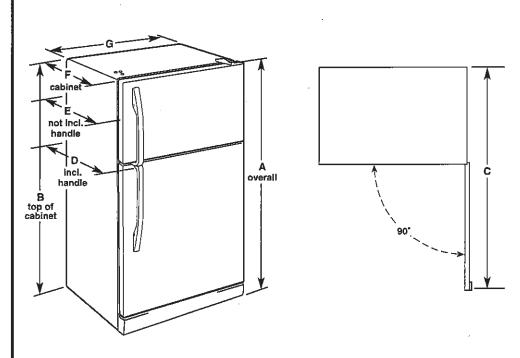

Model Number	Model Size	Reversible Door	Height - Overall "A"	Height - Top of Cabinet "B"	Depth - Door Open 90° "C"	Depth - With Handles "D"	Depth - Without Handles "E"	Depth - Cabinet Only "F"	Width - Cabinet "G"
WRT311FZD	20.5 cu. ft.	Yes	66¼" (168,3 cm)	65½" (166.4 cm)	62¼" (158.1 cm)	32%" (83.5 cm)	305%" (77.8 cm)	28½" (72.4 cm)	32¾" (83.2 cm)
WRT511SZD WRT541SZD	21.3 cu. ft.	Yes	66¼" (168.3 cm)	65½" (166.4 cm)	62¼" (158.1 cm)	34" (86.4 cm)	32½" (82.3 cm)	28½* (72.4 cm)	32¾° (83.2 cm)

LOCATION REQUIREMENTS




To ensure proper ventilation for your refrigerator, allow for a %" (1.25 cm) space on each and between overhead cabinets and refrigerator top. Allow at least 1" (2.5 cm) between back of cabinet and the wall. If your refrigerator has an ice maker, make sure you leave some extra space at the back for the water line connections.


If you are installing your refrigerator next to a fixed wall, leave 2" (5 cm) minimum on the hinge side (depending on your model) to allow for the door to swing open.


NOTE: This refrigerator is intended for use in a location where the temperature ranges from a minimum of 55°F (13°C) to a maximum of 110°F (43°C). The preferred room temperature range for optimum performance, which reduces electricity usage and provides superior cooling, is between 60°F (15°C) and 90°F (32°C). It is recommended that you do not install the refrigerator near a heat source, such as an oven or radiator.


33 of 46

Refrigerator Door Swing Verification









When facing the refrigerator

RIGHT HAND DOOR OPENING

INITIAL

- Hinges on right
- · Handle on left


LEFT HAND DOOR OPENING

- Hinges on left
- Handle on right


MITIAL

GARAGE LEFT

Prease check and INITIAL your door swing selection.







Available Finishes/Colours



YWFE515S0JB Black



YWFE515S0JS Stainless Steel

YWFE515S0JW

Manuals & Literature:



Installation Instructions Use and Care





5.3 cu. ft. Whirlpool® electric range with Frozen Bake™ technology

YWFE515S0JS

This Whirlpool® electric range with a dual element stove top helps you get dinner to the table. Skip preheating for favorites like pizza with Frozen Bake™ technology. This self cleaning oven also prevents cooked food from getting cold with the Keep Warm setting. Closed door broiling helps keep the kitchen comfortable.

FlexHeat™ Dual Radiant Element

sujons/rearrings and the conflict equipment of the

Get two elements in one with a 6" inner ring that's great for smaller pots and pans and a 9" expandable outer ring that makes room for larger cookware.

Frozen Bake^{ra} technology Skip preheating and cook frozen favorites like pizza in fewer steps with preprogrammed settings that automatically adjust cooking times for you.

Keep dishes from getting cold with this setting that delivers low heat to the oven.

Closed Door Brolling
Maintain the optimal cooking temperature for food while still keeping the kitchen comfortable and cool using this broiling temperature management system that helps prevent overheating.

Pimensiana) ==		ាភ ់ ឡើល្រកការការការការការការការការការការការការកា
Depth	27 3/4	Handle Type
Height	36	
Width	29 7/8	
		A FORMA

	Handle Type	Reach-Through Handle
123	***************************************	
	ifone, a	
	Hot Surface Indicator Light	Yes

Range Type	Freestanding
Fuel Type	Electric
Size (IN,inches)	30
·	

Ederoli 🗼 🖖	je og og de
Door Removable	Yes
Drawer Type	Storage Drawer
Oven Door	Glass Window
Oven Window Size	Extra Large
Handle Color	Stainless Steel
Handle Material	Metal


Calving a	Heating Element On Indicator Light:	
diam'r.	Power On Indicator Light	No
	Griddle	NA
Sales Consolin	Automatic Convection Conversion Temperature Adjust	No
A PROPERTY AND A PROP	Power Outage Compatible	No





WHIRLPOOL 30" (76.0 CM) FREESTANDING ELECTRIC RANGES Model YWFE515S0JS

Product Dimensions



- A. 273/4" (70.5 cm) max. depth with handle
- B. 46⁷/a* (119.1 cm) overall height (max.) with leveling legs screwed all the way in*
- C. 36" (91.4 cm) cooktop height (max.) with leveling legs screwed all the way in*
 D. 297/s" (75.9 cm) width
- E. 255/16* (64.3 cm) depth back of range to front of cooktop**
- F. Model/serial/rating plate (located on the frame behind a top comer of the door or either side of the drawer)

IMPORTANT: Range must be level after installation. Follow the instructions in the "Level Range" section. Using the cooktop as a reference for leveling the range is not recommended.


- *Range can be raised approximately 1" (2.5 cm) by adjusting the leveling legs.
- **Front of door and drawer may extend further forward depending on styling.

Cabinet Dimensions

Cabinet opening dimensions shown are for 25" (64.0 cm) countertop depth, 24" (61.0 cm) base cabinet depth and 36" (91.4 cm) countertop height.

IMPORTANT: If installing a range hood or microwave hood combination above the cooking surface, follow the range hood or microwave hood combination installation instructions for dimensional clearances above the cooktop surface.

A freestanding range may be installed next to combustible walls with zero clearance.



- A. 13" (33.0 cm) max. upper cabinet depth
- B. 30" (76.2 cm) min. opening width
- C. For minimum clearance to top of cooktop, see NOTE*
- D. 30" (76.2 cm) min. opening width
- E. Outlet 8" (20.3 cm) to 22" (55.9 cm) from either cabinet, 7" (17.8 cm) max. from floor.
- F. Cabinet door or hinges should not extend into the cutout.

*NOTE: 24" (61.0 cm) minimum when bottom of wood or metal cabinet is covered by not less than 1/4" (6.4 mm) flame retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015" (0.4 mm) stainless steel, 0.024" (0.6 mm) aluminum or 0.020" (0.5 mm) copper.

30" (76.2 cm) minimum clearance between the top of the cooking platform and the bottom of an uncovered wood or metal cabinet.



WHIRLPOOL 30" (76.0 CM) FREESTANDING ELECTRIC RANGES Model YWFE515S0JS

Electrical Requirements - Canada Only



Electrical Shock Hazard

Electrically ground range.

Failure to do so can result in death, fire, or electrical shock.

If codes permit and a separate ground wire is used, it is recommended that a qualified electrical installer determine that the ground path is adequate and wire gauge are in accordance

Be sure that the electrical connection and wire size are adequate and in conformance with CSA Standard C22.1, Canadian Electrical Code, Part 1 - latest edition, and all local codes and ordinances.

A copy of the above code standards can be obtained from:

Canadian Standards Association 178 Rexdale Blvd. Toronto, ON M9W 1R3 CANADA

Check with a qualified electrical installer if you are not sure the range is properly grounded.

Range Rating*		Specified Rating of Power Supply Cord Kit and Circuit Protection
100/0401/	100/000)/	4
120/240 V	120/208 V	Amps

- *The NEC calculated load is less than the total connected load listed on the model/serial/rating plate.
- **If connecting to a 50 A circuit, use a 50 A rated cord with kit. For 50 A rated cord kits, use kits that specify use with a nominal 13/8" (3.5 cm) diameter connection opening.
- A time-delay fuse or circuit breaker is recommended.
- This range is equipped with a CSA International Certified Power Cord intended to be plugged into a standard 14-50R wall receptacle. Be sure the wall receptacle is within reach of range's final location.



Do not use an extension cord.

INSTALLATION INSTRUCTIONS


Unpack Range

WARNING

Excessive Weight Hazard

Use two or more people to move and install range. Failure to do so can result in back or other injury.


- 1. Remove shipping materials, tape and film from range.
- 2. Remove oven racks and parts package from inside oven.
- 3. Do not remove the shipping base at this time.



A. Shipping base

4. On Ranges Equipped with a Storage Drawer:


Remove the storage drawer. See the "Storage Drawer" section. Use a 1/4" (6.4 mm) drive ratchet to lower the rear leveling legs one-half turn. Use a wrench or pliers to lower front leveling legs one-half turn.



- A. 1/4" (6.4 mm) drive ratchet
 - C. Wrench or pliers
- B. Rear leveling leg
- D. Front leveling leg

On Ranges Equipped with a Warming Drawer or Premium Storage Drawer:

On ranges equipped with a warming drawer or premium storage drawer, the rear legs cannot be accessed by removing the warming drawer or premium storage drawer. It will be necessary to adjust the rear legs from outside the range. Use wrench or pliers to lower the front and rear leveling legs one half turn.



- Rear leveling leg
- B. Wrench or pliers
- C. Front leveling lea

WHIRLPOOL 30" (76.0 CM) FREESTANDING ELECTRIC RANGES Model YWFE515S0JS

Install Anti-Tip Bracket

AWARNING



Tip Over Hazard

A child or adult can tip the range and be killed.

Install anti-tip bracket to floor or wall per installation


Slide range back so rear range foot is engaged in the slot of the anti-tip bracket.

Re-engage anti-tip bracket if range is moved.

Do not operate range without anti-tlp bracket installed and engaged.

Failure to follow these instructions can result in death or serious burns to children and adults.


- Remove the anti-tip bracket from where it is taped inside the storage drawer or warming drawer.
- 2. Determine which mounting method to use: floor or wall. If you have a stone or masonry floor, you can use the wall mounting method. If you are installing the range in a mobile home, you must secure the range to the floor.
- Determine and mark centerline of the cutout space. The mounting can be installed on either the left-side or right-side of the cutout. Position mounting bracket against the wall in the cutout so that the V-notch of the bracket is 12⁹/16" (31.9 cm) from centerline as shown.




A. 129/16" (31.9 cm) B. Bracket V-notch

 Drill two 1/8" (3 mm) holes that correspond to the bracket holes of the determined mounting method. See the following illustrations.

Floor Mounting








Rear position

Front position

Diagonal (2 options)

Wall Mounting



- 5. Using the Phillips screwdriver, mount anti-tip bracket to the wall or floor with the two #12 x $1^5/a^n$ (4.1 cm) screws provided.
- Move range close enough to opening to allow for final electrical connections. Remove shipping base, cardboard or hardboard from under range.
- 7. Move range into its final location, making sure rear leveling leg slides into anti-tip bracket.



8. Move range forward onto shipping base, cardboard or hardboard to continue installing the range using the following installation instructions.

Project: Wallaceton Unit: 3183A-4, Phase: 3

Model: 20-1606 B The Grassfield

38 of 46





Stainless Steel

Also available in:

White	WDF330PAHW
Black	WDF330PAHR

Capacity			
Total Place Settings	13		
General Features & Propertion	es		
Heavy Cycle			
High Temperature Wash Op	tion		
Heated Dry Option			
ENERGY STAR® Certified	ENERGY STAR® Certified		
Industry's Best Selling Dish	washer Brand [†]		
Designed, Engineered and Assembled in U.S.A. with American Pride Electrical Details			
		Amps	10
Volts	120		
Hz	60		
Certifications			
ENERGY STAR® Certified	Yes		

Technical Details	
Dishwasher Type	Built-in
Control Location	Front
Control Type	Push Button
Number of Wash Cycles	3
Number of Options	4
dBA	55
Number of Racks	2
Tub Material	Plastic
Wash System	Filter
Wash System Type	Removable Filter
Number of Wash Arms	2
Dimensions	
Product Dimensions (H x W x D)	34-1/2" x 23-7/8" x 24-1/2"
Depth with Door Open 90°	49-1/2"
Deference Metaclel	

Reference Material

Dimension Guide

Install Guide

Use & Care Guide

Energy Guide

Warranty

Key Features & Benefits

1-Hour Wash Cycle


Clean dishes in half the time so your plates, pans and glasses are thoroughly cleaned up and taken care of in just an hour.*

Soil Sensor

Determines how dirty dishes are and adjusts the Normal cycle as needed to make sure dishes come out clean.

Normal Cycle

Use for normal amounts of food soil to clean up leftover messes from your day-to-day meals.



^{*}Per IEC standards. **Compared to Normal cycle with lightly soiled loads. †Based on 12-month average of sales. TraQline 2018. NOTE: Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

®/TM © 2020. All rights reserved. Printed in the U.S.A. D200052XXA. WDF330PAHSPECSHEETV01.

Project: Wallaceton Unit: 3183A-4, Phase: 3

Model: 20-1606 B The Grassfield

39 of 46




PRODUCT MODEL NUMBERS

WDF110PAB	WDF320PAD	WDT710PAH
WDF111PAB	WDF330PAH	WDT720PAD
WDF120PAF	WDF331PAH	WDT730PAH
WDF121PAF	WDF520PAD	WDT735PAG
WDF130PAH	WDF540PAD	WDT735PAH
WDF131PAH	WDF545PAF	

DRAIN REQUIREMENTS

- A new drain hose is supplied with your dishwasher. If drain hose is not long enough, use a new drain hose with a maximum length of 12 ft (3.7 m) that meets all current AHAM/IAPMO test standards, is resistant to heat and detergent, and fits the 1" (25 mm) drain connector of the dishwasher. See the "Tools and Parts" section at the front of the guide for part details and orders.
- Make sure to connect drain hose to waste tee or disposer inlet above drain trap in house plumbing and 20" (508 mm) minimum above the floor. It is recommended that the drain hose either be looped up and securely fastened to the underside of the counter or be connected to an air gap.
- Make sure to use an air gap if the drain hose is connected to house plumbing lower than 20" (508 mm) above subfloor or floor.

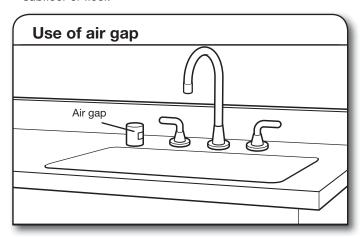

- If required, the air gap should be installed in accordance with the air gap installation instructions. When you are connecting the air gap, a rubber hose (not provided) will be needed to connect to the waste tee or disposer inlet.
- Use 1/2" minimum I.D. drain line fittings.

WATER SUPPLY REQUIREMENTS

- This dishwasher has a water heating feature and also requires a connection to a hot water supply line.
- A hot water line with 20 to 120 psi (138 to 862 kPa) water pressure can be verified by a licensed plumber.
- 120°F (49°C) water at dishwasher

Undercounter Dishwasher

■ ³/8" O.D. copper tubing with compression fitting or flexible braided water supply line. See the "Tools and Parts" section at the front of the guide for part details and orders.

NOTE: 1/2" minimum plastic tubing is not recommended.

- A 90° elbow with ³/₄" hose connection with rubber washer. See the "Tools and Parts" section at the front of the guide for part details and orders.
- Do not solder within 6" (152 mm) of the water inlet valve.
- If installed in new construction, make sure the house water supply lines have been flushed prior to connecting the dishwasher to remove any debris that may exist in the supply line.

NOTE: If replacing an existing dishwasher, it is recommended to install a new water line (see the "Tools and Parts" section at the front of the guide for part details) and drain hose (supplied) with the new dishwasher.

ELECTRICAL REQUIREMENTS

You Must Have:


- 120-volt, 60 Hz, AC-only, 15- or 20-amp, fused electrical supply
- Copper wire only
- A maximum of 2 field wiring supply conductors (12 AWG largest size) plus 1 grounding conductor are permitted in the terminal box.

We Recommend:

- A time-delay fuse or circuit breaker
- A separate circuit

If Connecting Dishwasher with a Power Cord:

- Use a UL Listed power cord kit marked for use with dishwasher. See the "Tools and Parts" section at the front of the guide for part details and orders.
- Plug into a grounded 3 prong outlet. Outlet must meet all local codes and ordinances.





If Connecting Dishwasher with Direct Wiring:

- Use flexible, armored, or nonmetallic sheathed copper wire with grounding wire that meets the wiring requirements for your home and local codes and ordinances.
- Use a UL Listed/CSA Approved metallic strain relief.

Project: Wallaceton Unit: 3183A-4, Phase: 3

Model: 20-1606 B The Grassfield

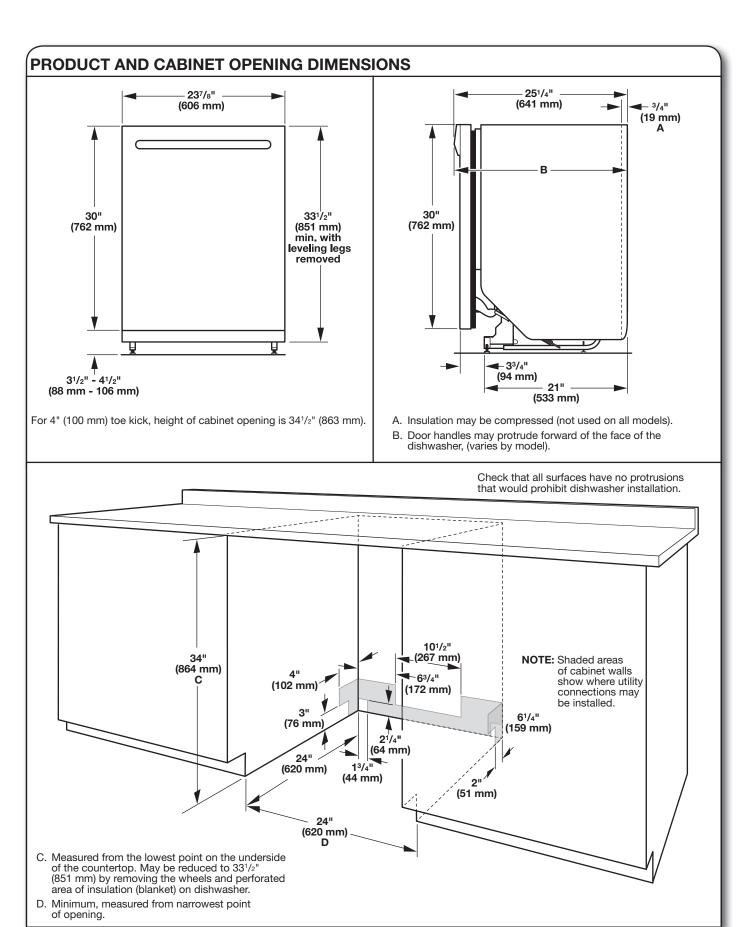






Installation Instructions Instrucciones de instalación Instructions d'installation

Stack Kit

Juego para lavadora y secadora

Enemble superposé

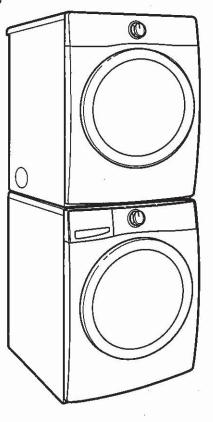

Kit Number W10869845 Número de juego W10869845 Ensemble numéro W10869845

For use only with front-load washers and dryers Para uso sólo con lavadoras y secadoras de carga frontal Pour utilisation avec laveuses et sécheuses à chargement par l'avant seulement

> If you have any problems or questions, visit us at www.whirlpool.com Si tiene cualquier problema o duda, visitenos en www.whirlpool.com Pour tout problème ou toute question, consulter www.whirlpool.ca

W10895535A




Table of Contents

STACK KIT SAFETY	. 2
INSTALLATION REQUIREMENTS	
Tools and Parts	2
Location Requirements	3
Uninstall Washer and Dryer	4
If Your Washer or Dryer	
Is Still in Its Packaging	4
INSTALLATION INSTRUCTIONS	5
Complete Installation	6

Índice

SEGURIDAD DEL JUEGO PARA LAVADORA Y	
SECADORA SUPERPUESTAS	7
REQUISITOS DE INSTALACIÓN	
Herramientas y piezas	. 7
Requisitos de ubicación	. 8
Como desinstalar la lavadora	
y la secadora	. 9
Si su lavadora o secadora	
está aún en su empaque	. 9
INSTRUCCIONES	
DE INSTALACIÓN	10
Complete la instalación	11

Table des matières

SÉCURITÉ DE L'ENSEMBLE	
SUPERPOSÉ :	12
EXIGENCES D'INSTALLATION 1	12
Outillage et pièces	12
Exigences d'emplacement	13
Désinstallation de la laveuse	
et de la sécheuse	14
Si la laveuse ou la sécheuse	
est encore dans son emballage 1	14
INSTRUCTIONS	
D'INSTALLATION 1	15
Achever l'installation1	16

STACK KIT SAFETY

Your safety and the safety of others are very important.

We have provided many important safety messages in this manual and on your appliance. Always read and obey all safety messages.



This is the safety alert symbol.

This symbol alerts you to potential hazards that can kill or hurt you and others.

All safety messages will follow the safety alert symbol and either the word "DANGER" or "WARNING." These words mean:

ADANGER

You can be killed or seriously injured if you don't immediately follow instructions.

AWARNING

You can be killed or seriously injured if you don't follow instructions.


All safety messages will tell you what the potential hazard is, tell you how to reduce the chance of injury, and tell you what can happen if the instructions are not followed.

INSTALLATION REQUIREMENTS


TOOLS AND PARTS

Gather the required tools and parts before starting installation.


Tools needed:




#2 Phillips screwdriver




Adjustable wrench that opens to 2" (51 mm)



Pliers or slip-joint pliers (for drain and inlet hoses)



Level




Bucket




Tape measure


Parts supplied:









Plastic clips (2)








Pan-head screws (4)

LOCATION REQUIREMENTS

Recessed Area and Closet Installation Instructions

IMPORTANT: The stacked washer/dryer can be installed in an enclosure. Check the locations of the water supply faucets, grounded electrical outlets, and gas supply line connection (gas dryer only). Depending on your application, longer washer fill hoses, longer electric power supply cords, and a longer flexible stainless steel gas connector line than that supplied with the washer/dryer may be needed.



If the water supply faucets, electrical outlets, gas supply line, or power cord need modification, have a qualified plumber, electrician, or gas technician make the changes.

Mobile home - Additional installation requirements

This dryer is suitable for mobile home installations. The installation must conform to the Manufactured Home Construction and Safety Standard, Title 24 CFR, Part 3280 (formerly the Federal Standard for Mobile Home Construction and Safety, Title 24, HUD Part 280) or the Canadian Manufactured Home Standard CAN/CSA-Z240 MH,

Mobile home installations require special parts (listed following), which are available for purchase from your local dealer or service center.

Stacked pair must be securely fastened to the floor.


Parts Needed:

- Mobile Home Installation Kit, Part Number 346764, needs to be purchased to accomplish this. Order 2 kits to enable you to secure both the front and the back of the unit to the floor.
- Metal exhaust system hardware.



Special provisions must be made in mobile homes to introduce outside air into the dryer. The opening (such as a nearby window) should be at least twice as large as the dryer exhaust opening.

The exhaust vent must be securely fastened to a noncombustible portion of the mobile home structure and must not terminate beneath the mobile home. Terminate the exhaust vent outside.



UNINSTALL WASHER AND DRYER

IMPORTANT: If your washer and dryer are already installed, they must be uninstalled.

If you need to uninstall your washer or dryer, see the Installation Instructions that came with your model for tools required.

A WARNING

Excessive Weight Hazard

Use two or more people to move washer or dryer. Failure to do so can result in back or other injury.

Uninstalling Your Washer

- 1. Turn off the hot and cold water faucets.
- 2. Unplug the power supply cord.
- Slowly loosen the fill hoses at the faucets to relieve the water pressure. Use a sponge or towel to absorb the released water.
- Remove the "HOT" and "COLD" fill hoses from the back of the washer. Drain water in the hoses into a bucket.
- Remove the drain hose from the wall drain pipe or utility sink and drain any water in the hose into a bucket.

Uninstalling Your Electric Dryer

- 1. Unplug the power supply cord.
- Pull the dryer away from the wall enough to loosen the vent clamp. Loosen the clamp and gently remove the exhaust vent from the dryer exhaust outlet.

Steam Models Only:

- 3. Turn off water faucet.
- **4.** Disconnect the water inlet hose from faucet, then drain the hose into a bucket.

Uninstalling Your Gas Dryer

- 1. Unplug the power supply cord.
- 2. Turn off the gas supply.
- Pull the dryer away from the wall enough to loosen the vent clamp. Loosen the clamp and gently remove the exhaust vent from the dryer exhaust outlet.
- 4. Disconnect the flexible gas supply line from the dryer. Put a piece of tape over the open ends of the gas line connection fittings.

Steam Models Only:

- 5. Turn off water faucet.
- Disconnect the water inlet hose from faucet, then drain the hose into a bucket.



IF YOUR WASHER OR DRYER IS STILL IN ITS PACKAGING

A WARNING

Excessive Weight Hazard

Use two or more people to move washer or dryer. Failure to do so can result in back or other injury.


Position the packaged washer or dryer close to its final position. Cut the packaging as follows:

- Washer: Cut plastic film along dotted cut line around the base. Remove the packaging. Do not remove the shipping botts
- Dryer: Cut around top and down corners along dotted cut lines. Discard carton top, corner posts, and sides. Leave carton bottom underneath dryer.


INSTALLATION INSTRUCTIONS

A WARNING


Excessive Weight Hazard Use two or more people to move washer or dryer. Failure to do so can result in back or other injury.

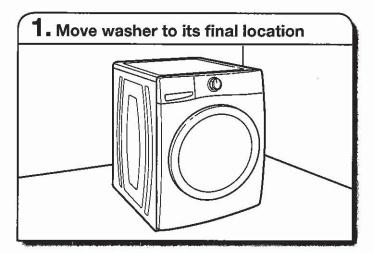


Leave room to work behind washer. Do not remove the shipping bolts.

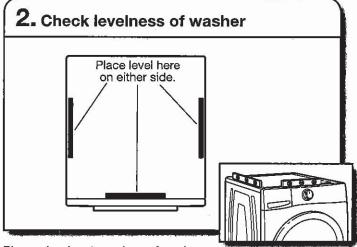


Place a level on top edges of washer, checking each side and front. If not level, tip washer and adjust feet up or down as shown in Installation Instructions, repeating as necessary.









LEVEL




Not Level

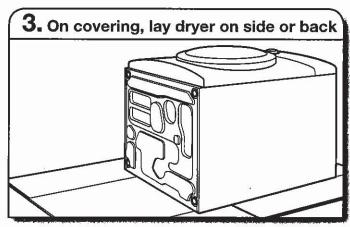


Place a covering, such as cardboard or a blanket, on the floor to avoid damage. Gently lay the dryer down with its side or back on the covering.

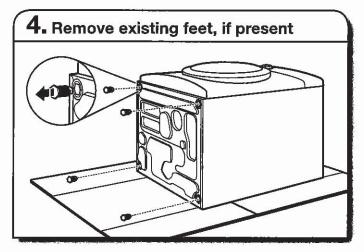

Using a wrench or slip-joint pliers, remove the existing feet if present.

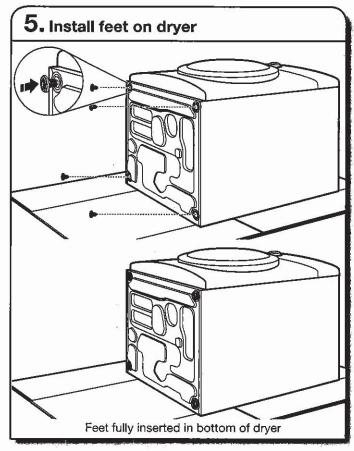


Using a wrench or slip-joint pliers, install the new feet, turning them fully into the bottom of the dryer.

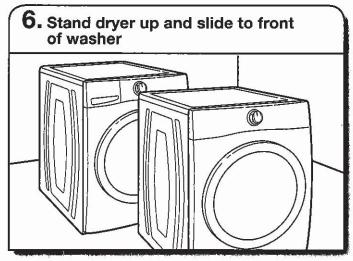


Lift the dryer back to an upright position, keeping it on the cardboard (or carton bottom). Use the cardboard to slide the dryer to the front of the washer to avoid damaging the rubber feet.


46.46

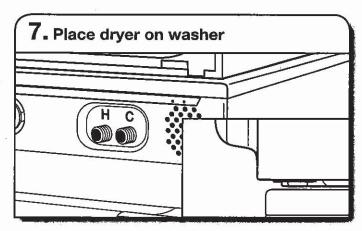

Lift the dryer up and set securely on top of washer. Position dryer to slightly overhang the back of the washer – too much overhang will allow the rear feet to slip off the back of the washer top.

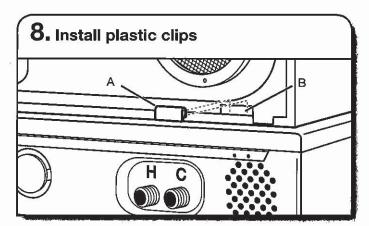

Remove the plastic clips (2), brackets (2), and pan-head screws (4) from the parts bag. Take a plastic clip (A) and, with the flat side facing out, push it down onto the lower edge of the slot (B) in the dryer back. A flat-blade screwdriver may help to open the plastic clip slightly. Repeat on other side.

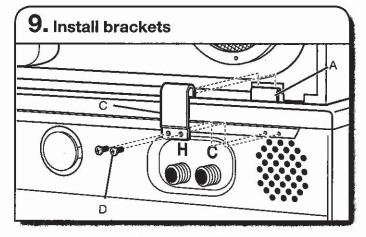

Push the hooked end of the bracket (C) down over the plastic clip (A). A flat-blade screwdriver may help to seat the bracket over the plastic clip. Slide the dryer forward as needed and attach bracket (C) to washer with pan-head screws (D). Tighten screws securely. Repeat on other side.

COMPLETE INSTALLATION

Follow the Installation Instructions that came with your washer and dryer to remove the shipping bolts and complete the installation.