Sales Selection Sheet Checklist

Model: 20-2095 END ALT MOD B The Forb€

1 of 51

PURCHASERS: NAVPREET, SINGH AUJLA/ **Heathwood Homes (Huron) Limited VENDOR: DECK LOT** FINISHED BASEMENT **COLD CELLAR UPGRADED / MODIFIED ELEVATION CORNER UPGRADE REAR UPGRADE CEILING UPGRADE - SMOOTH** MAIN FLOOR SECOND FLOOR **BASEMENT** ADDITIONAL ROUGH-INS 200 AMP SERVICE WET BAR ROUGH-IN **HUMIDIFIER** AIR CONDITIONING(STD) Y GAS ROUGH-IN **STOVE DRYER BBQ** ADDITIONAL FIREPLACE KITCHEN: HOODFAN VENTING SIZE **6 IN ROUND DUCT** 7 IN ROUND DUCT **FULL BASEMENT STAIRS:** Carpet Grade N/A **UPPER BASEMENT STAIRS:** LOWER BASEMENT STAIRS: N/A MAIN STAIRS: All Oak MEDIA STAIRS (if applicable): N/A LOFT STAIRS (if applicable): N/A April 5, 2022 TINA LEFUR April 5, 2022 Signature on file Date **Decor Consultant:** Purchaser: **Date** April 5, 2022 MARILYN ROSEN **Date** Purchaser: **Heathwood Homes (Huron) Limited Date**

Approved

Locked Date:

LOT 3190A-4

NAVPREET, SINGH AUJLA/ Project: Wallaceton Unit: 3190A-4, Phase: 3 Model: 20-2095 END ALT MOD B The Forbes



Locked:

Closed:

Cabinet Colour/Style	9120	VIKING III-GEORGIAN-ORCHID 3DL***STD***
Countertop	9120	Group 2-Quartz-Caesarstone-OCEAN FOAM #6141-3/4 inch with built-up edge ***2***
Countertop Edge	4005	DOUBLE MITRE 1 1/2 INCH ***UPG***
Cabinet Hardware	4005	9677-HARDWARE ***STD***
Island Cabinet Colour/Style	9120	VIKING III-GEORGIAN-ORCHID 3DL***STD***
Island Countertop	9120	Group 2-Quartz-Caesarstone-OCEAN FOAM #6141-3/4 inch with built-up edge ***2***
Backsplash	9120	OD.ON.TPE.02.HEX.MT-ONTARIO HEXAGON MATTE-TAUPE ***2***
Backsplash Grout	9120	Grout-(00) White ***STD***
Backsplash Tile Pattern	3110	HORIZONTAL HEX ***STD***
HoodFan	9393	SCB51930-CYCLONE 30 inch CANOPY CHIMNEY HOODFAN-SS
Appliance	9393	Purchasers have been advised: standard fridge opening is a minimum 37 3/8 x 73 3/8". Ice Waterline Rough-In is included.
Appliance	9393	Standard stove opening is 30" and standard dishwasher opening is 24". Any gas stove will require backsplash or stainless steel backing to avoid fire hazards.
Appliance	9393	Purchasers acknowledge: Heathwood Homes and its contractors will not be responsible for any kitchen cabinet changes due to appliances dimension changes after
Comment		
nen/Breakfast		
Flooring	9393	GE.MD.WHT.1818.MT Madison Series White Matte 18
Floor Tile Grout	9393	Grout-(27) Silver ***STD***
Floor Tile Pattern	3000	STANDARD SQUARE ***STD***

NAVPREET, SINGH AUJLA/ Project: Wallaceton Unit: 3190A-4, Phase: 3 Model: 20-2095 END ALT MOD B The Forbes

Comment			
Foyer		_	
Flooring		3000	GE.MD.WHT.1818.MT Madison Series White Matte 18
Floor Tile Gro	out	3000	Grout-(27) Silver ***STD***
Floor Tile Pa	ttern	3000	STANDARD SQUARE ***STD***
Comment			
Laundry Room			
Flooring		3000	GE.MD.WHT.1818.MT Madison Series White Matte 18
Floor Tile Gr	out	3000	Grout-(27) Silver ***STD***
Floor Tile Pa	ttern	3000	STANDARD SQUARE ***STD***
Comment			
Laundry Room C	pt.		
Cabinet - Up	pers	1111	N/A *****
Cabinet Hardware		1111	N/A *****
Comment			
Mud Room			
Flooring		1111	GE.MD.WHT.1818.MT Madison Series White Matte 18
Page 2 of 10			

NAVPREET, SINGH AUJLA/ Project: Wallaceton Unit: 3190A-4, Phase: 3 Model: 20-2095 END ALT MOD B The Forbes



Floor Tile Grout	1111	Grout-(27) Silver ***STD***
Floor Tile Pattern	3000	STANDARD SQUARE ***STD***
Floor Tile Pattern	5000	STANDARD SQUARE STD
Comment		
Powder Room		
Flooring	3000	GE.MD.WHT.1818.MT Madison Series White Matte 18
Floor Tile Grout	3000	Grout-(27) Silver ***STD***
Floor Tile Pattern	3000	STANDARD SQUARE ***STD***
Plumbing Fixture (Colour)	3000	Plumbing Fixtures-WHITE ***STD***
Comment		
Hall		
Flooring	3000	GE.MD.WHT.1818.MT Madison Series White Matte 18
Grout	3000	Grout-(27) Silver ***STD***
Floor Tile Pattern	3000	STANDARD SQUARE ***STD***
Comment		
Great Room		
Flooring	3000	Red Oak Pearl-Vintage Engineered-BARISTA-3/4 inch x 3 1/4 inch ***STD***
Comment		
Page 3 of 10		

Customer Colours NAVPREET, SINGH AUJLA/ Project: Wallaceton Unit: 3190A-4, Phase: 3 Locked: Model: 20-2095 END ALT MOD B The Forbes Closed: **Upper Hall** Flooring 3000 Red Oak Pearl-Vintage Engineered-BARISTA-3/4 inch x 3 1/4 inch ***UPG*** Comment Finished Basement (Rec) Room/Hall DY 16611-Dynasty Tex-SANDY BEIGE-40 oz Poly***STD*** 3000 Flooring Comment Master Bedroom 3000 DY 16611-Dynasty Tex-SANDY BEIGE-40 oz Flooring Poly***STD** Comment Bedroom 2 DY 16611-Dynasty Tex-SANDY BEIGE-40 oz Poly***STD*** Flooring 3000 Comment Bedroom 3 3000 DY 16611-Dynasty Tex-SANDY BEIGE-40 oz Flooring Poly***STD*** Comment Bedroom 4 Flooring 3000 DY 16611-Dynasty Tex-SANDY BEIGE-40 oz

Poly***STD***

Comment

Page 4 of 10

NAVPREET, SINGH AUJLA/ Project: Wallaceton Unit: 3190A-4, Phase: 3 Model: 20-2095 END ALT MOD B The Forbes



Ensuite 2		
Cabinet Colour/Style	3000	Viking II-GEORGIAN-RAIN CLOUD-3DL ***STD***
Countertop	3000	Group 2-Quartz-Caesarstone-OCEAN FOAM #6141-3/4 inch with built-up edge ***3***
Countertop Edge	4006	GROUP 1 - DOUBLE MITRE 1 1/2 INCH ***2***
Cabinet Hardware	4006	9677-HARDWARE ***STD***
Floor Tile	4006	GE.MD.WHT.1818.MT Madison Series White Matte 18
Floor Tile Grout	4006	Grout-(27) Silver ***STD***
Floor Tile Pattern	3000	STANDARD SQUARE ***STD***
Plumbing Fixture (colour)	3000	Plumbing Fixtures-WHITE ***STD***
Tub Wall Tile	9020	QT.WV.WHT.0810-Weave-White-8 x 10 ***STD***
Tub Wall Tile Grout	9020	Grout-(00) White ***STD***
Tub Wall Tile Pattern	3070	HORIZONTAL STACKED ***STD***
Comment		
Master Ensuite		
Cabinet Colour/Style	3070	Viking II-GEORGIAN-RAIN CLOUD-3DL ***STD***
Countertop	3070	Group 2-Quartz-Caesarstone-OCEAN FOAM #6141-3/4 inch with built-up edge ***3***
Countertop Edge	4006	GROUP 1 - DOUBLE MITRE 1 1/2 INCH ***2***
Cabinet Hardware	4006	9677-HARDWARE ***STD***

NAVPREET, SINGH AUJLA/ Project: Wallaceton Unit: 3190A-4, Phase: 3 Model: 20-2095 END ALT MOD B The Forbes

Floor Tile	4006	GE.MD.WHT.1818.MT Madison Series White Matte 18
Floor Tile Grout	4006	Grout-(27) Silver ***STD***
Floor Tile Pattern	3000	STANDARD SQUARE ***STD***
Shower Floor Tile	8661	OD.ON.SWT.0202.MT.N-Ontario Series Mosaic-Snow White Matte-2 x 2 ***STD***
Shower Floor Tile Grout	8661	Grout-(00) White ***STD***
Shower Floor Tile Pattern	3000	STANDARD SQUARE ***STD***
Shower Wall Tile	9020	QT.WV.WHT.0810-Weave-White-8 x 10 ***STD***
Shower Wall Tile Grout	9020	Grout-(00) White ***STD***
Shower Wall Tile Pattern	3070	HORIZONTAL STACKED ***STD***
Shower Jamb(s) and Sill(s)	3070	Shower Jamb / Sill-Thassos White ***STD***
Plumbing Fixture (colour)	3070	Plumbing Fixtures-WHITE ***STD***
Comment		
Main Bathroom		
Cabinet Colour/Style	3070	Viking II-GEORGIAN-RAIN CLOUD-3DL ***STD***
Countertop	3070	Group 2-Quartz-Caesarstone-OCEAN FOAM #6141-3/4 inch with built-up edge ***3***
Countertop Edge	4006	GROUP 1 - DOUBLE MITRE 1 1/2 INCH ***2***
Cabinet Hardware	4006	9677-HARDWARE ***STD***
Flooring	4006	GE.MD.WHT.1818.MT Madison Series White Matte 18

NAVPREET, SINGH AUJLA/ Project: Wallaceton Unit: 3190A-4, Phase: 3 Model: 20-2095 END ALT MOD B The Forbes

Floor Tile Grout	4006	Grout-(27) Silver ***STD***
Floor Tile Pattern	3000	STANDARD SQUARE ***STD***
Wall Tile	9020	QT.WV.WHT.0810-Weave-White-8 x 10 ***STD***
Wall Tile Grout	9020	Grout-(00) White ***STD***
Main Bathroom Tile Pattern	3070	HORIZONTAL STACKED ***STD***
Diumbing Fixture (Colour)	3070	Plumbing Fixtures-WHITE ***STD***
Plumbing Fixture (Colour)	3070	Flumbling Fixtures-WHITE STD
Comment		
Finished Basement Bathroom		
Cabinet Colour/Style	3070	Viking II-GEORGIAN-RAIN CLOUD-3DL ***STD***
Cabinot Coloan Ctyle	00.0	
Countertop 3070		6698-46-Countertop-PALOMA POLAR ETCHINGS
[55.5]		FINISH-Formica ***STD***
Countertop Edge 1111		N/A *****
. 0		
Cabinet Hardware	1111	9677-HARDWARE ***STD***
Flooring	1111	GE.MD.WHT.1818.MT Madison Series White Matte 18
Floor Tile Grout	1111	Grout-(27) Silver ***STD***
Floor Tile Pattern	3000	STANDARD SQUARE ***STD***
Shower Floor Tile	8661	OD.ON.SWT.0202.MT.N-Ontario Series Mosaic-Snow
Officwer Floor Tile	0001	White Matte-2 x 2 ***STD***
Shower Floor Tile Grout	8661	Grout-(00) White ***STD***
Chowel Floor flic Crout	0001	
Shower Floor Tile Pattern 3000		STANDARD SQUARE ***STD***

NAVPREET, SINGH AUJLA/ Project: Wallaceton Unit: 3190A-4, Phase: 3 Model: 20-2095 END ALT MOD B The Forbes



Locked:

Closed:

Shower Wall Tile	9020	QT.WV.WHT.0810-Weave-White-8 x 10 ***STD***	
Shower Wall Tile Grout	9020	Grout-(00) White ***STD***	
Shower Wall Tile Pattern	3070	HORIZONTAL STACKED ***STD***	
Shower Jamb(s)	3070	Shower Jamb / Sill-Thassos White ***STD***	
Plumbing Fixture (Colour)	3070	Plumbing Fixtures-WHITE ***STD***	
Comment			
Great Room Fireplace			
Туре	8865	Dimplex-Electric Fireplace-PF3033HL ***STD***	
Mantle	8865	NF-17-Paint Grade Mantle- Cabinet (Per Plan)-WHITE ***STD***	PG 23
Surround Opt.	1111	N/A *****	
Disclaimer	1111	Purchasers have been advised: heat from the FP can damage TV above a FP and items placed on mantle.	
Disclaimer	1111	Heathwood and its contractors will not be liable for any damage on items placed/installed above a FP after closing.	
Comment			
Basement Stairs			
Туре	1111	Carpet Grade Stairs ***STD BASEMENT STAIRS***	
Colour	7940	Sambucca STAIN TO COMPLIMENT HARDWOOD AND WILL VARY FROM FLOORING ***99***	
Carpet Runner	1111	N/A *****	
Handrail/Pickets/Post Type	9119	Handrail only on closed walls (one or two sides per building code) ***STD***	
Handrail/Pickets/Post Colours	1729	Carpet Grade-Stain handrail, pickets, stringers, nosing _pos	l
Carpet	1729	DY 16611-Dynasty Tex-SANDY BEIGE-40 oz Poly***STD***	
Page 8 of 10			

NAVPREET, SINGH AUJLA/ Project: Wallaceton Unit: 3190A-4, Phase: 3 Model: 20-2095 END ALT MOD B The Forbes

Page 9 of 10

Custom Stain/Paint	1111	N/A *****
Comment		
Comment		
Basement Stairs Landings (Upper and	d Lo	
Flooring	1111	N/A *****
Comment		
Comment		
Main Stairs		
_		
Туре	1111	Oak Stairs ***STD MAIN STAIRS***
0.15	7040	O
Colour	7940	Sambucca STAIN TO COMPLIMENT HARDWOOD AND WILL VARY FROM FLOORING ***99***
		WILL VAINT I NOW I LOOKING 99
Carpet Runner	1111	N/A *****
Carpet Runner	1111	
Handrail/Pickets/Posts Type	1111	1 5/16 inch Square pickets with 3 1/2" Square/Cap
	L	Post(s)-ALL OAK ***STD***
Handrail/Pickets/Posts Colour	1728	Oak Grade-Stain handrail,oak pickets,stringers,treads,riser
Custom Stain/Paint	1111	N/A *****
Comment		
Comment		
Main Stairs Landing(s) (Lower)		
Flooring	1111	N/A *****
Comment		
Comment		
<u>L</u>		
Throughout		
		
Walls - Paint Colour	1111	22-Wall-WARM GREY ***STD***
Underpad	1111	500 Series-Underpad ***STD***
	4444	
Thresholds	1111	Metal Thresholds ***STD***

NAVPREET, SINGH AUJLA/ Project: Wallaceton Unit: 3190A-4, Phase: 3 Model: 20-2095 END ALT MOD B The Forbes

Switches	s and Plug	1111	Decora	White Switches and Plugs ***	SID***
Trim Siz	e	1111	4 ¼ Bas	eboard and 2 ¾ Casings ***Sī	-D***
Trim - Pa	aint Colour	1111	Trim-WI	HITE ***STD***	
Comme	nt				
Purchaser:	NAVPREET, SINGH	AUJLA	Date	Decor Consultant	Date
Purchaser:			Date	 Wallaceton	 Date Approved

12 of 51 construction summary



Lot: 3190A-4

Model: 20-2095 END ALT MOD B The Forbes

Project/Phase: Wallaceton / 3

Offer Worksheet	THIS IS A DECK LOT COMPLETE WITH A 4 FT. DEEP DECK WITH STAIRS TO GRADE -AMENDMENT DONE JANUARY 3, 2022 Note:
Offer Worksheet	Five Appliances: SS Fridge, Stove, Dishwasher: White Front Loader Washer/Dryer - Townhomes Note:
Offer Worksheet	The Purchaser(s) acknowledge that they have NOT been referred by an existing Heathwood Homeowner and therefor are not entitled to a referral fee under Heathwood Homes Referral program. Note:
Offer Worksheet	Purchasers acknowledge and accept that This floorplan is a Modified version, whereby there is approximately 60sqft less on 3 floors. Note:

DisciplineMS.rpt 13dec21 Page 1 of 7

13 of 51 construction summary



Lot: 3190A-4

Model: 20-2095 END ALT MOD B The Forbes

Project/Phase: Wallaceton / 3

APPLIANCES

Invoice	Qty.	Description
1044	1	- APPLIANCES - CYCLONE 30 INCH WALL MOUNT CHIMNEY HOOD SS - SCB51930
313,484		
05Apr22		
		CABINETRY-delete stove uppers; ELECTRICAL-delete std range hood; HEATING/AIR CONDITIONING-Duct
		change to 6 in

CABINETRY

Invoice	Qty.	Description
1044 313,484 05Apr22	1	- APPLIANCES - CYCLONE 30 INCH WALL MOUNT CHIMNEY HOOD SS - SCB51930
**		CABINETRY-delete stove uppers; ELECTRICAL-delete std range hood; HEATING/AIR CONDITIONING-Duct change to 6 in
1044 313,652	1	KITCHEN - 05H-66cm deep fridge enclosure (counter depth) with no walls ([2] 66cm deep gables and [1] 66cm deep cabinet) (This is not a zero clearance enclosure. Standard heights and widths will be used.) Viking
05Apr22		SKETCH # 3 DRYWAL-Notify; FRAMING-Modify Bulkhead; PAINTING-Notify
1044 313,768	1	KITCHEN - 11A-Upper angle corner per unit Viking
05Apr22		SKETCH # 3 FRAMING-Notify; DRYWAL-Notify; PAINTING-Notify
1044 314,040	1	KITCHEN - 30H-Wall cabinet with shelf for microwave (finished interior) (opening 24 InchW x 13 3/4 InchH x 17 InchD) Viking
05Apr22		SKETCH # 3
1044 311,215	1	MAIN BATHROOM - GRANITE - COUNTERTOP WITH 4 INCH BACKSPLASH - 3/4 INCH GROUP 2 WITH MITRE EDGE - MAIN BATHROOM - UPG
05Apr22 **		CABINETRY-delete std countertop; GRANITE-see upgraded single hole faucet and undermount sink
1044 311,213	1	ENSUITE 2 - GRANITE - COUNTERTOP WITH 4 INCH BACKSPLASH - 3/4 INCH GROUP 2 WITH MITRE EDGE - ENSUITE 2 - UPG
05Apr22 **		CABINETRY-delete std countertop; GRANITE-see upgraded single hole faucet and undermount sink
1044 314,279	3	- GRANITE - GRANITE CUTOUT W/ STRAIGHT EDGE POLISH TO ACCOMMODATE UNDER MOUNT VANITY SINK
05Apr22 **		FOR MASTER ENSUITE / MAIN BATHROOM / ENSUITE 2
1044 314,411	1	KITCHEN - PLUMBING - KITCHEN SINK UPGRADE - BLANCO KITCHEN SINK QUATRUS U 2 #401247 (32 INCH X 18 INCH) UNDERMOUNT 2 BOWL EQUAL SIZE 9 INCH DEEP IN STAINLESS STEEL -
05Apr22 **		CABINETRY-upgraded kitchen sink; GRANITE-upgraded kitchen sink
1044 311,214	1	MASTER ENSUITE - GRANITE - COUNTERTOP WITH 4 INCH BACKSPLASH - 3/4 INCH GROUP 2 WITH MITRE EDGE - ENSUITE MASTER - UPG
05Apr22 **		CABINETRY-delete std countertop; GRANITE-see upgraded single hole faucet and undermount sink

CARPET

Invoice	Qty.	Description
1044	1	UPPER HALL - HARDWOOD - VINTAGE - 3-1/4 INCH RED OAK ENGINEERED - UPPER HALL - UPG
311,994		
05Apr22 **		CARPET-delete std carpet; INTERIOR TRIM-supply and install quarter rounds; PAINTING-paint quarter round

DisciplineMS.rpt 13dec21 Page 2 of 7

14 of 51



CONSTRUCTION SUMMARY

Lot: 3190A-4

Model: 20-2095 END ALT MOD B The Forbes

Project/Phase: Wallaceton / 3

CERAMICS

	Invoice Qty. Description		
Invoice	Qty.	Description	
1044 309,835 05Apr22	1	KITCHEN - CERAMICS - BACKSPLASH - KITCHEN - UPGRADE 2	
1044 314,179 05Apr22	1	KITCHEN - CERAMICS - ADDITIONAL BACKSPLASH DUE TO INSTALL CHIMENEY HOODFAN IN KITCHEN - KITCHEN - UPGRADE 2	
1044 309,880 05Apr22	1	KITCHEN/BREAKFAST - CERAMICS - FLOOR - KITCHEN / BREAKFAST - UPGRADE 1	
1044 309,901 05Apr22	1	MAIN HALL - CERAMICS - FLOOR - MAIN HALL - UPGRADE 1	
1044 309,894 05Apr22	1	MAIN BATHROOM - CERAMICS - FLOOR - MAIN BATHROOM - UPGRADE 1	
1044 309,863 05Apr22	1	FOYER - CERAMICS - FLOOR - FOYER - UPGRADE 1	
1044 309,908 05Apr22	1	MUD ROOM - CERAMICS - FLOOR - MUD ROOM - UPGRADE 1	
1044 309,915 05Apr22	1	POWDER ROOM - CERAMICS - FLOOR - POWDER ROOM - UPGRADE 1	
1044 309,856 05Apr22	1	MASTER ENSUITE - CERAMICS - FLOOR - ENSUITE MASTER - UPGRADE 1	
1044 309,849 05Apr22	1	ENSUITE 2 - CERAMICS - FLOOR - ENSUITE 2 - UPGRADE 1	
1044 309,842 05Apr22	1	FINISHED BASEMENT BATHROOM - CERAMICS - FLOOR - BASEMENT BATHROOM - UPGRADE 1	
1044 309,887 05Apr22	1	LAUNDRY ROOM - CERAMICS - FLOOR - LAUNDRY ROOM - UPGRADE 1	

DisciplineMS.rpt 13dec21

15 of 51 construction summary



Lot: 3190A-4

Model: 20-2095 END ALT MOD B The Forbes Project/Phase: Wallaceton / 3

DRYWALL

Invoice	Qty.	Description
1044 313,652	1	KITCHEN - 05H-66cm deep fridge enclosure (counter depth) with no walls ([2] 66cm deep gables and [1] 66cm deep cabinet) (This is not a zero clearance enclosure. Standard heights and widths will be used.) Viking
05Apr22 **		SKETCH # 3 DRYWAL-Notify; FRAMING-Modify Bulkhead; PAINTING-Notify
1044 313,768	1	KITCHEN - 11A-Upper angle corner per unit Viking
05Apr22 **		SKETCH # 3 FRAMING-Notify; DRYWAL-Notify; PAINTING-Notify
1044 314,238	1	- ELECTRICAL - POTLIGHT BUNDLE - 8 X T477GR-W 4 INCH LINE VOLTAGE POTLIGHTS INCLUDES 2 SWITCHESMAIN FLOOR (SEE SLIM LINE FOR BASEMENT)
05Apr22 **		4 X GREAT ROOM ON 1 SWITCH AND 4 X KITCHEN ON 1 SWITCH SKETCH # 2 DRYWALL-Drywall/Ceiling cutouts for potlights; FRAMING-Frame to accommodate potlights

ELECTRICAL

ELECI	KI	CAL
Invoice	Qty.	Description
1044 313,484 05Apr22 **	1	- APPLIANCES - CYCLONE 30 INCH WALL MOUNT CHIMNEY HOOD SS - SCB51930 CABINETRY-delete stove uppers; ELECTRICAL-delete std range hood; HEATING/AIR CONDITIONING-Duct change to 6 in
1044 314,223 05Apr22	1	KITCHEN - ELECTRICAL - ADDITIONAL SWITCH FOR RELOCATED STD LIGHT CENTERED +/- ABOVE ISLAND SKETCH # 2
1044 314,229 05Apr22	1	KITCHEN - ELECTRICAL - EXTRA WALL INTERIOR OUTLET (120V/15A) ON A SEPARATE CIRCUIT (ON ARCFAULT) FOR MICROWAVE SHELF SKETCH # 3
1044 314,232 05Apr22	1	GREAT ROOM - ELECTRICAL - EXTRA WALL INTERIOR OUTLET ON EXISTING CIRCUIT (DOES NOT INCLUDE KITCHEN OUTLETS) TO BE CENTERED ABOVE GREAT ROOM FIREPLACE 70" +/- FROM FLOOR SKETCH # 2
1044 314,242 05Apr22	1	KITCHEN - ELECTRICAL - RELOCATION OF SWITCHES/LIGHTS (MUST SPECIFY LOCATION) - NOTE: PLUGS CANNOT BE RELOCATED- MUST PURCHASE ADDITIONAL OUTLET. FOR RELOCATED STANDARD KITCHEN LIGHT CENTERED +/- ABOVE ISLAND SKETCH # 2
1044 314,238 05Apr22	1	- ELECTRICAL - POTLIGHT BUNDLE - 8 X T477GR-W 4 INCH LINE VOLTAGE POTLIGHTS INCLUDES 2 SWITCHESMAIN FLOOR (SEE SLIM LINE FOR BASEMENT) 4 X GREAT ROOM ON 1 SWITCH AND 4 X KITCHEN ON 1 SWITCH SKETCH # 2 DRYWALL-Drywall/Ceiling cutouts for potlights; FRAMING-Frame to accommodate potlights
1044 314,340 05Apr22 **	1	KITCHEN - HEATING/AIR - ROUGH-IN GAS LINE FOR GAS STOVE AT MAIN FLOOR (SEE SPECS) (HOOK-UP NOT INCLUDED) LEAVE STANDARD 120 VOLT ELECTRICAL OUTLET ON A SEPARATE CIRCUIT. * STANDARD 220V WILL STAY SKETCH # 3 ELECTRICAL-Notify

DisciplineMS.rpt 13dec21 Page 4 of 7

16 of 51 construction summary



Lot: 3190A-4

Model: 20-2095 END ALT MOD B The Forbes

Project/Phase: Wallaceton / 3

FRAMING

Invoice	Qty.	Description
1044 313,652	1	KITCHEN - 05H-66cm deep fridge enclosure (counter depth) with no walls ([2] 66cm deep gables and [1] 66cm deep cabinet) (This is not a zero clearance enclosure. Standard heights and widths will be used.) Viking
05Apr22 **		SKETCH # 3 DRYWAL-Notify; FRAMING-Modify Bulkhead; PAINTING-Notify
1044 313,768	1	KITCHEN - 11A-Upper angle corner per unit Viking
05Apr22 **		SKETCH # 3 FRAMING-Notify; DRYWAL-Notify; PAINTING-Notify
1044 314,238	1	- ELECTRICAL - POTLIGHT BUNDLE - 8 X T477GR-W 4 INCH LINE VOLTAGE POTLIGHTS INCLUDES 2 SWITCHESMAIN FLOOR (SEE SLIM LINE FOR BASEMENT)
05Apr22 **		4 X GREAT ROOM ON 1 SWITCH AND 4 X KITCHEN ON 1 SWITCH SKETCH # 2 DRYWALL-Drywall/Ceiling cutouts for potlights: FRAMING-Frame to accommodate potlights

GLASS PRODUCTS / MIRRORS

Invoice	Description
1044 310,753 05Apr22	MASTER ENSUITE - MIRRORS/GLASS PRODUCTS - UPGRADE TO FRAMELESS CLEAR GLASS WITH D-RING HANDLE IN CHROME - ENSUITE MASTER

DisciplineMS.rpt 13dec21 Page 5 of 7

17 of 51



Lot: 3190A-4

Model: 20-2095 END ALT MOD B The Forbes

Project/Phase: Wallaceton / 3

GRANITE

Invoice	Qty.	Description
1044 311,198 05Apr22	1	KITCHEN - GRANITE - COUNTERTOP - 3/4 INCH GROUP 2 WITH MITRE EDGE - KITCHEN / ISLAND - UPG
1044 311,215 05Apr22	1	MAIN BATHROOM - GRANITE - COUNTERTOP WITH 4 INCH BACKSPLASH - 3/4 INCH GROUP 2 WITH MITRE EDGE - MAIN BATHROOM - UPG CABINETRY-delete std countertop; GRANITE-see upgraded single hole faucet and undermount sink
1044 311,213 05Apr22	1	ENSUITE 2 - GRANITE - COUNTERTOP WITH 4 INCH BACKSPLASH - 3/4 INCH GROUP 2 WITH MITRE EDGE - ENSUITE 2 - UPG CABINETRY-delete std countertop; GRANITE-see upgraded single hole faucet and undermount sink
1044 314,279 05Apr22	3	- GRANITE - GRANITE CUTOUT W/ STRAIGHT EDGE POLISH TO ACCOMMODATE UNDER MOUNT VANITY SINK FOR MASTER ENSUITE / MAIN BATHROOM / ENSUITE 2
1044 314,365 05Apr22 **	3	- PLUMBING - AMERICAN STANDARD - SINK - UNDERMOUNT SINK - BOXE - WHITE - MODEL 0315 000 020 FOR MASTER ENSUITE / MAIN BATHROOM / ENSUITE 2 GRANITE-See specs
1044 314,524 05Apr22 **	3	- PLUMBING - MOEN -VICHY - LAV SINGLE HANDLE FAUCET WITH LIFT ROD DRAIN - CHROME (MODEL: 6710) - FOR MASTER ENSUITE / MAIN BATH / ENSUITE 2 GRANITE-See specs
1044 314,411 05Apr22 **	1	KITCHEN - PLUMBING - KITCHEN SINK UPGRADE - BLANCO KITCHEN SINK QUATRUS U 2 #401247 (32 INCH X 18 INCH) UNDERMOUNT 2 BOWL EQUAL SIZE 9 INCH DEEP IN STAINLESS STEEL - CABINETRY-upgraded kitchen sink; GRANITE-upgraded kitchen sink
1044 311,214 05Apr22	1	MASTER ENSUITE - GRANITE - COUNTERTOP WITH 4 INCH BACKSPLASH - 3/4 INCH GROUP 2 WITH MITRE EDGE - ENSUITE MASTER - UPG CABINETRY-delete std countertop; GRANITE-see upgraded single hole faucet and undermount sink

HARD	HARDWOOD		
Invoice	Qty.	Description	
1044	1	UPPER HALL - HARDWOOD - VINTAGE - 3-1/4 INCH RED OAK ENGINEERED - UPPER HALL - UPG	
311,994			
05Apr22			
		CARPET-delete std carnet: INTERIOR TRIM-supply and install quarter rounds: PAINTING-paint quarter round	

HEATING / AIR CONDITIONING

Invoice	Qty.	Description
1044	1	- APPLIANCES - CYCLONE 30 INCH WALL MOUNT CHIMNEY HOOD SS - SCB51930
313,484		
05Apr22		
**		CABINETRY-delete stove uppers; ELECTRICAL-delete std range hood; HEATING/AIR CONDITIONING-Duct
		change to 6 in
1044	1	KITCHEN - HEATING/AIR - ROUGH-IN GAS LINE FOR GAS STOVE AT MAIN FLOOR (SEE SPECS) (HOOK-UP NOT
314,340		INCLUDED) LEAVE STANDARD 120 VOLT ELECTRICAL OUTLET ON A SEPARATE CIRCUIT. * STANDARD 220V WILL STAY
05Apr22		SKETCH # 3
0011p122		ELECTRICAL-Notify

DisciplineMS.rpt 13dec21 Page 6 of 7

18 of 51 construction summary



Lot: 3190A-4

Model: 20-2095 END ALT MOD B The Forbes

Project/Phase: Wallaceton / 3

INTERIOR TRIM AND DOORS

Invoice	Qty.	Description
1044	1	UPPER HALL - HARDWOOD - VINTAGE - 3-1/4 INCH RED OAK ENGINEERED - UPPER HALL - UPG
311,994		
05Apr22		
**		CARPET-delete std carpet; INTERIOR TRIM-supply and install quarter rounds; PAINTING-paint quarter round

PAINTING

Invoice	Qty.	Description
1044 313,652	1	KITCHEN - 05H-66cm deep fridge enclosure (counter depth) with no walls ([2] 66cm deep gables and [1] 66cm deep cabinet) (This is not a zero clearance enclosure. Standard heights and widths will be used.) Viking
05Apr22 **		SKETCH # 3 DRYWAL-Notify; FRAMING-Modify Bulkhead; PAINTING-Notify
1044	1	KITCHEN - 11A-Upper angle corner per unit Viking
313,768		
05Apr22		SKETCH # 3
**		FRAMING-Notify; DRYWAL-Notify; PAINTING-Notify
1044	1	UPPER HALL - HARDWOOD - VINTAGE - 3-1/4 INCH RED OAK ENGINEERED - UPPER HALL - UPG
311,994		
05Apr22		
**		CARPET-delete std carpet; INTERIOR TRIM-supply and install quarter rounds; PAINTING-paint quarter round

DITIMDING

_	PLUMBING		
Invoice	Qty.	Description	
1044 314,365	3	- PLUMBING - AMERICAN STANDARD - SINK - UNDERMOUNT SINK - BOXE - WHITE - MODEL 0315 000 020	
05Apr22		FOR MASTER ENSUITE / MAIN BATHROOM / ENSUITE 2 GRANITE-See specs	
1044 314,524	3	- PLUMBING - MOEN -VICHY - LAV SINGLE HANDLE FAUCET WITH LIFT ROD DRAIN - CHROME (MODEL: 6710) -	
05Apr22		FOR MASTER ENSUITE / MAIN BATH / ENSUITE 2 GRANITE-See specs	
1044 314,479	1	MASTER ENSUITE - PLUMBING - MOEN -HANDHELD SHOWER - ENGAGE ECO-PERFORMANCE 6 FUNCTION HAND SHOWER WITH MAGNETIX DOCKING MODEL 26100 EP CHROME (IN LIEU OF STANDARD SHOWERHEAD) -	
05Apr22		FOR MASTER ENSUITE SHOWER	
1044 314,411	1	KITCHEN - PLUMBING - KITCHEN SINK UPGRADE - BLANCO KITCHEN SINK QUATRUS U 2 #401247 (32 INCH X 18 INCH) UNDERMOUNT 2 BOWL EQUAL SIZE 9 INCH DEEP IN STAINLESS STEEL -	
05Apr22		CABINETRY-upgraded kitchen sink; GRANITE-upgraded kitchen sink	

DisciplineMS.rpt 13dec21 Page 7 of 7

Project: Wallaceton
Unit: 3190A-4, Phase: 3
Model: 20-2095 END ALT MOD B The Forbes

9 of 51

THE FORBES

MODIFIED

20-2095 END MOD


ALT ELEV. B

Sketch#1

ELEVATION B | 2,660 SQ. FT.

Includes 616 sq. ft. of Finished Lower Level

WALLACETON

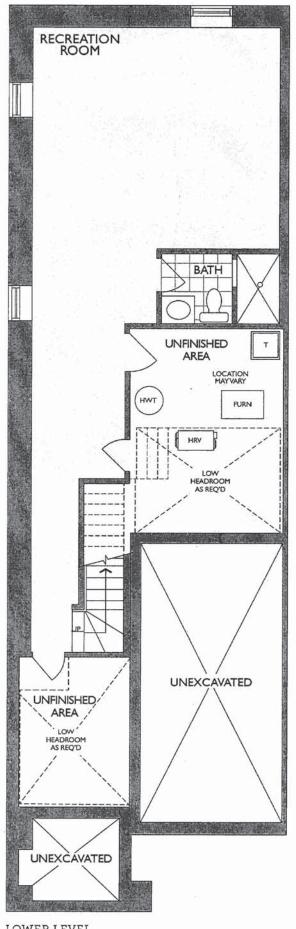

LOWER LEVEL ELEVATION A & B

Legal Plan Dec. 8, 2020

Project: Wallaceton
Unit: 3190A-4, Phase: 3
Model: 20-2095 END ALT MOD B The Forbes

Of 51

THE FORBES

MODIFIED

20-2095 END MOD


ELEVATION B | 2,660 SQ. FT.

ALT ELEV. B


Sketch #2

Includes 616 sq. ft. of Finished Lower Level

WALLACETON

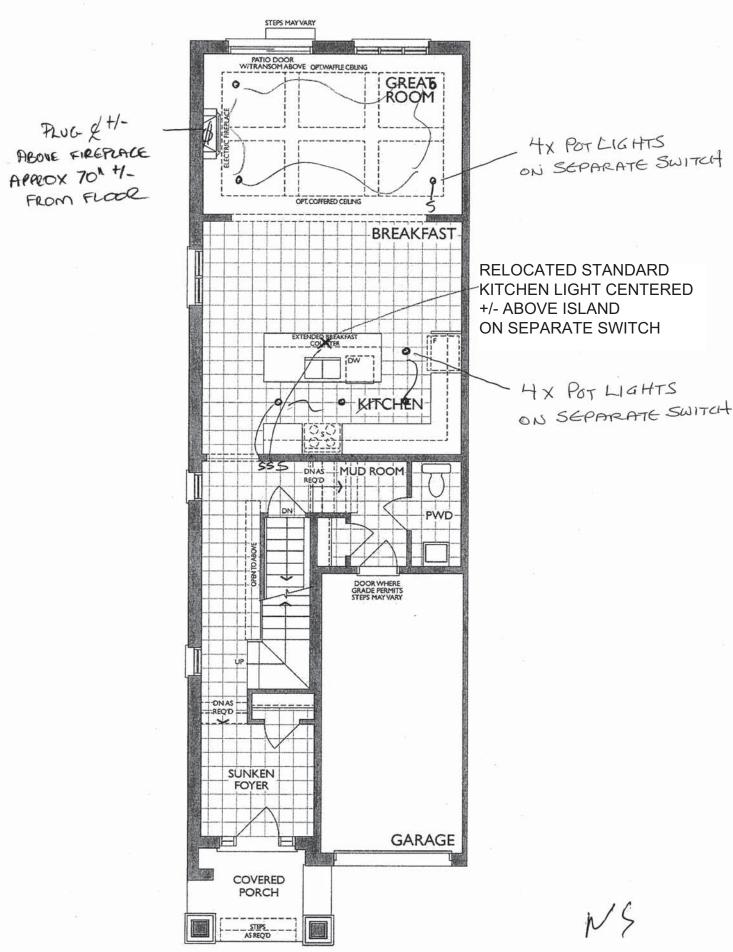

MAIN FLOOR ELEVATION B Legal Plan Dec. 8, 2020

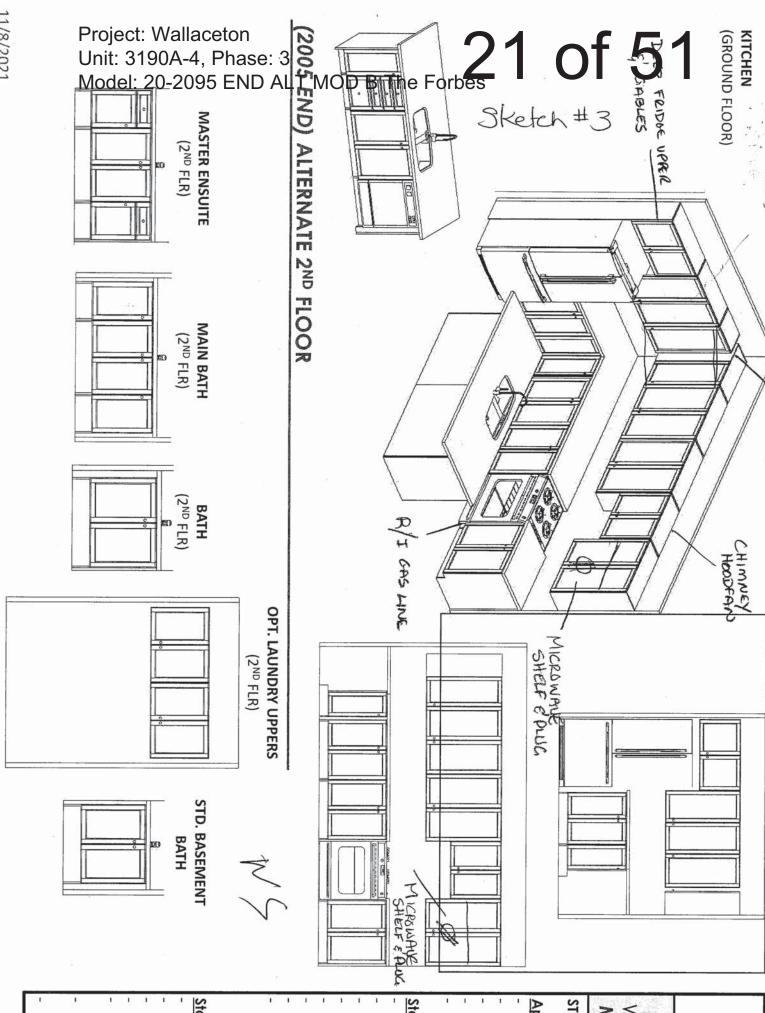



H

UPPER ANGLE



WALLACETON, KITCHENER ON MODEL: 20-2095 (ALT 2005 END) **HEATHWOOD HOMES**

STANDARD CONTRACT INCLUDES:

Appliance Openings

- Hood Opening: 30"W Std. hood
- Fridge Opening: 37 3/8 "W X 73 3/8" H
- Stove Opening: 30" Freestanding 30cm deep cabinet over fridge
- Dishwasher Opening: 24"

Standard Kitchens Scope

- 100cm H wall cabinets
- Std. Blumotion Hinges-soft close
- Std. Metabox Drawers- not soft close
- Min 40cm W drawer
- Base pie cut corner cabinets
- Backing on all cabinets Countertop by others

Upgrade applied paneled fridge &

dishwashers supply only (appliance

Standard Vanity & Laundry Scope:

hardware by others)

- Powder by others, pedestal
- All vanities include laminate counter
- Std. Blum Hinges- not soft close
- MetaBox Drawers- not soft close
- Mains: Full height doors (top drawers Master Ensuite: Top drawers (Full height doors at sink)
- added if Masters can't accommodate) Optional laundry base & wall cabinets

Project: Wallaceton
Unit: 3190A-4, Phase: 3
Model: 20-2095 END ALT MOD B The Forbes

20
51

THE FORBES

MODIFIED

20-2095 END MOD


ALT ELEV. B

Sketch #4

ELEVATION B | 2,660 SQ. FT.

Includes 616 sq. ft. of Finished Lower Level

WALLACETON

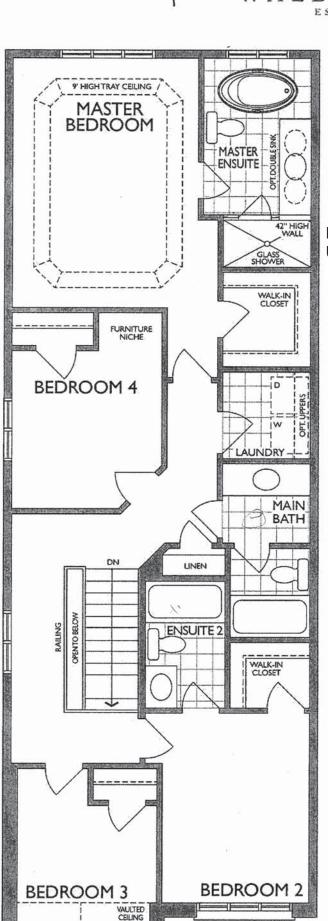

ALT. SECOND FLOOR

ELEVATION B

FRAMELESS UPG HANDHELD SHOWER

NS

Legal Plan Dec. 8, 2020

Project: Wallaceton
Unit: 3190A-4, Phase: 3
Model: 20-2095 END ALT MOD B The Forbes

23 of 51





NFAS NF17 Mantel CABINET

Project: Wallaceton Unit: 3190A-4, Phase: 3

24 of 51 Model: 20-2095 END ALT MOD B The For



Sink Specifications

Colour SKU brushed finish 401247

Design and planning tips

Min cabinet size: 36 in (915 mm) Bowl Depth: 9 in (230.0 mm)

Specifications:

Installation clips, Sink template, Installation instructions, 3 ½" (90 mm) stainless steel strainers

Depending on cabinet construction, a different cabinet size may be required. Consult the cabinet manufacturer.


Codes/Standards: ASME A112.19.3-2017/ CSA

B45.4-17

Optional Accessories

CapFlow Strainer Cover 517666 Workstation 406344 Ash Cutting Board 406345 Sink Grid 406349

QUATRUS U 2 Stainless steel brushed finish



Warranty

Limited lifetime warranty on all sinks and faucets. One-year warranty on all accessories and soap dispensers.

Code/Standards Compliance

BLANCO sinks and faucets are third-party tested and certified to CSA, cUPC, ANSI/ASME, IAPMO and NSF standards and listed by applicable certification bodies. For more information on individual product listings, contact our office or listing organization.



Need support? Learn more by watching our sink & faucet How-to videos: https://www.blanco.com/ca-en/support/how-to-videos/how-to-videos-for-sinks/



BLANCO Canada Inc 100 Corporation Drive Brampton ON L6S 6B5 Tel & Fax

Tel: 905-494-2400 Toll free: 1-877-425-2626 Fax: 905-494-2425 Toll free: 1-877-825-2626

While BLANCO strives to provide accurate information, all images and dimensions in this document are intended for reference only and are subject to change at any time without notice. This document is not intended for use as an installation guide. For technical installation details, refer to installation instructions provided with the product. BLANCO assumes no responsibility for the use of superseded or voided specifications.

MOEN

FAUCET DESCRIPTION

- Reflex™ pulldown system offers smooth operation, easy movement and secure docking
 Power Clean™ spray technology
 Metal construction with various finishes identified by suffix

- Quick connect installation
- Pulldown spray with 68" braided hose Flexible supply lines with 3/8" compression fittings
- High arc spout provides height and reach to fill or clean large pots while pulldown wand provides the maneuverability for cleaning or rinsing 360° rotating spout
- Faucet designed for handle to be mounted on right side only

OPERATION

- Lever style handle
- Temperature controlled by 100° arc of handle travel
- Operates with less than 5 lbs. of force
- Operates in stream or spray mode in the pullout or retracted position **FLOW**

Flow is limited to 1.5 gpm (5.7 L/min) max at 60 psi

CARTRIDGE

• 1255™ Duralast™ cartridge

STANDARDS


- Third party certified to IAPMO Green, ASME A112.18.1/CSA B125.1 and all applicable requirements therein including NSF 61/9G & 372
- Meets CalGreen and Georgia SB370 requirements Complies with California Proposition 65 and with the Federal Safe Drinking
- The backflow protection system in the device consists of two independently operating check valves, a primary and a secondary which prevent backflow
- ADA 🖒 for lever handle

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the
- 10 year limited warranty when used in a multifamily installation
- 5 year limited warranty when used in a commercial installation

Visit www.moen.com/support for complete details and limitations

Specifications




ALIGN™ **Single Handle High Arc Pulldown Kitchen Faucet**

Models: 7565 series

NOTE: THIS FAUCET IS DESIGNED TO BE INSTALLED THROUGH 1 HOLE, 1-1/2" (38mm) MIN. DIA. (OPTIONAL 3-HOLE ESCUTCHEON 141002 AVAILABLE)



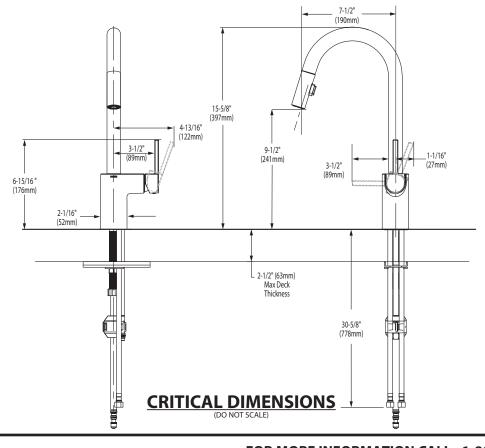

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN

www.moen.com

Rev. 6/20



b BARRIER FREE (ABOVE COUNTER OR DROP-IN ONLY)

BOULEVARD® PEDESTAL SINK VITREOUS CHINA

BOULEVARD® PEDESTAL SINK

☐ 0641.800 Faucet holes on 8" (203mm) centers (Illustrated)

STD • 0641.400 Faucet holes on 4" (102mm) centers

☐ 0641.100 Center hole only

- · Classic styled rectangular pedestal lavatory
- · Vitreous china
- Rear overflow
- Supplied with mounting kit
- Right Height® for greater comfort during use
- Faucet ledge with large deck area (faucet not included)
- Design coordinates with Boulevard® Toilet
- Basin has flat bottom to also allow use as an above counter sink or a drop-in sink (with u-shaped cut out)

Nominal Dimensions:

24" x 19" x 35-1/2" (610 x 483 x 902mm)

- ☐ 0641.008 Pedestal top-8" (203mm) centers
- ☐ 0641.004 Pedestal top-4" (102mm) centers
- ☐ 0641.001 Pedestal top-center hole only
- □ **0010.000** Pedestal only

Bowl sizes:

17" (432mm) wide, 12-1/2" (318mm) front to back, 5" (127mm) deep

Compliance Certifications -

Meets or Exceeds the Following Specifications:

• ASME A112.19.2 - 2008/CSA B45.1-08

To Be Specified:

- ☐ Color: ☐ White ☐ Linen
- ☐ Faucet Finish:
- Supplies:
- ☐ 1-1/4" Trap:
- □ Nipple:




SEE REVERSE FOR ROUGHING-IN DIMENSIONS

^{*} See faucet section for additional models available

Model: 20-2095 END ALT MOD B The Forbes 27 of 51



BOULEVARD® PEDESTAL SINK

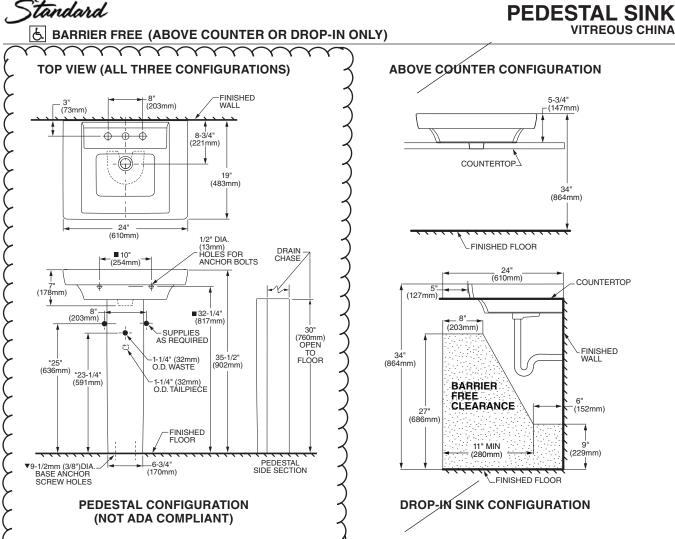

ABOVE COUNTER AND DROP-IN SINK CONFIGURATIONS MEET THE AMERICANS WITH DISABILITIES ACT GUIDELINES AND ANSI A117.1 ACCESSIBLE AND USABLE BUILDINGS AND FACILITIES - CHECK LOCAL CODES.

Top of sink installed at 34" (864mm) height from finished floor. Sink installed 5" (127mm) minimum from front edge of countertop. Provide 27" (686mm) knee clearance area.

NOTES:

* DIMENSIONS SHOWN FOR LOCATION OF SUPPLIES AND "P" TRAPS ARE SUGGESTED.

▼ PEDESTAL ANCHORING SCREWS NOT INCLUDED.

■ SUITABLE FOR REINFORCEMENT ONLY. ACTUAL DIMENSIONS MUST BE TAKEN FROM FIXTURE.

FITTING NOT INCLUDED AND MUST BE ORDERED SEPARATELY.

PROVIDE SUITABLE REINFORCEMENT FOR ALL WALL SUPPORTS.

NETAL ATTOM INSTRUCTIONS SUBPLIED WITH LANGUAGO V. INSTALLATION INSTRUCTIONS SUPPLIED WITH LAVATORY.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerance established by ANSI Standard A112.19.2 These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

© 2018 AS America Inc.

Project: Wallaceton Unit: 3190A-4, Phase: 3

28 of 51 Model: 20-2095 END ALT MOD B The Forb

> MASTER ENSUITE X 1 MAIN BATHROOM X 1 **ENSUITE 2 X 1**

American Standard

BOXE **UNDERCOUNTER SINK**

VITREOUS CHINA

Style That Works Better

BOXE UNDERCOUNTER SINK

Vitreous china

& BARRIER FREE

- · Rectangular undercounter mount sink with rectangular interior and flat bottom design bowl
- Unglazed rim
- Front overflow
- Supplied with template
- · Meets OBC requirement when sink is installed with overflow to the rear
- Mounting clips available separately (P031006000) (Faucet not included)

☐ 0315 000 Unglazed Rim

508 x 406mm (20" x 16")

Bowl size: 438mm (17-1/4") wide, 337mm (13-1/4") front to back, 127mm (5") deep

COMPLIANCE CERTIFICATIONS -Meets or exceeds the following Specifications:

ASME A112.19.2M for Vitreous China Fixtures.

CAN/CSA B45 Series.

To Be Specified □ Colour: ■ White □ Faucet*: ☐ Faucet Finish: ■ Supplies & Stops: ☐ Trap 1-1/4" (32 mm):

• Countertop 864mm (34") from finished floor. Sink installed 102mm (4") from front edge of countertop. Countertop thickness to be 25mm (1") maximum.

MEETS THE AMERICAN DISABILITIES ACT GUIDELINES AND ANSI A117.1 ACCESSIBLE AND USEABLE BUILDINGS AND FACILITIES - CHECK LOCAL CODES.

WE RECOMMEND USING SINK AS A TEMPLATE TO DETERMINE PROPER CONTOUR. CUT COUNTERTOP 38MM (1-1/2") INSIDE SINK CONTOUR. FAUCETS NOT INCLUDED AND MUST BE ORDERED SEPARATELY.

* DIMENSIONS SHOWN FOR LOCATION OF SUPPLIES AND "P" TRAP ARE SUGGESTED.

- UNDERCOUNTER MOUNTING KIT SUPPLIED SEPARATELY.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard A112.19.2.

These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

4" (102mm) OR 8" (203mm) FINISHED WALL OR SPLASHBACK ф---OPENING-12-3/4" (406 324mm) \bigoplus 13-1/4" (337mm _16-3/4". (425mm COUNTERTOP BY OTHERS FINISHED WALL _17-1/4". (438mm __ 20" __ 508m *10-1/4" (260mm) 3/8" (10mm) <u>HOT</u> 3/8" (10mm) COLD 1-1/4" (32mm) WASTE COUNTERTOR 4" (102mm) OR 8" (203mm) *34" (864mm)

FINISHED FLOOR

NOTE: *SUGGESTED DIMENSION - VARIABLE DEPENDING ON TYPE OF SUPPLY AND WASTE

* To comply with ADA standards, overflow hole must face back.

BAS-146

© 2010 AS Canada, ULC

(55

08/10

^{*} See faucet section for additional models available

Project: Wallaceton Unit: 3190A-4, Phase: 3

Model: 20-2095 END ALT MOD B The Forb

BASEMENT BATH X 1

American Standard


BARRIER FREE

COLONY™ COUNTERTOP SINK

VITREOUS CHINA

COLONY COUNTERTOP SINK

- · Vitreous china
- Self-rimming
- · Front overflow
- · Supplied with template
- Faucet deck (Faucet shown not included)





Centre hole only


Nominal Dimensions: 521 x 448mm (20-1/2" x 17-5/8")

Bowl sizes:

422mm (16-5/8") wide, 279mm (11") front to back, 143mm (5-5/8") deep







01/07

COMPLIANCE CERTIFICATIONS -

Meets or exceeds the following Specifications:

- ASME A112.19.2M for Vitreous China Fixtures.
- · CAN/CSA B45 Series.

To Be Specified

- ☐ Colour: ☐ White ☐ Bone ☐ Silver Gray ☐ Linen
- □ Faucet*:
- □ Faucet Finish:
- Supplies & Stops:
- ☐ Trap 1-1/4" (32 mm):

* DIMENSIONS SHOWN FOR LOCATION OF SUPPLIES AND "P" TRAP ARE SUGGESTED. FOR COUNTERTOP CUTOUT AND INSTALLATION INSTRUCTIONS USE TEMPLATE SUPPLIED WITH SINK.

SUPPLIED WITH SINK.

FAUCETS NOT INCLUDED AND MUST BE ORDERED SEPARATELY.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard A112.19.2.

These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

BAS-198

© 2000 American Standard Inc.

^{*} See faucet section for additional models available



$DEMI^{\mathsf{M}}$ Product Specification Sheet

Two Piece Freestanding Collection

CF2007 Two Piece Freestanding Soaker


Size: 60" x 32" x 22"

1524 mm x 813 mm x 559 mm




- Vacuum formed acrylic reinforced with fiberglass
- Scratch, stain and fade resistant high gloss finish
- Installation friendly two piece design
- Accepts deck mounted faucet
- Includes integral pop up drain and rectangular overflow
- Includes levelling feet


TWO PIECE ASSEMBLY

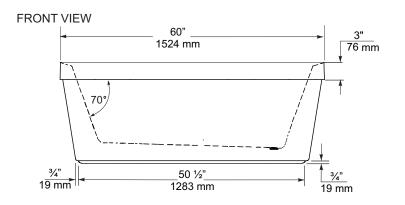

TOP VIEW

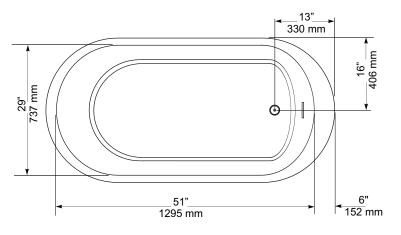

END VIEW



GENERAL SPECIFICATIONS

Average Weight	90 lb	41 kg
Bathing Well at bottom	43"x 20"	1092 x 508 mm
Capacity Drain to Overflow		195 litres
Water Depth Drain to Overflow	16"	406 mm
Drain Opening (dia.)	2"	51 mm
Overflow Opening	2 ¼"x ½"	57 x 13 mm
Drain to Floor Clearance	3 1/4"	83 mm

NOTES: Please confirm measurements on actual product to ensure proper identification. Bathtub to be installed on the floor supported by 5 self levelling feet. Adjust if required to level the bathtub for adequate drainage. Refer to installation instructions for additional information.

IMPORTANT: Dimensions of fixtures are nominal and may vary \pm %" (6 mm). Weight may vary \pm 5 lb (2.3 kg). Drawing is not to scale. These measurements are subject to change at manufacturer's discretion.

Compliance Certifications -

Meets or Exceeds the following Specifications:

CAN/CSA - B45 Series





60 Shorncliffe Rd., Toronto, Ontario M8Z 5K1 Telephone: 416.231.9030 Fax: 416.231.0929 www.mirolin.com Customer Service: 416.231.5790 Canada, U.S.A.: 800.MIROLIN(647-6546) Fax, Canada: 800.463.2236 R0084162 25 Sep. 2018 Unit: 3190A-4, Phase: 3

Model: 20-2095 END ALT MOD B The Forb

American Standard

Style That Works Better

FloWise™ DUAL FLUSH **ELONGATED TOILET**

VITREOUS CHINA


FloWise™ DUAL FLUSH ELONGATED TOILET

2476 216

- Vitreous china
- · Low-consumption Dual Flush Full flush 6.0 Lpf/1.3 gpf, Partial flush 3.0 Lpf/0.66 gpf.
- · Elongated wash down bowl
- · Internal trapway fully-glazed, 2-1/4" (57mm) ballpass
- · Concealed trapway bowl
- · Chrome-plated top mounted push button actuator
- Easy to clean sanitary dam on bowl
- Includes Elongated Slow Close Seat
- 100% factory flush tested
- · 2 bolt caps

Separate Component Parts:

- ☐ 3067 316 Elongated Bowl with Slow Close Seat
- **4035 216** Unlined Tank



- ☐ 3067 316 Elongated Bowl
- **4035 516** Lined Tank

Nominal Dimensions: 794 x 432 x 765mm (31-1/4" x 17" x 30-1/8")


Compliance Certifications -Meets or Exceeds the Following Specifications:


- ASME A112.19.2M (and 19.6M)
- · CAN/CSA B45 series

To Be Specified

- Colour: 020 White
- Supply with stop:







NOTES:
THIS TOILET IS DESIGNED TO ROUGH-IN AT A MINIMUM DIMENSION OF 305MM (12")
FROM FINISHED WALL TO C/L OF OUTLET.
SUPPLY NOT INCLUDED WITH FIXTURE AND MUST BE ORDERED SEPARATELY.
* DIMENSION SHOWN FOR LOCATION OF SUPPLY IS SUGGESTED.
FOR ADDITIONAL INFORMATION REFER TO INSTALLATION INSTRUCTIONS SUPPLIED.
IMPORTANT. Dimensions of fixture are peripaid and may use within the prepare of the present IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerance established by ANSI Standard A112.19.2

established by Ankist damagna (112.19.2). These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

UPGRADED VALUE ADDED FEATURES AT NO EXTRA CHARGE

TOI-284 © 2008 American Standard 08/08 Project: Wallaceton Unit: 3190A-4, Phase: 3

32 of 51 Model: 20-2095 END ALT MOD B The Fork

POWDER ROOM X1 BASEMENT BATH X 1

MOEN®

Specifications

DESCRIPTION

- Metal construction with various finishes identified by suffix
- 16" long 3/8" tubing connections Includes metal or 50/50 pop-up type waste assembly where noted

OPERATION

- Pivot action lever style handle Temperature controlled through 180° degree arc of handle travel

FLOW

Flow is limited to 1.5 gpm max (5.7L/min) at 60 psi

CARTRIDGE

- 1225 cartridge design
- Nonmetallic/nonferrous and stainless steel material
- Can accommodate reversed piping and back to back installations

- Third party certified to WaterSense®, CSA B-125.1, ASME A112.18.1 and all applicable requirements referenced therein including NSF61/9
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act

 ADA for lever handle

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations



CHATEAU® Single-Handle Lavatory Faucet

with Metal Waste Assembly

Model: L4625 series L4631BC

Bulk Packed (12 per carton):


L64624 series

with 50/50 Waste Assembly **Bulk Packed (12 per carton):** L64625 series

Less Waste **Bulk Packed (12 per carton):** L64600 series

NOTE: THIS FAUCET IS DESIGNED TO BE INSTALLED THRU 3-1" DIA. HOLES, 2" ON CENTER



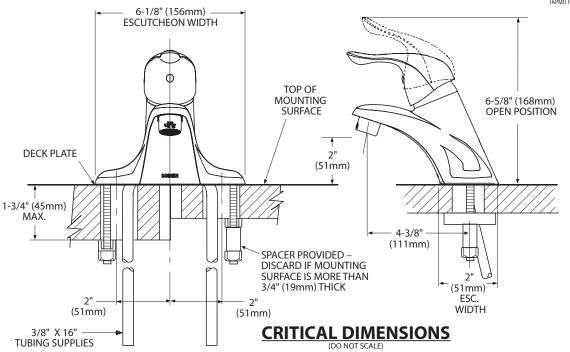

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN

www.moen.com

Rev 8/15

Model: 20-2095 END ALT MOD B The Fork

33 of 51

MASTER ENSUITE X 1 MAIN BATHROOM X 1 **ENSUITE 2 X 1**



Buy it for looks. Buy it for life.®

FAUCET DESCRIPTION

- Metal construction with chrome finish
- Flexible supply lines with 3/8" compression fittings
- Includes metal pop-up waste assembly
- Optional 3 hole deck plate (escutcheon) available

OPERATION

- Lever style handle
- Temperature controlled by 100° arc of handle travel
- Includes hot & cold temperature indicators

FLOW

Flow is limited to 1.2 gpm max (4.5 L/min) at 60 psi

CARTRIDGE

- 1255™ Duralast™ cartridge
- Nonmetallic/nonferrous and ceramic material


STANDARDS

- Third party certified to WaterSense,® ASME A112.18.1/CSA B125.1, and all applicable requirements referenced therein
- Certified to NSF 61/9 & 372
- Compliant with California water efficiency regulations
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- ADA **6** for lever handle

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations

Specifications




Vichy™ Single-Handle Lavatory Faucet

Model: 6710

NOTE: THIS FAUCET IS DESIGNED TO BE INSTALLED THRU 1 HOLE, 1-1/4" MIN. DIA.



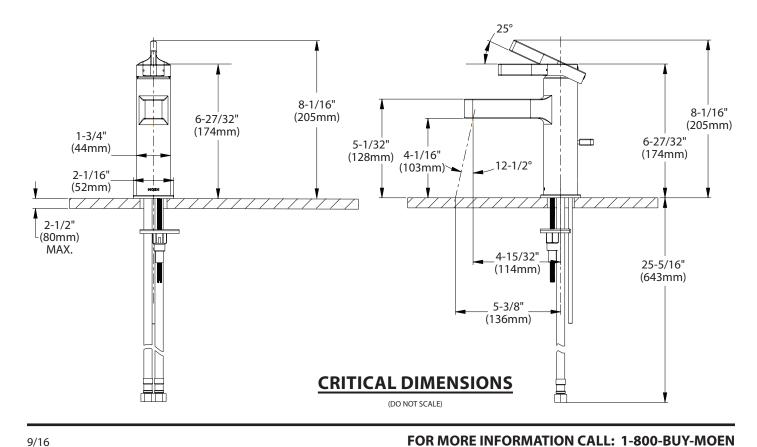

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN

www.moen.com

Project: Wallaceton Unit: 3190A-4, Phase: 3

Model: 20-2095 END ALT MOD B The Forb

34 of 51

MASTER ENSUITE X 1

MOEN[®]

Specifications

DESCRIPTION

- Various finishes identified by suffix
- Includes handshower, hose and magnetic dock
- Magnetix™ technology features an innovative magnetic docking system
- 60" hose that extends reach and flexibility
- EP suffix models assembled with two check valves for backflow prevention
- 1/2" IPS connection

OPERATION

- Six Spray Settings
- Magnetic dock rotates to adjust angle of handshower

FLOW

- Designed to deliver 2.5 gpm (9.5 L/min) MAX at 80 psi
- EP suffix models designed to deliver 1.75 gpm (6.6 L/min) MAX at 80 psi (for models manufactured after 3/1/18)
- EP suffix models designed to deliver 2.0 gpm (7.6 L/min) MAX at 80 psi (for models manufactured before 3/1/18)

STANDARDS

- Designed and manufactured to comply with the applicable requirements of WaterSense®, ASME A112.18.1/CSA B-125.1, ASSE 1014 and all applicable specifications referenced therein
- EP suffix models are third party certified to WaterSense®

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
- 10 year limited warranty when used in a multifamily installation
- 5 year limited warranty when used in a commercial installation

Visit www.moen.com/support for complete details and limitations




Engage™ **6-Function Handshower** with Magnetix™ Docking and Hose

Models: 26100 series



EP Suffix Models Only

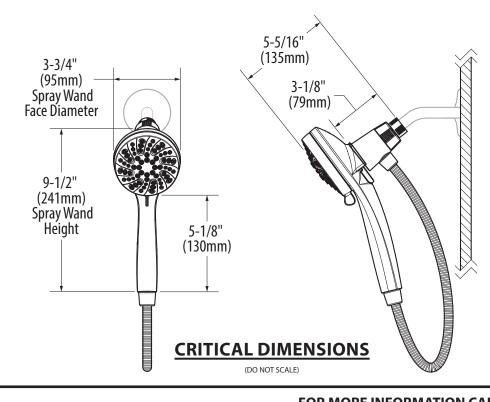

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN

www.moen.com

12/20



Buy it for looks. Buy it for life.®

There is more than 1 version of this model. Page down to identify the version you have.

- Metal construction with various finishes identified by suffix
- Includes non-metalic showerhead, arm, flange and non-metalic diverter tub spout

OPERATION

- Handle operates counterclockwise through a 270° arc with off at 6 o'clock and maximum hot at the 9 o'clock position. Shut off in clockwise direction
- Adjustable temperature limit stop to control maximum hot water temperature
- Pressure balancing mechanism maintains selected discharge temperature to $\pm\,3^\circ$

- Showerhead is limited to 2.5 gpm (9.5 L/min) at 80 psi EP suffix models are limited to 1.75 gpm (6.6 L/min) at 80 psi
- NH suffix models contain no showerhead

CARTRIDGE

- 1222 cartridge design Accommodates back to back installations
- Nonmetallic/nonferrous and stainless steel material

STANDARDS

- Third party certified to meet ASME A112.18.1/CSA B125.1 and all applicable requirements referenced therein
- EP suffix models are third party certified to WaterSense®

ADA (for lever handle

6.5" (165mm) ESC. DIAM.

WARRANTY

Lifetime limited warranty against leaks, drips and finish defects

2"CC (51mm) 1 7/8" IPS (48mm) MAX WALL

FINISHED WALL LINE

7-1/2" (190mm)

to the original consumer purchaser 5 year warranty if used in commercial installations

Specifications






CHATEAU° POSI-TEMP° **Single-Handle Tub/Shower Trim Kit**

Models: TL181 series - valve trim only (Bulk Packed 12 per carton) TL182 series - shower trim only (Bulk Packed 12 per carton) TL183 series - tub/shower trim

(Bulk Packed 12 per carton)

Valves: 62300 series 2500 series

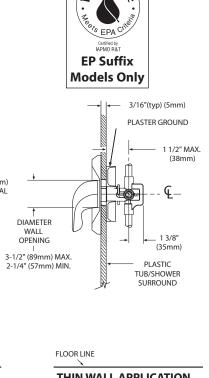

2 1/2" MAX. (63mm) 6'-6" (1981mm) NOMINAL 4-1/2" (114mm) WALL OPENING SHOWER 48" (1219mm) 32" (813mm) (133mm AND TUB ONLY **THICK WALL APPLICATION THIN WALL APPLICATION CRITICAL DIMENSIONS**

— 1/2" MIN. CC (13mm) 5/8" MIN. IPS (16mm)

(DO NOT SCALE)

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN

www.moen.com

TL183sp: Rev. 5/13

MOEN[®]

Specifications

DESCRIPTION

 Metal construction with various finishes identified by suffix OPERATION


- · Lever style handles with hot and cold color indicator
- Rotate hot side handle counterclockwise to open (clockwise to close) and the cold side handle (clockwise to open) and (counterclockwise to close)

STANDARDS

- Third party certified to: ASME A112.18.1/CSA B-125.1, and all applicable requirements referenced therein
- ADA 🕒 for lever handles

WARRANTY


- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
- 10 year limited warranty when used in a multi-family installation
- 5 year limited warranty when used in a commercial installation Visit www.moen.com/support for complete details and limitations




CHATEAU® Two-Handle Garden Tub Trim

Models: T994 series

Valves: 4792, 4793, 4794, 4796, 4797, 4798

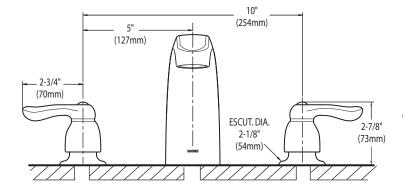



CRITICAL DIMENSIONS

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN

www.moen.com

Rev. 3/19

Model: 20-2095 END ALT MOD B The Forbes 3

SC(B)519 | ALITO Collection





Wall Mount

Strong and sturdy with attractive lines and an imposing frame, the SC(B)519 is fitted with a time-delay OFF feature up to nine minutes, a 550 CFM fan, two bright front mounted LED lights and a digital three-speed push button control panel.

Green Features



3 Speed Push Button **Control Panel**



Time-Delay **OFF Feature**



Long-Lasting **LED Lights**



Grease Cup



SCB51930	Stainless Steel	6"	Baffle	30"	550
SCB51936	Stainless Steel	6"	Baffle	36"	550


Cyclone Range Hoods Inc.


SC(B)519 | ALITO Collection



Features

- · Wall mount range hood
- 6" round duct adapter
- Non-stick aluminum fan blades
- 3 speed push button control
- 2 LED lights (2 x 1.4W, 4000K)
- · Quick release aluminum mesh filters
- · Standard chimney fits up to 9 ft. ceiling
- · Up to 9 minutes time-delay OFF feature
- · Plug-in connection





Options

• Filters:

SCB519 - Quick Release Stainless Steel Baffle Filters

Chimney Flues:

A1.CH10 - short (7'-8' ceilings)

A1.CH18 - standard (8'-9' ceilings)

A1.CH30 - extended (9'-11' ceilings)

• Widths: 24", 30", 36"

Specifications

Air Flow Volume: 550 CFM

Electrical Connection: 120 V/60 Hz

Power Consumption: 300 Watts

Current: 2.5 Amps

• Fan Speed: 1599 RPM

Fan Type: Centrifugal Blower

· Finishes: Stainless Steel

Ducting: 6" Round

Noise Level: Min. 2 Sones
 Max. 6 Sones



Project: Wallaceton 39 of 51 Unit: 3190A-4, Phase: 3 Model: 20-2095 END ALT MOD B The Fork



Whirtpool® 21 cu. ft. Top-Freezer Refrigerator WRT541SZD



Fingerprint-Resistant Stainless WRT541SZDZ

Also available in:

White	WRT541SZDW
Black	WRT541SZDB
Monochromatic Stainless Steel	WRT541SZDM

Capacity		
Total Capacity	21 cu. ft.	
Refrigerator Capacity	15 cu. ft.	
Freezer Capacity	6 cu. ft.	
General Features & Properti	es	
EZ Connect Icemaker Kit		
LED Interior Lighting		
ENERGY STAR® Certified		
Electronic Temperature Controls		
Freezer Temperature Controls		
Clear Door Bins		
Adjustable Door Bins		
Quiet Cooling		
Fingerprint Resistant		
Electrical Details		
Amps	6.5	
Volts	115	
Certifications		
ADA Compliant	Yes	
ENERGY STAR® Certified	Yes	

Technical Details	
Refrigerator Type	Top-Freezer
Number of Doors	2
Number of Interior Refrigerator Shelves	3
Number of Refrigerator Door Bins	1 Fixed, 4 Adjustable
Number of Interior Freezer Shelves	1
Number of Freezer Door Bins	2 Fixed
Lighting Type	LED
Ice Maker	Optional
Ice Maker Location	Freezer
Dispenser Type	N/A
Dimensions	
Product Dimensions (H x W x D)	66-1/4" x 32-3/4" x 34"
Depth with Door Open 90°	62-1/4"
Cutout Dimensions	Allow extra 1/2" on sides and top Allow extra 1" on rear
Reference Material	

Key Features & Benefits

Frameless Glass Shelves


Store more items on wall-to-wall shelves for greater storage flexibility.

Flexi-Slide™ Bin

Make space for tall items with the bin that quickly and easily moves side to side.

Humidity-Controlled Crispers

Store fruits and vegetables in their ideal environment.

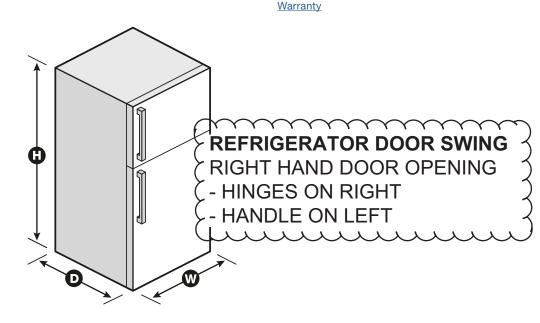

Dimension Guide Use & Care Guide

Energy Guide

NOTE: Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

®/™ © 2020. All rights reserved. Printed in the U.S.A. D200052XXC. WRT541SZDSPECSHEETV01.

Model: 20-2095 END ALT MOD B The Forbes





Top Mount Refrigerator

PRODUCT MODEL NUMBERS

WRT311FZD WRT511SZD WRT541SZD

Electrical: A 115-volt, 60-Hz, AC-only, 15-or 20-amp fused, grounded electrical supply is required. It is recommended that a separate circuit serving only your refrigerator be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.


NOTE: Before performing any type of installation, cleaning, or removing a light bulb, turn the control (Thermostat, Refrigerator or Freezer Control depending on the model) to OFF and then disconnect the refrigerator from the electrical source. When you are finished, reconnect the refrigerator to the electrical source and reset the control (Thermostat, Refrigerator or Freezer Control depending on the model) to the desired setting. See "Using the Controls."

Water: A cold water supply with water pressure between 30 and 120 psi (207 and 827 kPa) is required to operate ice maker and water dispenser. If you have questions about your water pressure, call a licensed, qualified plumber.

IMPORTANT: The pressure of the water coming out of a reverse osmosis system going to the water inlet valve of the refrigerator needs to be between 30 and 120 psi (207 and 827 kPa).


Reverse Osmosis Water Supply: If a reverse osmosis water filtration system is connected to your cold water supply, the water pressure to the reverse osmosis system needs to be a minimum of 40 to 60 psi (276 to 414 kPa).

PRODUCT DIMENSIONS

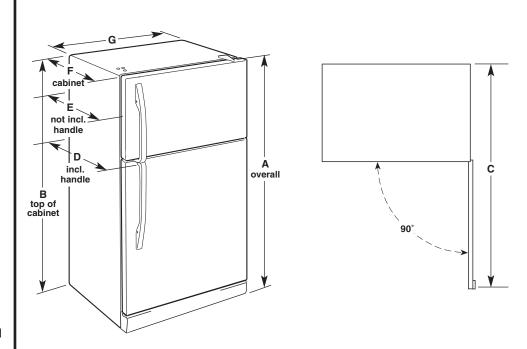

Model Number	Model Size	Reversible Door	Height - Overall "A"	Height - Top of Cabinet "B"	Depth - Door Open 90° "C"	Depth - With Handles "D"	Depth - Without Handles "E"	Depth - Cabinet Only "F"	Width - Cabinet "G"
WRT311FZD	20.5 cu. ft.	Yes	661/4" (168.3 cm)	65½" (166.4 cm)	621/4" (158.1 cm)	32 ⁷ / ₈ " (83.5 cm)	30 ⁵ / ₈ " (77.8 cm)	28½" (72.4 cm)	32¾" (83.2 cm)
WRT511SZD WRT541SZD	21.3 cu. ft.	Yes	66½" (168.3 cm)	65½" (166.4 cm)	62½" (158.1 cm)	34" (86.4 cm)	32½" (82.3 cm)	28½" (72.4 cm)	32¾" (83.2 cm)

LOCATION REQUIREMENTS



To ensure proper ventilation for your refrigerator, allow for a $\frac{1}{2}$ " (1.25 cm) space on each and between overhead cabinets and refrigerator top. Allow at least 1" (2.5 cm) between back of cabinet and the wall. If your refrigerator has an ice maker, make sure you leave some extra space at the back for the water line connections.

If you are installing your refrigerator next to a fixed wall, leave 2" (5 cm) minimum on the hinge side (depending on your model) to allow for the door to swing open.

NOTE: This refrigerator is intended for use in a location where the temperature ranges from a minimum of 55°F (13°C) to a maximum of 110°F (43°C). The preferred room temperature range for optimum performance, which reduces electricity usage and provides superior cooling, is between 60°F (15°C) and 90°F (32°C). It is recommended that you do not install the refrigerator near a heat source, such as an oven or radiator.

Model: 20-2095 END ALT MOD B The Forbe







Available Finishes/Colours

YWFE515S0JB Black




YWFF515S0JS Stainless Steel



YWFE515S0JW White

Manuals & Literature:





Warranty

5.3 cu. ft. Whirlpool® electric range with Frozen Bake™ technology

YWFE515S0JS

This Whirlpool® electric range with a dual element stove top helps you get dinner to the table. Skip preheating for favorites like pizza with Frozen Bake™ technology. This self cleaning oven also prevents cooked food from getting cold with the Keep Warm setting. Closed door broiling helps keep the kitchen comfortable.

Top Features

FlexHeat™ Dual Radiant Element

Get two elements in one with a 6" inner ring that's great for smaller pots and pans and a 9" expandable outer ring that makes room for larger cookware.

Frozen Bake™ technology
Skip preheating and cook frozen favorites like pizza in fewer steps with preprogrammed settings that automatically adjust cooking times for you.

Keep Warm setting

Keep dishes from getting cold with this setting that delivers low heat to the oven.

Closed Door Broiling
Maintain the optimal cooking temperature for food while still keeping the kitchen comfortable and cool using this broiling temperature management system that helps prevent overheating.

Dimensions	
Depth	27 3/4
Height	36
Width	29 7/8

Configuration and Overview		
Range Type	Freestanding	
Fuel Type	Electric	
Size (IN,inches)	30	

Yes
Storage Drawer
Glass Window
Extra Large
Stainless Steel
Metal

Exterior	
Handle Type	Reach-Through Handle
Features	
Hot Surface Indicator Light	Yes
Heating Flement On	Yes


reatures	
Hot Surface Indicator Light	Yes
Heating Element On Indicator Light	Yes
Power On Indicator Light	No
Griddle	NA
Automatic Convection Conversion Temperature Adjust	No
Power Outage Compatible	No

Model: 20-2095 END ALT MOD B The Forbes

42 of 51

WHIRLPOOL 30" (76.0 CM) FREESTANDING ELECTRIC RANGES Model YWFE515S0JS

Product Dimensions



- A. 273/4" (70.5 cm) max. depth with handle
- B. 46⁷/₈" (119.1 cm) overall height (max.) with leveling legs screwed all the way in*
- C. 36" (91.4 cm) cooktop height (max.) with leveling legs screwed all the way in*
- D. 297/8" (75.9 cm) width
- E. 25⁵/₁₆" (64.3 cm) depth back of range to front of cooktop**
- F. Model/serial/rating plate (located on the frame behind a top corner of the door or either side of the drawer)

IMPORTANT: Range must be level after installation. Follow the instructions in the "Level Range" section. Using the cooktop as a reference for leveling the range is not recommended.


- *Range can be raised approximately 1" (2.5 cm) by adjusting the leveling legs.
- **Front of door and drawer may extend further forward depending on styling.

Cabinet Dimensions

Cabinet opening dimensions shown are for 25" (64.0 cm) countertop depth, 24" (61.0 cm) base cabinet depth and 36" (91.4 cm) countertop height.

IMPORTANT: If installing a range hood or microwave hood combination above the cooking surface, follow the range hood or microwave hood combination installation instructions for dimensional clearances above the cooktop surface.

A freestanding range may be installed next to combustible walls with zero clearance.



- A. 13" (33.0 cm) max. upper cabinet depth
- B. 30" (76.2 cm) min. opening width
- C. For minimum clearance to top of cooktop, see NOTE*
- D. 30" (76.2 cm) min. opening width
- E. Outlet 8" (20.3 cm) to 22" (55.9 cm) from either cabinet, 7" (17.8 cm) max. from floor.
- F. Cabinet door or hinges should not extend into the cutout.

*NOTE: 24" (61.0 cm) minimum when bottom of wood or metal cabinet is covered by not less than 1/4" (6.4 mm) flame retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015" (0.4 mm) stainless steel, 0.024" (0.6 mm) aluminum or 0.020" (0.5 mm) copper.

30" (76.2 cm) minimum clearance between the top of the cooking platform and the bottom of an uncovered wood or metal cabinet.

Model: 20-2095 END ALT MOD B The Forbes

43 of 51

WHIRLPOOL 30" (76.0 CM) FREESTANDING ELECTRIC RANGES Model YWFE515S0JS

Electrical Requirements - Canada Only

AWARNING



Electrical Shock Hazard

Electrically ground range.

Failure to do so can result in death, fire, or electrical shock.

If codes permit and a separate ground wire is used, it is recommended that a qualified electrical installer determine that the ground path is adequate and wire gauge are in accordance with local codes.

Be sure that the electrical connection and wire size are adequate and in conformance with CSA Standard C22.1, Canadian Electrical Code, Part 1 - latest edition, and all local codes and ordinances.

A copy of the above code standards can be obtained from:

Canadian Standards Association 178 Rexdale Blvd. Toronto, ON M9W 1R3 CANADA

 Check with a qualified electrical installer if you are not sure the range is properly grounded.

Range Rating*		Specified Rating of Power Supply Cord Kit and Circuit Protection		
120/240 V	120/208 V	Amps		
8.8 - 16.5 KW 16.6 - 22.5 KW	7.8 - 12.5 KW 12.6 - 18.5 KW	40 or 50** 50		

^{*}The NEC calculated load is less than the total connected load listed on the model/serial/rating plate.

- A time-delay fuse or circuit breaker is recommended.
- This range is equipped with a CSA International Certified Power Cord intended to be plugged into a standard 14-50R wall receptacle. Be sure the wall receptacle is within reach of range's final location.



Do not use an extension cord.

INSTALLATION INSTRUCTIONS


Unpack Range

AWARNING

Excessive Weight Hazard

Use two or more people to move and install range. Failure to do so can result in back or other injury.


- 1. Remove shipping materials, tape and film from range.
- 2. Remove oven racks and parts package from inside oven.
- 3. Do not remove the shipping base at this time.



A. Shipping base

4. On Ranges Equipped with a Storage Drawer:


Remove the storage drawer. See the "Storage Drawer" section. Use a 1/4" (6.4 mm) drive ratchet to lower the rear leveling legs one-half turn. Use a wrench or pliers to lower front leveling legs one-half turn.



- A. 1/4" (6.4 mm) drive ratchet
- B. Rear leveling leg
- C. Wrench or pliers
- D. Front leveling leg

On Ranges Equipped with a Warming Drawer or Premium Storage Drawer:

On ranges equipped with a warming drawer or premium storage drawer, the rear legs cannot be accessed by removing the warming drawer or premium storage drawer. It will be necessary to adjust the rear legs from outside the range. Use wrench or pliers to lower the front and rear leveling legs one half turn.



- A. Rear leveling leg
- B. Wrench or pliers
- C. Front leveling leg

^{**}If connecting to a 50 A circuit, use a 50 A rated cord with kit. For 50 A rated cord kits, use kits that specify use with a nominal 13/8" (3.5 cm) diameter connection opening.

Model: 20-2095 END ALT MOD B The Forbes

44 of 51

WHIRLPOOL 30" (76.0 CM) FREESTANDING ELECTRIC RANGES Model YWFE515S0JS

Install Anti-Tip Bracket

AWARNING

Tip Over Hazard

A child or adult can tip the range and be killed.

Install anti-tip bracket to floor or wall per installation instructions.


Slide range back so rear range foot is engaged in the slot of the anti-tip bracket.

Re-engage anti-tip bracket if range is moved.

Do not operate range without anti-tip bracket installed and engaged.

Failure to follow these instructions can result in death or serious burns to children and adults.


- Remove the anti-tip bracket from where it is taped inside the storage drawer or warming drawer.
- 2. Determine which mounting method to use: floor or wall. If you have a stone or masonry floor, you can use the wall mounting method. If you are installing the range in a mobile home, you must secure the range to the floor.
- 3. Determine and mark centerline of the cutout space. The mounting can be installed on either the left-side or right-side of the cutout. Position mounting bracket against the wall in the cutout so that the V-notch of the bracket is 129/16" (31.9 cm) from centerline as shown.




A. 129/16" (31.9 cm) B. Bracket V-notch

 Drill two 1/8" (3 mm) holes that correspond to the bracket holes of the determined mounting method. See the following illustrations.

Floor Mounting



Wall Mounting



- 5. Using the Phillips screwdriver, mount anti-tip bracket to the wall or floor with the two #12 x $1^5/8$ " (4.1 cm) screws provided.
- **6.** Move range close enough to opening to allow for final electrical connections. Remove shipping base, cardboard or hardboard from under range.
- 7. Move range into its final location, making sure rear leveling leg slides into anti-tip bracket.



8. Move range forward onto shipping base, cardboard or hardboard to continue installing the range using the following installation instructions.

15 of 51 Model: 20-2095 END ALT MOD B The Forbe





Stainless Steel

Also available in:

White	WDF330PAHW
Rlack	WDE330PAHR

Capacity	
Total Place Settings	13
General Features & Properties	
Heavy Cycle	
High Temperature Wash Option	
Heated Dry Option	
ENERGY STAR® Certified	
Industry's Best Selling Dishwasher Brand [†]	
Designed, Engineered and Assembled in the U.S.A. with American Pride	
Electrical Details	
Amps	10
Volts	120
Hz	60
Certifications	
ENERGY STAR® Certified	Yes

Technical Details	
Dishwasher Type	Built-in
Control Location	Front
Control Type	Push Button
Number of Wash Cycles	3
Number of Options	4
dBA	55
Number of Racks	2
Tub Material	Plastic
Wash System	Filter
Wash System Type	Removable Filter
Number of Wash Arms	2
Dimensions	
Product Dimensions (H x W x D)	34-1/2" x 23-7/8" x 24-1/2"
Depth with Door Open 90°	49-1/2"

Reference Material **Dimension Guide**

Install Guide Use & Care Guide

Energy Guide

Warranty

Key Features & Benefits

1-Hour Wash Cycle


Clean dishes in half the time so your plates, pans and glasses are thoroughly cleaned up and taken care of in just an hour.*

Soil Sensor

Determines how dirty dishes are and adjusts the Normal cycle as needed to make sure dishes come out clean.

Normal Cycle

Use for normal amounts of food soil to clean up leftover messes from your day-to-day meals.



^{*}Per IEC standards. **Compared to Normal cycle with lightly soiled loads. †Based on 12-month average of sales. TraQline 2018. NOTE: Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

®/™ © 2020. All rights reserved. Printed in the U.S.A. D200052XXA. WDF330PAHSPECSHEETV01.






Undercounter Dishwasher

PRODUCT MODEL NUMBERS

WDF110PAB	WDF320PAD	WDT710PAH
WDF111PAB	WDF330PAH	WDT720PAD
WDF120PAF	WDF331PAH	WDT730PAH
WDF121PAF	WDF520PAD	WDT735PAG
WDF130PAH	WDF540PAD	WDT735PAH
WDF131PAH	WDF545PAF	

DRAIN REQUIREMENTS

- A new drain hose is supplied with your dishwasher. If drain hose is not long enough, use a new drain hose with a maximum length of 12 ft (3.7 m) that meets all current AHAM/IAPMO test standards, is resistant to heat and detergent, and fits the 1" (25 mm) drain connector of the dishwasher. See the "Tools and Parts" section at the front of the guide for part details and orders.
- Make sure to connect drain hose to waste tee or disposer inlet above drain trap in house plumbing and 20" (508 mm) minimum above the floor. It is recommended that the drain hose either be looped up and securely fastened to the underside of the counter or be connected to an air gap.
- Make sure to use an air gap if the drain hose is connected to house plumbing lower than 20" (508 mm) above subfloor or floor.

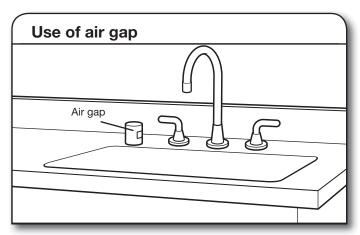

- If required, the air gap should be installed in accordance with the air gap installation instructions. When you are connecting the air gap, a rubber hose (not provided) will be needed to connect to the waste tee or disposer inlet.
- Use 1/2" minimum I.D. drain line fittings.

WATER SUPPLY REQUIREMENTS

- This dishwasher has a water heating feature and also requires a connection to a hot water supply line.
- A hot water line with 20 to 120 psi (138 to 862 kPa) water pressure can be verified by a licensed plumber.
- 120°F (49°C) water at dishwasher
- ³/8" O.D. copper tubing with compression fitting or flexible braided water supply line. See the "Tools and Parts" section at the front of the guide for part details and orders.

NOTE: 1/2" minimum plastic tubing is not recommended.

- A 90° elbow with ³/₄" hose connection with rubber washer. See the "Tools and Parts" section at the front of the guide for part details and orders.
- Do not solder within 6" (152 mm) of the water inlet valve.
- If installed in new construction, make sure the house water supply lines have been flushed prior to connecting the dishwasher to remove any debris that may exist in the supply line.

NOTE: If replacing an existing dishwasher, it is recommended to install a new water line (see the "Tools and Parts" section at the front of the guide for part details) and drain hose (supplied) with the new dishwasher.

ELECTRICAL REQUIREMENTS

You Must Have:


- 120-volt, 60 Hz, AC-only, 15- or 20-amp, fused electrical supply
- Copper wire only
- A maximum of 2 field wiring supply conductors (12 AWG largest size) plus 1 grounding conductor are permitted in the terminal box.

We Recommend:

- A time-delay fuse or circuit breaker
- A separate circuit

If Connecting Dishwasher with a Power Cord:

- Use a UL Listed power cord kit marked for use with dishwasher. See the "Tools and Parts" section at the front of the guide for part details and orders.
- Plug into a grounded 3 prong outlet. Outlet must meet all local codes and ordinances.



If Connecting Dishwasher with Direct Wiring:

- Use flexible, armored, or nonmetallic sheathed copper wire with grounding wire that meets the wiring requirements for your home and local codes and ordinances.
- Use a UL Listed/CSA Approved metallic strain relief.


Model: 20-2095 END ALT MOD B The Forbe

PRODUCT AND CABINET OPENING DIMENSIONS — 23⁷/8" -(606 mm) — 25¹/₄" -(641 mm) — ³/₄" (19 mm) 30" (762 mm) 331/2" 301 (851 mm) min. with (762 mm) leveling legs removed **4**−3³/₄" (94 mm) 31/2" - 41/2" (88 mm - 106 mm) (533 mm) For 4" (100 mm) toe kick, height of cabinet opening is 341/2" (863 mm). A. Insulation may be compressed (not used on all models). B. Door handles may protrude forward of the face of the dishwasher, (varies by model). Check that all surfaces have no protrusions that would prohibit dishwasher installation. 101/2" NOTE: Shaded areas (864 mm) of cabinet walls show where utility -6³/₄" (102 mm) (172 mm) connections may be installed. (76 mm (159 mm) 2¹/₄" (64 mm) 24" / (620 mm) (44 mm) 2" (51 mm) 24' (620 mm) D C. Measured from the lowest point on the underside of the countertop. May be reduced to 33¹/₂" (851 mm) by removing the wheels and perforated area of insulation (blanket) on dishwasher. D. Minimum, measured from narrowest point of opening.

-8 of 51 Model: 20-2095 END ALT MOD B The Forbes

5.0 cu.ft I.E.C. Closet-Depth Front Load Washer with Intuitive Controls

Model: WFW560CHW

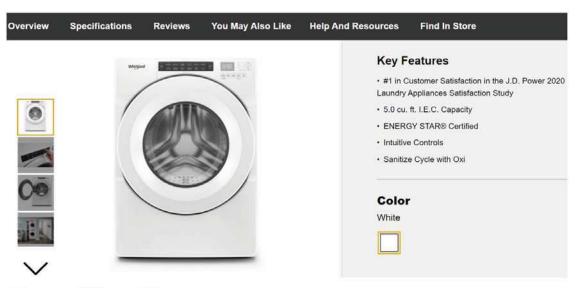

Specifications

Width: 6858.00, 27.0" Centimeters, Inches


Depth: 8016.88, 31-9/16" Centimeters, Inches

Dimensions		
Capacity	4-3/10	
Depth	8016.88 cm, 31-9/16 in	
Gross Weight	97068688.00 kg, 214 lbs	
Net Weight	92532768.00 kg, 204 lbs	
Width Appearance	6858.00 cm, 27.0 in	
LCD Touch Screen	No	
Window	Yes	
Details		
Advanced Vibration Control™	No	
Dispense System	Detergent, Fabric Softener & Bleach	
Eco Monitor/Efficiency Monitor	No	
Hoses Included	4ft 4in Drain Hose Included	
Internal Heater	No	
Maximum Spin Speed	1160	
Out Of Balance Sensing	Yes	
Water Factor	ctor 3-1/5	
Cycles and Options		
Number Of Wash Cycles	35	
Electrical		
Power Cord Included	Yes	
Controls		
Automatic Temperature Controls	Yes	
Control Location	Front	
LCD Touch Screen	No	


Compatibility Works With No **Options** Number Of Washer Options **Features** Stackable Yes Water Faucet No Cycles Number Of Wash Cycles 35 Exterior Lid/Door Lock Yes Lid/Door Swing Left Modifiers Delay Start No Number Of Rinse Options Number Of Soil Levels 3 Number Of Spin Speeds Number Of Wash/Rinse Temperatures 4 Pre Soak Yes Temperature Selections Hot, Cold, Cool, Warm

9 of 51 Unit: 3190A-4, Phase: 3 Model: 20-2095 END ALT MOD B The Forb


Recessed area or closet installation (stacked washer and dryer)




Custom under counter installation



Recessed area or closet installation (washer only)

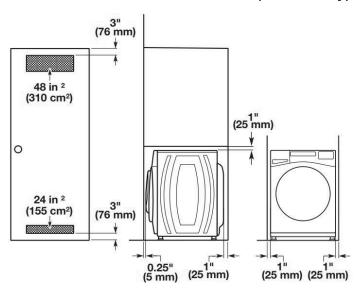

Custom cabinet installation

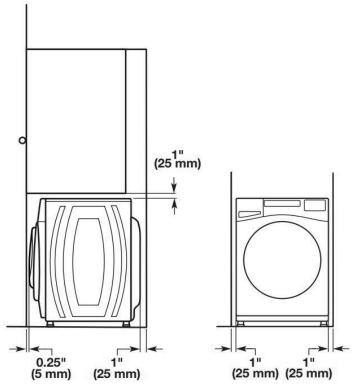


Drain System

It is the responsibility of the installer to install and secure the drain hose in to the provided plumbing/drain in a manner that will avoid the drain hose coming out of o leaking from the plumbing/drain.

Drain system can be installed using a floor drain, wall standpipe, floor standpipe, or laundry tub. Select the method you need.

IMPORTANT: To avoid siphoning, only 4.5" (114 mm) of drain hose should be inside standpipe. Always secure drain hose with

Floor standpipe drain system

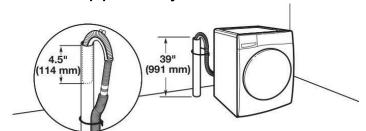


Minimum diameter for a standpipe drain: 2" (51 mm). Minimum carry-away capacity: 17 gallons (64 L) per minute. A 1/4" (6 mm) diameter to 1" (25 mm) diameter Standpipe Adapter Kit is available; refer to the Quick Start Guide for online ordering information. Top of standpipe must be at least 39" (762 mm) high; install no higher than 96" (2.4 m) from bottom of washer. If you have an overhead sewer and need to pump higher than 96 (2.4 m), a sump pump and associated hardware are needed. See

Model: 20-2095 END ALT MOD B The Forbes


50 of 51

Wall standpipe drain system

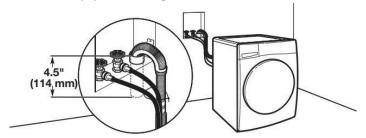


See requirements in "Floor standpipe drain system."


Laundry tub drain system

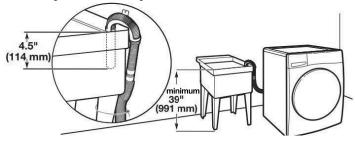

Minimum capacity: 20 gallons (76 L). Top of laundry tub must be at least 39" (991 mm) from the floor; install no higher than 96" (2.4 m) from bottom of washer.

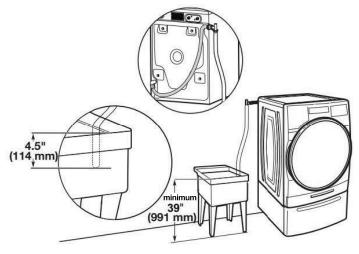

Floor drain system

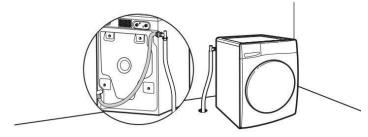

Floor drain system requires a Siphon Break Kit, 2 Connector Kits, and an Extension Drain Hose that may be purchased separately; refer to the Quick Start Guide for online ordering information. Minimum siphon break height: 28" (710 mm) from bottom of washer. (Additional hoses may be needed.)

Electrical Requirements

AWARNING



Electrical Shock Hazard

Plug into a grounded 3 prong outlet.

Do not remove ground prong.

Do not use an adapter.

Do not use an extension cord.

Failure to follow these instructions can result in death, fire, or electrical shock.

- A 120 V, 60 Hz, AC only, 15 or 20 A, fused electrical supply is required. A time-delay fuse or circuit breaker is recommended. It is recommended that a separate circuit breaker serving only this appliance be provided.
- This washer is equipped with a power supply cord having a 3-prong grounding plug.
- To minimize possible shock hazard, the cord must be plugged into a mating, 3-prong, grounding-type outlet, grounded in accordance with local codes and ordinances. If a mating outlet is not available, it is the personal responsibility and obligation of the customer to have the properly grounded outlet installed by a qualified electrician.
- If codes permit and a separate ground wire is used, it is recommended that a qualified electrician determine that the ground path is adequate.
- Do not ground to a gas pipe.
- Check with a qualified electrician if you are not sure the washer is properly grounded.
- Do not have a fuse in the neutral or ground circuit.

GROUNDING INSTRUCTIONS

For a grounded, cord-connected appliance:

This appliance must be grounded. In the event of a malfunction or breakdown, grounding will reduce the risk of electric shock by providing a path of least resistance for electric current. This appliance is equipped with a cord having an equipment-grounding conductor and a grounding plug. The plug must be plugged into an appropriate outlet that is properly installed and grounded in accordance with all local codes and ordinances.

WARNING: Improper connection of the equipment-grounding conductor can result in a risk of electric shock. Check with a qualified electrician or serviceman if you are in doubt as to whether the appliance is properly grounded. Do not modify the plug provided with the appliance: If it will not fit the outlet, have a proper outlet installed by a qualified electrician.

For a permanently connected appliance:

This appliance must be connected to a grounded metal, permanent wiring system, or an equipment-grounding conductor must be run with the circuit conductors and connected to the equipment-grounding terminal or lead on the appliance.

SAVE THESE INSTRUCTIONS

WHIRLPOOL DRYER Model #: YWED5620HW



7.4 cu. ft. Front Load Electric **Dryer with Intuitive Touch Controls**



7.4 cu. ft. Front Load Electric Dryer with Intuitive Touch Controls

Model #: YWED5620HW

Dimensions

Dimensions	
Depth	78.74 cm, 31.0 in
Depth With Door Open 90 Degree	138.43 cm, 54-1/2 in
Height	98.42 cm, 38-3/4 in
Width	68.58 cm, 27.0 in
Configuration and Overview	
Fuel Type	Electric
Cycles and Options	
Cycles and Options Cycle Time Remaining	Yes
	Yes No
Cycle Time Remaining	
Cycle Time Remaining Lint Filter Indicator	No

Power Cord Included

Long Vent	No
Maximum Vent Length	64
Venting Direction	Left, Right, Bottom, Rear

Electrical

Hz	60