#### Sales Selection Sheet Checklist

1 of 45

LOT 3184B-8 Model: 20-1606 A The Grassfield PURCHASERS: ROBIN KALOTY/ **VENDOR:** Heathwood Homes (Huron) Limited DECK LOT - UPGRADED TO 8' X 8' DECK FINISHED BASEMENT COLD CELLAR **UPGRADED / MODIFIED ELEVATION** CORNER UPGRADE REAR UPGRADE **CEILING UPGRADE - SMOOTH** MAIN FLOOR SECOND FLOOR BASEMENT ADDITIONAL ROUGH-INS 200 AMP SERVICE WET BAR ROUGH-IN **HUMIDIFIER** AIR CONDITIONING GAS ROUGH-IN STOVE **DRYER** BBQ ADDITIONAL FIREPLACE KITCHEN: HOODFAN VENTING SIZE 6 IN ROUND DUCT 7 IN ROUND DUCT **FULL BASEMENT STAIRS:** N/A All Oak **UPPER BASEMENT STAIRS:** Carpet Grade LOWER BASEMENT STAIRS: All Oak MAIN STAIRS: MEDIA STAIRS (if applicable): N/A LOFT STAIRS (if applicable): N/A LEFUR **Decor Consultant:** PAPERAES ... -04- 0 7 2022 Purchaser: Date Heathwood Homes (Huron) Limited Date Approved Locked Date:

ROBIN KALOTY/ Project: Wallaceton Unit: 3184B-8, Phase: 3 Model: 20-1606 A The Grassfield

Cabinet Colour/Style	9156	Viking III-SIMCOE-RAIN CLOUD-3DL ***STD***
Countertop	9121	MSI Quartz GROUP 1 ICED WHITE 3/4 inch with double mitre edge ***1***
Countertop Edge	4005	DOUBLE MITRE 1 1/2 INCH ***UPG***
Cabinet Hardware	2086	9677-HARDWARE ***STD***
sland Cabinet Colour/Style	9156	Viking III-SIMCOE-RAIN CLOUD-3DL ***STD***
sland Countertop	9121	MSI Quartz GROUP 1 ICED WHITE 3/4 inch with double mitre edge ***1***
Backsplash	1111	N/A *****
Backsplash Grout	1111	N/A *****
Backsplash Tile Pattern	1111	N/A *****
HoodFan	9393	SCB51930-CYCLONE 30 inch CANOPY CHIMNEY HOODFAN-SS
Appliance	9393	Purchasers have been advised: standard fridge opening is a minimum 37 3/8 x 73 3/8". Ice Waterline Rough-In is included.
Appliance	9393	Standard stove opening is 30" and standard dishwasher opening is 24". Any gas stove will require backsplash or stainless steel backing to avoid fire hazards.
Appliance	9393	Purchasers acknowledge: Heathwood Homes and its contractors will not be responsible for any kitchen cabinet changes due to appliances dimension changes after
Comment		

Flooring	8913	UN.BL.BIA.1224-Biel-Bianco (White)-12 x 24 See Tile Direction on Sketch Page ***2***	S 2
Floor Tile Grout	2225	Grout-(27) Silver ***STD***	
Floor Tile Pattern	3050	SIDE TO SIDE ***STD***	

Customer Co	lours		2 of 15
ROBIN KALOTY/ Project: Wallaceton Unit: 3184B-8, Phas Model: 20-1606 A The	se: 3 Grassfield		Created: 12/1/2021 12:28:00 Locked: Closed:
			Closed.
		=	
Comment			
Foyer			
Flooring		8913	UN.BL.BIA.1224-Biel-Bianco (White)-12 x 24 See Tile Direction on Sketch Page ***2***
Floor Tile Grou	ut	2225	Grout-(27) Silver ***STD***
Floor Tile Patt	ern	3050	SIDE TO SIDE ***STD***
Comment			
Laundry Room	CANADA	]	
Flooring		3050	GE.BY.AZR.1313 New Byzantine Azzuro 13
Floor Tile Gro	ut	2225	Grout-(27) Silver ***STD***
Floor Tile Patt	ern	3000	STANDARD SQUARE ***STD***
Comment			
Mud Room			
Flooring		8913	UN.BL.BIA.1224-Biel-Bianco (White)-12 x 24 See Tile Direction on Sketch Page ***2***
Floor Tile Gro	ut	2225	Grout-(27) Silver ***STD***
Floor Tile Patt	ern	3050	SIDE TO SIDE ***STD***
Comment	# ## ### ### #########################	<u> </u>	

process of the second

Page 2 of 9

pos a marino po-

#### **Customer Colours** ROBIN KALOTY/ Project: Wallaceton Unit: 3184B-8, Phase: 3 Wallaceton Locked: Model: 20-1606 A The Grassfield Closed: Powder Room UN.BL.BIA.1224-Biel-Bianco (White)-12 x 24 See Tile Direction on Sketch Page \*\*\*2\*\*\* 8913 Flooring Grout-(27) Silver \*\*\*STD\*\*\* Floor Tile Grout 2225 SIDE TO SIDE \*\*\*STD\*\*\* Floor Tile Pattern 3050 Plumbing Fixture (Colour) 1737 Plumbing Fixtures-WHITE \*\*\*STD\*\*\* Comment Hall 8913 UN.BL.BIA.1224-Biel-Bianco (White)-12 x 24 See Tile Flooring Direction on Sketch Page Grout-(27) Silver \*\*\*STD\*\*\* 2225 Grout SIDE TO SIDE \*\*\*STD\*\*\* 3050 Floor Tile Pattern Comment **Great Room** Red Oak Pearl-Vintage 7498 Flooring

Engineered-GRYPHON/IRONGATE-3/4 inch x 3 1/4 inch Comment **Upper Hall** 

7498 Red Oak Pearl-Vintage Flooring

Engineered-GRYPHON/IRONGATE-3/4 inch x 3 1/4 inch \*\*\*3\*\*\*

Comment

Page 4 of 9

ROBIN KALOTY/ Project: Wallaceton Unit: 3184B-8, Phase: 3 Model: 20-1606 A The Grassfield

Finished Basement (Rec) Room/Hall		
Flooring	9248	DY 89418 -Dynasty Tex-BLACK ICE-40 oz Poly***STD***
Comment	11 17	
Master Bedroom		
Flooring	9248	DY 89418 -Dynasty Tex-BLACK ICE-40 oz Poly***STD ***
Comment		10 to
Bedroom 2		
Flooring	9248	DY 89418 -Dynasty Tex-BLACK ICE-40 oz Poly***STD ***
Comment		
Bedroom 3		
Flooring	9248	DY 89418 -Dynasty Tex-BLACK ICE-40 oz Poly***STD ***
Comment		
Master Ensuite		
Sendin March (1971) 103 (00 March (1970) 104 (04 March (1970) 104	0157	Viking III-SIMCOE-MOONLIGHT-3DL ***STD***
Cabinet Colour/Style	9157	VIKING III-SIIVICOE-IVIOONLIGHTI-SDL STD
Countertop	8796	6698-46-Countertop-PALOMA POLAR ETCHINGS FINISH-Formica ***STD***
Countertop Edge	1111	N/A *****
Cabinet Hardware	2086	9677-HARDWARE ***STD***
Floor Tile	2086	GE.MD.WHT.1818.MT Madison Series White Matte 18
Floor Tile Grout	2225	Grout-(27) Silver ***STD***

ROBIN KALOTY/ Project: Wallaceton Unit: 3184B-8, Phase: 3 Model: 20-1606 A The Grassfield

Floor Tile Pattern	3000 STANDARD SQUARE ***STD***
Observed Files a Tile	8661 OD.ON.SWT.0202.MT.N-Ontario Series Mosaic-Snow
Shower Floor Tile	White Matte-2 x 2 ***STD***
Shower Floor Tile Grout	2226 Grout-(00) White ***STD***
Shower Floor Tile Pattern	3000 STANDARD SQUARE ***STD***
O	9020 QT.WV.WHT.0810-Weave-White-8 x 10 ***STD***
Shower Wall Tile	9020 QT.WV.WHT.0810-Weave-White-8 x 10 ***STD***
Shower Wall Tile Grout	2226 Grout-(00) White ***STD***
O W # T ! D #	LIODIZONIAL CTACKED ***CTD***
Shower Wall Tile Pattern	HORIZONTAL STACKED ***STD***
Shower Jamb(s) and Sill(s)	Shower Jamb / Sill-Thassos White ***STD***
Plumbing Fixture (colour)	1737 Plumbing Fixtures-WHITE ***STD***
Comment	
7 3	
Main Bathroom	
Cabinet Colour/Style	9111 VIKING III SIMCOE ORCHID 3DL ***STD***
Countertop	8797 6697-46-Countertop-ARGENTO ROMANO ETCHINGS
	FINISH-Formica ***STD***
Countertop Edge	1111 N/A *****
	0000 0077 HARDIMARE ***CTD***
Cabinet Hardware	2086 9677-HARDWARE ***STD***
Flooring	GE.MD.WHT.1818.MT Madison Series White Matte 18
	2005
Floor Tile Grout	2225 Grout-(27) Silver ***STD***
Floor Tile Pattern	STANDARD SQUARE ***STD***

ROBIN KALOTY/ Project: Wallaceton Unit: 3184B-8, Phase: 3 Model: 20-1606 A The Grassfield 7 Created: 12 12:28:05 5

Wall Tile	9022	QT.WV.TGR.0810-Weave-Tender Grey-8 x 10 ***STD***
		×
Wall Tile Grout	2226	Grout-(00) White ***STD***
Main Bathroom Tile Pattern	3000	STANDARD SQUARE ***STD***
Plumbing Fixture (Colour)	1737	Plumbing Fixtures-WHITE ***STD***
Comment		51
	***	20 - <b>2</b> (1 - 2) - 2 (1 - 2) -
Finished Basement Bathroom		
Ways are an assessment on a consequence of the cons	0157	Viking III-SIMCOE-MOONLIGHT-3DL ***STD***
Cabinet Colour/Style	9157	VIKING III-SIMICOE-MOONLIGH 1-3DL *****S1D*****
Countertop	8796	6698-46-Countertop-PALOMA POLAR ETCHINGS FINISH-Formica ***STD***
Countertop Edge	1111	N/A *****
Cabinet Hardware	2086	9677-HARDWARE ***STD***
Flooring	2086	GE.MD.WHT.1818.MT Madison Series White Matte 18
Floor Tile Grout	2225	Grout-(27) Silver ***STD***
Floor Tile Pattern	3000	STANDARD SQUARE ***STD***
Shower Floor Tile	8661	OD.ON.SWT.0202.MT.N-Ontario Series Mosaic-Snow White Matte-2 x 2 ***STD***
Shower Floor Tile Grout	2226	Grout-(00) White ***STD***
Shower Floor Tile Pattern	3000	STANDARD SQUARE ***STD***
Shower Wall Tile	9020	QT.WV.WHT.0810-Weave-White-8 x 10 ***STD***
Shower wall tile	9020	XI.VVV.VVIII.OO IO-VVEAVE-VVIIILE-O X IO SID

ROBIN KALOTY/ Project: Wallaceton Unit: 3184B-8, Phase: 3 Model: 20-1606 A The Grassfield S (398 4 5) Cresied: 12/14/202 12:28:01 5

Shower Wall Tile	Grout	2226	Grout-(00) White ***STD***	
Shower Wall Tile	Shower Wall Tile Pattern		HORIZONTAL STACKED ***STD***	
Shower Jamb(s)		8923	Shower Jamb / Sill-Thassos White ***STD***	
Plumbing Fixture	(Colour)	1737	Plumbing Fixtures-WHITE ***STD***	
Comment	WW.			
Great Room Fireplace	e			
Type	COLUMN TO THE STATE OF THE STAT	8865	Dimplex-Electric Fireplace-PF3033HL ***STD***	
Mantle		8891	NF-17-Paint Grade Mantle- Cabinet (Per Plan)-WHITE PC ***STD***	G 22
Surround Opt.		1111	N/A *****	
Disclaimer		1111	Purchasers have been advised: heat from the FP can damage TV above a FP and items placed on mantle.	
Disclaimer		1111	Heathwood and its contractors will not be liable for any damage on items placed/installed above a FP after closing.	
Comment		-41-		
L		ille.	A) (1)	
Basement Stairs				
Туре		1714	Carpet Grade Stairs ***STD BASEMENT STAIRS***	
Colour		7912	Irongate (Gryphon) STAIN TO COMPLIMENT HARDWOOD AND WILL VARY FROM FLOORING	
Carpet Runner		1111	N/A *****	
Handrail/Pickets/F	Post Type	9119	Handrail only on closed walls (one or two sides per building code) ***STD***	
Handrail/Pickets/F	Post Colours	1729	Carpet Grade-Stain handrail, pickets, stringers, nosing pos	
Carpet		9248	DY 89418 -Dynasty Tex-BLACK ICE-40 oz Poly***STD***	
Custom Stain/Pai	nt	1111	N/A *****	
Comment Page 7 of 9				

#### **Customer Colours** ROBIN KALOTY/ Project: Wallaceton Unit: 3184B-8, Phase: 3 Locked: Model: 20-1606 A The Grassfield Closed: Basement Stairs Landings (Upper and Lo 7498 Red Oak Pearl-Vintage Flooring Engineered-GRYPHON/IRONGATE-3/4 inch x 3 1/4 inch Comment **Main Stairs** Oak Stairs \*\*\*STD MAIN STAIRS\*\*\* 1712 Type Irongate (Gryphon) STAIN TO COMPLIMENT HARDWOOD AND WILL VARY FROM FLOORING 7912 Colour 1111 N/A \*\*\*\*\* Carpet Runner Single Collar Alt. Plain w/ Shoes with 3 1/2" Square/Cap 8148 Handrail/Pickets/Posts Type Post(s)-BLACK \*\*\*2\*\*\* Handrail/Pickets/Posts Colour 7761 Oak Grade-Stain handrail, stringers, treads, risers, nosingpost N/A \*\*\*\*\* Custom Stain/Paint 1111 Comment Main Stairs Landing(s) Flooring 7498 Red Oak Pearl-Vintage Engineered-GRYPHON/IRONGATE-3/4 inch x 3 1/4 inch Comment Throughout 22-Wall-WARM GREY \*\*\*STD\*\*\* Walls - Paint Colour 1717 500 Series-Underpad \*\*\*STD\*\*\* Underpad 1079 Metal Thresholds \*\*\*STD\*\*\* Thresholds 2232

Decora White Switches and Plugs \*\*\*STD\*\*\*

4 1/4 Baseboard and 2 3/4 Casings \*\*\*STD\*\*\*

5796

8705

Switches and Plug

Trim Size

ROBIN KALOTY/ Project: Wallaceton Unit: 3184B-8, Phase: 3 Model: 20-1606 A The Grassfield 100 f 98 4 5

rrim - Pa	int Colour 1716	Irim-vvHiI	F91D	
Commen	t	3 2		
			200 3000	
Purchaser:	Rohi Kalo My	Dee 7/2,	Decor Consultant	Date
Purchaser:		Date	Wallaceton	-04- 0 7 2022 Date Approved

## CONSTRUCTION SUMMARY Of 45



Lot: 3184B-8

Model: 20-1606 A The Grassfield Project/Phase: Wallaceton / 3

Worksheet	THIS IS A DECK LOT COMPLETE WITH A 4 FT. DEEP DECK WITH STAIRS TO GRADE. DONE BY AMENDMENT DATED DEC.7, 2021  Note:  See upg deck to 8x8
Offer Worksheet	Five Appliances: SS Fridge, Stove, Dishwasher: White Front Loader Washer/Dryer - Townhomes  Note:
Offer Worksheet	The Purchaser(s) acknowledge that they have NOT been referred by an existing Heathwood Homeowner and therefor are not entitled to a referral fee under Heathwood Homes Referral program  Note:

DisciplineMS.rpt 13dec21 Page 1 of 7

## construction summary of 45



Lot: 3184B-8 Model: 20-1606 A The Grassfield

Project/Phase: Wallaceton / 3

#### **ALUMINUM**

Invoice	Qty.	Description
964	1	- DECK - 6 FEET DOOR - UPGRADE TO 8 FT WIDTH 8 FT DEPTH
314,197		
07Apr22 **		

#### **APPLIANCES**

Invoice	Qty.	Description
964	1	KITCHEN - APPLIANCES - CYCLONE 30 INCH WALL MOUNT CHIMNEY HOOD SS - SCB51930
313,484		
07Apr22		SKETCH # 3
		CABINETRY-delete stove uppers; ELECTRICAL-delete std range hood; HEATING/AIR CONDITIONING-Duct
		change to 6 in

<b>CABIN</b>	CABINETRY				
Invoice	Qty.	Description			
964 313,768	1	KITCHEN - 11A-Upper angle corner per unit Viking			
07Apr22		SKETCH # 3 DRYWAL-Notify; FRAMING-Notify; PAINTING-Notify			
964 313,624	1	KITCHEN - 04H-66cm deep fridge enclosure (counter depth) with (1) wall ([1] 66cm deep gable and [1] 66cm deep cabinet) (This is not a zero clearance enclosure. Standard heights and widths will be used.) Viking			
07Apr22		SKETCH # 3 DRYWAL-Notify; FRAMING-Modify Bulkhead; PAINTING-Notify			
964 314,040	1	KITCHEN - 30H-Wall cabinet with shelf for microwave (finished interior) (opening 24 InchW x 13 3/4 InchH x 17 InchD) Viking			
07Apr22		KITCHEN - SEE SKETCH # 3			
964 313,484	1	KITCHEN - APPLIANCES - CYCLONE 30 INCH WALL MOUNT CHIMNEY HOOD SS - SCB51930			
07Apr22 **		SKETCH # 3 CABINETRY-delete stove uppers; ELECTRICAL-delete std range hood; HEATING/AIR CONDITIONING-Duct change to 6 in			

CARPET			
Invoice	Qty.	Description	
964	1	UPPER HALL - HARDWOOD - VINTAGE - 3-1/4 INCH RED OAK ENGINEERED - UPPER HALL - UPG	
311,486			
07Apr22			
**		CARPET-delete std carpet; INTERIOR TRIM-supply and install quarter rounds; PAINTING-paint quarter round	

DisciplineMS.rpt 13dec21 Page 2 of 7

## 13 of 45



Lot: 3184B-8 Model: 20-1606 A The Grassfield Project/Phase: Wallaceton / 3

#### **CERAMICS**

Invoice	Qty.	Description
964 308,182 07Apr22	1	KITCHEN - CERAMICS - FLOOR - KITCHEN - UPGRADE 2
964 308,166 07Apr22	1	FOYER - CERAMICS - FLOOR - FOYER - UPGRADE 2
964 308,217 07Apr22	1	POWDER ROOM - CERAMICS - FLOOR - POWDER ROOM - UPGRADE 2
964 308,210 07Apr22	1	MUD ROOM - CERAMICS - FLOOR - MUD ROOM - UPGRADE 2
964 308,158 07Apr22	1	MASTER ENSUITE - CERAMICS - FLOOR - ENSUITE MASTER - UPGRADE 1
964 308,195 07Apr22	1	MAIN BATHROOM - CERAMICS - FLOOR - MAIN BATHROOM - UPGRADE 1
964 308,151 07Apr22	1	FINISHED BASEMENT BATHROOM - CERAMICS - FLOOR - BASEMENT BATHROOM - UPGRADE 1
1048 308,203 28Apr22	1	MAIN HALL - CERAMICS - FLOOR - MAIN HALL - UPGRADE 2 MISSED ON ORIGINAL SSS

#### **CONCRETE AND DRAIN**

01101	COTTORETE THE DIGHT		
Invoice	Qty.	Description	
964	1	- DECK - 6 FEET DOOR - UPGRADE TO 8 FT WIDTH 8 FT DEPTH	
314,197			
07Apr22 **			

#### DECK

DECK		
Invoice	Qty.	Description
964 314,197 07Apr22	1	- DECK - 6 FEET DOOR - UPGRADE TO 8 FT WIDTH 8 FT DEPTH

DisciplineMS.rpt 13dec21 Page 3 of 7

## 14 of 45



CONSTRUCTION SUMMARY

Lot: 3184B-8 Model: 20-1606 A The Grassfield Project/Phase: Wallaceton / 3

#### **DRYWALL**

Invoice	Qty.	Description
964 313,768	1	KITCHEN - 11A-Upper angle corner per unit Viking
07Apr22 **		SKETCH # 3 DRYWAL-Notify; FRAMING-Notify; PAINTING-Notify
964 313,624	1	KITCHEN - 04H-66cm deep fridge enclosure (counter depth) with (1) wall ([1] 66cm deep gable and [1] 66cm deep cabinet) (This is not a zero clearance enclosure. Standard heights and widths will be used.) Viking
07Apr22 **		SKETCH # 3  DRYWAL-Notify; FRAMING-Modify Bulkhead; PAINTING-Notify
964 310,692	1	- DRYWALL - SMOOTH CEILING IN MAIN FLOOR
07Apr22		
		PAINTING-Notify

#### **ELECTRICAL**

Invoice		Description
964 314,223	2	- ELECTRICAL - ADDITIONAL SWITCH
07Apr22		1) WITH CAPPED ELECTRICAL IN GREAT ROOM 2) WITH CAPPED ELECTRICAL ON ISLAND SKETCH # 2
964 314,224	2	- ELECTRICAL - CEILING ROUGH-IN (CAPPED)
07Apr22		1) 1X CENTERED +/- ON GREAT ROOM CEILING ON SEPERATE SWITCH 2) 1X CENTERED +/- ON ISLAND ON SEPERATE SWITCH SKETCH # 2
964 314,232	1	GREAT ROOM - ELECTRICAL - EXTRA WALL INTERIOR OUTLET ON EXISTING CIRCUIT (DOES NOT INCLUDE KITCHEN OUTLETS)
07Apr22		GREAT ROOM - TO BE CENTERED +/- ABOVE FIREPLACE APPROX. 70" +/- FROM FLOOR SKETCH # 2
964 314,229	1	KITCHEN - ELECTRICAL - EXTRA WALL INTERIOR OUTLET (120V/15A) ON A SEPARATE CIRCUIT (ON ARCFAULT)
07Apr22		KITCHEN - TO BE LOCATED AT MICROWAVE SHELF SKETCH # 3
964 313,484	1	KITCHEN - APPLIANCES - CYCLONE 30 INCH WALL MOUNT CHIMNEY HOOD SS - SCB51930
07Apr22 **		SKETCH # 3 CABINETRY-delete stove uppers; ELECTRICAL-delete std range hood; HEATING/AIR CONDITIONING-Duct change to 6 in

#### **EXTERIOR BRICK**

Invoice	Qty.	Description
964	1	- DECK - 6 FEET DOOR - UPGRADE TO 8 FT WIDTH 8 FT DEPTH
314,197		
07Apr22 **		

#### **EXTERIOR CAULKING**

Invoice	Qty.	Description
964	1	- DECK - 6 FEET DOOR - UPGRADE TO 8 FT WIDTH 8 FT DEPTH
314,197		
07Apr22 **		

DisciplineMS.rpt 13dec21 Page 4 of 7

## 15 of 45 construction summary



Lot: 3184B-8 Model: 20-1606 A The Grassfield

Project/Phase: Wallaceton / 3

#### **EXTERIOR RAILINGS**

Invoice	Qty.	Description
964	1	- DECK - 6 FEET DOOR - UPGRADE TO 8 FT WIDTH 8 FT DEPTH
314,197		
07Apr22 **		

#### **FORMING**

Invoice	Qty.	Description
964	1	- DECK - 6 FEET DOOR - UPGRADE TO 8 FT WIDTH 8 FT DEPTH
314,197		
07Apr22 **		

#### **FRAMING**

Invoice	Qty.	Description
964 313,768	1	KITCHEN - 11A-Upper angle corner per unit Viking
07Apr22 **		SKETCH # 3 DRYWAL-Notify; FRAMING-Notify; PAINTING-Notify
964 313,624	1	KITCHEN - 04H-66cm deep fridge enclosure (counter depth) with (1) wall ([1] 66cm deep gable and [1] 66cm deep cabinet) (This is not a zero clearance enclosure. Standard heights and widths will be used.) Viking
07Apr22 **		SKETCH # 3 DRYWAL-Notify; FRAMING-Modify Bulkhead; PAINTING-Notify
964	1	- DECK - 6 FEET DOOR - UPGRADE TO 8 FT WIDTH 8 FT DEPTH
314,197		
07Apr22		

#### **GRANITE**

Invoice	Qty.	Description
964	1	KITCHEN - GRANITE - COUNTERTOP - 3/4 INCH GROUP 1 WITH MITRE EDGE - KITCHEN / ISLAND - UPG
310,840		
07Apr22		KITCHEN

#### **HARDWOOD**

		~ <del>~</del>
Invoice	Qty.	Description
964	1	UPPER HALL - HARDWOOD - VINTAGE - 3-1/4 INCH RED OAK ENGINEERED - UPPER HALL - UPG
311,486		
07Apr22		
		CARPET-delete std carpet; INTERIOR TRIM-supply and install quarter rounds; PAINTING-paint quarter round

#### **HEATING / AIR CONDITIONING**

HEATING / AMY COMPANION			
Invoice	Qty.	Description	
964 314,197 07Apr22 **	1	- DECK - 6 FEET DOOR - UPGRADE TO 8 FT WIDTH 8 FT DEPTH	
964 313,484	1	KITCHEN - APPLIANCES - CYCLONE 30 INCH WALL MOUNT CHIMNEY HOOD SS - SCB51930	
07Apr22 **		SKETCH # 3 CABINETRY-delete stove uppers; ELECTRICAL-delete std range hood; HEATING/AIR CONDITIONING-Duct change to 6 in	

DisciplineMS.rpt 13dec21 Page 5 of 7

## 16 of 45 construction summary



Lot: 3184B-8 Model: 20-1606 A The Grassfield

Project/Phase: Wallaceton / 3

#### **INTERIOR RAILINGS**

Invoice	Qty.	Description
964	1	- INTERIOR RAILINGS - BLACK METAL - SINGLE COLLAR ALT. PLAIN W/ SHOES WITH 3 1/2 INCH SQUARE/CAP POST(S) AS PER PLAN - MAIN STAIR - UPG
312,248		TOST(S)/TSTERTERIN NEWFORK OF G
07Apr22		
		PAINTING-Notify
1048 312,243		BASEMENT STAIR - INTERIOR RAILING - BLACK METAL - SINGLE COLLAR ALT. PLAIN W/ SHOES WITH 3 1/2 INCH SQUARE/CAP POST(S) AS PER PLAN - BASEMENT STAIRS -UPG
28Apr22		MISSED ON ORIGINAL SSS
		PAINTING-Notify

#### INTERIOR TRIM AND DOORS

INTERIOR TRIM AND DOORS			
Invoice	Qty.	Description	
964 314,197 07Apr22 **	1	- DECK - 6 FEET DOOR - UPGRADE TO 8 FT WIDTH 8 FT DEPTH	
964 311,486 07Apr22 **	1	UPPER HALL - HARDWOOD - VINTAGE - 3-1/4 INCH RED OAK ENGINEERED - UPPER HALL - UPG  CARPET-delete std carpet; INTERIOR TRIM-supply and install quarter rounds; PAINTING-paint quarter round	

#### LUMBER

Invoice Qty. Description	Invoice
964 314,197 07Apr22 **	964 314,197

DisciplineMS.rpt 13dec21 Page 6 of 7 Printed and Sent: 15-Mar-23

## 17 of 45 construction summary



Lot: 3184B-8 Model: 20-1606 A The Grassfield Project/Phase: Wallaceton / 3

#### **PAINTING**

Invoice	Qty.	Description	
964 313,768	1	KITCHEN - 11A-Upper angle corner per unit Viking	
07Apr22		SKETCH # 3 DRYWAL-Notify; FRAMING-Notify; PAINTING-Notify	
964 313,624	1	KITCHEN - 04H-66cm deep fridge enclosure (counter depth) with (1) wall ([1] 66cm deep gable and [1] 66cm deep cabinet) (This is not a zero clearance enclosure. Standard heights and widths will be used.) Viking	
07Apr22		SKETCH # 3	
**		DRYWAL-Notify; FRAMING-Modify Bulkhead; PAINTING-Notify	
964 310,692	1	- DRYWALL - SMOOTH CEILING IN MAIN FLOOR	
07Apr22 **		PAINTING-Notify	
964 312,248	1	- INTERIOR RAILINGS - BLACK METAL - SINGLE COLLAR ALT. PLAIN W/ SHOES WITH 3 1/2 INCH SQUARE/CAP POST(S) AS PER PLAN - MAIN STAIR - UPG	
07Apr22 **		PAINTING-Notify	
964	1	UPPER HALL - HARDWOOD - VINTAGE - 3-1/4 INCH RED OAK ENGINEERED - UPPER HALL - UPG	
311,486			
07Apr22			
**		CARPET-delete std carpet; INTERIOR TRIM-supply and install quarter rounds; PAINTING-paint quarter round	
1048 312,243	1	BASEMENT STAIR - INTERIOR RAILING - BLACK METAL - SINGLE COLLAR ALT. PLAIN W/ SHOES WITH 3 1/2 INCH SQUARE/CAP POST(S) AS PER PLAN - BASEMENT STAIRS - UPG	
28Apr22 **		MISSED ON ORIGINAL SSS PAINTING-Notify	

#### **STEEL**

Invoice	Qty.	Description
		I

964	1	- DECK - 6 FEET DOOR - UPGRADE TO 8 FT WIDTH 8 FT DEPTH
314,197		
07Apr22		

#### **WINDOWS**

#### Invoice Oty. Description

Invoice	Qty.	Description
964	1	- DECK - 6 FEET DOOR - UPGRADE TO 8 FT WIDTH 8 FT DEPTH
314,197		
07Apr22 **		

DisciplineMS.rpt 13dec21 Page 7 of 7

20-1606 ELEV. A

Model: 20-1606 A The Grassfield


## 18 of 45

#### THE GRASSFIELD

ELEVATION A | 1,986 SQ. FT.

Sketch # | Includes 380 sq. ft. of Finished Lower Level

WALLACETON

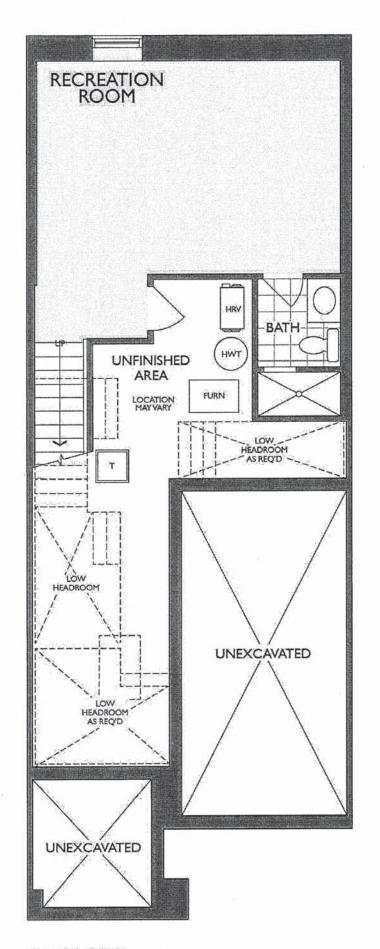

LOWER LEVEL **ELEVATION A & B** 

Legal Plan Dec. 3, 2020

Model: 20-1606 A The Grassfield

19 of 45

#### THE GRASSFIELD


Sketch #2


ELEVATION A | 1,986 SQ. FT.

Includes 380 sq. ft. of Finished Lower Level

WALLACETON

20-1606 ELEV. A

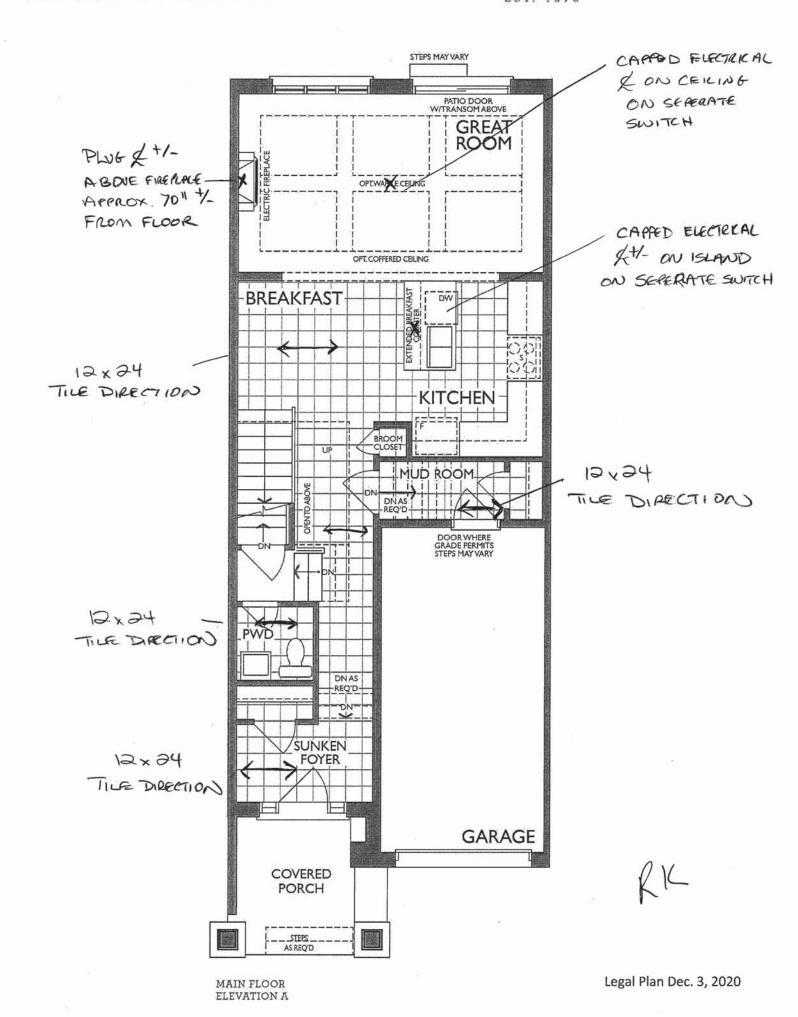

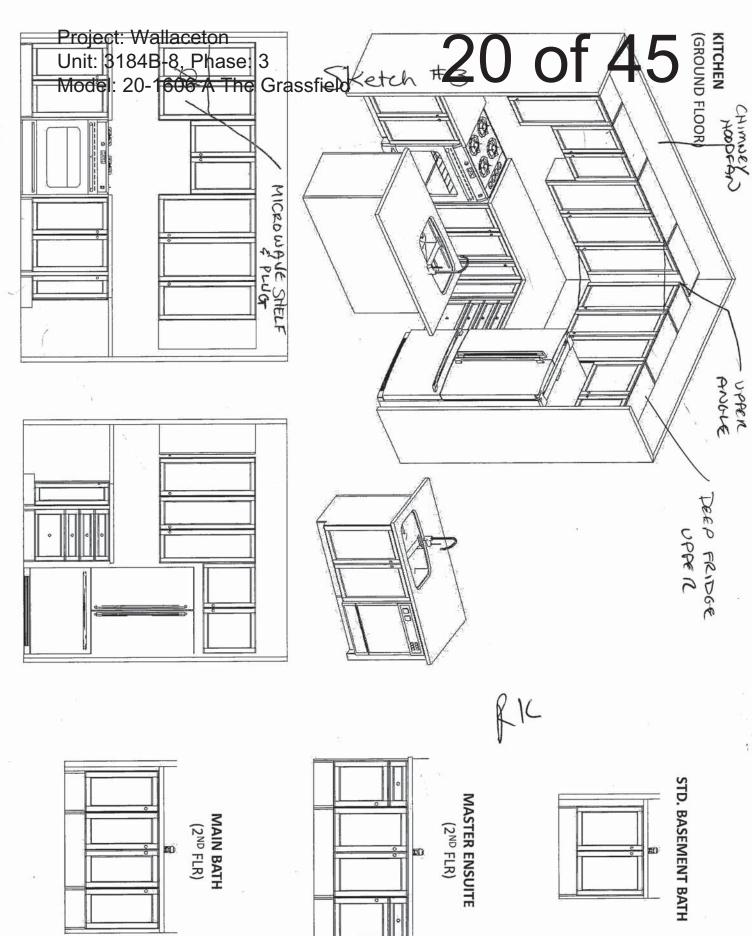



## WALLACETON, KITCHENER ON **HEATHWOOD HOMES**

MODEL: 20-1606 (2003)

STANDARD CONTRACT INCLUDES:

# Appliance Openings

- Hood Opening: 30"W Std. hood
- Fridge Opening: 37 3/8 "W X 73 3/8" H
- Stove Opening: 30" Freestanding 30cm deep cabinet over fridge
- Dishwasher Opening: 24"

# Standard Kitchens Scope

- 100cm H wall cabinets
- Std. Blumotion Hinges-soft close
- Std. Metabox Drawers- not soft close
- Min 40cm W drawer
- Base pie cut corner cabinets
- Backing on all cabinets
- Countertop by others
- Upgrade applied paneled fridge & hardware by others) dishwashers supply only (appliance

# Standard Vanity & Laundry Scope:

- Powder by others, pedestal
- All vanities include laminate counter
- Std. Blum Hinges- not soft close
- Master Ensuite: Top drawers (Full height Tandem Box Drawers-soft close
- Mains: Full height doors (top drawers doors at sink) Optional laundry base & wall cabinets added if Masters can't accommodate)

20-1606 ELEV. A

Model: 20-1606 A The Grassfield

21 of 45


#### THE GRASSFIELD

Sketch #4

ELEVATION A | 1,986 SQ. FT.

Includes 380 sq. ft. of Finished Lower Level

WALLACETON

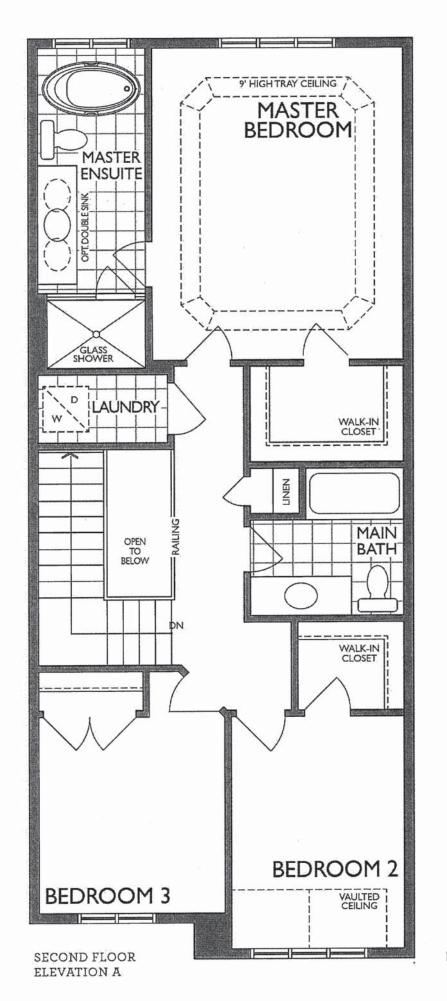

Legal Plan Dec. 3, 2020

Project: Wallaceton Unit: 3184B-8, Phase: 3 Model: 20-1606 A The Grassfield

22 of 45





NFAS NF17 Mantel - Cabinet

RK

Franke Kindred Canada Limited Printed in Canada

DBR10S


MB100


CA1W


Project: Wallaceton Unit: 3184B-8, Phase: 3

Model: 20-1606 A The Grassfield

## 23 of 45

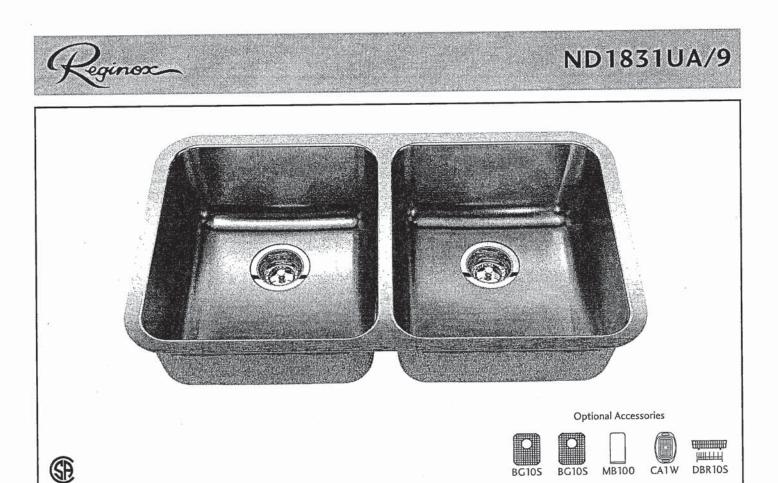





BG10S

**BG10S** 

#### ND1831UA/9 SPECIFICATION

Model ND1831UA/9 is a double (two equal size) bowl undermount sink manufactured by Franke Kindred Canada Limited from 18 gauge stainless steel. Product has silk finished rims and linear brush finished bowls. Sink is fully undercoated. Basket strainer waste fittings (3 1/2", 89 mm) are included. Sink is backed with a limited lifetime warranty.

- O.D. 17 3/4" x 30 7/8" x 8 1/2" (45 x 78 x 22 cm)
- Recommended for minimum 36" cabinet

Franke Kindred Canada Limited P.O. Box 190, 1000 Franke Kindred Road, Midland, Ontario, Canada, L4R 4K9 Phone: 866-687-7465 Fax: 800-361-8408



Model: 20-1606 A The Grassfield

## 24 of 45

Page down to identify the version you have.

#### FAUCET DESCRIPTION

Reflex™ pulldown system offers smooth operation, easy movement and secure docking
Power Clean™ spray technology
Metal construction with various finishes identified by suffix
Duralock™ connect installation

Duralock' connect installation
Pulldown spray with 68" braided hose
Flexible supply lines with 3/8" compression fittings
High arc spout provides height and reach to fill or clean large
pots while pulldown wand provides the maneuverability for cleaning or rinsing
360° rotating spout

Faucet designed for handle to be mounted on right side only

#### **OPERATION**

Lever style handle Temperature controlled by 100° arc of handle travel Operates with less than 5 lbs. of force

Operates with less than 5 lbs. of force
 Operates in stream or spray mode in the pullout or retracted position

FLOW

Flow is limited to 1.5 gpm (5.7 L/min) max at 60 psi

CARTRIDGE 1255™ Duralast™ cartridge

#### STANDARDS

Third party certified to IAPMO Green, ASME A112.18.1/CSA B125.1 and all applicable requirements therein including NSF 61/9G & 372

Meets CalGreen and Georgia SB370 requirements

Complies with California Proposition 65 and with the Federal Safe Drinking

The backflow protection system in the device consists of two independently operating check valves, a primary and a secondary which prevent backflow


ADA ( for lever handle

Lifetime limited warranty against leaks, drips and finish defects to the original homeowner

10 year limited warranty when used in a multifamily installation

5 year limited warranty when used in a commercial installation Visit www.moen.com/support for complete details and limitations

#### Specifications




ALIGN™ Single Handle High Arc **Pulldown Kitchen Faucet** 

Models: 7565 series

NOTE: THIS FAUCET IS DESIGNED TO BE INSTALLED THROUGH 1 HOLE, 1-1/2" (38mm) MIN. DIA. (OPTIONAL 3-HOLE ESCUTCHEON 141002 AVAILABLE)



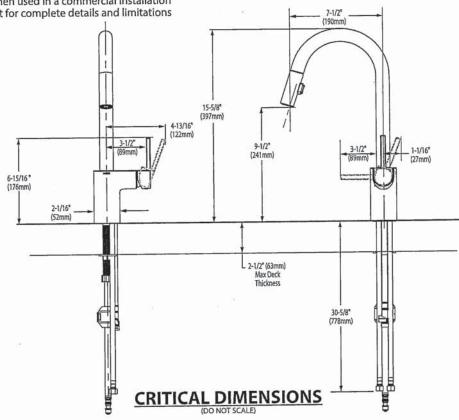

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN www.moen.com

Rev. 6/20



#### **barrier free (above counter or drop-in only)**

#### **BOULEVARD®** PEDESTAL SINK VITREOUS CHINA

#### **BOULEVARD® PEDESTAL SINK**

- □,0641.800 Faucet holes on 8" (203mm) centers (Illustrated) 24 0641.400 Faucet holes on 4" (102mm) centers
- □ 0641.100 Center hole only
  - · Classic styled rectangular pedestal lavatory
  - · Vitreous china
  - · Rear overflow
  - · Supplied with mounting kit
  - Right Height® for greater comfort during use
  - · Faucet ledge with large deck area (faucet not included)
  - Design coordinates with Boulevard® Toilet
  - · Basin has flat bottom to also allow use as an above counter sink or a drop-in sink (with u-shaped cut out)

#### **Nominal Dimensions:**

24" x 19" x 35-1/2" (610 x 483 x 902mm)

- ☐ 0641.008 Pedestal top-8" (203mm) centers
- ☐ 0641.004 Pedestal top-4" (102mm) centers
- ☐ 0641.001 Pedestal top-center hole only
- ☐ 0010.000 Pedestal only

#### Bowl sizes:

17" (432mm) wide, 12-1/2" (318mm) front to back, 5" (127mm) deep

#### Compliance Certifications -

Meets or Exceeds the Following Specifications:

ASME A112.19.2 - 2008/CSA B45.1-08

- To Be Specified: ☐ Color: ☐ White ☐ Linen
- Faucet Finish:
- □ Supplies:
- ☐ 1-1/4" Trap:
- ☐ Nipple:



SEE REVERSE FOR ROUGHING-IN DIMENSIONS

© 2018 AS America Inc.

See faucet section for additional models available

Model: 20-1606 A The Grassfield


26 of 45




**BOULEVARD®** PEDESTAL SINK

BARRIER FREE (ABOVE COUNTER OR DROP-IN ONLY)

#### TOP VIEW (ALL THREE CONFIGURATIONS)

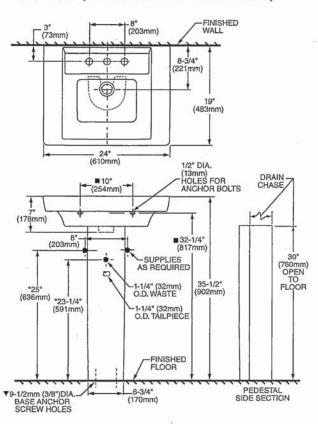

PEDESTAL CONFIGURATION (NOT ADA COMPLIANT)

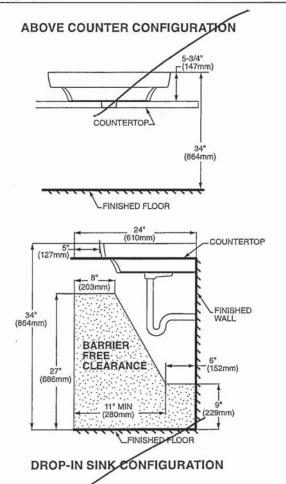



ABOVE COUNTER AND DROP-IN SINK CONFIGURATIONS MEET THE AMERICANS WITH DISABILITIES ACT GUIDELINES AND ANSI A117.1 ACCESSIBLE AND USABLE BUILDINGS AND FACILITIES - CHECK LOCAL CODES.

Top of sink installed at 34" (864mm) height from finished floor. Sink installed 5" (127mm) minimum from front edge of countertop. Provide 27" (686mm) knee clearance area.

NOTES:

\* DIMENSIONS SHOWN FOR LOCATION OF SUPPLIES AND "P" TRAPS ARE SUGGESTED.

▼ PEDESTAL ANCHORING SCREWS NOT INCLUDED.

■ SUITABLE FOR REINFORCEMENT ONLY. ACTUAL DIMENSIONS MUST BE TAKEN FROM FIXTURE.

FITTING NOT INCLUDED AND MUST BE ORDERED SEPARATELY.

PROVIDE SUITABLE REINFORCEMENT FOR ALL WALL SUPPORTS.

INSTALLATION INSTRUCTIONS SUPPLIED WITH LAVATORY.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerance established by ANSI Standard A112.19.2 These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

© 2018 AS America Inc.

spec\_0641\_BoulevardPedSink Rev 2/18

J<sub>B</sub>

Model: 20-1606 A The Grassfield

## 27 of 45

#### American Standard

#### **BARRIER FREE**

#### **COLONY™** COUNTERTOP SINK

VITREOUS CHINA

#### COLONY COUNTERTOP SINK

- · Vitreous china
- · Self-rimming
- · Front overflow
- · Supplied with template
- Faucet deck (Faucet shown not included)



Faucet holes on 203mm (8") centres

0346 403 (Illustrated)

Faucet holes on 102mm (4") centres

0346 001

Centre hole only

Nominal Dimensions: 521 x 448mm (20-1/2" x 17-5/8")

Bowl sizes:

422mm (16-5/8") wide, 279mm (11") front to back, 143mm (5-5/8") deep



· ASME A112.19.2M for Vitreous China Fixtures.

CAN/CSA B45 Series.


#### To Be Specified


- ☐ Colour: ☐ White ☐ Bone ☐ Silver Gray ☐ Linen
- ☐ Faucet\*:

BAS-198 -

- ☐ Faucet Finish:
- ☐ Supplies & Stops:
- ☐ Trap 1-1/4" (32 mm):

See faucet section for additional models available

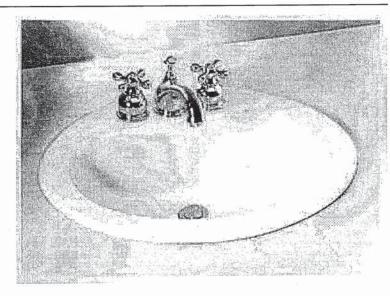

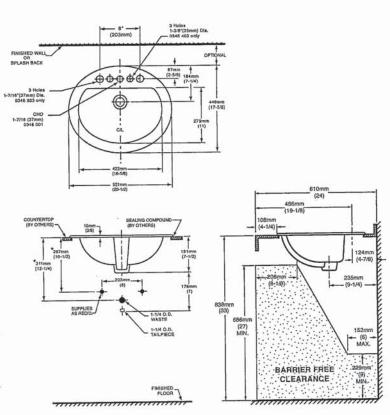

NOTES:

\* DIMENSIONS SHOWN FOR LOCATION OF SUPPLIES AND "P" TRAP ARE SUGGESTED.
FOR COUNTERTOP CUTOUT AND INSTALLATION INSTRUCTIONS USE TEMPLATE
SUPPLIED WITH SINK.
FAUCETS NOT INCLUDED AND MUST BE ORDERED SEPARATELY.
IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances
established by ANSI Standard A112.19.2.

These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.



Model: 20-1606 A The Grassfield

## 28 of 45



## DEMI<sup>™</sup> Product Specification Sheet

#### Two Piece Freestanding Collection

CF2007

Two Piece Freestanding Soaker

Size:

60" x 32" x 22"


1524 mm x 813 mm x 559 mm




- Vacuum formed acrylic reinforced with fiberglass
- Scratch, stain and fade resistant high gloss finish
- Installation friendly two piece design
- Accepts deck mounted faucet
- Includes integral pop up drain and rectangular overflow
- Includes levelling feet

#### TWO PIECE ASSEMBLY

TOP VIEW

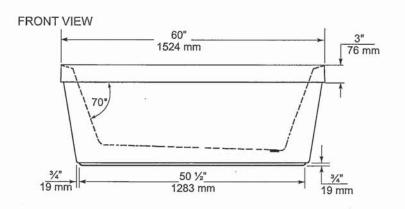

#### **END VIEW**



	- Teathanna	13"	_
29" 737 mm		191	406 mm
4	51" 1295 mm	- 6" -152 n	nm

GENERAL SPECIFICATIONS 90 lb 41 kg Average Weight 1092 x 508 mm Bathing Well at bottom 43"x 20" Capacity Drain to Overflow 195 litres 406 mm Water Depth Drain to Overflow 51 mm Drain Opening (dia.) Overflow Opening 2 1/4"x 1/2" 57 x 13 mm 3 1/4" 83 mm Drain to Floor Clearance

NOTES: Please confirm measurements on actual product to ensure prope identification. Bathtub to be installed on the floor supported by 5 self levelling feet. Adjust if required to level the bathtub for adequate drainage. Refer to installation instructions for additional information.

**IMPORTANT:** Dimensions of fixtures are nominal and may vary  $\pm$  %" (6 mm). Weight may vary  $\pm$  5 lb ( 2.3 kg). Drawing is not to scale. These measurements are subject to change at manufacturer's discretion.

Compliance Certifications -

Meets or Exceeds the following Specifications:

CAN/CSA - B45 Series





60 Shorncliffe Rd., Toronto, Ontario M8Z 5K1 Telephone: 416.231.9030 Fax: 416.231.0929 www.mirolin.com

Customer Service: 416.231.5790 Canada, U.S.A.: 800.MIROLIN(647-6546) Fax, Canada: 800.463.2236

R0084162 25 Sep. 2018





Project: Wallaceton

29 of 45 Unit: 3184B-8, Phase: 3 Model: 20-1606 A The Grassfield

#### American Standard

Style That Works Better

#### FloWise™ DUAL FLUSH **ELONGATED TOILET**

VITREOUS CHINA

#### FloWise™ DUAL FLUSH ELONGATED TOILET

#### 2476 216

- · Vitreous china
- · Low-consumption Dual Flush Full flush 6.0 Lpf/1.3 gpf, Partial flush 3.0 Lpf/0.66 gpf.
- · Elongated wash down bowl
- · Internal trapway fully-glazed, 2-1/4" (57mm) ballpass
- · Concealed trapway bowl
- · Chrome-plated top mounted push button actuator
- · Easy to clean sanitary dam on bowl
- Includes Elongated Slow Close Seat
- · 100% factory flush tested
- · 2 bolt caps

#### Separate Component Parts:

- 3067 316 Elongated Bowl with Slow Close Seat
- ☐ 4035 216 Unlined Tank
- 2476 516 Same as above with Lined tank
  - ☐ 3067 316 Elongated Bowl
  - 4035 516 Lined Tank


Nominal Dimensions: 794 x 432 x 765mm (31-1/4" x 17" x 30-1/8")


#### Compliance Certifications -Meets or Exceeds the Following Specifications:

- ASME A112.19.2M (and 19.6M)
- CAN/CSA B45 series

#### To Be Specified

- Colour: 020 White
- Supply with stop:

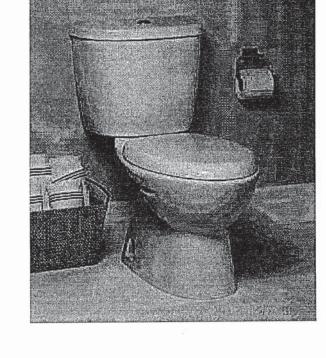

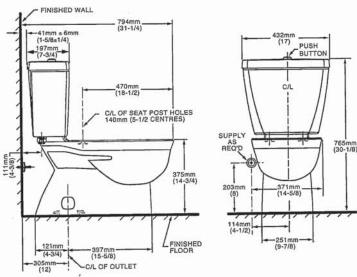

NOTES:
THIS TOILET IS DESIGNED TO ROUGH-IN AT A MINIMUM DIMENSION OF 305MM (12")
FROM FINISHED WALL TO C/L OF OUTLET.
SUPPLY NOT INCLUDED WITH FIXTURE AND MUST BE ORDERED SEPARATELY.
\* DIMENSION SHOWN FOR LOCATION OF SUPPLY IS SUGGESTED.
FOR ADDITIONAL INFORMATION REFER TO INSTALLATION INSTRUCTIONS SUPPLIED.
IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerance established by ANSI Standard A112.19.2
These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

#### UPGRADED VALUE ADDED FEATURES AT NO EXTRA CHARGE

TOI-284 08/08 © 2008 American Standard



Model: 20-1606 A The Grassfield

## 30 of 45

### MOEN

There is more than 1 version of this model. Page down to identify the version you have.

#### DESCRIPTION

- Metal construction with various finishes identified by suffix
- Flexible supplies with 3/8" compression fittings Includes metal or 50/50 pop-up type waste assembly where noted

#### **OPERATION**

- Pivot action lever style handle
- Temperature controlled through 100° degree arc of handle travel

- · Water usage is limited to these maximum flow rates as indicated by the corresponding product markings
- ° 1.2 gpm max (4.5L/min) at 60 psi ° 1.5 gpm max (5.7L/min) at 60 psi

#### CARTRIDGE

- 1255™ Duralast™ cartridge Nonmetallic/nonferrous and stainless steel material

#### STANDARDS

- Third party certified to WaterSense®, ASME A112.18.1/CSA B125.1 and all applicable requirements referenced therein
- Certified to NSF 61/9 & 372
- Products marked with 1.2 gpm are compliant with California water efficiency regulations
- Complies with California Proposition 65 and with the Federal Safe
- Drinking Water Act for lever handle ADA

#### WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations

#### Specifications



**CHATEAU®** Single-Handle Lavatory Faucet

with Metal Waste Assembly


Model: L4625 series L4631BC

Bulk Packed (12 per carton): L64624 series

with 50/50 Waste Assembly Bulk Packed (12 per carton): L64625 series

**Less Waste** Bulk Packed (12 per carton): L64600 series

NOTE: THIS FAUCET IS DESIGNED TO BE INSTALLED THRU 3-1" DIA. HOLES, 2" ON CENTER

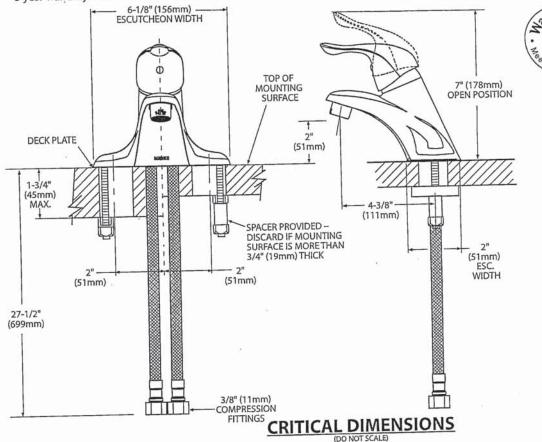

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN www.moen.com

Rev. 8/15

Model: 20-1606 A The Grassfield

## 31 of 45



Buy it for looks. Buy it for life.®

#### DESCRIPTION

Metal construction with various finishes identified by suffix Includes non-metalic showerhead, arm, flange and non-metalic diverter tub spout

#### OPERATION

- Handle operates counterclockwise through a 270° arc with off at 6 o'clock and maximum hot at the 9 o'clock position. Shut off in
- clockwise direction Adjustable temperature limit stop to control maximum hot water
- Pressure balancing mechanism maintains selected discharge temperature to  $\pm\,3^\circ$

- Showerhead is limited to 2.5 gpm (9.5 L/min) at 80 psi EP suffix models are limited to 1.75 gpm (6.6 L/min) at 80 psi NH suffix models contain no showerhead

#### CARTRIDGE

- 1222 cartridge design Accommodates back to back installations
- Nonmetallic/nonferrous and stainless steel material

#### **STANDARDS**

- Third party certified to meet ASME A112.18.1/CSA B125.1 and all applicable requirements referenced therein
- EP suffix models are third party certified to WaterSense®
- ADA 🚷 for lever handle

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations

#### Specifications






#### CHATEAU' POSI-TEMP' Single-Handle Tub/Shower Trim Kit

Models: TL181 series - valve trim only (Bulk Packed 12 per carton) TL182 series - shower trim only (Bulk Packed 12 per carton) TL183 series - tub/shower trim (Bulk Packed 12 per carton)

Valves: 62300 series 2500 series

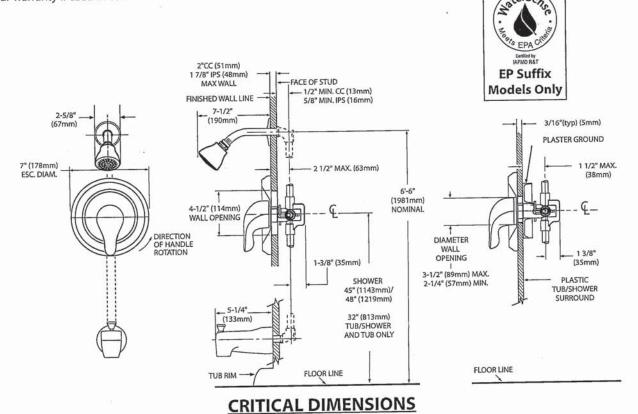

(DO NOT SCALE)

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN www.moen.com

TL183sp: Rev. 5/13

Project: Wallaceton

Unit: 3184B-8, Phase: 3

Model: 20-1606 A The Grassfield

## 32 of 45

## **MOEN**<sup>®</sup>

#### DESCRIPTION

Metal construction with various finishes identified by suffix

#### **OPERATION**

- · Lever style handles with hot and cold color indicator
- Rotate hot side handle counterclockwise to open (clockwise to close) and the cold side handle (clockwise to open) and (counterclockwise to close)


#### **STANDARDS**

- Third party certified to: ASME A112.18.1/CSA B-125.1, and all applicable requirements referenced therein
- ADA 🕒 for lever handles

#### WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
- 10 year limited warranty when used in a multi-family installation
- 5 year limited warranty when used in a commercial installation Visit www.moen.com/support for complete details and limitations


#### Specifications




#### CHATEAU® Two-Handle Garden Tub Trim

Models: T994 series

Valves: 4792, 4793, 4794, 4796, 4797, 4798

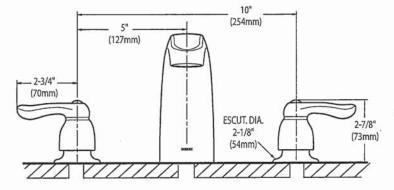



#### CRITICAL DIMENSIONS (DO NOT SCALE)

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN

www.moen.com


RIL


Model: 20-1606 A The Grassfield

## 33 of 45

#### SC(B)519 | ALITO Collection



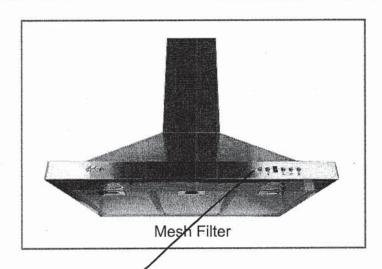

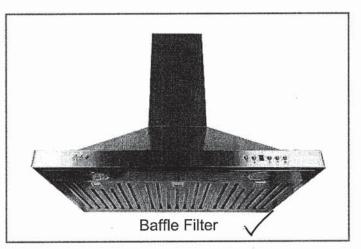

#### Wall Mount

Strong and sturdy with attractive lines and an imposing frame, the SC(B)519 is fitted with a time-delay OFF feature up to nine minutes, a 550 CFM fan, two bright front mounted LED lights and a digital three-speed push button control panel.

#### **Green Features**



3 Speed Push Button Control Panel



Long-Lasting LED Lights



Time-Delay OFF Feature



Grease Cup



Model	Colour	Ducting	Filters	Size	CFM
SC51924	Stainless Steel	6"	Mesh	24"	550
SC51930	Stainless Steel	6"	Mesh	30"	550
SC51936	Stainless Steel	6"	Mesh	36"	550
SCB51924	Stainless Steel	6"	Baffle	24"	550
SCB51930 V	Stainless Steel	6"	Baffle	(30")	550
SCB51936	Stainless Steel	6"	Baffle	36"	550

#### Cyclone Range Hoods Inc.

1361 Huntingwood Drive, Unit 16. Toronto, ON. M1S 3J1. Canada.

Toll Free: 1-888-293-5662 Tel: (416) 293-0933 Fax: (416) 293-4793 Website: www.CycloneRangeHoods.com

Model: 20-1606 A The Grassfield


## 34 of 45


#### SC(B)519 | ALITO Collection



#### **Features**

- · Wall mount range hood
- · 6" round duct adapter
- · Non-stick aluminum fan blades
- · 3 speed push button control
- 2 LED lights (2 x 1.4W, 4000K)
- Quick release aluminum mesh filters
- · Standard chimney fits up to 9 ft. ceiling
- · Up to 9 minutes time-delay OFF feature
- · Plug-in connection





#### **Options**

· Filters:

SC519 - Quick Release Aluminum Mesh Filters

SCB519 - Quick Release Stainless Steel
Baffle Filters

· Chimney Flues:

A1.CH10 - short (7'-8' ceilings)

A1.CH18 - standard (8'-9' ceilings)

A1.CH30 - extended (9'-11' ceilings)

Widths: 24" (30"), 36"

#### Specifications

· Air Flow Volume: 550 CFM

Electrical Connection: 120 V/60 Hz

Power Consumption: 300 Watts

Current: 2.5 Amps

Fan Speed: 1599 RPM

Fan Type: Centrifugal Blower

· Finishes: Stainless Steel

Ducting: 6" Round

 Noise Level: Min. 2 Sones Max. 6 Sones




Model: 20-1606 A The Grassfield

## 35 of 45



## Whirlpool 21 cu. ft. Top-Freezer Refrigerator WRT541SZD



Fingerprint-Resistant Stainless WRT541SZDZ

#### Also available in:

1	
( )	White

WRT541SZDW



WRT541SZDB



WRT541SZDM

Capacity	
Total Capacity	21 cu. ft.
Refrigerator Capacity	15 cu. ft.
Freezer Capacity	6 cu. ft.
General Features & Propert	ties
EZ Connect Icemaker Kit	
LED Interior Lighting	
ENERGY STAR® Certified	
Electronic Temperature Co	ontrols
Freezer Temperature Cont	rols
Clear Door Bins	
Adjustable Door Bins	
Quiet Cooling	
Fingerprint Resistant	

Fingerprint Resistant	
Electrical Details	
Amps	6.5
Volts	115
Certifications	
ADA Compliant	Yes
ENERGY STAR® Certified	Yes

Technical Details	
Refrigerator Type	Top-Freezer
Number of Doors	2
Number of Interior Refrigerator Shelves	3
Number of Refrigerator Door Bins	1 Fixed, 4 Adjustable
Number of Interior Freezer Shelves	1
Number of Freezer Door Bins	2 Fixed
Lighting Type	LED
Ice Maker	Optional
Ice Maker Location	Freezer
Dispenser Type	N/A
Dimensions	
Product Dimensions (H x W x D)	66-1/4" x 32-3/4" x 34"
Depth with Door Open 90°	62-1/4"
Cutout Dimensions	Allow extra 1/2" on sides and top
	Allow extra 1" on rear

Reference Material **Dimension Guide** Use & Care Guide

**Energy Guide** Warranty

#### Key Features & Benefits

#### Frameless Glass Shelves


Store more items on wall-to-wall shelves for greater storage flexibility.

#### Flexi-Slide™ Bin

Make space for tall items with the bin that quickly and easily moves side to side.

#### **Humidity-Controlled Crispers**

Store fruits and vegetables in their ideal environment.



HINGES ON RIGHT HANDLE ON LEFT. GARAGE RIGHT

NOTE: Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice, ®/™ © 2020. All rights reserved. Printed in the U.S.A. D200052XXC. WRT541SZDSPECSHEETV01.

Model: 20-1606 A The Grassfield

## 36 of 45



#### **Top Mount Refrigerator**

#### PRODUCT MODEL NUMBERS

WRT311FZD WRT511SZD WRT541SZD

**Electrical:** A 115-volt, 60-Hz, AC-only, 15-or 20-amp fused, grounded electrical supply is required. It is recommended that a separate circuit serving only your refrigerator be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.


NOTE: Before performing any type of installation, cleaning, or removing a light bulb, turn the control (Thermostat, Refrigerator or Freezer Control depending on the model) to OFF and then disconnect the refrigerator from the electrical source. When you are finished, reconnect the refrigerator to the electrical source and reset the control (Thermostat, Refrigerator or Freezer Control depending on the model) to the desired setting. See "Using the Controls."

Water: A cold water supply with water pressure between 30 and 120 psi (207 and 827 kPa) is required to operate ice maker and water dispenser. If you have questions about your water pressure, call a licensed, qualified plumber.

IMPORTANT: The pressure of the water coming out of a reverse osmosis system going to the water inlet valve of the refrigerator needs to be between 30 and 120 psi (207 and 827 kPa).


Reverse Osmosis Water Supply: If a reverse osmosis water filtration system is connected to your cold water supply, the water pressure to the reverse osmosis system needs to be a minimum of 40 to 60 psi (276 to 414 kPa).

#### PRODUCT DIMENSIONS

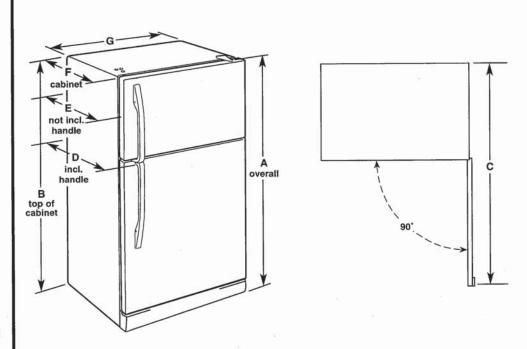

Model Number	Model Size	Reversible Door	Height - Overall "A"	Height - Top of Cabinet "B"	Depth - Door Open 90° "C"	Depth - With Handles "D"	Depth - Without Handles "E"	Depth - Cabinet Only "F"	Width - Cabinet "G"
WRT311FZD	20.5 cu. ft.	Yes	661/4" (168.3 cm)	65½" (166.4 cm)	62¼" (158.1 cm)	32%" (83.5 cm)	30%" (77.8 cm)	28½" (72.4 cm)	32¾" (83.2 cm)
WRT511SZD WRT541SZD	21.3 cu. ft.	Yes	661/4" (168.3 cm)	65½" (166.4 cm)	62¼" (158.1 cm)	34" (86.4 cm)	32½" (82.3 cm)	28½" (72.4 cm)	32¾" (83.2 cm)

#### LOCATION REQUIREMENTS



To ensure proper ventilation for your refrigerator, allow for a  $\frac{1}{2}$ " (1.25 cm) space on each and between overhead cabinets and refrigerator top. Allow at least 1" (2.5 cm) between back of cabinet and the wall. If your refrigerator has an ice maker, make sure you leave some extra space at the back for the water line connections.


If you are installing your refrigerator next to a fixed wall, leave 2" (5 cm) minimum on the hinge side (depending on your model) to allow for the door to swing open.

**NOTE:** This refrigerator is intended for use in a location where the temperature ranges from a minimum of 55°F (13°C) to a maximum of 110°F (43°C). The preferred room temperature range for optimum performance, which reduces electricity usage and provides superior cooling, is between 60°F (15°C) and 90°F (32°C). It is recommended that you do not install the refrigerator near a heat source, such as an oven or radiator.

Model: 20-1606 A The Grassfield

## 37 of 45





#### Available Finishes/Colours



YWFE515S0JB




YWFE515S0JS Stainless Steel

YWFE515S0JW

#### Manuals & Literature:







Use and Care

Warranty

#### 5.3 cu. ft. Whirlpool® electric range with Frozen Bake™ technology

#### YWFE515S0JS

This Whirlpool® electric range with a dual element stove top helps you get dinner to the table. Skip preheating for favorites like pizza with Frozen Bake™ technology. This self cleaning oven also prevents cooked food from getting cold with the Keep Warm setting. Closed door broiling helps keep the kitchen comfortable:

#### Top Features

FlexHeat™ Dual Radiant Element

Get two elements in one with a 6" inner ring that's great for smaller pots and pans and a 9" expandable outer ring that makes room for larger cookware.

Frozen Bake™ technology

Dimensions

Skip preheating and cook frozen favorites like pizza in fewer steps with preprogrammed settings that automatically adjust cooking times for you.

Keep Warm setting
Keep dishes from getting cold with this setting that delivers low heat to the oven.

Extra Large Stainless Steel

Oven Window Size

Handle Color Handle Material

planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

Closed Door Broiling
Maintain the optimal cooking temperature for food while still keeping the kitchen comfortable and cool using this broiling temperature management system that helps prevent overheating.

Depth	27 3/4
Height	36
Width	29 7/8
Configuration and Ov	erview.
Range Type	Freestanding
Fuel Type	Electric
Size (IN,inches)	30
Exterior	
Door Removable	Yes
Drawer Type	Storage Drawer
Oven Door	Glass Window

A STATE OF THE PARTY OF THE PAR	539955
Handle Type	Reach-Through Handle
*	
Features	Free Company of the Company

Yes
Yes
No
NA
No

Power Outage Compatible No	
Fower Outage Companies	
	5 10 CO
delibited Children Annold in Billion and Annold Ann	

CANADIAN APPLIANCE SOURCE LP Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice. Dimensions are for

Page 2 of 20

CANADIAN APPLIANCE SOURCE LP




Model: 20-1606 A The Grassfield

## 38 of 45

#### WHIRLPOOL 30" (76.0 CM) FREESTANDING ELECTRIC RANGES Model YWFE515S0JS

#### **Product Dimensions**



- A. 273/4" (70.5 cm) max. depth with handle
- B. 46<sup>7</sup>/<sub>8</sub>" (119.1 cm) overall height (max.) with leveling legs screwed all the way in\*
- C. 36" (91.4 cm) cooktop height (max.) with leveling legs screwed all the way in
- D. 29<sup>7</sup>/<sub>8</sub>" (75.9 cm) width
- E. 25<sup>5</sup>/16" (64.3 cm) depth back of range to front of cooktop\*\*
  F. Model/serial/rating plate (located on the frame behind a top corner of the door or either side of the drawer)

IMPORTANT: Range must be level after installation. Follow the instructions in the "Level Range" section. Using the cooktop as a reference for leveling the range is not recommended.


- \*Range can be raised approximately 1" (2.5 cm) by adjusting the leveling legs.
- \*\*Front of door and drawer may extend further forward depending on styling.

#### Cabinet Dimensions

Cabinet opening dimensions shown are for 25" (64.0 cm) countertop depth, 24" (61.0 cm) base cabinet depth and 36" (91.4 cm) countertop height.

IMPORTANT: If installing a range hood or microwave hood combination above the cooking surface, follow the range hood or microwave hood combination installation instructions for dimensional clearances above the cooktop surface.

A freestanding range may be installed next to combustible walls with zero clearance.



- A. 13" (33.0 cm) max. upper cabinet depth
- B. 30" (76.2 cm) min. opening width
- C. For minimum clearance to top of cooktop, see NOTE\*
- D. 30" (76.2 cm) min. opening width

  E. Outlet 8" (20.3 cm) to 22" (55.9 cm) from either cabinet,
  7" (17.8 cm) max. from floor.
- F. Cabinet door or hinges should not extend into the cutout.

\*NOTE: 24" (61.0 cm) minimum when bottom of wood or metal cabinet is covered by not less than 1/4" (6.4 mm) flame retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015" (0.4 mm) stainless steel, 0.024" (0.6 mm) aluminum or 0.020" (0.5 mm) copper.

30" (76.2 cm) minimum clearance between the top of the cooking platform and the bottom of an uncovered wood or metal cabinet.

Model: 20-1606 A The Grassfield

## 39 of 45

#### WHIRLPOOL 30" (76.0 CM) FREESTANDING ELECTRIC RANGES Model YWFE515S0JS

Electrical Requirements - Canada Only



**Electrical Shock Hazard** 

Electrically ground range.

Failure to do so can result in death, fire, or electrical shock.

If codes permit and a separate ground wire is used, it is recommended that a qualified electrical installer determine that the ground path is adequate and wire gauge are in accordance with local codes.

Be sure that the electrical connection and wire size are adequate and in conformance with CSA Standard C22.1, Canadian Electrical Code, Part 1 - latest edition, and all local codes and ordinances.

A copy of the above code standards can be obtained from:

Canadian Standards Association 178 Rexdale Blvd. Toronto, ON M9W 1R3 CANADA

Check with a qualified electrical installer if you are not sure the range is properly grounded.

Range Rating*		Specified Rating of Power Supply Cord Kit and Circuit Protection
120/240 V	120/208 V	Amps
8.8 - 16.5 KW	7.8 - 12.5 KW	40 or 50**
16.6 - 22.5 KW	12.6 - 18.5 KW	50

- \*The NEC calculated load is less than the total connected load listed on the model/serial/rating plate.
- \*\*If connecting to a 50 A circuit, use a 50 A rated cord with kit. For 50 A rated cord kits, use kits that specify use with a nominal 13/8" (3.5 cm) diameter connection opening.
- A time-delay fuse or circuit breaker is recommended.
- This range is equipped with a CSA International Certified Power Cord intended to be plugged into a standard 14-50R wall receptacle. Be sure the wall receptacle is within reach of range's final location.



Do not use an extension cord.

#### INSTALLATION INSTRUCTIONS


**Unpack Range** 

#### AWARNING

**Excessive Weight Hazard** 

Use two or more people to move and install range. Failure to do so can result in back or other injury.


- Remove shipping materials, tape and film from range.
- 2. Remove oven racks and parts package from inside oven.
- 3. Do not remove the shipping base at this time.



A. Shipping base

#### 4. On Ranges Equipped with a Storage Drawer:


Remove the storage drawer. See the "Storage Drawer" section. Use a 1/4" (6.4 mm) drive ratchet to lower the rear leveling legs one-half turn. Use a wrench or pliers to lower front leveling legs one half turn. front leveling legs one-half turn.



- A. 1/4" (6.4 mm) drive ratchet
- B. Rear leveling leg
- C. Wrench or pliers
- D. Front leveling leg

#### On Ranges Equipped with a Warming Drawer or Premium Storage Drawer:

On ranges equipped with a warming drawer or premium storage drawer, the rear legs cannot be accessed by removing the warming drawer or premium storage drawer. It will be necessary to adjust the rear legs from outside the range. Use wrench or pliers to lower the front and rear leveling legs one half turn.



- Rear leveling leg
- B. Wrench or pliers
- C. Front leveling leg

Model: 20-1606 A The Grassfield

## 40 of 45

#### WHIRLPOOL 30" (76.0 CM) FREESTANDING ELECTRIC RANGES Model YWFE515S0JS

#### Install Anti-Tip Bracket

#### AWARNING



Tip Over Hazard

A child or adult can tip the range and be killed.

Install anti-tip bracket to floor or wall per installation instructions.


Slide range back so rear range foot is engaged in the slot of the anti-tip bracket.

Re-engage anti-tip bracket if range is moved.

Do not operate range without anti-tip bracket installed and engaged.

Failure to follow these instructions can result in death or serious burns to children and adults.

- Remove the anti-tip bracket from where it is taped inside the storage drawer or warming drawer.
- Determine which mounting method to use: floor or wall.
  If you have a stone or masonry floor, you can use the wall mounting method. If you are installing the range in a mobile home, you must secure the range to the floor.
- 3. Determine and mark centerline of the cutout space. The mounting can be installed on either the left-side or right-side of the cutout. Position mounting bracket against the wall in the cutout so that the V-notch of the bracket is 129/16" (31.9 cm) from centerline as shown.



A. 12º/16" (31.9 cm) B. Bracket V-notch

 Drill two 1/8" (3 mm) holes that correspond to the bracket holes of the determined mounting method. See the following illustrations.

#### Floor Mounting








Rear position

Front position

Diagonal (2 options)

#### Wall Mounting



- Using the Phillips screwdriver, mount anti-tip bracket to the wall or floor with the two #12 x 1<sup>5</sup>/<sub>8</sub>" (4.1 cm) screws provided.
- Move range close enough to opening to allow for final electrical connections. Remove shipping base, cardboard or hardboard from under range.
- Move range into its final location, making sure rear leveling leg slides into anti-tip bracket.



 Move range forward onto shipping base, cardboard or hardboard to continue installing the range using the following installation instructions.

RK

41 of 45 Model: 20-1606 A The Grassfield





Stainless Steel WDF330PAHS

#### Also available in:

White	WDF330PAHW
Black	WDF330PAHB

Capacity		
Total Place Settings	13	
General Features & Properti	es	
Heavy Cycle		
High Temperature Wash Op	tion	
Heated Dry Option		
ENERGY STAR® Certified		
Industry's Best Selling Dishwasher Brand <sup>†</sup>		
Designed, Engineered and Assembled in the U.S.A. with American Pride		
Electrical Details		
Amps	10	
Volts 120		
Hz	60	
Certifications		
ENERGY STAR® Certified	Yes	

Technical Details	
Dishwasher Type	Built-in
Control Location	Front
Control Type	Push Button
Number of Wash Cycles	3
Number of Options	4
dBA	55
Number of Racks	2
Tub Material	Plastic
Wash System	Filter
Wash System Type	Removable Filter
Number of Wash Arms	2
Dimensions	
Product Dimensions (H x W x D)	34-1/2" x 23-7/8" x 24-1/2"
Depth with Door Open 90°	49-1/2"

#### Reference Material

**Dimension Guide** 

Install Guide

Use & Care Guide

**Energy Guide** 

Warranty

#### Key Features & Benefits

#### 1-Hour Wash Cycle


Clean dishes in half the time so your plates, pans and glasses are thoroughly cleaned up and taken care of in just an hour.\*

#### Soil Sensor

Determines how dirty dishes are and adjusts the Normal cycle as needed to make sure dishes come out clean.

#### **Normal Cycle**

Use for normal amounts of food soil to clean up leftover messes from your day-to-day meals.



<sup>\*</sup>Per IEC standards. \*\*Compared to Normal cycle with lightly soiled loads. †Based on 12-month average of sales. TraQline 2018. NOTE: Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice. 

®/™ © 2020. All rights reserved. Printed in the U.S.A. D200052XXA. WDF330PAHSPECSHEETV01.

Model: 20-1606 A The Grassfield






#### **Undercounter Dishwasher**

#### PRODUCT MODEL NUMBERS

WDF110PAB	WDF320PAD	WDT710PAH
WDF111PAB	WDF330PAH	WDT720PAD
WDF120PAF	WDF331PAH	WDT730PAH
WDF121PAF	WDF520PAD	WDT735PAG
WDF130PAH	WDF540PAD	WDT735PAH
WDE121DAL	WDE646DAE	

#### **DRAIN REQUIREMENTS**

- A new drain hose is supplied with your dishwasher. If drain hose is not long enough, use a new drain hose with a maximum length of 12 ft (3.7 m) that meets all current AHAM/IAPMO test standards, is resistant to heat and detergent, and fits the 1" (25 mm) drain connector of the dishwasher. See the "Tools and Parts" section at the front of the guide for part details and orders.
- Make sure to connect drain hose to waste tee or disposer inlet above drain trap in house plumbing and 20" (508 mm) minimum above the floor. It is recommended that the drain hose either be looped up and securely fastened to the underside of the counter or be connected to an air gap.
- Make sure to use an air gap if the drain hose is connected to house plumbing lower than 20" (508 mm) above subfloor or floor.

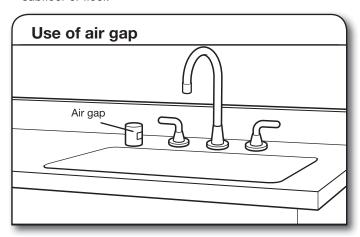

- If required, the air gap should be installed in accordance with the air gap installation instructions. When you are connecting the air gap, a rubber hose (not provided) will be needed to connect to the waste tee or disposer inlet.
- Use 1/2" minimum I.D. drain line fittings.

#### WATER SUPPLY REQUIREMENTS

- This dishwasher has a water heating feature and also requires a connection to a hot water supply line.
- A hot water line with 20 to 120 psi (138 to 862 kPa) water pressure can be verified by a licensed plumber.
- 120°F (49°C) water at dishwasher
- ³/8" O.D. copper tubing with compression fitting or flexible braided water supply line. See the "Tools and Parts" section at the front of the guide for part details and orders.

NOTE: 1/2" minimum plastic tubing is not recommended.

- A 90° elbow with ³/₄" hose connection with rubber washer. See the "Tools and Parts" section at the front of the guide for part details and orders.
- Do not solder within 6" (152 mm) of the water inlet valve.
- If installed in new construction, make sure the house water supply lines have been flushed prior to connecting the dishwasher to remove any debris that may exist in the supply line.

**NOTE:** If replacing an existing dishwasher, it is recommended to install a new water line (see the "Tools and Parts" section at the front of the guide for part details) and drain hose (supplied) with the new dishwasher.

#### **ELECTRICAL REQUIREMENTS**

#### You Must Have:


- 120-volt, 60 Hz, AC-only, 15- or 20-amp, fused electrical supply
- Copper wire only
- A maximum of 2 field wiring supply conductors (12 AWG largest size) plus 1 grounding conductor are permitted in the terminal box.

We Recommend:

- A time-delay fuse or circuit breaker
- A separate circuit

#### If Connecting Dishwasher with a Power Cord:

- Use a UL Listed power cord kit marked for use with dishwasher. See the "Tools and Parts" section at the front of the guide for part details and orders.
- Plug into a grounded 3 prong outlet. Outlet must meet all local codes and ordinances.



#### If Connecting Dishwasher with Direct Wiring:

- Use flexible, armored, or nonmetallic sheathed copper wire with grounding wire that meets the wiring requirements for your home and local codes and ordinances.
- Use a UL Listed/CSA Approved metallic strain relief.

Model: 20-1606 A The Grassfield

## 43 of 45

#### PRODUCT AND CABINET OPENING DIMENSIONS — 23<sup>7</sup>/8" -(606 mm) — 25¹/₄" -(641 mm) — ³/₄" (19 mm) 30" (762 mm) 331/2" 301 (851 mm) min. with (762 mm) leveling legs removed **4**−3³/₄" (94 mm) 31/2" - 41/2" (88 mm - 106 mm) (533 mm) For 4" (100 mm) toe kick, height of cabinet opening is 341/2" (863 mm). A. Insulation may be compressed (not used on all models). B. Door handles may protrude forward of the face of the dishwasher, (varies by model). Check that all surfaces have no protrusions that would prohibit dishwasher installation. 101/2" NOTE: Shaded areas (864 mm) of cabinet walls show where utility -6<sup>3</sup>/<sub>4</sub>" (102 mm) (172 mm) connections may be installed. (76 mm (159 mm) 2<sup>1</sup>/<sub>4</sub>" (64 mm) 24" / (620 mm) (44 mm) 2" (51 mm) 24' (620 mm) D C. Measured from the lowest point on the underside of the countertop. May be reduced to 33<sup>1</sup>/<sub>2</sub>" (851 mm) by removing the wheels and perforated area of insulation (blanket) on dishwasher.


D. Minimum, measured from narrowest point of opening.

Model: 20-1606 A The Grassfield

## 44 of 45

#### WHIRLPOOL WASHER Model #: WFW5620HW

Whidpool Brand Canada English | Washer and Dryers | Weshers | Front Load Washers | WFW5820HW



5.2 cu. ft. I.E.C. Closet-Depth Front Load Washer with Load & Go™ Dispenser









Whirlpool

5.2 cu. ft. I.E.C. Closet-Depth Front Load Washer with Load & Go™ Dispenser

Model #: WFW5620HW

#### **Dimensions**


Depth	80.17 cm, 31-9/16 in
Depth With Door Open 90 Degree	143.51 cm, 56-1/2 in
Minimum Height	98.11 cm, 38-5/8 in
Width	68.58 cm, 27.0 in
Appearance	*
LCD Touch Screen	No
Window	Yes
Details	14
Drum Material	Stainless Steel
Cycles and Options	
Number of Wash Cycles	37
Electrical	
Hz: 1	60
Power Cord Included	Yes

Model: 20-1606 A The Grassfield

## 45 of 45

#### WHIRLPOOL DRYER Model #: YWED5620HW

Whitipool Brand Ganada English | Washer and Dryers | Dryers | Electric Dryers | YWED5520HW





7.4 cu. ft. Front Load Electric Dryer with Intuitive Touch Controls









Whirlpool

7.4 cu. ft. Front Load Electric Dryer with Intuitive Touch Controls

Model #: YWED5620FIW

#### Dimensions

Depth Depth With Door Open 90 Degree	138.43 cm, 54-1/2 in
Height	98.42 cm, 38-3/4 in
Width	68.58 cm, 27.0 in
Configuration and Overview	
Fuel Type	Electric
Cycles and Options	4
Cycle Time Remaining	Yes
Lint Filter Indicator	No
Number of Dryer Cycles	36
Number of Dryness Levels	3
Ventilation System	
Long Vent	No.
Maximum Vent Length	64
Venting Direction	Left, Right, Bottom, Rear
Electrical	
	60
Hz	

