Sales Selection Sheet Checklist

1 of 42

LOT 3189A-5 Model: 20-1456 B The Hampton PURCHASERS: 12370409 CANADA INC./ VENDOR: Heathwood Homes (Huron) Limited OPTIONAL DOUBLE SINKS IN MASTER ENSUITE BATHROOM 1 FINISHED BASEMENT COLD CELLAR **UPGRADED / MODIFIED ELEVATION CORNER UPGRADE REAR UPGRADE CEILING UPGRADE - SMOOTH** MAIN FLOOR SECOND FLOOR **BASEMENT** ADDITIONAL ROUGH-INS 200 AMP SERVICE WET BAR ROUGH-IN **HUMIDIFIER** AIR CONDITIONING **GAS ROUGH-IN** STOVE **DRYER BBQ** ADDITIONAL FIREPLACE KITCHEN: HOODFAN VENTING SIZE **6 IN ROUND DUCT** 7 IN ROUND DUCT **FULL BASEMENT STAIRS:** N/A **UPPER BASEMENT STAIRS:** All Oak LOWER BASEMENT STAIRS: Carpet Grade MAIN STAIRS: All Oak MEDIA STAIRS (if applicable): N/A LOFT STAIRS (if applicable): N/A LEFUR **Decor Consultant:** -04- 0 6 2022 Date Purchaser: Date Heathwood Homes (Huron) Limited

Approved

Locked Date:

12370409 CANADA INC./ Project: Wallaceton Unit: 3189A-5, Phase: 3 Model: 20-1456 B The Hampton

Locked: Closed:

Cabinet Colour/Style	9111	VIKING III SIMCOE ORCHID 3DL ***STD***
Countertop	9121	MSI Quartz GROUP 1 ICED WHITE 3/4 inch with double mitre edge ***1***
Countertop Edge	4005	DOUBLE MITRE 1 1/2 INCH ***UPG***
Cabinet Hardware	2086	9677-HARDWARE ***STD***
Island Cabinet Colour/Style	9111	VIKING III SIMCOE ORCHID 3DL ***STD***
Island Countertop	9121	MSI Quartz GROUP 1 ICED WHITE 3/4 inch with double mitre edge ***1***
Backsplash	8104	OD.ON.TPE.02.HEX.MT-ONTARIO HEXAGON MATTE-TAUPE ***2***
Backsplash Grout	2226	Grout-(00) White ***STD***
Backsplash Tile Pattern	3110	HORIZONTAL HEX ***STD***
HoodFan	9393	SCB51930-CYCLONE 30 inch CANOPY CHIMNEY HOODFAN-SS
Appliances	9393	Purchasers have been advised: standard fridge opening is a minimum 37 3/8 x 73 3/8". Ice Waterline Rough-In is included.
Appliances	9393	Standard stove opening is 30" and standard dishwasher opening is 24". Any gas stove will require backsplash or stainless steel backing to avoid fire hazards.
Appliances	9393	Purchasers acknowledge: Heathwood Homes and its contractors will not be responsible for any kitchen cabinet changes due to appliances dimension changes after
Comment	780 12	

Kitchen/Breakfast	

Page 1 of 8

Flooring	9393	GE.MD.WHT.1818.MT Madison Series White Matte 18
Floor Tile Grout	2225	Grout-(27) Silver ***STD***
Floor Tile Pattern	3000	STANDARD SQUARE ***STD***

12370409 CANADA INC./ Project: Wallaceton Unit: 3189A-5, Phase: 3 3 of 427/12

Locked:

odel: 20-1456 B The Hampton		Closed:
Comment		
	153300000000000000000000000000000000000	
Flooring	7502	Red Oak Pearl-Vintage Engineered-PEWTER/ECLIPSE-3/4 inch x 3 1/4 inch
Comment		
oyer		
Flooring	7502	GE.MD.WHT.1818.MT Madison Series White Matte 18
Floor Tile Grout	2225	Grout-(27) Silver ***STD***
Floor Tile Pattern	3000	STANDARD SQUARE ***STD***
Comment		
lud Room	AND STATE AND ADDRESS OF	
Flooring	3000	GE.MD.WHT.1818.MT Madison Series White Matte 18
Floor Tile Grout	2225	Grout-(27) Silver ***STD***
Floor Tile Pattern	3000	STANDARD SQUARE ***STD***
Comment		
Powder Room		(B) (C. +)
Flooring	3000	GE.MD.WHT.1818.MT Madison Series White Matte 18
	10	

12370409 CANADA INC./ Project: Wallaceton Unit: 3189A-5, Phase: 3 Model: 20-1456 B The Hampton Created: 1. 1. 2022 12:06:427

FIOUR FIIE OF	Vü t	<u> </u>	Orode-(21) Oliver O10
Floor Tile Pattern		3000	STANDARD SQUARE ***STD***
Plumbing Fix	cture (Colour)	1737	Plumbing Fixtures-WHITE ***STD***
Comment			
Great Room			
Flooring		7502	Red Oak Pearl-Vintage Engineered-PEWTER/ECLIPSE-3/4 inch x 3 1/4 inch
Comment			
Upper Hall			
Control of Fact Advanced Control of Control		7502	Red Oak Pearl-Vintage
Flooring		7302	Engineered-PEWTER/ECLIPSE-3/4 inch x 3 1/4 inch ***3***
Comment			
Finished Decem	ant (Bas) Basm/Hall		
Finished Basem	ent (Rec) Room/Hall		
Flooring		9248	DY 89418 -Dynasty Tex-BLACK ICE-40 oz Poly***STD***
Comment			
Comment			*
Master Bedroom	1		
Flooring		9248	DY 89418 -Dynasty Tex-BLACK ICE-40 oz Poly***STD ***
Comment			
Bedroom 2		No.	
Flooring		9248	DY 89418 -Dynasty Tex-BLACK ICE-40 oz Poly***STD ***
	9		

12370409 CANADA INC./ Project: Wallaceton Unit: 3189A-5, Phase: 3 Model: 20-1456 B The Hampton 5 of 427 2

		Olocca.
Comment		
Bedroom 3		
Flooring	9248	DY 89418 -Dynasty Tex-BLACK ICE-40 oz Poly***STD ***
Comment		
Comment		
Master Ensuite New Mark Production Control of Control		
Cabinet Colour/Style	9111	VIKING III SIMCOE ORCHID 3DL ***STD***
Countertop	8796	6698-46-Countertop-PALOMA POLAR ETCHINGS FINISH-Formica ***STD***
		FINISH-FOITHICA STD
Countertop Edge	1111	N/A *****
Cabinet Hardware	7672	135-HARDWARE ***STD***
Cabillet Haldware	1012	
Floor Tile	8921	OV.CH.GRY.1224-Chambray-Grey-12 x 24 See Tile Direction on Sketch H Page ***2***
Floor Tile Grout	2225	Grout-(27) Silver ***STD***
Floor file Grout	2225	
Floor Tile Pattern	3040	FRONT TO BACK ***STD***
Shower Floor Tile	8661	OD.ON.SWT.0202.MT.N-Ontario Series Mosaic-Snow
Charlet Floor the		White Matte-2 x 2 ***STD***
Shower Floor Tile Grout	2226	Grout-(00) White ***STD***
Onower Floor file Grout		
Shower Floor Tile Pattern	3000	STANDARD SQUARE ***STD***
. A		v
Shower Wall Tile	9020	QT.WV.WHT.0810-Weave-White-8 x 10 ***STD***
040 (2000)(2000)(2000)	L	
Shower Wall Tile Grout	2226	Grout-(00) White ***STD***
Shower Wall Tile Pattern	3070	HORIZONTAL STACKED ***STD***

12370409 CANADA INC./ Project: Wallaceton Unit: 3189A-5, Phase: 3 Model: 20-1456 B The Hampton 6 6 427 <u>1</u> 2 12:06:12

Shower Jamb(s) and Sill(s)	8923	Shower Jamb / Sill-Thassos White ***STD***
		Plumbing Fixtures-WHITE ***STD***
Plumbing Fixture (colour)	1737	Plumbing Fixtures-VVHITE STD
Comment		
Main Bathroom		
Cabinet Colour/Style	9111	VIKING III SIMCOE ORCHID 3DL ***STD***
Countertop	8796	6698-46-Countertop-PALOMA POLAR ETCHINGS FINISH-Formica ***STD***
Countertop Edge	1111	N/A *****
Cabinet Hardware	7672	135-HARDWARE ***STD***
Flooring	8921	OV.CH.GRY.1224-Chambray-Grey-12 x 24 See Tile
		Direction on Sketch H Page ***2***
	5005	O (OT) O'L - ***OTD***
Floor Tile Grout	2225	Grout-(27) Silver ***STD***
Floor Tile Pattern	3050	SIDE TO SIDE ***STD***
Tub Wall Tile	9020	QT.WV.WHT.0810-Weave-White-8 x 10 ***STD***
Tub Wall Tile Grout	2226	Grout-(00) White ***STD***
Tub Well Tile Bettern	3070	HORIZONTAL STACKED ***STD***
Tub Wall Tile Pattern	3070	HORIZONIAL STACKED STD
Disabing Fishure (Colour)	1737	Plumbing Fixtures-WHITE ***STD***
Plumbing Fixture (Colour)	1737	Flumbing Fixtures-VVIITE OTB
Comment		
	-v +	
Finished Decement Dathers		
Finished Basement Bathroom		
Cabinet Colour/Style	9111	VIKING III SIMCOE ORCHID 3DL ***STD***
	[a=c c	DOOD 10 On whater DALOMA DOLAD STOURIOG
Countertop	8796	6698-46-Countertop-PALOMA POLAR ETCHINGS

12370409 CANADA INC./ Project: Wallaceton Unit: 3189A-5, Phase: 3 Model: 20-1456 B The Hampton 7 6427 2 Created: 10.2022 12:06:02

		FINISH-Formica ***STD***
Countertop Edge	1111	N/A *****
Cabinet Hardware	7672	135-HARDWARE ***STD***
Flooring	7672	TR.SP.WHITE.1313 SEMPRE White Matte 13
Floor Tile Grout	2225	Grout-(27) Silver ***STD***
Floor Tile Pattern	3000	STANDARD SQUARE ***STD***
i.		
Shower Floor Tile	8661	OD.ON.SWT.0202.MT.N-Ontario Series Mosaic-Snow
		White Matte-2 x 2 ***STD***
Shower Floor Tile Grout	2226	Grout-(00) White ***STD***
Shower Floor Tile Pattern	3000	STANDARD SQUARE ***STD***
Wall Tile	9020	QT.WV.WHT.0810-Weave-White-8 x 10 ***STD***
Wall Tile Grout	2226	Grout-(00) White ***STD***
Wall Tile Pattern	3070	HORIZONTAL STACKED ***STD***
Shower Jamb(s)	8923	Shower Jamb / Sill-Thassos White ***STD***
		Plumbing Fixtures-WHITE ***STD***
Plumbing Fixture (Colour)	1737	Plumbing Fixtures-WHITE 31D
Comment		
Great Room Fireplace		
Туре	8865	Dimplex-Electric Fireplace-PF3033HL ***STD***
Mantle	8891	NF-17-Paint Grade Mantle- Cabinet (Per Plan)-WHITE ***STD***
0	aaaa	N/A *****
Surround Opt.	1111	IVA

12370409 CANADA INC./ Project: Wallaceton Unit: 3189A-5, Phase: 3 Model: 20-1456 B The Hampton

Page 7 of 8

8 6 427 4 2 Sed: 10 02 12:06: 2

Locked:

•		Closed.
Disclaimer	1111	Purchasers have been advised: heat from the FP can damage TV above a FP and items placed on mantle.
Disclaimer	1111	Heathwood and its contractors will not be liable for any damage on items placed/installed above a FP after closing.
Comment		
Basement Stairs		
Туре	1714	Carpet Grade Stairs ***STD BASEMENT STAIRS***
Colour	7922	Eclipse (Pewter) STAIN TO COMPLIMENT HARDWOOD AND WILL VARY FROM FLOORING ***99***
Carpet Runner	1111	N/A *****
Handrail/Pickets/Post Type	9119	Handrail only on closed walls (one or two sides per building code) ***STD***
Handrail/Pickets/Post Colours	1729	Carpet Grade-Stain handrail, pickets, stringers, nosing ₋pos
Carpet	9248	DY 89418 -Dynasty Tex-BLACK ICE-40 oz Poly***STD***
Custom Stain/Paint	1111	N/A *****
Comment	,	
Basement Stairs Landing(s)		
Flooring	7502	Red Oak Pearl-Vintage Engineered-PEWTER/ECLIPSE-3/4 inch x 3 1/4 inch ***3***
Comment		
Main Stairs		3
Туре	1712	Oak Stairs ***STD MAIN STAIRS***
Colour	7922	Eclipse (Pewter) STAIN TO COMPLIMENT HARDWOOD AND WILL VARY FROM FLOORING ***99***
Carpet Runner	1111	N/A *****
Handrail/Pickets/Posts Type	7652	1 5/16 inch Square pickets with 3 1/2" Square/Cap Post(s)-ALL OAK ***STD***

12370409 CANADA INC./ Project: Wallaceton Unit: 3189A-5, Phase: 3 Model: 20-1456 B The Hampton

Locked:

Closed: Oak Grade-Stain handrail,oak pickets,stringers,treads,risers Handrail/Pickets/Posts Colour 1728 N/A ***** 1111 Custom Stain/Paint Comment Main Stairs Landing(s) Red Oak Pearl-Vintage 7502 Flooring Engineered-PEWTER/ECLIPSE-3/4 inch x 3 1/4 inch Comment Throughout 22-Wall-WARM GREY ***STD*** 1717 Walls - Paint Colour 500 Series-Underpad ***STD*** 1079 Underpad Metal Thresholds ***STD*** Thresholds 2232 Decora White Switches and Plugs ***STD*** Switches and Plug 5796 4 1/4 Baseboard and 2 3/4 Casings ***STD*** 8705 Trim Size Trim - Paint Colour 1716 Trim-WHITE ***STD*** Comment

Purchaser:

12370409 CANADA INC.

Date

Date

r Consultant

Purchaser:

Wallaceton

-04- 0 6 2022

Date Approved



Lot: 3189A-5 Model: 20-1456 B The Hampton Project/Phase: Wallaceton / 3

Offer Worksheet	Five Appliances: SS Fridge, Stove, Dishwasher: White Front Loader Washer/Dryer - Townhomes Note:
Offer	The Purchaser(s) acknowledge that they have NOT been referred by an existing Heathwood Homeowner and therefor are not entitled to a referral feree under Heathwood Homes Referral program.

DisciplineMS.rpt 13dec21 Page 1 of 5

Printed and Sent: 10-Mar-23

construction summary of 42



Lot: 3189A-5

Model: 20-1456 B The Hampton Project/Phase: Wallaceton / 3

APPLIANCES

Invoice	Qty.	Description
1000	1	- APPLIANCES - CYCLONE 30 INCH WALL MOUNT CHIMNEY HOOD SS - SCB51930
313,484		
06Apr22		
		CABINETRY-delete stove uppers; ELECTRICAL-delete std range hood; HEATING/AIR CONDITIONING-Duct
		change to 6 in

CARINETRY

CABIN	ET.	KY
Invoice	Qty.	Description
1000 313,624	1	KITCHEN - 04H-66cm deep fridge enclosure (counter depth) with (1) wall ([1] 66cm deep gable and [1] 66cm deep cabinet) (This is not a zero clearance enclosure. Standard heights and widths will be used.) Viking
06Apr22		SKETCH # 3 DRYWAL-Notify; FRAMING-Modify Bulkhead; PAINTING-Notify
1000 313,768	1	KITCHEN - 11A-Upper angle corner per unit Viking
06Apr22		SKETCH # 3 DRYWAL-Notify; FRAMING-Modify Bulkhead; PAINTING-Notify
1000	1	MASTER ENSUITE - PLUMBING - OPTION FROM ONE SINK TO DOUBLE SINKS INCLUDING STD CHATEAU FAUCET OVERMOUNT COLONY SINK ONE EXTRA VANITY LIGHT AND CABINET CONVERSION 2D VIKING
06Apr22 ** NoCat		SKETCH # 4 CABINETRY-2D Convert Cabinetry Viking; ELECTRICAL-Additional Vanity Light
1000 313,484	1	- APPLIANCES - CYCLONE 30 INCH WALL MOUNT CHIMNEY HOOD SS - SCB51930
06Apr22 **		CABINETRY-delete stove uppers; ELECTRICAL-delete std range hood; HEATING/AIR CONDITIONING-Duct change to 6 in

CARPET					
Invoice	Qty.	Description			
1000 311,441	1	UPPER HALL - HARDWOOD - VINTAGE - 3-1/4 INCH RED OAK ENGINEERED - UPPER HALL - UPG			
06Apr22		CARPET-delete std carpet; INTERIOR TRIM-supply and install quarter rounds; PAINTING-paint quarter round			

DisciplineMS.rpt 13dec21 Page 2 of 5

Printed and Sent: 10-Mar-23

12 of 42 construction summary



Lot: 3189A-5 Model: 20-1456 B The Hampton

Project/Phase: Wallaceton / 3

CERAMICS

Invoice	Qty.	Description
1000 308,014 06Apr22	1	KITCHEN - CERAMICS - FLOOR - KITCHEN - UPGRADE 1
1000 308,042 06Apr22	1	POWDER ROOM - CERAMICS - FLOOR - POWDER ROOM - UPGRADE 1
1000 308,028 06Apr22	1	MUD ROOM - CERAMICS - FLOOR - MUD ROOM - UPGRADE 1
1000 307,999 06Apr22	1	FOYER - CERAMICS - FLOOR - FOYER - UPGRADE 1
1000 307,993 06Apr22	1	MASTER ENSUITE - CERAMICS - FLOOR - ENSUITE MASTER - UPGRADE 2
1000 308,022 06Apr22	1	MAIN BATHROOM - CERAMICS - FLOOR - MAIN BATHROOM - UPGRADE 2
1000 307,978 06Apr22	1	KITCHEN - CERAMICS - BACKSPLASH - KITCHEN - UPGRADE 2
1000 314,179 06Apr22	1	KITCHEN - CERAMICS - ADDITIONAL BACKSPLASH DUE TO INSTALL CHIMNEY HOODFAN IN KITCHEN - KITCHEN - UPGRADE 2

DRYWALL

DRYWALL				
Invoice	Qty.	Description		
1000 313,624	1	KITCHEN - 04H-66cm deep fridge enclosure (counter depth) with (1) wall ([1] 66cm deep gable and [1] 66cm deep cabinet) (This is not a zero clearance enclosure. Standard heights and widths will be used.) Viking		
06Apr22 **		SKETCH # 3 DRYWAL-Notify; FRAMING-Modify Bulkhead; PAINTING-Notify		
1000	1	KITCHEN - 11A-Upper angle corner per unit Viking		
313,768				
06Apr22		SKETCH # 3		
**		DRYWAL-Notify; FRAMING-Modify Bulkhead; PAINTING-Notify		

DisciplineMS.rpt 13dec21 Page 3 of 5

13 of 42 construction summary



Lot: 3189A-5 Model: 20-1456 B The Hampton Project/Phase: Wallaceton / 3

ELECTRICAL

Invoice	Qty.	Description
1000 314,223	2	- ELECTRICAL - ADDITIONAL SWITCH
06Apr22		1) WITH CAPPED ELECTRICAL IN GREAT ROOM;2) WITH CAPPED ELECTRICAL ON ISLAND SKETCH # 2
1000 314,224	2	- ELECTRICAL - CEILING ROUGH-IN (CAPPED)
06Apr22		1) CENTERED +/- ON CEILING OF GREAT ROOM ON SEPERATE SWITCH;2) CENTERED ON ISLAND ON SEPERATE SWITCH SKETCH # 2
1000 314,232	1	GREAT ROOM - ELECTRICAL - EXTRA WALL INTERIOR OUTLET ON EXISTING CIRCUIT (DOES NOT INCLUDE KITCHEN OUTLETS)
06Apr22		GREAT ROOM -TO BE CENTERED +/- OVER FIREPLACE APPROX. 70" FROM FLOOR SKETCH # 2
1000 314,340	1	KITCHEN - HEATING/AIR - ROUGH-IN GAS LINE FOR GAS STOVE AT MAIN FLOOR (SEE SPECS) (HOOK-UP NOT INCLUDED) LEAVE STANDARD 120 VOLT ELECTRICAL OUTLET ON A SEPARATE CIRCUIT. * STANDARD 220V
06Apr22		WILL STAY SKETCH # 3 ELECTRICAL-Notify
1000	1	MASTER ENSUITE - PLUMBING - OPTION FROM ONE SINK TO DOUBLE SINKS INCLUDING STD CHATEAU FAUCET OVERMOUNT COLONY
06Apr22 ** NoCat		SINK ONE EXTRA VANITY LIGHT AND CABINET CONVERSION 2D VIKING SKETCH # 4 CABINETRY-2D Convert Cabinetry Viking; ELECTRICAL-Additional Vanity Light
1000	1	- APPLIANCES - CYCLONE 30 INCH WALL MOUNT CHIMNEY HOOD SS - SCB51930
313,484	1	- ATTENNALS - CTCLONE SWINCH WALL MOUNT CHIMINET 1100D 35 - 3CD31730
06Apr22		
**		CABINETRY-delete stove uppers; ELECTRICAL-delete std range hood; HEATING/AIR CONDITIONING-Duct change to 6 in
		enunge to v m

FRAMING

Invoice	Qty.	Description
1000 313,624	1	KITCHEN - 04H-66cm deep fridge enclosure (counter depth) with (1) wall ([1] 66cm deep gable and [1] 66cm deep cabinet) (This is not a zero clearance enclosure. Standard heights and widths will be used.) Viking
06Apr22 **		SKETCH # 3 DRYWAL-Notify; FRAMING-Modify Bulkhead; PAINTING-Notify
1000	1	KITCHEN - 11A-Upper angle corner per unit Viking
313,768		
06Apr22		SKETCH # 3
**		DRYWAL-Notify; FRAMING-Modify Bulkhead; PAINTING-Notify

HARD	HARDWOOD						
Invoice	oice Qty. Description						
1000	1	UPPER HALL - HARDWOOD - VINTAGE - 3-1/4 INCH RED OAK ENGINEERED - UPPER HALL - UPG					
311,441							
06Apr22							
		CARPET-delete std carnet: INTERIOR TRIM-supply and install quarter rounds: PAINTING-paint quarter round					

DisciplineMS.rpt 13dec21 Page 4 of 5

Printed and Sent: 10-Mar-23

14 of 42



Lot: 3189A-5 Model: 20-1456 B The Hampton Project/Phase: Wallaceton / 3

HEATING / AIR CONDITIONING

Invoice	Qty.	Description
1000 314,340 06Apr22	1	KITCHEN - HEATING/AIR - ROUGH-IN GAS LINE FOR GAS STOVE AT MAIN FLOOR (SEE SPECS) (HOOK-UP NOT INCLUDED) LEAVE STANDARD 120 VOLT ELECTRICAL OUTLET ON A SEPARATE CIRCUIT. * STANDARD 220V WILL STAY SKETCH # 3 ELECTRICAL-Notify
1000 313,484	1	- APPLIANCES - CYCLONE 30 INCH WALL MOUNT CHIMNEY HOOD SS - SCB51930
06Apr22		CABINETRY-delete stove uppers; ELECTRICAL-delete std range hood; HEATING/AIR CONDITIONING-Duct change to 6 in

INTERIOR TRIM AND DOORS

Invoice	Qty.	Description
1000	1	UPPER HALL - HARDWOOD - VINTAGE - 3-1/4 INCH RED OAK ENGINEERED - UPPER HALL - UPG
311,441		
06Apr22		
**		CARPET-delete std carpet; INTERIOR TRIM-supply and install quarter rounds; PAINTING-paint quarter round

PAINTING

Invoice	Qty.	Description
1000 313,624	1	KITCHEN - 04H-66cm deep fridge enclosure (counter depth) with (1) wall ([1] 66cm deep gable and [1] 66cm deep cabinet) (This is not a zero clearance enclosure. Standard heights and widths will be used.) Viking
06Apr22 **		SKETCH # 3 DRYWAL-Notify; FRAMING-Modify Bulkhead; PAINTING-Notify
1000	1	KITCHEN - 11A-Upper angle corner per unit Viking
313,768		
06Apr22		SKETCH # 3 DRYWAL-Notify; FRAMING-Modify Bulkhead; PAINTING-Notify
		DRY WAL-NOUTY; FRANTING-MOUTHY BUIKTIERU; PAINTING-NOUTY
1000	1	UPPER HALL - HARDWOOD - VINTAGE - 3-1/4 INCH RED OAK ENGINEERED - UPPER HALL - UPG
311,441		
06Apr22		
**		CARPET-delete std carpet; INTERIOR TRIM-supply and install quarter rounds; PAINTING-paint quarter round

PLUMBING					
Invoice	Invoice Qty. Description				
1000	1	MASTER ENSUITE - PLUMBING - OPTION FROM ONE SINK TO DOUBLE SINKS INCLUDING STD CHATEAU FAUCET OVERMOUNT COLONY SINK ONE EXTRA VANITY LIGHT AND CABINET CONVERSION 2D VIKING			
06Apr22 NoCat		SKETCH # 4 CABINETRY-2D Convert Cabinetry Viking; ELECTRICAL-Additional Vanity Light			

DisciplineMS.rpt 13dec21 Page 5 of 5

Printed and Sent: 10-Mar-23

Project: Wallaceton Unit: 3189A-5, Phase: 3

Model: 20-1456 B The Hampton

15 of 42

THE HAMPTON


Sketch#1

ELEVATION B | 1,800 SQ. FT.

Includes 329 sq. ft. of Finished Lower Level

WALLACETON

20-1456 ELEV. B

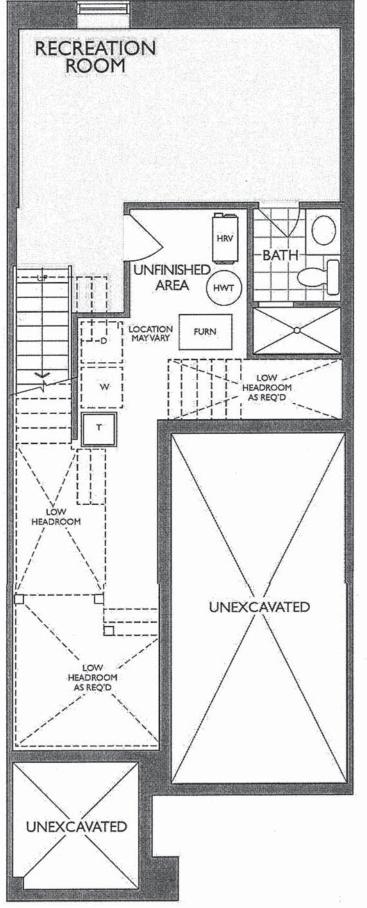

CF.

LOWER LEVEL Legal Plan Dec. 3, 2020 ELEVATION B

Project: Wallaceton Unit: 3189A-5, Phase: 3

Model: 20-1456 B The Hampton

16 of 42

THE HAMPTON


Sketch#2

ELEVATION B | 1,800 SQ. FT.

Includes 329 sq. ft. of Finished Lower Level

WALLACETON


20-1456 ELEV. B

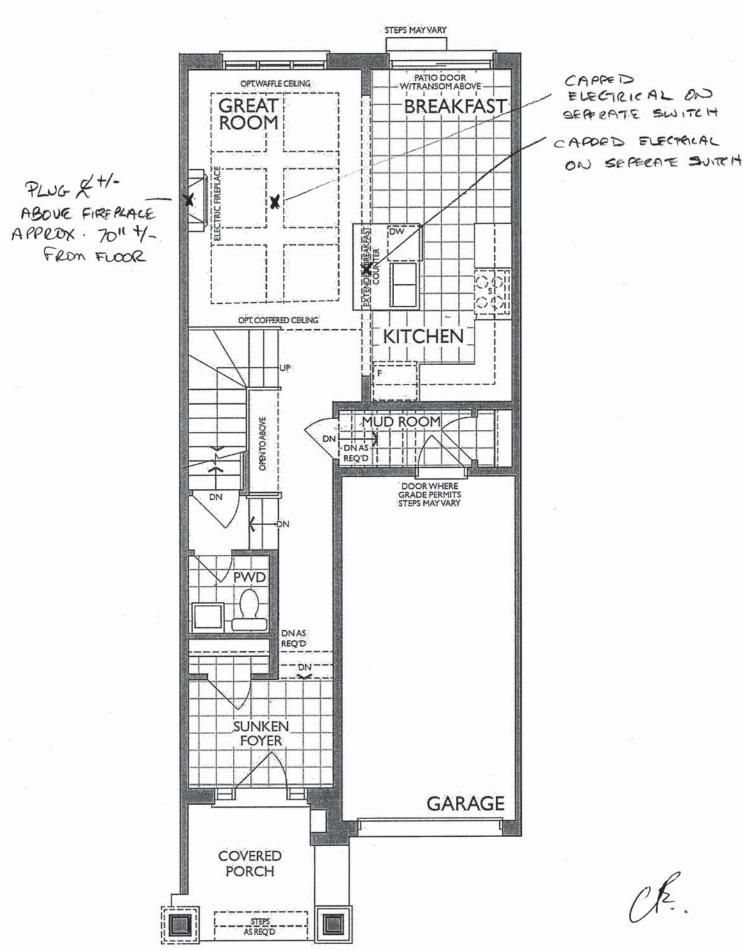

MAIN FLOOR

ELEVATION B

Legal Plan Dec. 3, 2020

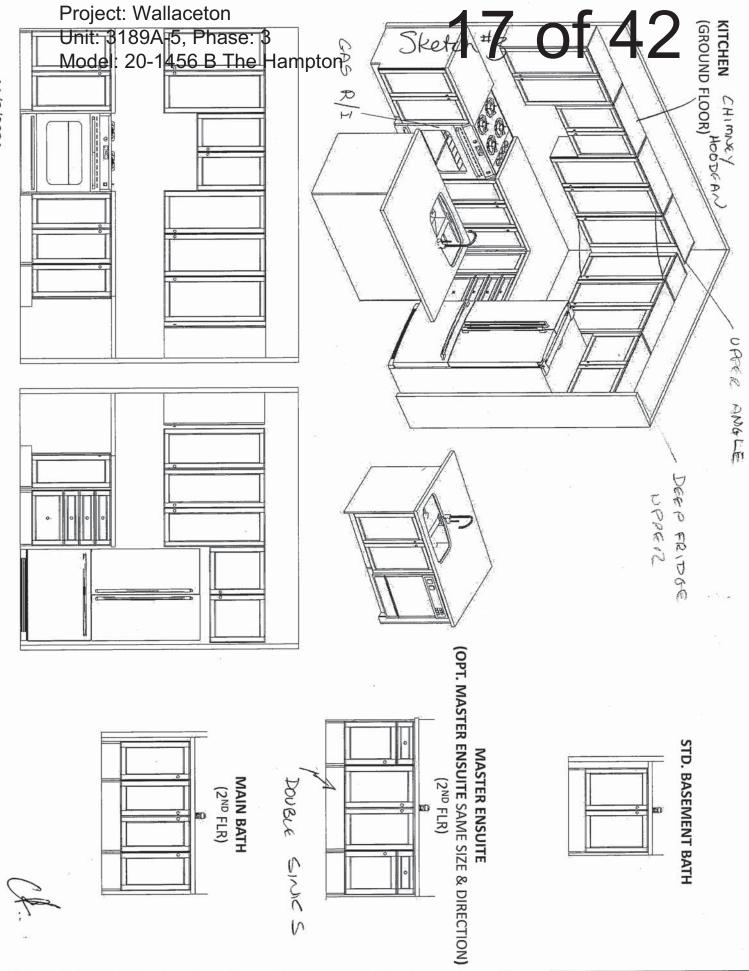

Standard Kitchens Scope

100cm H wall cabinets

Base pie cut corner cabinets
Backing on all cabinets

Countertop by others

Upgrade applied paneled fridge &

dishwashers supply only (appliance

hardware by others)

Std. Blumotion Hinges- soft close Std. Metabox Drawers- not soft close

Min 40cm W drawer

STANDARD CONTRACT INCLUDES:

WALLACETON, KITCHENER ON

MODEL: 20-1456 (2002)

HEATHWOOD HOMES

KITCHENS LIMITED

1350 Shawson Drive, Mississauga, ON L4W 1C5

REZ

U H

Appliance Openings

30cm deep cabinet over fridge

Fridge Opening: 37 3/8 "W X 73 3/8" H

Hood Opening: 30"W Std. hood

Stove Opening: 30" Freestanding

Dishwasher Opening: 24"

THIS DRAWING IS FOR DESIGN PURPOSES ONLY IT IS NOT AN EXACT RENDITION.

Standard Vanity & Laundry Scope:

Powder by others, pedestal

Std. Blum Hinges- not soft close

Tandem Box Drawers-soft close

All vanities include laminate counter

Master Ensuite: Top drawers (Full height

Mains: Full height doors (top drawers

added if Masters can't accommodate Optional laundry base & wall cabinets doors at sink)

Project: Wallaceton Unit: 3189A-5, Phase: 3

Model: 20-1456 B The Hampton

18 of 42

THE HAMPTON


Sketch #4

ELEVATION B | 1,800 SQ. FT.

Includes 329 sq. ft. of Finished Lower Level

WALLACETON


20-1456 ELEV. B

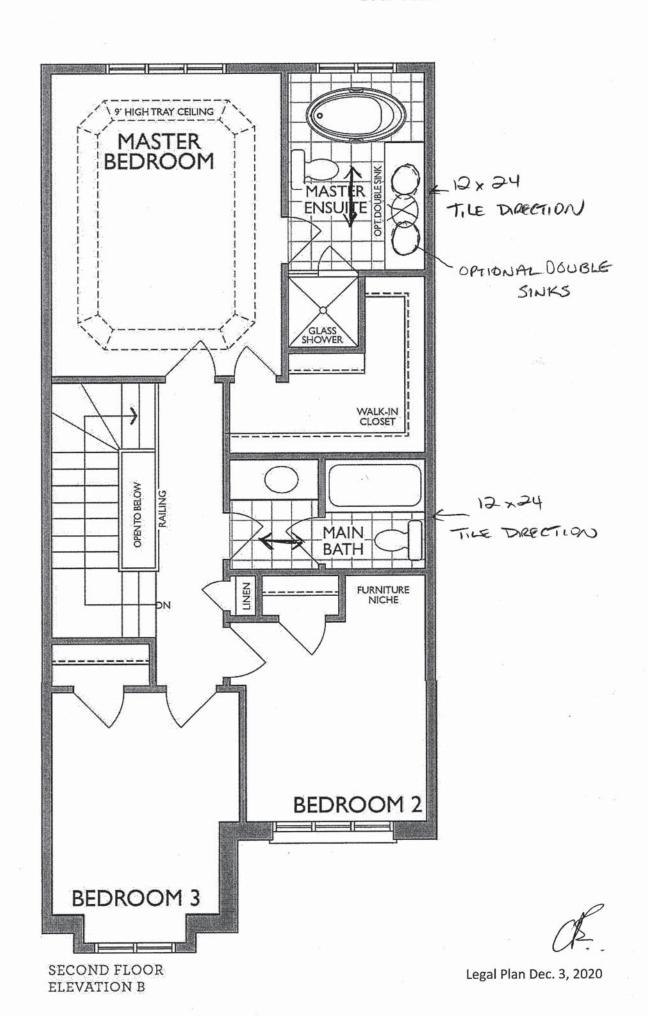

Project: Wallaceton Unit: 3189A-5, Phase: 3 Model: 20-1456 B The Hampton

19 of 42



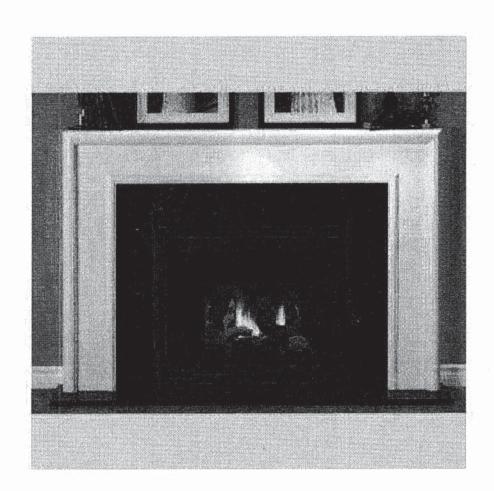

NFAS NF17 Mantel - Cabinet

A.

Franke Kindred Canada Limited Printed in Canada


Project: Wallaceton
Unit: 3189A-5, Phase: 3


Model: 20-1456 B The Hampton


20 of 42

Regimes_

ND1831UA/9

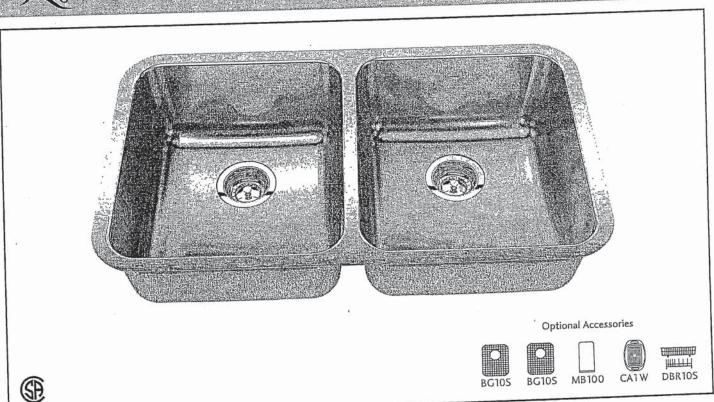





ND1831UA/9 SPECIFICATION

Model ND1831UA/9 is a double (two equal size) bowl undermount sink manufactured by Franke Kindred Canada Limited from 18 gauge stainless steel. Product has silk finished rims and linear brush finished bowls. Sink is fully undercoated. Basket strainer waste fittings (3 1/2", 89 mm) are included. Sink is backed with a limited lifetime warranty.

- O.D. 17 3/4" x 30 7/8" x 8 1/2" (45 x 78 x 22 cm)
- Recommended for minimum 36" cabinet

Franke Kindred Canada Limited
P.O. Box 190, 1000 Franke Kindred Road, Midland, Ontario, Canada, L4R 4K9 Phone: 866-687-7465 Fax: 800-361-8408



¹ Project: Wallaceton

Unit: 3189A-5, Phase: 3

Model: 20-1456 B The Hampton

21 of 42

There is more than 1 version of this model. Page down to identify the version you have.

FAUCET DESCRIPTION

Reflex™ pulldown system offers smooth operation, easy movement and secure docking
Power Clean™ spray technology
Metal construction with various finishes identified by suffix
Duralock™ connect installation
Pulldown spray with 68″ braided been

Pulldown spray with 68" braided hose
Flexible supply lines with 3/8" compression fittings
High arc spout provides height and reach to fill or clean large
pots while pulldown wand provides the maneuverability for cleaning or rinsing
360° rotating spout
Faucet designed for handle to be mounted on right side only
ERATION

Lever style handle
Temperature controlled by 100° arc of handle travel
Operates with less than 5 lbs. of force
Operates in stream or spray mode in the pullout or retracted position
FLOW

Flow to be the stream of the stream of the pullout or retracted position
Flow

The stream of the stream of the stream of the pullout or retracted position

The stream of the stre

Flow is limited to 1.5 gpm (5.7 L/min) max at 60 psi

CARTRIDGE

• 1255™ Duralast™ cartridge STANDARDS


Third party certified to IAPMO Green, ASME A112.18.1/CSA B125.1 and all applicable requirements therein including NSF 61/9G & 372

Meets CalGreen and Georgia SB370 requirements

Complies with California Proposition 65 and with the Federal Safe Drinking

- The backflow protection system in the device consists of two independently operating check valves, a primary and a secondary which prevent backflow

Specifications



ALIGN™ Single Handle High Arc **Pulldown Kitchen Faucet**

Models: 7565 series

NOTE: THIS FAUCET IS DESIGNED TO BE INSTALLED THROUGH 1 HOLE, 1-1/2" (38mm) MIN. DIA. (OPTIONAL 3-HOLE ESCUTCHEON 141002 AVAILABLE)



WARRANTY

Lifetime limited warranty against leaks, drips and finish defects to the original homeowner

10 year limited warranty when used in a multifamily installation
 5 year limited warranty when used in a commercial installation
 Visit www.moen.com/support for complete details and limitations

4-13/16" (122mm) 9-1/2" (241mm 1-1/16° (27mm) 6-15/16 ' (176mm) 30-5/8° (778mm

CRITICAL DIMENSIONS

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN www.moen.com

Rev. 6/20

Unit: 3189A-5, Phase: 3

Model: 20-1456 B The Hampton

22 of 42



BARRIER FREE (ABOVE COUNTER OR DROP-IN ONLY)

BOULEVARD® PEDESTAL SINK

BOULEVARD® PEDESTAL SINK

- 0641.800 Faucet holes on 8" (203mm) centers (Illustrated) 0641.400 Faucet holes on 4" (102mm) centers
- ☐ 0641.100 Center hole only
 - Classic styled rectangular pedestal lavatory
 - · Vitreous china
 - · Rear overflow
 - Supplied with mounting kit
 - Right Height[®] for greater comfort during use
 - Faucet ledge with large deck area (faucet not included)
 - Design coordinates with Boulevard® Toilet
 - Basin has flat bottom to also allow use as an above counter sink or a drop-in sink (with u-shaped cut out)

Nominal Dimensions:

24" x 19" x 35-1/2" (610 x 483 x 902mm)

- ☐ 0641.008 Pedestal top-8" (203mm) centers ☐ 0641.004 Pedestal top-4" (102mm) centers
- ☐ 0641.001 Pedestal top-center hole only
- ☐ 0010.000 Pedestal only

Bowl sizes:

17" (432mm) wide, 12-1/2" (318mm) front to back, 5" (127mm) deep


Compliance Certifications -

Meets or Exceeds the Following Specifications:

ASME A112.19.2 - 2008/CSA B45.1-08

To Be Specified:

- □ Color: □ White □ Linen
- ☐ Faucet Finish:
- ☐ Supplies:
- ☐ 1-1/4" Trap:
- ☐ Nipple:



SEE REVERSE FOR ROUGHING-IN DIMENSIONS

© 2018 AS America Inc.

spec_0641_BoulevardPedSink Rev 2/18



See faucet section for additional models available

Unit: 3189A-5, Phase: 3


Model: 20-1456 B The Hampton

23 of 42


American Standard BOULEVARD® PEDESTAL SINK


BARRIER FREE (ABOVE COUNTER OR DROP-IN ONLY)



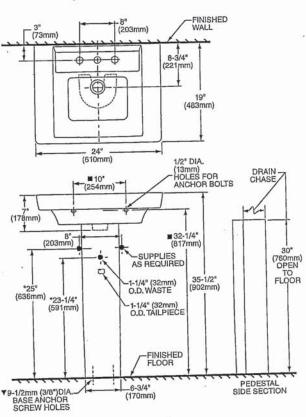

PEDESTAL CONFIGURATION (NOT ADA COMPLIANT)





DROP-IN SINK CONFIGURATION



ABOVE COUNTER AND DROP-IN SINK CONFIGURATIONS MEET THE AMERICANS WITH DISABILITIES ACT GUIDELINES AND ANSI A117.1 ACCESSIBLE AND USABLE BUILDINGS AND FACILITIES - CHECK LOCAL CODES.

Top of sink installed at 34" (864mm) height from finished floor. Sink installed 5" (127mm) minimum from front edge of countertop. Provide 27" (686mm) knee clearance area.

NOTES:

* DIMENSIONS SHOWN FOR LOCATION OF SUPPLIES AND "P" TRAPS ARE SUGGESTED.

* DIMENSIONS SHOWN FOR LOCATION OF SUPPLIES AND "P" TRAPS ARE SUGGESTED.

▼ PEDESTAL ANCHORING SCREWS NOT INCLUDED.

■ SUITABLE FOR REINFORCEMENT ONLY. ACTUAL DIMENSIONS MUST BE TAKEN FROM FIXTURE.

FITTING NOT INCLUDED AND MUST BE ORDERED SEPARATELY.

PROVIDE SUITABLE REINFORCEMENT FOR ALL WALL SUPPORTS.

INSTALLATION INSTRUCTIONS SUPPLIED WITH LAVATORY.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerance established by ANSI Standard A112.19.2 These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

© 2018 AS America Inc.

spec_0641_BoulevardPedSink Rev 2/18

J8

PART OF LIXIL

Unit: 3189A-5, Phase: 3

Model: 20-1456 B The Hampton

24 of 42

American Standard

COLONY™ COUNTERTOP SINK

VITREOUS CHINA

BARRIER FREE

COLONY COUNTERTOP SINK

- Vitreous china
- · Self-rimming
- · Front overflow
- · Supplied with template
- Faucet deck (Faucet shown not included)



Faucet holes on 203mm (8") centres

0346 403 (Illustrated)

Faucet holes on 102mm (4") centres

0346 001

Centre hole only

Nominal Dimensions:

Bowl sizes: 422mm (16-5/8") wide, 279mm (11") front to back, 143mm (5-5/8") deep

521 x 448mm (20-1/2" x 17-5/8")

COMPLIANCE CERTIFICATIONS -Meets or exceeds the following Specifications: ASME A112.19.2M for Vitreous China Fixtures.

To Be Specified

CAN/CSA B45 Series.


☐ Colour: ☐ White ☐ Bone ☐ Silver Gray Linen


Faucet*:

☐ Faucet Finish:

Supplies & Stops:

Trap 1-1/4" (32 mm):

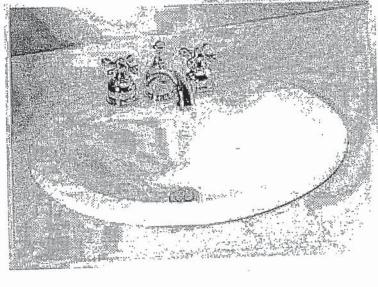

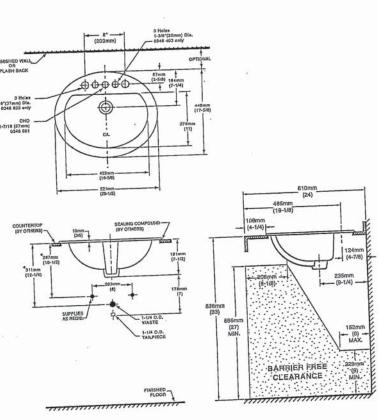

NOTES:

* DIMENSIONS SHOWN FOR LOCATION OF SUPPLIES AND "P" TRAP ARE SUGGESTED.

* DIMENSIONS SHOWN FOR LOCATION OF SUPPLIES AND "P" TRAP ARE SUGGESTED.

* POR COUNTERTOP CUTOUT AND INSTALLATION INSTRUCTIONS USE TEMPLATE

SUPPLIED WITH SINK.

FAUCETS NOT INCLUDED AND MUST BE ORDERED SEPARATELY.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard A112.19.2.

These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or volded pages.

* See faucet section for additional models available

BAS-198

© 2000 American Standard Inc.

01/07



Project: Wallaceton Unit: 3189A-5, Phase: 3

Model: 20-1456 B The Hampton

25 of 42



DEMI[™] Product Specification Sheet

Two Piece Freestanding Collection

Two Piece Freestanding Soaker

Size:


60" x 32" x 22"


1524 mm x 813 mm x 559 mm




- Vacuum formed acrylic reinforced with fiberglass
- Scratch, stain and fade resistant high gloss finish
- Installation friendly two piece design
- Accepts deck mounted faucet
- Includes integral pop up drain and rectangular overflow
- Includes levelling feet

TWO PIECE ASSEMBLY

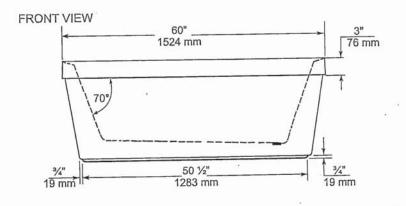

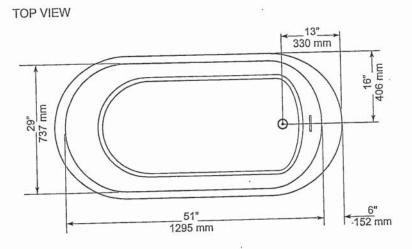

END VIEW



GENERAL SPECIFICATIONS Average Weight Bathing Well at bottom Capacity Drain to Overflow Water Depth Drain to Overflow Drain Opening (dia.) Overflow Opening Drain to Floor Clearance	90 lb 43"x 20" 16" 2" 2 ¼"x ½" 3 ¼"	41 kg 1092 x 508 mm 195 litres 406 mm 51 mm 57 x 13 mm 83 mm	
--	--	--	--

NOTES: Please confirm measurements on actual product to ensure proper identification. Bathtub to be installed on the floor supported by 5 self levelling feet. Adjust if required to level the bathtub for adequate drainage. Refer to installation instructions for additional information.

IMPORTANT: Dimensions of fixtures are nominal and may vary \pm ¼" (6 mm). Weight may vary \pm 5 lb (2.3 kg). Drawing is not to scale. These measurements are subject to change at manufacturer's discretion.

Compliance Certifications -Meets or Exceeds the following Specifications:

CAN/CSA - B45 Series






60 Shorneliffe Rd., Toronto, Ontario M8Z 5K1 Telephone: 416.231.9030 Fax: 416.231.0929 www.mirolin.com

Customer Service: 416.231.5790 Canada, U.S.A.: 800.MIROLIN(647-6546) Fax, Canada: 800.463.2236

R0084162 25 Sep. 2018





Unit: 3189A-5, Phase: 3

Model: 20-1456 B The Hampton

26 of 42

American Standard

Style That Works Better

FloWise™ DUAL FLUSH **ELONGATED TOILET**

VITREOUS CHINA


FloWise™ DUAL FLUSH ELONGATED TOILET

2476 216

- · Vitreous china
- · Low-consumption Dual Flush Full flush 6.0 Lpf/1.3 gpf, Partial flush 3.0 Lpf/0.66 gpf.
- · Elongated wash down bowl
- · Internal trapway fully-glazed, 2-1/4" (57mm) ballpass
- · Concealed trapway bowl
- · Chrome-plated top mounted push button actuator
- · Easy to clean sanitary dam on bowl
- Includes Elongated Slow Close Seat
- 100% factory flush tested
- · 2 bolt caps

Separate Component Parts:

- 3067 316 Elongated Bowl with Slow Close Seat
- ☐ 4035 216 Unlined Tank



- ☐ 3067 316 Elongated Bowl
- 4035 516 Lined Tank


Nominal Dimensions: 794 x 432 x 765mm (31-1/4" x 17" x 30-1/8")


Compliance Certifications -Meets or Exceeds the Following Specifications:

- ASME A112.19.2M (and 19.6M)
- CAN/CSA B45 series

To Be Specified

- Colour: 020 White
- Supply with stop:





NOTES:
THIS TOILET IS DESIGNED TO ROUGH-IN AT A MINIMUM DIMENSION OF 305MM (12")
FROM FINISHED WALL TO C/L OF OUTLET.
SUPPLY NOT INCLUDED WITH FIXTURE AND MUST BE ORDERED SEPARATELY.
* DIMENSION SHOWN FOR LOCATION OF SUPPLY IS SUGGESTED.
FOR ADDITIONAL INFORMATION REFER TO INSTALLATION INSTRUCTIONS SUPPLIED.
IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerance established by ANSI Standard A112.19.2
These measurements are subject to change or cancellation. No responsibility is assumed for the control of th

established by ANGI Standard AT12.19.2
These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

UPGRADED VALUE ADDED FEATURES AT NO EXTRA CHARGE

08/08 © 2008 American Standard



Project: Wallaceton Unit: 3189A-5, Phase: 3

Model: 20-1456 B The Hampton

27 of 42

MOEN

There is more than 1 version of this model. Page down to identify the version you have.

DESCRIPTION

Metal construction with various finishes identified by suffix

Flexible supplies with 3/8" compression fittings

Includes metal or 50/50 pop-up type waste assembly where noted OPERATION

Pivot action lever style handle

Temperature controlled through 100° degree arc of handle travel
 FLOW

 Water usage is limited to these maximum flow rates as indicated by the corresponding product markings 1.2 gpm max (4.5L/min) at 60 psi

.5 gpm max (5.7L/min) at 60 psi

CARTRIDGE

1255™ Duralast™ cartridge

Nonmetallic/nonferrous and stainless steel material

STANDARDS

Third party certified to WaterSense®, ASME A112.18.1/CSA B125.1 and all applicable requirements referenced therein Certified to NSF 61/9 & 372

Products marked with 1.2 gpm are compliant with California water

efficiency regulations Complies with California Proposition 65 and with the Federal Safe

Drinking Water Act

ADA for lever handle

WARRANTY

Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser

5 year warranty if used in commercial installations

Specifications




CHATEAU® Single-Handle Lavatory Faucet

with Metal Waste Assembly Model: L4625 series L4631BC Bulk Packed (12 per carton): L64624 series

with 50/50 Waste Assembly Bulk Packed (12 per carton): L64625 series

Less Waste Bulk Packed (12 per carton): L64600 series

NOTE: THIS FAUCET IS DESIGNED TO BE INSTALLED THRU 3-1" DIA. HOLES, 2" ON CENTER

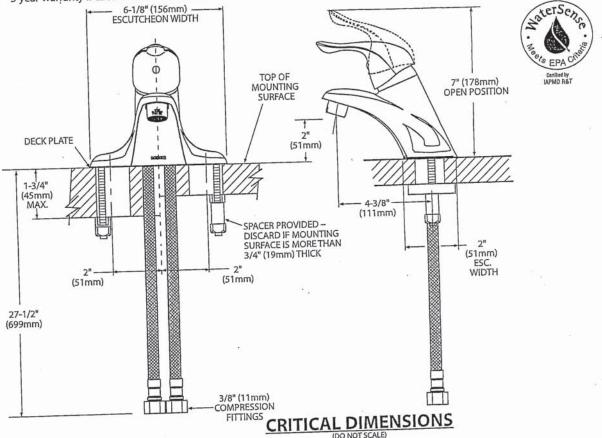

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN

www.moen.com

Rev. 8/15

Project: Wallaceton Unit: 3189A-5, Phase: 3

Model: 20-1456 B The Hampton

28 of 42



Buy it for looks. Buy it for life.®

DESCRIPTION

Metal construction with various finishes identified by suffix Includes non-metalic showerhead, arm, flange and non-metalic diverter tub spout

OPERATION

- Handle operates counterclockwise through a 270° arc with off at 6 o'clock and maximum hot at the 9 o'clock position. Shut off in clockwise direction
- Adjustable temperature limit stop to control maximum hot water temperature
- Pressure balancing mechanism maintains selected discharge temperature to $\pm 3^{\circ}$

FLOW

- Showerhead is limited to 2.5 gpm (9.5 L/min) at 80 psi EP suffix models are limited to 1.75 gpm (6.6 L/min) at 80 psi NH suffix models contain no showerhead

CARTRIDGE

- 1222 cartridge design Accommodates back to back installations
- Nonmetallic/nonferrous and stainless steel material

STANDARDS

- Third party certified to meet ASME A112.18.1/CSA B125.1 and all applicable requirements referenced therein EP suffix models are third party certified to WaterSense*

ADA (a) for lever handle

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations

Specifications






CHATEAU POSI-TEMP Single-Handle Tub/Shower Trim Kit

Models: TL181 series - valve trim only (Bulk Packed 12 per carton) TL182 series - shower trim only (Bulk Packed 12 per carton) TL183 series - tub/shower trim (Bulk Packed 12 per carton)

Valves: 62300 series 2500 series

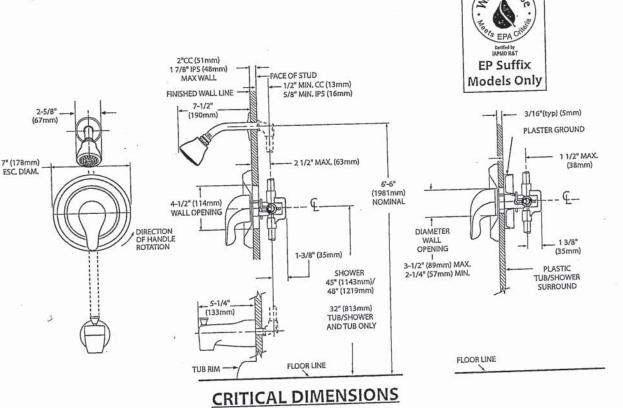

(DO NOT SCALE)

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN www.moen.com

TL183sp: Rev. 5/13

Unit: 3189A-5, Phase: 3

Model: 20-1456 B The Hampton

29 of 42

MOEN

DESCRIPTION

Metal construction with various finishes identified by suffix

OPERATION

- Lever style handles with hot and cold color indicator
- Rotate hot side handle counterclockwise to open (clockwise to close) and the cold side handle (clockwise to open) and (counterclockwise to close)

STANDARDS


- Third party certified to: ASME A112.18.1/CSA B-125.1, and all applicable requirements referenced therein
- ADA for lever handles

WARRANTY

Rev. 3/19

- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
- 10 year limited warranty when used in a multi-family installation
- 5 year limited warranty when used in a commercial installation Visit www.moen.com/support for complete details and limitations


Specifications




CHATEAU® Two-Handle Garden Tub Trim

Models: T994 series

Valves: 4792, 4793, 4794, 4796, 4797, 4798

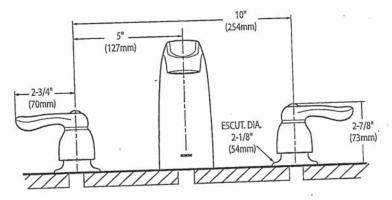



CRITICAL DIMENSIONS

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN www.moen.com


Project: Wallaceton Unit: 3189A-5, Phase: 3

Model: 20-1456 B The Hampton

30 of 42

SC(B)519 | ALITO Collection



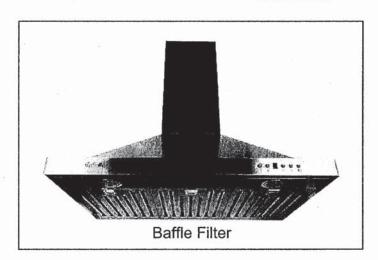

Wall Mount

Strong and sturdy with attractive lines and an imposing frame, the SC(B)519 is fitted with a time-delay OFF feature up to nine minutes, a 550 CFM fan, two bright front mounted LED lights and a digital three-speed push button control panel.

Green Features



3 Speed Push Button Control Panel




Time-Delay OFF Feature



Long-Lasting LED Lights



Grease Cup

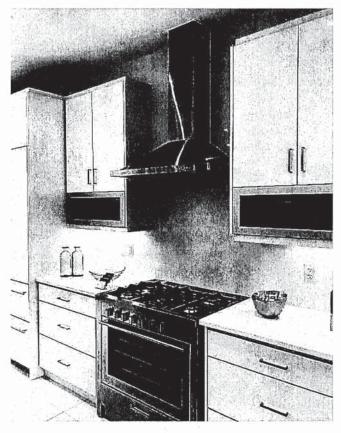

Model	Colour	Ducting	Filters	Size	CFM

	,				
SCB51930 ✓	Stainless Steel	6"	Baffle	(30")	550
SCB51936	Stainless Steel	6"	Baffle	36"	550

Cyclone Range Hoods Inc.

1361 Huntingwood Drive, Unit 16. Toronto, ON. M1S 3J1. Canada.

Toll Free: 1-888-293-5662 Tel: (416) 293-0933 Fax: (416) 293-4793 Website: www.CycloneRangeHoods.com

Project: Wallaceton Unit: 3189A-5, Phase: 3

Model: 20-1456 B The Hampton


31 of 42


SC(B)519 | ALITO Collection



Features

- · Wall mount range hood
- · 6" round duct adapter
- · Non-stick aluminum fan blades
- · 3 speed push button control
- · 2 LED lights (2 x 1.4W, 4000K)
- · Quick release aluminum mesh filters
- · Standard chimney fits up to 9 ft. ceiling
- · Up to 9 minutes time-delay OFF feature
- · Plug-in connection





Options

· Filters:

SCB519 - Quick Release Stainless Steel Baffle Filters

· Chimney Flues:

A1.CH10 - short (7'-8' ceilings)

A1.CH18 - standard (8'-9' ceilings)

A1.CH30 - extended (9'-11' ceilings)

Widths: 24"(30",)36"

Specifications

· Air Flow Volume: 550 CFM

Electrical Connection: 120 V/60 Hz

· Power Consumption: 300 Watts

· Current: 2.5 Amps

· Fan Speed: 1599 RPM

Fan Type: Centrifugal Blower

· Finishes: Stainless Steel

Ducting: 6" Round

 Noise Level: Min. 2 Sones Max. 6 Sones




Project: Wallaceton Unit: 3189A-5, Phase: 3

Model: 20-1456 B The Hampton

32 of 42



Whirlpool 21 cu. ft. Top-Freezer Refrigerator WRT541SZD



Fingerprint-Resistant Stainless WRT541SZDZ

Also available in:

White	WRT541SZDW
Black	WRT541SZDB
Monochromatic	WRT541SZDM

Capacity	10.00.00.00.00.000.0
Total Capacity	21 cu. ft.
Refrigerator Capacity	15 cu. ft.
Freezer Capacity	6 cu. ft.
General Features & Propert	ties
EZ Connect Icemaker Kit	
LED Interior Lighting	
ENERGY STAR® Certified	
Electronic Temperature Co	ontrols
Freezer Temperature Cont	rols
Clear Door Bins	
Adjustable Door Bins	
Quiet Cooling	
Fingerprint Resistant	
Electrical Details	
Amps	6.5
Volts	115

ADA Compliant

ENERGY STAR® Certified

	Dispenser Type
	Dimensions
5 1	Product Dimension (H x W x D)
-	Depth with Door O
	Cutout Dimensions
	Reference Material

Dimension Guide Use & Care Guide

Energy Guide Warranty

Technical Details		
Refrigerator Type	Top-Freezer	
Number of Doors	2	
Number of Interior Refrigerator Shelves	3	
Number of Refrigerator Door Bins	1 Fixed, 4 Adjustable	
Number of Interior Freezer Shelves	1	
Number of Freezer Door Bins	2 Fixed	
Lighting Type	LED	
Ice Maker	Optional	
Ice Maker Location	Freezer	
Dispenser Type	N/A	
Dimensions		
Product Dimensions (H x W x D)	66-1/4" x 32-3/4" x 34"	
Depth with Door Open 90°	62-1/4"	
Cutout Dimensions	Allow extra 1/2" on sides and top Allow extra 1"	

on rear

Key Features & Benefits

Stainless Steel

Frameless Glass Shelves


Store more items on wall-to-wall shelves for greater storage flexibility.

Flexi-Slide™ Bin

Make space for tall items with the bin that quickly and easily moves side to side.

Humidity-Controlled Crispers

Store fruits and vegetables in their ideal environment.



HINGES ON RIGHT HANDLE ON LEFT.

GARAGE RIGHT

NOTE: Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice, ®/™ © 2020. All rights reserved. Printed in the U.S.A. D200052XXC. WRT541SZDSPECSHEETV01.

Project: Wallaceton Unit: 3189A-5, Phase: 3

Model: 20-1456 B The Hampton

33 of 42



Top Mount Refrigerator

PRODUCT MODEL NUMBERS

WRT311FZD WRT511SZD WRT541SZD

Electrical: A 115-volt, 60-Hz, AC-only, 15or 20-amp fused, grounded electrical supply is required. It is recommended that a separate circuit serving only your refrigerator be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.


NOTE: Before performing any type of installation, cleaning, or removing a light bulb, turn the control (Thermostat, Refrigerator or Freezer Control depending on the model) to OFF and then disconnect the refrigerator from the electrical source. When you are finished, reconnect the refrigerator to the electrical source and reset the control (Thermostat, Refrigerator or Freezer Control depending on the model) to the desired setting. See "Using the Controls."

Water: A cold water supply with water pressure between 30 and 120 psi (207 and 827 kPa) is required to operate ice maker and water dispenser. If you have questions about your water pressure, call a licensed, qualified plumber.

IMPORTANT: The pressure of the water coming out of a reverse osmosis system going to the water inlet valve of the refrigerator needs to be between 30 and 120 psi (207 and 827 kPa).


Reverse Osmosis Water Supply: If a reverse osmosis water filtration system is connected to your cold water supply, the water pressure to the reverse osmosis system needs to be a minimum of 40 to 60 psi (276 to 414 kPa).

PRODUCT DIMENSIONS

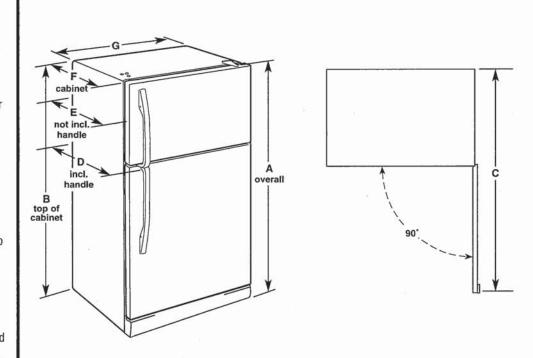

Model Number	Model Size	Reversible Door	Height - Overall "A"	Height - Top of Cabinet "B"	Depth - Door Open 90° "C"	Depth - With Handles "D"	Depth - Without Handles "E"	Depth - Cabinet Only "F"	Width - Cabinet "G"
WRT311FZD	20.5 cu. ft.	Yes	661/4" (168.3 cm)	65½" (166.4 cm)	62¼" (158.1 cm)	32%" (83.5 cm)	30%" (77.8 cm)	28½" (72.4 cm)	32¾" (83.2 cm)
WRT511SZD WRT541SZD	21.3 cu. ft.	Yes	66¼" (168.3 cm)	65½" (166.4 cm)	62¼" (158.1 cm)	34" (86.4 cm)	32½" (82.3 cm)	28½" (72.4 cm)	32¾" (83.2 cm)

LOCATION REQUIREMENTS



To ensure proper ventilation for your refrigerator, allow for a $\frac{1}{2}$ " (1.25 cm) space on each and between overhead cabinets and refrigerator top. Allow at least 1" (2.5 cm) between back of cabinet and the wall. If your refrigerator has an ice maker, make sure you leave some extra space at the back for the water line connections.

If you are installing your refrigerator next to a fixed wall, leave 2" (5 cm) minimum on the hinge side (depending on your model) to allow for the door to swing open.

NOTE: This refrigerator is intended for use in a location where the temperature ranges from a minimum of 55°F (13°C) to a maximum of 110°F (43°C). The preferred room temperature range for optimum performance, which reduces electricity usage and provides superior cooling, is between 60°F (15°C) and 90°F (32°C). It is recommended that you do not install the refrigerator near a heat source, such as an oven or radiator.

Unit: 3189A-5, Phase: 3

Model: 20-1456 B The Hampton

34 of 42





Available Finishes/Colours



YWFE515S0JB Black

YWFE515S0JS Stainless Steel

YWFE515S0JW White

Manuals & Literature:



Installation Instructions Use and Care



Warranty

5.3 cu. ft. Whirlpool® electric range with Frozen Bake™ technology

YWFE515S0JS

This Whirlpool® electric range with a dual element stove top helps you get dinner to the table. Skip preheating for favorites like pizza with Frozen Bake™ technology. This self cleaning oven also prevents cooked food from getting cold with the Keep Warm setting. Closed door broiling helps keep the kitchen comfortable.

Top Features

FlexHeat™ Dual Radiant Element
Get two elements in one with a 6" inner ring that's great for smaller pots and pans and a 9" expandable outer ring that makes room for larger cookware.

Frozen Bake™ technology
Skip preheating and cook frozen favorites like pizza in fewer steps with preprogrammed settings that automatically adjust cooking times for you.

Keep dishes from getting cold with this setting that delivers low heat to the oven.

Oven Window Size

Handle Color

Handle Material

Maintain the optimal cooking temperature for food while still keeping the kitchen comfortable and cool using this broiling temperature management system that helps prevent overheating.

Dimensions		Exterior		
Depth	27 3/4	Handle Type	Reach-Through Handle	
Height	36	4	Tiandie	
Width	29 7/8	Features	102	
Configuration and Ov	rerview	Hot Surface Indicator Light	Yes	
Range Type	Freestanding	Heating Element On	Yes	
Fuel Type	Electric	Indicator Light		
Size (IN,inches)	30	Power On Indicator Light	No	
		Griddle	NA	
Exterior		Automatic Convection Conversion Temperature	No	
Door Removable	Yes	Adjust	No	
Drawer Type	Storage Drawer	Power Outage Compatible		
Oven Door	Glass Window		red and department of the	

Extra Large

Metal

Stainless Steel

Handle Type	Reach-Through Handle		
Features			
Hot Surface Indicator Light	Yes		
Heating Element On Indicator Light	Yes		
Power On Indicator Light	No		
Griddle	NA		
Automatic Convection Conversion Temperature Adjust	No		
Power Outage Compatible	No		

CANADIAN APPLIANCE SOURCE LP


Unit: 3189A-5, Phase: 3

Model: 20-1456 B The Hampton

35 of 42

WHIRLPOOL 30" (76.0 CM) FREESTANDING ELECTRIC RANGES Model YWFE515S0JS

Product Dimensions



- A. 273/4" (70.5 cm) max. depth with handle
- B. 467/s" (119.1 cm) overall height (max.) with leveling legs screwed all the way in*
- C. 36" (91.4 cm) cooktop height (max.) with leveling legs screwed all the way in*
- D. 297/8" (75.9 cm) width
- E. 255/16" (64.3 cm) depth back of range to front of cooktop**
- F. Model/serial/rating plate (located on the frame behind a top corner of the door or either side of the drawer)

IMPORTANT: Range must be level after installation. Follow the instructions in the "Level Range" section. Using the cooktop as a reference for leveling the range is not recommended.


- *Range can be raised approximately 1" (2.5 cm) by adjusting the leveling legs.
- **Front of door and drawer may extend further forward depending on styling.

Cabinet Dimensions

Cabinet opening dimensions shown are for 25" (64.0 cm) countertop depth, 24" (61.0 cm) base cabinet depth and 36" (91.4 cm) countertop height.

IMPORTANT: If installing a range hood or microwave hood combination above the cooking surface, follow the range hood or microwave hood combination installation instructions for dimensional clearances above the cooktop surface.

A freestanding range may be installed next to combustible walls with zero clearance.



- A. 13" (33.0 cm) max. upper cabinet depth
- B. 30" (76.2 cm) min. opening width
- C. For minimum clearance to top of cooktop, see NOTE*
- D. 30" (76.2 cm) min. opening width
- E. Outlet 8" (20.3 cm) to 22" (55.9 cm) from either cabinet, 7" (17.8 cm) max. from floor.
- F. Cabinet door or hinges should not extend into the cutout.

*NOTE: 24" (61.0 cm) minimum when bottom of wood or metal cabinet is covered by not less than 1/4" (6.4 mm) flame retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015" (0.4 mm) stainless steel, 0.024" (0.6 mm) aluminum or 0.020" (0.5 mm) copper.

30" (76.2 cm) minimum clearance between the top of the cooking platform and the bottom of an uncovered wood or metal cabinet.

Unit: 3189A-5, Phase: 3

Model: 20-1456 B The Hampton

36 of 42

WHIRLPOOL 30" (76.0 CM) FREESTANDING ELECTRIC RANGES Model YWFE515S0JS

Electrical Requirements - Canada Only

AWARNING



Electrical Shock Hazard

Electrically ground range.

Failure to do so can result in death, fire, or electrical shock.

If codes permit and a separate ground wire is used, it is recommended that a qualified electrical installer determine that the ground path is adequate and wire gauge are in accordance with local codes.

Be sure that the electrical connection and wire size are adequate and in conformance with CSA Standard C22.1, Canadian Electrical Code, Part 1 - latest edition, and all local codes and ordinances.

A copy of the above code standards can be obtained from:

Canadian Standards Association 178 Rexdale Blvd. Toronto, ON M9W 1R3 CANADA

 Check with a qualified electrical installer if you are not sure the range is properly grounded.

Range Rating*	27	Specified Rating of Power Supply Cord Kit and Circuit Protection		
120/240 V	120/208 V	Amps		
8.8 - 16.5 KW	7.8 - 12.5 KW	40 or 50**		
16.6 - 22.5 KW 12.6 - 18.5 KW		50		

- *The NEC calculated load is less than the total connected load listed on the model/serial/rating plate.
- **If connecting to a 50 A circuit, use a 50 A rated cord with kit. For 50 A rated cord kits, use kits that specify use with a nominal 13/s" (3.5 cm) diameter connection opening.
- A time-delay fuse or circuit breaker is recommended.
- This range is equipped with a CSA International Certified Power Cord intended to be plugged into a standard 14-50R wall receptacle. Be sure the wall receptacle is within reach of range's final location.



Do not use an extension cord.

INSTALLATION INSTRUCTIONS


Unpack Range

AWARNING

Excessive Weight Hazard

Use two or more people to move and install range. Failure to do so can result in back or other injury.


- 1. Remove shipping materials, tape and film from range.
- 2. Remove oven racks and parts package from inside oven.
- 3. Do not remove the shipping base at this time.



A. Shipping base

4. On Ranges Equipped with a Storage Drawer:


Remove the storage drawer. See the "Storage Drawer" section. Use a 1/4" (6.4 mm) drive ratchet to lower the rear leveling legs one-half turn. Use a wrench or pliers to lower front leveling legs one-half turn.



- A. 1/4" (6.4 mm) drive ratchet
- B. Rear leveling leg
- C. Wrench or pliers
- D. Front leveling leg

On Ranges Equipped with a Warming Drawer or Premium Storage Drawer:

On ranges equipped with a warming drawer or premium storage drawer, the rear legs cannot be accessed by removing the warming drawer or premium storage drawer. It will be necessary to adjust the rear legs from outside the range. Use wrench or pliers to lower the front and rear leveling legs one half turn.



- A. Rear leveling leg
- B. Wrench or pliers
- C. Front leveling leg

Project: Wallaceton Unit: 3189A-5, Phase: 3

Model: 20-1456 B The Hampton

37 of 42

WHIRLPOOL 30" (76.0 CM) FREESTANDING ELECTRIC RANGES Model YWFE515S0JS

Install Anti-Tip Bracket

Tip Over Hazard

A child or adult can tip the range and be killed.

Install anti-tip bracket to floor or wall per installation instructions.


Slide range back so rear range foot is engaged in the slot of the anti-tip bracket.

Re-engage anti-tip bracket if range is moved.

Do not operate range without anti-tip bracket installed and engaged.

Failure to follow these instructions can result in death or serious burns to children and adults.


- Remove the anti-tip bracket from where it is taped inside the storage drawer or warming drawer.
- 2. Determine which mounting method to use: floor or wall. If you have a stone or masonry floor, you can use the wall mounting method. If you are installing the range in a mobile home, you must secure the range to the floor.
- 3. Determine and mark centerline of the cutout space. The mounting can be installed on either the left-side or right-side of the cutout. Position mounting bracket against the wall in the cutout so that the V-notch of the bracket is 129/16" (31.9 cm) from centerline as shown.



A. 129/16" (31.9 cm) B. Bracket V-notch

4. Drill two 1/8" (3 mm) holes that correspond to the bracket holes of the determined mounting method. See the following

Floor Mounting








Diagonal (2 options)

Wall Mounting



- Using the Phillips screwdriver, mount anti-tip bracket to the wall or floor with the two #12 x 15/8" (4.1 cm) screws provided.
- Move range close enough to opening to allow for final electrical connections. Remove shipping base, cardboard or hardboard from under range.
- 7. Move range into its final location, making sure rear leveling leg slides into anti-tip bracket.



8. Move range forward onto shipping base, cardboard or hardboard to continue installing the range using the following installation instructions.

Project: Wallaceton Unit: 3189A-5, Phase: 3 Model: 20-1456 B The Hampton

38 of 42



Whirlpool 55 dBA* Front Control Dishwasher WDF330PAH



Stainless Steel

Also available in:

White	WDF330PAHW
Black	WDF330PAHR

Capacity		
Total Place Settings	13	
General Features & Propertion	es	
Heavy Cycle		
High Temperature Wash Op	tion	
Heated Dry Option		
ENERGY STAR® Certified		
Industry's Best Selling Dish	washer Brand [†]	
Designed, Engineered and Assembled in the U.S.A. with American Pride		
Electrical Details		
Amps	10	
Volts	120	
Hz	60	
Certifications		
ENERGY STAR® Certified	Yes	

Technical Details		
Dishwasher Type	Built-in	
Control Location	Front	
Control Type	Push Button	
Number of Wash Cycles	3	
Number of Options	4	
dBA [*]	55	
Number of Racks	2	
Tub Material	Plastic	
Wash System	Filter	
Wash System Type	Removable Filter	
Number of Wash Arms	2	
Dimensions		
Product Dimensions (H x W x D)	34-1/2" x 23-7/8" x 24-1/2"	
Depth with Door Open 90°	49-1/2"	
Poforonco Matorial		

Reference Material

Dimension Guide

Install Guide

Use & Care Guide

Energy Guide

Warranty

Key Features & Benefits

1-Hour Wash Cycle


Clean dishes in half the time so your plates, pans and glasses are thoroughly cleaned up and taken care of in just an hour.*

Soil Sensor

Determines how dirty dishes are and adjusts the Normal cycle as needed to make sure dishes come out clean.

Normal Cycle

Use for normal amounts of food soil to clean up leftover messes from your day-to-day meals.



^{*}Per IEC standards. **Compared to Normal cycle with lightly soiled loads. †Based on 12-month average of sales. TraQline 2018. NOTE: Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

®/™ © 2020. All rights reserved. Printed in the U.S.A. D200052XXA. WDF330PAHSPECSHEETV01.

Project: Wallaceton Unit: 3189A-5, Phase: 3

Model: 20-1456 B The Hampton






Undercounter Dishwasher

PRODUCT MODEL NUMBERS

WDF110PAB	WDF320PAD	WDT710PAH
WDF111PAB	WDF330PAH	WDT720PAD
WDF120PAF	WDF331PAH	WDT730PAH
WDF121PAF	WDF520PAD	WDT735PAG
WDF130PAH	WDF540PAD	WDT735PAH
WDF131PAH	WDF545PAF	

DRAIN REQUIREMENTS

- A new drain hose is supplied with your dishwasher. If drain hose is not long enough, use a new drain hose with a maximum length of 12 ft (3.7 m) that meets all current AHAM/IAPMO test standards, is resistant to heat and detergent, and fits the 1" (25 mm) drain connector of the dishwasher. See the "Tools and Parts" section at the front of the guide for part details and orders.
- Make sure to connect drain hose to waste tee or disposer inlet above drain trap in house plumbing and 20" (508 mm) minimum above the floor. It is recommended that the drain hose either be looped up and securely fastened to the underside of the counter or be connected to an air gap.
- Make sure to use an air gap if the drain hose is connected to house plumbing lower than 20" (508 mm) above subfloor or floor.

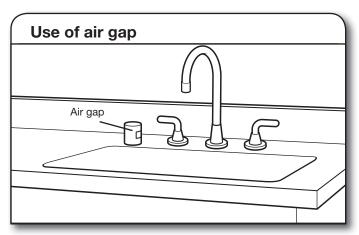

- If required, the air gap should be installed in accordance with the air gap installation instructions. When you are connecting the air gap, a rubber hose (not provided) will be needed to connect to the waste tee or disposer inlet.
- Use 1/2" minimum I.D. drain line fittings.

WATER SUPPLY REQUIREMENTS

- This dishwasher has a water heating feature and also requires a connection to a hot water supply line.
- A hot water line with 20 to 120 psi (138 to 862 kPa) water pressure can be verified by a licensed plumber.
- 120°F (49°C) water at dishwasher
- ³/8" O.D. copper tubing with compression fitting or flexible braided water supply line. See the "Tools and Parts" section at the front of the guide for part details and orders.

NOTE: 1/2" minimum plastic tubing is not recommended.

- A 90° elbow with ³/₄" hose connection with rubber washer. See the "Tools and Parts" section at the front of the guide for part details and orders.
- Do not solder within 6" (152 mm) of the water inlet valve.
- If installed in new construction, make sure the house water supply lines have been flushed prior to connecting the dishwasher to remove any debris that may exist in the supply line.

NOTE: If replacing an existing dishwasher, it is recommended to install a new water line (see the "Tools and Parts" section at the front of the guide for part details) and drain hose (supplied) with the new dishwasher.

ELECTRICAL REQUIREMENTS

You Must Have:


- 120-volt, 60 Hz, AC-only, 15- or 20-amp, fused electrical supply
- Copper wire only
- A maximum of 2 field wiring supply conductors (12 AWG largest size) plus 1 grounding conductor are permitted in the terminal box.

We Recommend:

- A time-delay fuse or circuit breaker
- A separate circuit

If Connecting Dishwasher with a Power Cord:

- Use a UL Listed power cord kit marked for use with dishwasher. See the "Tools and Parts" section at the front of the guide for part details and orders.
- Plug into a grounded 3 prong outlet. Outlet must meet all local codes and ordinances.



If Connecting Dishwasher with Direct Wiring:

- Use flexible, armored, or nonmetallic sheathed copper wire with grounding wire that meets the wiring requirements for your home and local codes and ordinances.
- Use a UL Listed/CSA Approved metallic strain relief.

Project: Wallaceton Unit: 3189A-5, Phase: 3

Model: 20-1456 B The Hampton

PRODUCT AND CABINET OPENING DIMENSIONS — 23⁷/8" -(606 mm) — 25¹/₄" -(641 mm) — ³/₄" (19 mm) 30" (762 mm) 331/2" 301 (851 mm) min. with (762 mm) leveling legs removed **4**−3³/₄" (94 mm) 31/2" - 41/2" (88 mm - 106 mm) (533 mm) For 4" (100 mm) toe kick, height of cabinet opening is 341/2" (863 mm). A. Insulation may be compressed (not used on all models). B. Door handles may protrude forward of the face of the dishwasher, (varies by model). Check that all surfaces have no protrusions that would prohibit dishwasher installation. 101/2" NOTE: Shaded areas (864 mm) of cabinet walls show where utility -6³/₄" (102 mm) (172 mm) connections may be installed. (76 mm (159 mm) 2¹/₄" (64 mm) 24" / (620 mm) (44 mm) 2" (51 mm) 24' (620 mm) D C. Measured from the lowest point on the underside of the countertop. May be reduced to 33¹/₂" (851 mm) by removing the wheels and perforated area of insulation (blanket) on dishwasher. D. Minimum, measured from narrowest point of opening.


Unit: 3189A-5, Phase: 3

Model: 20-1456 B The Hampton

41 of 42

WHIRLPOOL WASHER Model #: WFW5620HW

Whirlpool Brand Canada English | Washer and Dryers | Washers | Front Load Washers | WFW5620HW



5.2 cu. ft. I.E.C. Closet-Depth Front Load Washer with Load & Go™ Dispenser



5.2 cu. ft. I.E.C. Closet-Depth Front Load Washer with Load & Go™ Dispenser

Model #: WFW5620HW

Dimensions

Depth 80.17 cm, 31-9/16 in

Depth With Door Open 90 Degree 143.51 cm, 56-1/2 in

Minimum Height 98.11 cm, 38-5/8 in

Width 68.58 cm, 27.0 in

Appearance

LCD Touch Screen No

Window Yes

Details

Drum Material Stainless Steel

Cycles and Options

Number of Wash Cycles 37

Electrical

Iz 60

Power Cord Included Yes


Project: Wallaceton Unit: 3189A-5, Phase: 3

Model: 20-1456 B The Hampton

42 of 42

WHIRLPOOL DRYER Model #: YWED5620HW

Whirlpool Brand Canada English | Washer and Oryers | Dryers | Electric Dryers | YWED5620HW



Define Your Style

7.4 cu. ft. Front Load Electric Dryer with Intuitive Touch Controls

Whirlpool

7.4 cu. ft. Front Load Electric Dryer with Intuitive Touch Controls

Model #: YWED5620HV

Dimensions

Depth	78.74 cm, 31.0 in
Depth With Door Open 90 Degree	138.43 cm, 54-1/2 in
Height	98.42 cm, 38-3/4 in
Width	68.58 cm, 27.0 in
Configuration and Overview	*
Fuel Type	Electric
Cycles and Options	
Cycle Time Remaining	Yes
Lint Filter Indicator	No
Number of Dryer Cycles	36
Number of Dryness Levels	3
Ventilation System	
Long Vent	No
Maximum Vent Length	64
Venting Direction	Left, Right, Bottom, Rear
Electrical	
Hz	60
D	V