Sales Selection Sheet Checklist

1 of 46

LOT 3186A-1 Model: 20-2095 END ALT B The Forbes

PURCHASERS: MITHUN, BHUPENDRA DESAI/

VENDOR: Heathwood Homes (Huron) Limited

Locke	d Date:			Date Approved	Heathwood Homes (Huron) Limited
D	ate	Purchaser:		Mar 25, 2022	MARILYN ROSEN
D	ate	Purchaser:		Date	Decor Consultant:
		Signature on file		<u> </u>	2 IRIT SALEM
LOFT	STAIRS (if applicable):	N/A		
		(if applicable):	N/A		
MAIN	STAIRS:		All Oak		
LOWE	R BASE	MENT STAIRS:	N/A		
UPPE	R BASEN	MENT STAIRS:	N/A		
FULL	BASEME	NT STAIRS:	Carpet Grade		
	7 IN RO	UND DUCT			
Y		UND DUCT			
KITCH	IEN: HO	DDFAN VENTING SIZ	ZE		
	ADDITIO	ONAL FIREPLACE			
	BBQ				
	DRYER				
OA51	STOVE				
GASE	ROUGH-I	N			
Y	AIR COI	NDITIONING			
	HUMIDI	FIER			
	WET BA	R ROUGH-IN			
	200 AMI	PSERVICE			
ADDI1	ΓΙΟΝΑL F	ROUGH-INS			
	BASEM	ENT			
		D FLOOR			
Y	MAIN FI	_OOR			
CEILII	NG UPGF	RADE - SMOOTH			
	REAR U	IPGRADE			
		R UPGRADE			
UPGR		MODIFIED ELEVATION	ON		
	COLD	ELLAR			
Y	FINISHE	ED BASEMENT			

MITHUN, BHUPENDRA DESAI/ Project: Wallaceton Unit: 3186A-1, Phase: 3 Model: 20-2095 END ALT B The Forbes

Kitchen		
Cabinet Colour/Style	9156	Viking III-SIMCOE-RAIN CLOUD-3DL ***STD***
	0.00	
Countertop	9069	MSI Quartz GROUP 1 ICED WHITE ***STD***
Countertop Edge	4010	SINGLE POLISHED STRAIGHT EDGE 3/4 INCH ***STD**
Cabinet Hardware	2086	9677-HARDWARE ***STD***
Island Cabinet Colour/Style	9156	Viking III-SIMCOE-RAIN CLOUD-3DL ***STD***
Island Countertop	9069	MSI Quartz GROUP 1 ICED WHITE ***STD***
Backsplash	8637	QT.CH.ARW.0412.BR-Chess Bevelled-Arctic White-4 x 12 ***3***
Backsplash Grout	2226	Grout-(00) White ***STD***
Backsplash Tile Pattern	3070	HORIZONTAL STACKED ***STD***
HoodFan	9415	AVH-308CS-AVG 30 inch STAINLESS STEEL CHIMNEY WALL MOUNTED HOODFAN
Appliance	9415	Purchasers have been advised: standard fridge opening is a minimum 37 3/8 x 73 3/8". Ice Waterline Rough-In is included.
Appliance	9415	Standard stove opening is 30" and standard dishwasher opening is 24". Any gas stove will require backsplash or stainless steel backing to avoid fire hazards.
Appliance	9415	Purchasers acknowledge: Heathwood Homes and its contractors will not be responsible for any kitchen cabinet changes due to appliances dimension changes after
Comment		
Kitchen/Breakfast		
Flooring	9415	GE.MD.WHT.1818.MT Madison Series White Matte 18
Floor Tile Grout	2225	Grout-(27) Silver ***STD***
Floor Tile Pattern	3000	STANDARD SQUARE ***STD***

MITHUN, BHUPENDRA DESAI/ Project: Wallaceton Unit: 3186A-1, Phase: 3 Model: 20-2095 END ALT B The Forbes

Closed:	
Ciosea.	

Comment			
Foyer			
Flooring	3000	GE.MD.WHT.1818.MT Madison Series White Matte 18	
Floor Tile Grout	2225	Grout-(27) Silver ***STD***	
Floor Tile Patterr	3000	STANDARD SQUARE ***STD***	
Comment			
Lauradina Dalam			
Laundry Room			
Flooring	3000	GE.MD.WHT.1818.MT Madison Series White Matte 18	
Floor Tile Grout	2225	Grout-(27) Silver ***STD***	
Floor Tile Patterr	3000	STANDARD SQUARE ***STD***	
Comment			
Laundry Room Opt.			
Lauriary Room Opt.			
Cabinet - Uppers	9157	Viking III-SIMCOE-MOONLIGHT-3DL ***STD***	
Cabinet Hardwa	re 2086	9677-HARDWARE ***STD***	
Comment			
Mari Danie	L		
Mud Room			
Flooring	2086	GE.MD.WHT.1818.MT Madison Series White Matte 18	
Page 2 of 10			

MITHUN, BHUPENDRA DESAI/ Project: Wallaceton Unit: 3186A-1, Phase: 3 Model: 20-2095 END ALT B The Forbes

Floor Tile Grout		2225	Grout-(27) Silver ***STD***
Floor Tile Pattern		3000	STANDARD SQUARE ***STD***
Comment			
Powder Room			
Flooring		3000	GE.MD.WHT.1818.MT Madison Series White Matte 18
Floor Tile Gro	out	2225	Grout-(27) Silver ***STD***
Floor Tile Pattern		3000	STANDARD SQUARE ***STD***
Plumbing Fix	ture (Colour)	1737	Plumbing Fixtures-WHITE ***STD***
Comment			
Hall			
Flooring		1737	GE.MD.WHT.1818.MT Madison Series White Matte 18
Grout		2225	Grout-(27) Silver ***STD***
Floor Tile Pat	tern	3000	STANDARD SQUARE ***STD***
Comment			
Great Room			
Flooring		7498	Red Oak Pearl-Vintage Engineered-GRYPHON/IRONGATE-3/4 inch x 3 1/4 inch
Comment			
Page 3 of 10			

Customer Colours MITHUN, BHUPENDRA DESAI/ Project: Wallaceton Unit: 3186A-1, Phase: 3 Locked: Model: 20-2095 END ALT B The Forbes Closed: **Upper Hall** Flooring 9252 DY 16787 -Dynasty Tex-MYSTIC BEIGE-40 oz Poly***STD*** Comment Finished Basement (Rec) Room/Hall DY 16787 -Dynasty Tex-MYSTIC BEIGE-40 oz Poly***STD*** 9252 Flooring Comment Master Bedroom DY 16787 - Dynasty Tex-MYSTIC BEIGE-40 oz Flooring 9252 Poly***STD** Comment Bedroom 2 9252 Flooring DY 16787 -Dynasty Tex-MYSTIC BEIGE-40 oz Poly***STD** Comment Bedroom 3 9252 DY 16787 -Dynasty Tex-MYSTIC BEIGE-40 oz Flooring Poly***STD*** Comment Bedroom 4 Flooring 9252 DY 16787 - Dynasty Tex-MYSTIC BEIGE-40 oz Poly***STD***

Comment

Page 4 of 10

MITHUN, BHUPENDRA DESAI/ Project: Wallaceton Unit: 3186A-1, Phase: 3 Model: 20-2095 END ALT B The Forbes



Ensuite 2				
Cabinet Colour/Style	9157	Viking III-SIMCOE-MOONLIGHT-3DL ***STD***		
Countertop	8827	4925K-07-Countertop-CALCUTTA MARBLE-Wilsonart ***STD***		
Countertop Edge	1111	N/A *****		
Cabinet Hardware	2086	9677-HARDWARE ***STD***		
Floor Tile	2086	GE.MD.WHT.1818.MT Madison Series White Matte 18		
Floor Tile Grout	2225	Grout-(27) Silver ***STD***		
Floor Tile Pattern	3000	STANDARD SQUARE ***STD***		
	4707			
Plumbing Fixture (colour)	1737	Plumbing Fixtures-WHITE ***STD***		
Tub Wall Tile	9020	QT.WV.WHT.0810-Weave-White-8 x 10 ***STD***		
Tub Wall Tile Grout	2226	Grout-(00) White ***STD***		
Tub Wall Tile Pattern	3090	VERTICAL STACKED ***STD***		
Comment				
laster Ensuite				
Cabinet Colour/Style	9157	Viking III-SIMCOE-MOONLIGHT-3DL ***STD***		
Countertop	8827	4925K-07-Countertop-CALCUTTA MARBLE-Wilsonart ***STD***		
Countertop Edge	1111	N/A *****		
Cabinet Hardware	2086	9677-HARDWARE ***STD***		

MITHUN, BHUPENDRA DESAI/ Project: Wallaceton Unit: 3186A-1, Phase: 3 Model: 20-2095 END ALT B The Forbes

Floor Tile	2086	GE.MD.WHT.1818.MT Madison Series White Matte 18		
Floor Tile Grout	2225	Grout-(27) Silver ***STD***		
Floor Tile Pattern	3000	STANDARD SQUARE ***STD***		
Shower Floor Tile	8108	OD.ON.DGR.02.HEX.MT-ONTARIO HEXAGON MATTE-DARK GREY ***2***		
Shower Floor Tile Grout	7704	Grout-(19) Pearl Gray ***STD***		
Shower Floor Tile Pattern	3000	STANDARD SQUARE ***STD***		
Shower Wall Tile	5411	QT.SP.WHT.0810-Splendour-White-8 inch x 10 inch ***STD***		
Shower Wall Tile Grout	2226	Grout-(00) White ***STD***		
Shower Wall Tile Pattern	3090	VERTICAL STACKED ***STD***		
Shower Jamb(s) and Sill(s)	8923	Shower Jamb / Sill-Thassos White ***STD***		
Plumbing Fixture (colour)	1737	Plumbing Fixtures-WHITE ***STD***		
Comment				
Main Bathroom				
Cabinet Colour/Style	9157	Viking III-SIMCOE-MOONLIGHT-3DL ***STD***		
Countertop	8827	4925K-07-Countertop-CALCUTTA MARBLE-Wilsonart ***STD***		
Countertop Edge	1111	N/A *****		
Cabinet Hardware	2086	9677-HARDWARE ***STD***		
Flooring	2086	GE.MD.WHT.1818.MT Madison Series White Matte 18		

MITHUN, BHUPENDRA DESAI/ Project: Wallaceton Unit: 3186A-1, Phase: 3 Model: 20-2095 END ALT B The Forbes

Floor Tile Grout	2225	Grout-(27) Silver ***STD***		
Floor Tile Pattern	3000	STANDARD SQUARE ***STD***		
Wall Tile	9020	QT.WV.WHT.0810-Weave-White-8 x 10 ***STD***		
Wall Tile Grout	2226	Grout-(00) White ***STD***		
Main Bathroom Tile Pattern	3090	VERTICAL STACKED ***STD***		
Main Batinoon The Fattern	3030	VERTIONE OTNORED OTD		
Dlumbing Fixture (Colour)	1737	Plumbing Fixtures-WHITE ***STD***		
Plumbing Fixture (Colour)	1737	Flumbling Fixtures-White STD		
Comment				
Finished Basement Bathroom				
Cabinet Colour/Style	9157	Viking III-SIMCOE-MOONLIGHT-3DL ***STD***		
Countertop	8827	4925K-07-Countertop-CALCUTTA MARBLE-Wilsonart ***STD***		
Countains Educ	4444	N/A *****		
Countertop Edge	1111			
Cabinet Hardware	2086	9677-HARDWARE ***STD***		
Flooring	2086	GE.MD.WHT.1818.MT Madison Series White Matte 18		
Floor Tile Grout	2225	Grout-(27) Silver ***STD***		
Floor file Grout	2223			
Floor Tile Pattern	3000	STANDARD SQUARE ***STD***		
Shower Floor Tile	8661	OD.ON.SWT.0202.MT.N-Ontario Series Mosaic-Snow White Matte-2 x 2 ***STD***		
Shower Floor Tile Grout	2226	Grout-(00) White ***STD***		
Shower Floor Tile Pattern	3000	STANDARD SQUARE ***STD***		

Page 8 of 10

MITHUN, BHUPENDRA DESAI/ Project: Wallaceton Unit: 3186A-1, Phase: 3 Model: 20-2095 END ALT B The Forbes

Shower Wall Tile	9020	QT.WV.WHT.0810-Weave-White-8 x 10 ***STD***	
Shower Wall Tile Grout	2226	Grout-(00) White ***STD***	
Shower Wall Tile Pattern	3090	VERTICAL STACKED ***STD***	
Shower Jamb(s)	8923	Shower Jamb / Sill-Thassos White ***STD***	
Plumbing Fixture (Colour)	1737	Plumbing Fixtures-WHITE ***STD***	
Comment			
Great Room Fireplace			
Туре	8865	Dimplex-Electric Fireplace-PF3033HL ***STD***	
Mantle	8891	NF-17-Paint Grade Mantle- Cabinet (Per Plan)-WHITE ***STD***	G 2 ⁻
Surround Opt.	1111	N/A *****	
Disclaimer	1111	Purchasers have been advised: heat from the FP can damage TV above a FP and items placed on mantle.	
Disclaimer	1111	Heathwood and its contractors will not be liable for any damage on items placed/installed above a FP after closing.	
Comment			
Basement Stairs			
Туре	1714	Carpet Grade Stairs ***STD BASEMENT STAIRS***	
Colour	7912	Irongate (Gryphon) STAIN TO COMPLIMENT HARDWOOD AND WILL VARY FROM FLOORING	
Carpet Runner	1111	N/A *****	
Handrail/Pickets/Post Type	9119	Handrail only on closed walls (one or two sides per building code) ***STD***	
Handrail/Pickets/Post Colours	7762	Carpet Grade-Stain handrail, stringers, nosing _post(s). (Me	
Carpet	9252	DY 16787 -Dynasty Tex-MYSTIC BEIGE-40 oz Poly***STD***	

Page 9 of 10

MITHUN, BHUPENDRA DESAI/ Project: Wallaceton Unit: 3186A-1, Phase: 3 Model: 20-2095 END ALT B The Forbes

Custom Sta	in/Paint	1111	N/A *****
Comment			
Basement Stairs	s Landings (Upper and	Lo	
Flooring		1111	N/A *****
Comment			
Main Stairs			
Туре		1712	Oak Stairs ***STD MAIN STAIRS***
Colour		7912	Irongate (Gryphon) STAIN TO COMPLIMENT HARDWOOD AND WILL VARY FROM FLOORING
Carpet Runner		1111	N/A *****
Handrail/Pickets/Posts Type		8148	Single Collar Alt. Plain w/ Shoes with 3 1/2" Square/Cap Post(s)-BLACK ***2***
Handrail/Pic	ckets/Posts Colour	7761	Oak Grade-Stain handrail,stringers,treads,risers,nosingpos
Custom Sta	in/Paint	1111	N/A *****
Comment			
Main Stairs Lan	ding(s) (Lower)	_	
Flooring	3(1)	1111	N/A *****
Comment			
Throughout			
Walls - Pain	t Colour	1717	22-Wall-WARM GREY ***STD***
Underpad		1079	500 Series-Underpad ***STD***
Thresholds		2232	Metal Thresholds ***STD***

MITHUN, BHUPENDRA DESAI/ Project: Wallaceton Unit: 3186A-1, Phase: 3 Model: 20-2095 END ALT B The Forbes

Purchaser:	MITHUN, BHUPENDRA	1716 DESAI	Trim-WHI	TE ***STD*** Decor Consultant	 Date
Trim Size)	8705	4 ¼ Base	board and 2 ¾ Casings ***ST	·D***
Switches	and Plug	5/96	Decora W	hite Switches and Plugs ***5	S1D***

construction summary of 46



Lot: 3186A-1

Model: 20-2095 END ALT B The Forbes

Project/Phase: Wallaceton / 3

Offer	Five Appliances: SS Fridge, Stove, Dishwasher: White Front Loader Washer/Dryer - Townhomes
Worksheet	Note:
Offer	The Purchaser(s) acknowledge that they have NOT been referred by an existing Heathwood Homeowner and therefor are not
	entitled to a referral fee under Heathwood Homes referral progam.
Worksheet	Note:

DisciplineMS.rpt 13dec21 Page 1 of 6

Printed and Sent: 01-Apr-22



Lot: 3186A-1

Model: 20-2095 END ALT B The Forbes

Project/Phase: Wallaceton / 3

APPLIANCES

Invoice	Qty.	Description
941	1	KITCHEN - APPLIANCES - AVH-308CS - 30 inch Wall Mounted Chimney Hood
313,483		fan
01Apr22		
		CABINETRY - delete stove uppers; ELECTRICAL - delete std range hood; HEATING/AIR CONDITIONING - Du
		change to 6"

CADIMETER

	CABINETRY		
Invoice	Qty.	Description	
941 306,986	1	LAUNDRY ROOM - CABINETRY - VIKING I/II/III - OPT. LAUNDRY ROOM UPPERS - UPG	
01Apr22		SKETCH # 3	
941 313,768	1	KITCHEN - 11A-Upper angle corner per unit Viking	
01Apr22		SEE SKETCH # 2	
941 306,967 01Apr22	1	KITCHEN - CABINETRY - OPT LIGHT VALANCE (TRIM ONLY) - KITCHEN (ALL DOOR STYLES) - UPG	
01Api22			
941 313,483	1	KITCHEN - APPLIANCES - AVH-308CS - 30 inch Wall Mounted Chimney Hood fan	
01Apr22 **		CABINETRY - delete stove uppers; ELECTRICAL - delete std range hood; HEATING/AIR CONDITIONING - Du change to 6"	
941 313,652	1	- 05H-66cm deep fridge enclosure (counter depth) with no walls ([2] 66cm deep gables and [1] 66cm deep cabinet) (This is not a zero clearance enclosure. Standard heights and widths will be used.) Viking	
01Apr22		SKETCH# 2	

DisciplineMS.rpt 13dec21 Page 2 of 6

14 of 46



CONSTRUCTION SUMMARY

Lot: 3186A-1 Model: 20-2095 END ALT B The Forbes

Project/Phase: Wallaceton / 3

CERAMICS

CERAMICS Invoice Qty. Description		
941 314,180 01Apr22	1	KITCHEN - CERAMICS - ADDITIONAL BACKSPLASH DUE TO INSTALL CHIMENEY HOODFAN IN KITCHEN - KITCHEN - UPGRADE 3
941 309,354 01Apr22	1	KITCHEN - CERAMICS - BACKSPLASH - KITCHEN - UPGRADE 3
941 309,360 01Apr22	1	FINISHED BASEMENT BATHROOM - CERAMICS - FLOOR - BASEMENT BATHROOM - UPGRADE 1
941 309,367 01Apr22	1	ENSUITE 2 - CERAMICS - FLOOR - ENSUITE 2 - UPGRADE 1
941 309,374 01Apr22	1	MASTER ENSUITE - CERAMICS - FLOOR - ENSUITE MASTER - UPGRADE 1
941 309,381 01Apr22	1	FOYER - CERAMICS - FLOOR - FOYER - UPGRADE 1
941 309,398 01Apr22	1	KITCHEN/BREAKFAST - CERAMICS - FLOOR - KITCHEN / BREAKFAST - UPGRADE 1
941 309,405 01Apr22	1	LAUNDRY ROOM - CERAMICS - FLOOR - LAUNDRY ROOM - UPGRADE 1
941 309,412 01Apr22	1	MAIN BATHROOM - CERAMICS - FLOOR - MAIN BATHROOM - UPGRADE 1
941 309,419 01Apr22	1	MAIN HALL - CERAMICS - FLOOR - MAIN HALL - UPGRADE 1
941 309,426 01Apr22	1	MUD ROOM - CERAMICS - FLOOR - MUD ROOM - UPGRADE 1
941 309,433 01Apr22	1	POWDER ROOM - CERAMICS - FLOOR - POWDER ROOM - UPGRADE 1
941 309,456 01Apr22	1	MASTER ENSUITE - CERAMICS - SHOWER FLOOR - ENSUITE MASTER - UPGRADE 2



Lot: 3186A-1

Model: 20-2095 END ALT B The Forbes

Project/Phase: Wallaceton / 3

COFFERED CEILING

Invoice	Qty.	Description
941	1	GREAT ROOM - COFFERED CEILING - OPT. COFFERED CEILING - GREAT ROOM
310,672		
01Apr22		SKETCH # 2
		DRYWALL - notification; PAINTING- notification

DRYWALL

Invoice	Qty.	Description
941 310,716 01Apr22	1	- DRYWALL - SMOOTH CEILING IN MAIN FLOOR
		PAINTING - Paint smooth ceiling
941 310,672	1	GREAT ROOM - COFFERED CEILING - OPT. COFFERED CEILING - GREAT ROOM
01Apr22 **		SKETCH # 2 DRYWALL - notification; PAINTING- notification
941 314,238	1	- ELECTRICAL - POTLIGHT BUNDLE - 8 X T477GR-W 4 INCH LINE VOLTAGE POTLIGHTS INCLUDES 2 SWITCHES MAIN FLOOR (SEE SLIM LINE FOR BASEMENT)
01Apr22		6X- GREAT ROO AND 3x IN KITCHEN - USE SEPARATE SWITCH SEE SKETCH # 2 DRYWALL - Drywall/Ceiling cutouts for potlights; FRAMING - Frame to accommodate potlights

ELECTRICAL

Invoice		Description Description
Invoice	Qty.	Description
941 314,242	1	KITCHEN - ELECTRICAL - RELOCATION OF SWITCHES/LIGHTS (MUST SPECIFY LOCATION) - NOTE: PLUGS CANNOT BE RELOCATED- MUST PURCHASE ADDITIONAL OUTLET.
01Apr22		RELOCATE STD. KITCHEN LIGHT TO BE ABOVE THE BREAKFAST BAR- USE STD. KITCHEN LIGHT SWITCH
		SEE SKETCH # 2
941 314,232	1	GREAT ROOM - ELECTRICAL - EXTRA WALL INTERIOR OUTLET ON EXISTING CIRCUIT (DOES NOT INCLUDE KITCHEN OUTLETS)
01Apr22		TO BE INSTALLED ABOVE THE FIRE PLACE 70" +/- FROM FLOOR SEE SKETCH # 2
941 314,211	1	KITCHEN - ELECTRICAL - 4 INCH LINE VOLTAGE POTLIGHTS INSTALLED ON MAIN FLOOR (SEE SLIM LINE FOR BASEMENT)
01Apr22		TO BE INSTALLED IN TEH KITCHEN TOGETHER WITH THE 2 POT LIGHT (PART OF POT LIGHT PACKAGE) USE POT LIGHT PACKAGE SWITCH) SEE SKETCH # 2
941 314,238	1	- ELECTRICAL - POTLIGHT BUNDLE - 8 X T477GR-W 4 INCH LINE VOLTAGE POTLIGHTS INCLUDES 2 SWITCHES MAIN FLOOR (SEE SLIM LINE FOR BASEMENT)
01Apr22		6X- GREAT ROO AND 2X IN KITCHEN - USE SEPARATE SWITCH SEE SKETCH # 2 DRYWALL - Drywall/Ceiling cutouts for potlights; FRAMING - Frame to accommodate potlights
941	1	KITCHEN - APPLIANCES - AVH-308CS - 30 inch Wall Mounted Chimney Hood
313,483		fan
01Apr22 **		CABINETRY - delete stove uppers; ELECTRICAL - delete std range hood; HEATING/AIR CONDITIONING - Duchange to 6"

DisciplineMS.rpt 13dec21

Page 4 of 6



Lot: 3186A-1

Model: 20-2095 END ALT B The Forbes

Project/Phase: Wallaceton / 3

FRAMING

Invoice	Qty.	Description

941	1	- ELECTRICAL - POTLIGHT BUNDLE - 8 X T477GR-W 4 INCH LINE VOLTAGE POTLIGHTS INCLUDES 2 SWITCHES
314,238		MAIN FLOOR (SEE SLIM LINE FOR BASEMENT)
01Apr22		6X- GREAT ROO AND 2X IN KITCHEN - USE SEPARATE SWITCH SEE SKETCH # 2
**		DRYWALL - Drywall/Ceiling cutouts for potlights; FRAMING - Frame to accommodate potlights

GARAGE DOORS

Invoice	Otv	Description

941 314,255 01Apr22	1	- GARAGE DOORS - AUTOMATIC GARAGE DOOR OPENER COMES WITH ONE REMOTE AND ONE INTERIOR OPERATING BUTTON
941 314,256	1	- GARAGE DOORS - KEYLESS ENTRY (WIRELESS KEYPAD)
01Apr22		SKETCH# 2

GLASS PRODUCTS / MIRRORS

Invoice Qty. Description

HEATING / AIR CONDITIONING

Invoice Qty. Description

941	1	KITCHEN - APPLIANCES - AVH-308CS - 30 inch Wall Mounted Chimney Hood	ĺ
313,483		fan	ĺ
01Apr22			ĺ
**		CABINETRY - delete stove uppers; ELECTRICAL - delete std range hood; HEATING/AIR CONDITIONING - Du	ĺ
		change to 6"	ĺ

INTERIOR RAILINGS

Invoice Qty. Description

941 312,312 01Apr22	_	MAIN STAIRS - INTERIOR RAILINGS - BLACK METAL - SINGLE COLLAR ALT. PLAIN W/ SHOES WITH 3 1/2 INCH SQUARE/CAP POST(S) AS PER PLAN - MAIN STAIR - UPG

PAINTING

Invoice	Otv.	Description	

941	1	- DRYWALL - SMOOTH CEILING IN MAIN FLOOR
310,716		
01Apr22		
**		PAINTING - Paint smooth ceiling
941	1	GREAT ROOM - COFFERED CEILING - OPT. COFFERED CEILING - GREAT ROOM
310,672		
01Apr22		SKETCH#2
**		DRYWALL - notification; PAINTING- notification

DisciplineMS.rpt 13dec21 Page 5 of 6

Printed and Sent: 01-Apr-22



Lot: 3186A-1

Model: 20-2095 END ALT B The Forbes

Project/Phase: Wallaceton / 3

PLUMBING

Invoice	Otv.	Description

941 314,358 01Apr22 $\hbox{MASTER ENSUITE - PLUMBING - AMERICAN STANDARD - SINK - ABOVE COUNTER SINK - BOULEVARD - WHITE - MODEL 0641 004 020 4 INCH CENTRES - \\$

SPEC PAGES 27-28

Printed and Sent: 01-Apr-22

20-2095 END ALT ELEV. B

Model: 20-2095 END ALT B The Forbes

18 of 46


SKETCH #1

THE FORBES

ELEVATION B | 2,720 SQ. FT.

Includes 638 sq. ft. of Finished Lower Level

WALLACETON

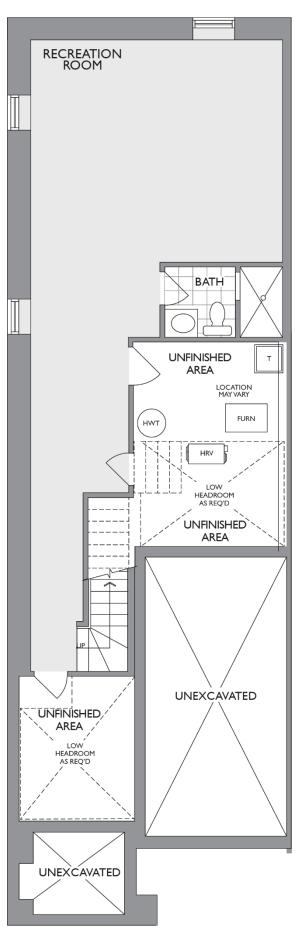

Model: 20-2095 END ALT B The Forbes

19 of 46

SKETCH #2


THE FORBES

ELEVATION B | 2,720 SQ. FT.

Includes 638 sq. ft. of Finished Lower Level

20-2095 END ALT ELEV. B

WALLACETON

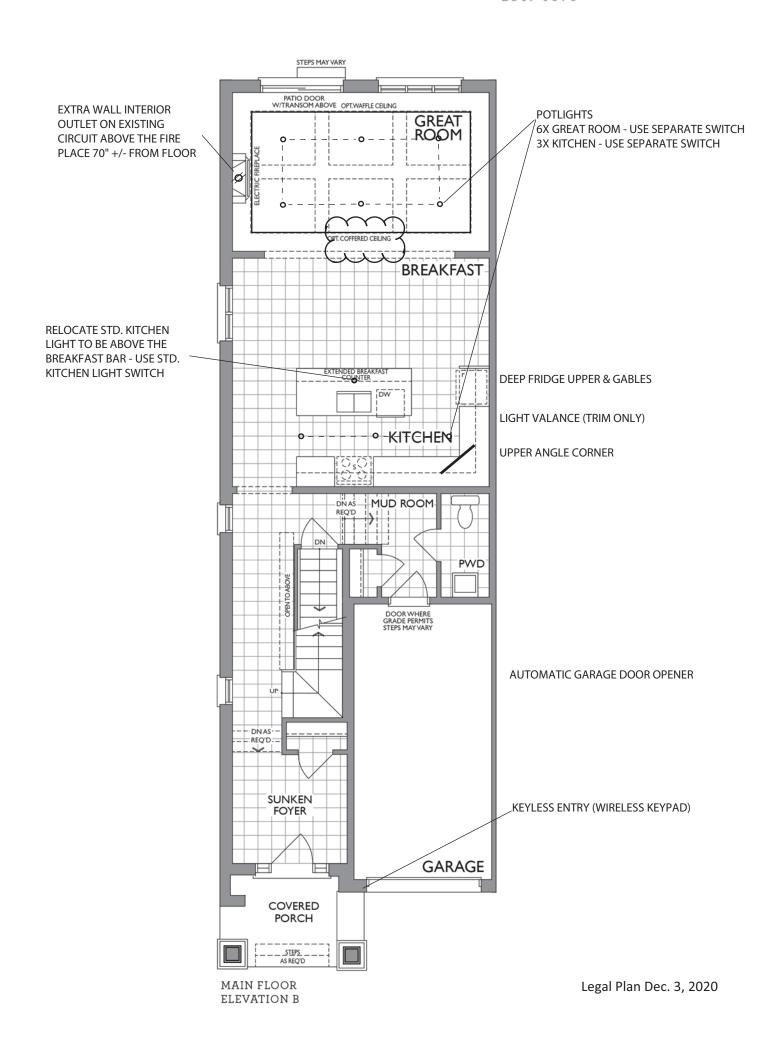

Model: 20-2095 END ALT B The Forbes

20 of 46


SKETCH #3

THE FORBES

ELEVATION B | 2,720 SQ. FT. Includes 638 sq. ft. of Finished Lower Level

20-2095 END ALT ELEV. B

WALLACETON

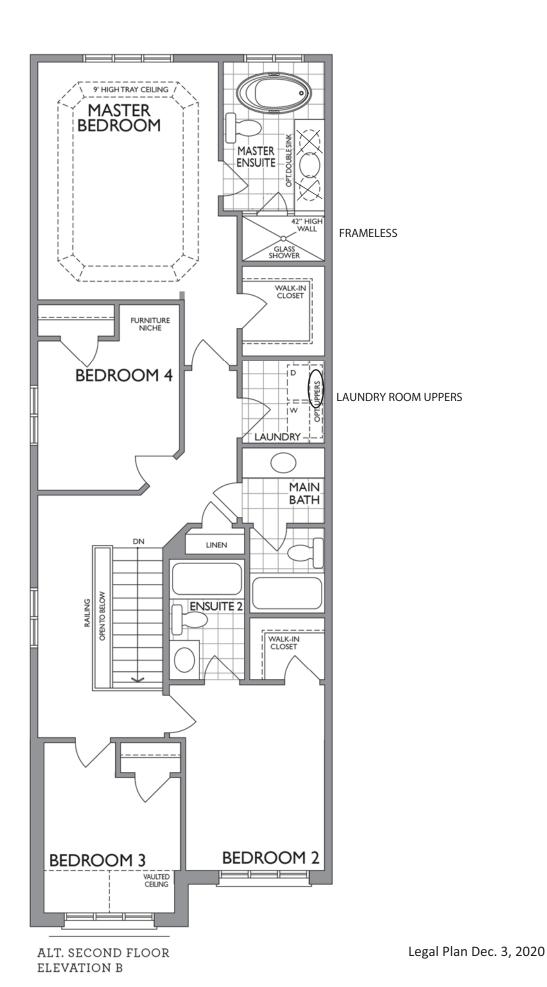

Project: Wallaceton Unit: 3186A-1, Phase: 3 Model: 20-2095 END ALT B The Forbes

21 of 46





NFAS NF17 Mantel


Model: 20-2095 END ALT B The Forbes


22 of 46

(Keginox

ND1831UA/9







ND1831UA/9 SPECIFICATION

Model ND1831UA/9 is a double (two equal size) bowl undermount sink manufactured by Franke Kindred Canada Limited from 18 gauge stainless steel. Product has silk finished rims and linear brush finished bowls. Sink is fully undercoated. Basket strainer waste fittings (3 1/2", 89 mm) are included. Sink is backed with a limited lifetime warranty.

- O.D. 17 3/4" x 30 7/8" x 8 1/2" (45 x 78 x 22 cm)
- Recommended for minimum 36" cabinet

Franke Kindred Canada Limited

P.O. Box 190, 1000 Franke Kindred Road, Midland, Ontario, Canada, L4R 4K9 Phone: 866-687-7465 Fax: 800-361-8408

Model: 20-2095 END ALT B The Forbes

23 of 46

MOEN

FAUCET DESCRIPTION

Reflex™ pulldown system offers smooth operation, easy movement and secure docking Power Clean™ spray technology Metal construction with various finishes identified by suffix

Quick connect installation

- Pulldown spray with 68" braided hose Flexible supply lines with 3/8" compression fittings
- High arc spout provides height and reach to fill or clean large pots while pulldown wand provides the maneuverability for cleaning or rinsing 360° rotating spout

Faucet designed for handle to be mounted on right side only

OPERATION

Lever style handle

Temperature controlled by 100° arc of handle travel

Operates with less than 5 lbs. of force

• Operates in stream or spray mode in the pullout or retracted position **FLOW**

Flow is limited to 1.5 gpm (5.7 L/min) max at 60 psi

CARTRIDGE

• 1255™ Duralast™ cartridge

STANDARDS


Third party certified to IAPMO Green, ASME A112.18.1/CSA B125.1 and all applicable requirements therein including NSF 61/9G & 372

- Meets CalGreen and Georgia SB370 requirements Complies with California Proposition 65 and with the Federal Safe Drinking
- The backflow protection system in the device consists of two independently operating check valves, a primary and a secondary which prevent backflow
- ADA 🖒 for lever handle

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the
- 10 year limited warranty when used in a multifamily installation
- 5 year limited warranty when used in a commercial installation Visit www.moen.com/support for complete details and limitations

Specifications




ALIGN™ **Single Handle High Arc Pulldown Kitchen Faucet**

Models: 7565 series

NOTE: THIS FAUCET IS DESIGNED TO BE INSTALLED THROUGH 1 HOLE, 1-1/2" (38mm) MIN. DIA. (OPTIONAL 3-HOLE ESCUTCHEON 141002 AVAILABLE)



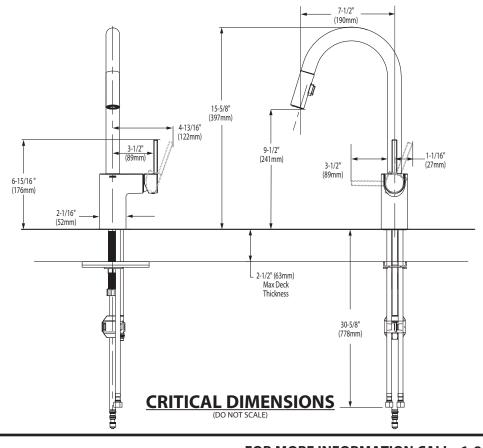

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN

www.moen.com

Rev. 6/20

Model: 20-2095 END ALT B The Forbes

24 of 46

POWDER ROOM



BARRIER FREE (ABOVE COUNTER OR DROP-IN ONLY)

BOULEVARD® PEDESTAL SINK VITREOUS CHINA

BOULEVARD® PEDESTAL SINK

☐ 0641.800 Faucet holes on 8" (203mm) centers (Illustrated)

STD • 0641.400 Faucet holes on 4" (102mm) centers

☐ 0641.100 Center hole only

- · Classic styled rectangular pedestal lavatory
- · Vitreous china
- Rear overflow
- Supplied with mounting kit
- Right Height® for greater comfort during use
- Faucet ledge with large deck area (faucet not included)
- Design coordinates with Boulevard® Toilet
- Basin has flat bottom to also allow use as an above counter sink or a drop-in sink (with u-shaped cut out)

Nominal Dimensions:

24" x 19" x 35-1/2" (610 x 483 x 902mm)

- ☐ 0641.008 Pedestal top-8" (203mm) centers
- ☐ 0641.004 Pedestal top-4" (102mm) centers
- ☐ 0641.001 Pedestal top-center hole only
- ☐ 0010.000 Pedestal only

Bowl sizes:

17" (432mm) wide, 12-1/2" (318mm) front to back, 5" (127mm) deep

Compliance Certifications -

Meets or Exceeds the Following Specifications:

• ASME A112.19.2 - 2008/CSA B45.1-08

To Be Specified:

- ☐ Color: ☐ White ☐ Linen
- ☐ Faucet Finish:
- Supplies:
- ☐ 1-1/4" Trap:
- □ Nipple:



SEE REVERSE FOR ROUGHING-IN DIMENSIONS

 $^{^{\}star}$ See faucet section for additional models available


Model: 20-2095 END ALT B The Forbes

25 of 46

POWDER ROOM

4merican tandard

BOULEVARD® PEDESTAL SINK

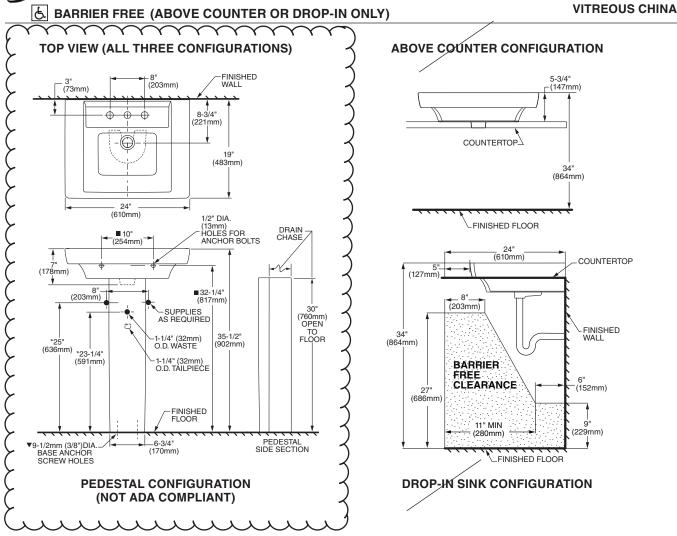

ABOVE COUNTER AND DROP-IN SINK CONFIGURATIONS MEET THE AMERICANS WITH DISABILITIES ACT GUIDELINES AND ANSI A117.1 ACCESSIBLE AND USABLE BUILDINGS AND FACILITIES - CHECK LOCAL CODES.

Top of sink installed at 34" (864mm) height from finished floor. Sink installed 5" (127mm) minimum from front edge of countertop. Provide 27" (686mm) knee clearance area.

NOTES:

* DIMENSIONS SHOWN FOR LOCATION OF SUPPLIES AND "P" TRAPS ARE SUGGESTED.

▼ PEDESTAL ANCHORING SCREWS NOT INCLUDED.
■ SUITABLE FOR REINFORCEMENT ONLY. ACTUAL DIMENSIONS MUST BE TAKEN FROM FIXTURE. FITTING NOT INCLUDED AND MUST BE ORDERED SEPARATELY.
PROVIDE SUITABLE REINFORCEMENT FOR ALL WALL SUPPORTS.

INICIALL ATION INSTRUCTIONS SUPPLIED WITH LAVATORY.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerance established by ANSI Standard A112.19.2 These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

© 2018 AS America Inc.

Model: 20-2095 END ALT B The Forbes

26 of 46

American Standard



BARRIER FREE

COLONY™ COUNTERTOP SINK

VITREOUS CHINA

COLONY COUNTERTOP SINK

- · Vitreous china
- Self-rimming
- · Front overflow
- · Supplied with template
- Faucet deck (Faucet shown not included)

☐ 0346 803 → Faucet hotes on 2031mm (8"), centres	
O346 403 (Illustrated) Faucet holes on 102mm (4") centres	3
V □ 0346 001)


Centre hole only


Nominal Dimensions: 521 x 448mm (20-1/2" x 17-5/8")


Bowl sizes:

422mm (16-5/8") wide, 279mm (11") front to back, 143mm (5-5/8") deep









COMPLIANCE CERTIFICATIONS -

Meets or exceeds the following Specifications:

- ASME A112.19.2M for Vitreous China Fixtures.
- · CAN/CSA B45 Series.

To Be Specified

- ☐ Colour: ☐ White ☐ Bone ☐ Silver Gray ☐ Linen
- □ Faucet*:
- □ Faucet Finish:
- Supplies & Stops:
- ☐ Trap 1-1/4" (32 mm):

NOTES:

* DIMENSIONS SHOWN FOR LOCATION OF SUPPLIES AND "P" TRAP ARE SUGGESTED. FOR COUNTERTOP CUTOUT AND INSTALLATION INSTRUCTIONS USE TEMPLATE SUPPLIED WITH SINK.

SUPPLIED WITH SINK.

FAUCETS NOT INCLUDED AND MUST BE ORDERED SEPARATELY.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard A112.19.2.

These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

BAS-198 .

^{*} See faucet section for additional models available

Model: 20-2095 END ALT B The Forbes

27 of 46

1X MASTER ENSUITE



BOULEVARD®

VITREOUS CHINA

BARRIER FREE (ABOVE COUNTER OR DROP-IN ONLY)

BOULEVARD®

SINK

☐ 0641.800 Faucet holes on 8" (203mm) centers (Illustrated)

STD 0641.400 Faucet holes on 4" (102mm) centers

☐ 0641.100 Center hole only

- · Classic styled rectangular pedestal lavatory
- · Vitreous china
- Rear overflow
- Supplied with mounting kit
- Right Height® for greater comfort during use
- Faucet ledge with large deck area (faucet not included)
- Design coordinates with Boulevard® Toilet
- Basin has flat bottom to also allow use as an above counter sink or a drop-in sink (with u-shaped cut out)

Nominal Dimensions:

24" x 19" x 35-1/2" (610 x 483 x 902mm)

- □ 0641.008 Pedestal top-8" (203mm) centers
- ☐ 0641.004 Pedestal top-4" (102mm) centers
- ☐ 0641.001 Pedestal top-center hole only
- □ **0010.000** Pedestal only

Bowl sizes:

17" (432mm) wide, 12-1/2" (318mm) front to back, 5" (127mm) deep

Compliance Certifications -

Meets or Exceeds the Following Specifications:

• ASME A112.19.2 - 2008/CSA B45.1-08

To Be Specified:

- □ Color: □ White □ Linen
- Faucet Finish:
- □ Supplies:
- ☐ 1-1/4" Trap:
- Nipple:



SEE REVERSE FOR ROUGHING-IN DIMENSIONS

See faucet section for additional models available


Model: 20-2095 END ALT B The Forbes

28 of 46

1X MASTER ENSUITE

4merican tandard

BOULEVARD®

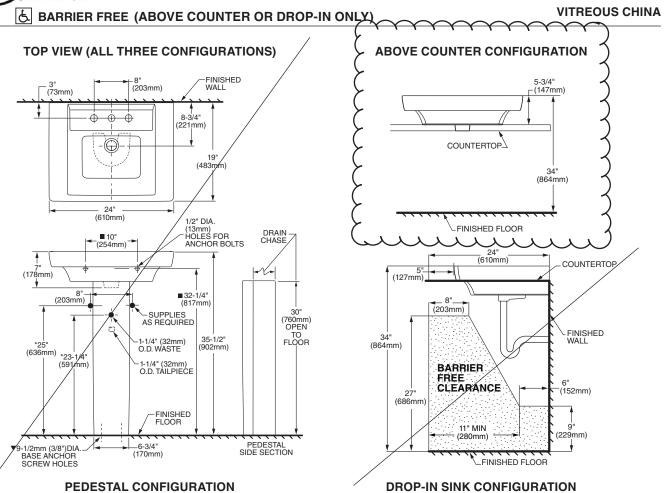



ABOVE COUNTER AND DROP-IN SINK CONFIGURATIONS MEET THE AMERICANS WITH DISABILITIES ACT GUIDELINES AND ANSI A117.1 ACCESSIBLE AND USABLE BUILDINGS AND FACILITIES - CHECK LOCAL CODES.

Top of sink installed at 34" (864mm) height from finished floor. Sink installed 5" (127mm) minimum from front edge of countertop. Provide 27" (686mm) knee clearance area.

(NOT ADA COMPLIANT)

NOTES:

* DIMENSIONS SHOWN FOR LOCATION OF SUPPLIES AND "P" TRAPS ARE SUGGESTED.

▼ PEDESTAL ANCHORING SCREWS NOT INCLUDED.

■ SUITABLE FOR REINFORCEMENT ONLY. ACTUAL DIMENSIONS MUST BE TAKEN FROM FIXTURE.

FITTING NOT INCLUDED AND MUST BE ORDERED SEPARATELY.

PROVIDE SUITABLE REINFORCEMENT FOR ALL WALL SUPPORTS. INSTALLATION INSTRUCTIONS SUPPLIED WITH LAVATORY.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerance established by ANSI Standard A112.19.2 These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

© 2018 AS America Inc.

Model: 20-2095 END ALT B The Forbes

29 of 46



DEMI™ **Product Specification Sheet**

Two Piece Freestanding Collection

CF2007 Two Piece Freestanding Soaker


Size: 60" x 32" x 22"

1524 mm x 813 mm x 559 mm




- Vacuum formed acrylic reinforced with fiberglass
- Scratch, stain and fade resistant high gloss finish
- Installation friendly two piece design
- Accepts deck mounted faucet
- Includes integral pop up drain and rectangular overflow
- Includes levelling feet


TWO PIECE ASSEMBLY

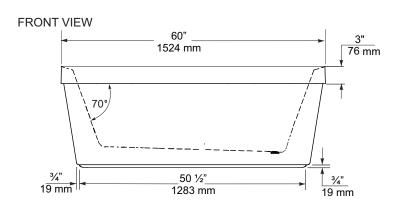

END VIEW



TOP VIEW

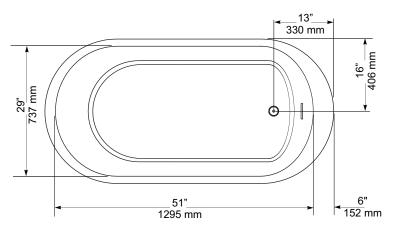

GENERAL SPECIFICATIONS

Average Weight 90 lb 41 kg Bathing Well at bottom 43"x 20" 1092 x 508 mm 195 litres Capacity Drain to Overflow Water Depth Drain to Overflow 406 mm Drain Opening (dia.) 51 mm Overflow Opening 2 1/4"x 1/2" 57 x 13 mm Drain to Floor Clearance

NOTES: Please confirm measurements on actual product to ensure proper identification. Bathtub to be installed on the floor supported by 5 self levelling feet. Adjust if required to level the bathtub for adequate drainage. Refer to installation instructions for additional information.

IMPORTANT: Dimensions of fixtures are nominal and may vary \pm %" (6 mm). Weight may vary \pm 5 lb (2.3 kg). Drawing is not to scale. These measurements are subject to change at manufacturer's discretion.

Compliance Certifications -

Meets or Exceeds the following Specifications:

CAN/CSA - B45 Series





60 Shorncliffe Rd., Toronto, Ontario M8Z 5K1 Telephone: 416.231.9030 Fax: 416.231.0929 Fax: 416.231.0929 www.mirolin.com

Customer Service: 416.231.5790 Canada, U.S.A.: 800.**MIROLIN**(647-6546) Fax, Canada: 800.463.2236

R0084162 25 Sep. 2018

Model: 20-2095 END ALT B The Forbes

30 of 46

American Standard

Style That Works Better

FloWise™ DUAL FLUSH **ELONGATED TOILET**

VITREOUS CHINA

FloWise™ DUAL FLUSH ELONGATED TOILET

2476 216

- Vitreous china
- · Low-consumption Dual Flush Full flush 6.0 Lpf/1.3 gpf, Partial flush 3.0 Lpf/0.66 gpf.
- · Elongated wash down bowl
- · Internal trapway fully-glazed, 2-1/4" (57mm) ballpass
- · Concealed trapway bowl
- · Chrome-plated top mounted push button actuator
- Easy to clean sanitary dam on bowl
- Includes Elongated Slow Close Seat
- 100% factory flush tested
- · 2 bolt caps

Separate Component Parts:

- ☐ 3067 316 Elongated Bowl with Slow Close Seat
- **4035 216** Unlined Tank
- 2476 516 Same as above with Lined tank
 - **☐** 3067 316 Elongated Bowl
 - **4035 516** Lined Tank


Nominal Dimensions: 794 x 432 x 765mm (31-1/4" x 17" x 30-1/8")


Compliance Certifications -Meets or Exceeds the Following Specifications:

- ASME A112.19.2M (and 19.6M)
- · CAN/CSA B45 series

To Be Specified

- Colour: 020 White
- Supply with stop:





08/08

NOTES:
THIS TOILET IS DESIGNED TO ROUGH-IN AT A MINIMUM DIMENSION OF 305MM (12")
FROM FINISHED WALL TO C/L OF OUTLET.
SUPPLY NOT INCLUDED WITH FIXTURE AND MUST BE ORDERED SEPARATELY.
* DIMENSION SHOWN FOR LOCATION OF SUPPLY IS SUGGESTED.
FOR ADDITIONAL INFORMATION REFER TO INSTALLATION INSTRUCTIONS SUPPLIED.
IMPORTANT. Dimensions of fixture are peripaid and may use within the prepare of the present

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerance established by ANSI Standard A112.19.2

established by Anki Graindan A 112.19.2. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

UPGRADED VALUE ADDED FEATURES AT NO EXTRA CHARGE

TOI-284 © 2008 American Standard



Model: 20-2095 END ALT B The Forbes

31 of 46

MOEN[®]

DESCRIPTION

- Metal construction with various finishes identified by suffix
- 16" long 3/8" tubing connections Includes metal or 50/50 pop-up type waste assembly where noted

OPERATION

- Pivot action lever style handle Temperature controlled through 180° degree arc of handle travel **FLOW**

Flow is limited to 1.5 gpm max (5.7L/min) at 60 psi

CARTRIDGE

- 1225 cartridge design
- Nonmetallic/nonferrous and stainless steel material
- Can accommodate reversed piping and back to back installations

- Third party certified to WaterSense®, CSA B-125.1, ASME A112.18.1 and all applicable requirements referenced therein including NSF61/9
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act

 ADA for lever handle

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations

Specifications



CHATEAU® Single-Handle Lavatory Faucet

with Metal Waste Assembly


Model: L4625 series L4631BC **Bulk Packed (12 per carton):** L64624 series

with 50/50 Waste Assembly **Bulk Packed (12 per carton):** L64625 series

Less Waste **Bulk Packed (12 per carton):** L64600 series

NOTE: THIS FAUCET IS DESIGNED TO BE INSTALLED THRU 3-1" DIA. HOLES, 2" ON CENTER



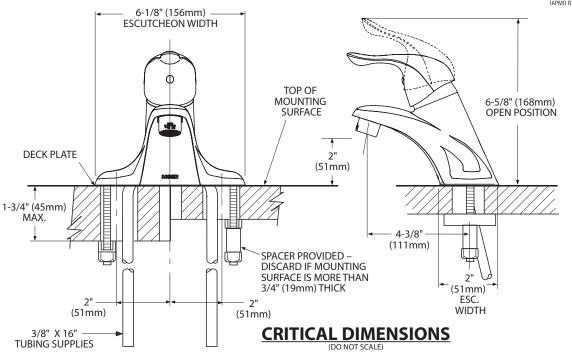

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN

www.moen.com

Rev 8/15

Model: 20-2095 END ALT B The Forbes



Buy it for looks. Buy it for life.®

There is more than 1 version of this model. Page down to identify the version you have.

- Metal construction with various finishes identified by suffix
- Includes non-metalic showerhead, arm, flange and non-metalic diverter tub spout

OPERATION

- Handle operates counterclockwise through a 270° arc with off at 6 o'clock and maximum hot at the 9 o'clock position. Shut off in clockwise direction
- Adjustable temperature limit stop to control maximum hot water temperature
- Pressure balancing mechanism maintains selected discharge temperature to $\pm\,3^\circ$

- Showerhead is limited to 2.5 gpm (9.5 L/min) at 80 psi EP suffix models are limited to 1.75 gpm (6.6 L/min) at 80 psi
- NH suffix models contain no showerhead

CARTRIDGE

- 1222 cartridge design Accommodates back to back installations
- Nonmetallic/nonferrous and stainless steel material

STANDARDS

- Third party certified to meet ASME A112.18.1/CSA B125.1 and all applicable requirements referenced therein
- EP suffix models are third party certified to WaterSense®

ADA (for lever handle

6.5" (165mm) ESC. DIAM.

WARRANTY

Lifetime limited warranty against leaks, drips and finish defects

2"CC (51mm) 1 7/8" IPS (48mm) MAX WALL

FINISHED WALL LINE

4-1/2" (114mm)

WALL OPENING

(133mm

7-1/2" (190mm)

to the original consumer purchaser 5 year warranty if used in commercial installations

Specifications






CHATEAU° POSI-TEMP° Single-Handle Tub/Shower Trim Kit

Models: TL181 series - valve trim only (Bulk Packed 12 per carton) TL182 series - shower trim only (Bulk Packed 12 per carton) TL183 series - tub/shower trim

(Bulk Packed 12 per carton)

Valves: 62300 series 2500 series

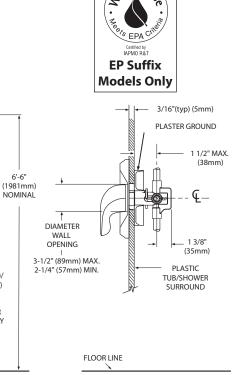

THIN WALL APPLICATION

THICK WALL APPLICATION CRITICAL DIMENSIONS (DO NOT SCALE)

— 1/2" MIN. CC (13mm) 5/8" MIN. IPS (16mm)

2 1/2" MAX. (63mm)

SHOWER

48" (1219mm) 32" (813mm)

AND TUB ONLY

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN

www.moen.com

TL183sp: Rev. 5/13

Model: 20-2095 END ALT B The Forbes

33 of 46

MOEN[®]

DESCRIPTION

 Metal construction with various finishes identified by suffix OPERATION


- · Lever style handles with hot and cold color indicator
- Rotate hot side handle counterclockwise to open (clockwise to close) and the cold side handle (clockwise to open) and (counterclockwise to close)

STANDARDS

- Third party certified to: ASME A112.18.1/CSA B-125.1, and all applicable requirements referenced therein
- ADA 🕒 for lever handles

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
- 10 year limited warranty when used in a multi-family installation
- 5 year limited warranty when used in a commercial installation Visit www.moen.com/support for complete details and limitations





Specifications

CHATEAU® Two-Handle Garden Tub Trim

Models: T994 series

Valves: 4792, 4793, 4794, 4796, 4797, 4798

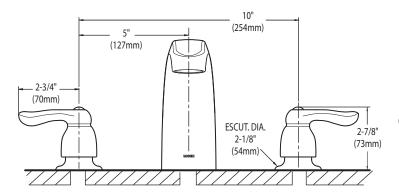



CRITICAL DIMENSIONS

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN

www.moen.com

02/28/2019 SPC12693 50000112075 Pubmed 00

Rev. 3/19


Project: Wallaceton

Unit: 3186A-1, Phase: 3

Model: 20-2095 END ALT B The Forbes

34 of 46








AVH-308CS 30" Wall mounted hood

Dimensions Diagration	Selected Model	
Dimensions Exterior Appearence Stainless steel grade Features Control Lighting Blower type Blower performance Speed 1, 2.4 sones Speed 6, 6.2 sones Filter type 2 aluminium micro hole filters (included) 2 Stainless steel baffle filters (included) Duct transition Ducting Chimney (ducted out) Electrical Requirements Accessories (optionnal) Optional duct covers Varianty 29 1/2" (W) x 19 3/4" (D) x 3 1/4" (H) 20 x 3 1/4" (H) 20 x 19 3/4" (D) x 3 1/4" (H) Electrical requirements 201 For touch with LED display 2 bulbs, 3W LED (bulbs included) 860 CFM, 6-Speed Speed 1, 2.4 sones Speed 6, 6.2 sones 2 aluminium micro hole filters (included) 2 Stainless steel baffle filters (included) For ceiling heights up to 9'0" AD-884S (884mm, AVN-AVH compatible)	Model number	AVH-308CS
Exterior Appearence Stainless steel grade Features Control Lighting Blower type Blower performance Speed 1, 2.4 sones Speed 6, 6.2 sones Filter type 2 aluminium micro hole filters (included) 2 Stainless steel baffle filters (included) 2 Stainless steel baffle filters (included) Duct transition Ducting Chimney (ducted out) For ceiling heights up to 9'0" Electrical requirements Accessories (optionnal) Optional duct covers Warranty Soft touch with LED display 2 bulbs, 3W LED (bulbs included) 860 CFM, 6-Speed Speed 1, 2.4 sones Speed 6, 6.2 sones 2 aluminium micro hole filters (included) 2 Stainless steel baffle filters (included) For ceiling heights up to 9'0" AD-884S (884mm, AVN-AVH compatible)	Dimensions	
Stainless steel grade Features Control Lighting Blower type Blower performance Speed 1, 2.4 sones Speed 6, 6.2 sones Filter type 2 aluminium micro hole filters (included) Duct transition Ducting Chimney (ducted out) Electrical Requirements Electrical requirements Accessories (optionnal) Optional duct covers Soft touch with LED display 2 bulbs, 3W LED (bulbs included) 860 CFM, 6-Speed 860 CFM,	Dimensions	29 1/2" (W) x 19 3/4" (D) x 3 1/4" (H)
Features Control Lighting Blower type Blower performance Speed 1, 2.4 sones Speed 6, 6.2 sones Filter type 2 aluminium micro hole filters (included) Duct transition Ducting Chimney (ducted out) Electrical Requirements Electrical requirements Accessories (optionnal) Optional duct covers Soft touch with LED display 2 bulbs, 3W LED (bulbs included) 860 CFM, 6-Speed Speed 1, 2.4 sones Speed 6, 6.2 sones 2 aluminium micro hole filters (included) 2 Stainless steel baffle filters (included) For ceiling heights up to 9'0" 120V / 60Hz / 2.7 Amps AD-884S (884mm, AVN-AVH compatible) Warranty	Exterior Appearence	
Control Lighting Soft touch with LED display 2 bulbs, 3W LED (bulbs included) 860 CFM, 6-Speed Speed 1, 2.4 sones Speed 6, 6.2 sones Filter type 2 aluminium micro hole filters (included) 2 Stainless steel baffle filters (included) Duct transition Ducting Chimney (ducted out) For ceiling heights up to 9'0" Electrical Requirements Electrical requirements Accessories (optionnal) Optional duct covers Warranty Sound (Top) Ducted For ceiling heights up to 9'0" AD-884S (884mm, AVN-AVH compatible)	Stainless steel grade	201
Lighting Blower type Blower performance Blower perf	Features	
Blower type Blower type Blower performance Blower performance Blower performance Blower performance Blower performance Blower performance Speed 1, 2.4 sones Speed 6, 6.2 sones 2 aluminium micro hole filters (included) 2 Stainless steel baffle filters (included) Blower transition Blower type Bl	Control	Soft touch with LED display
Blower performance Speed 1, 2.4 sones Speed 6, 6.2 sones Filter type 2 aluminium micro hole filters (included) 2 Stainless steel baffle filters (included) Duct transition Ducting Chimney (ducted out) For ceiling heights up to 9'0" Electrical Requirements Electrical requirements Accessories (optionnal) Optional duct covers Warranty Speed 1, 2.4 sones Speed 6, 6.2 sones 1 aluminium micro hole filters (included) For ceiling heights up to 9'0" 120V / 60Hz / 2.7 Amps AD-884S (884mm, AVN-AVH compatible)	Lighting	2 bulbs, 3W LED (bulbs included)
Speed 6, 6.2 sones 2 aluminium micro hole filters (included) 2 Stainless steel baffle filters (included) Duct transition Ducting Chimney (ducted out) Electrical Requirements Electrical requirements Accessories (optionnal) Optional duct covers Warranty Stainless steel baffle filters (included) 6" Round (Top) Ducted For ceiling heights up to 9'0" 120V / 60Hz / 2.7 Amps AD-884S (884mm, AVN-AVH compatible)	Blower type	860 CFM, 6-Speed
Filter type 2 aluminium micro hole filters (included) 2 Stainless steel baffle filters (included) Duct transition 6" Round (Top) Ducted Chimney (ducted out) For ceiling heights up to 9'0" Electrical Requirements Electrical requirements Accessories (optionnal) Optional duct covers Warranty 2 aluminium micro hole filters (included) For ceiling heights up to 9'0" 120V / 60Hz / 2.7 Amps AD-884S (884mm, AVN-AVH compatible)	Blower performance	Speed 1, 2.4 sones
2 Stainless steel baffle filters (included) Duct transition Ducting Chimney (ducted out) Electrical Requirements Electrical requirements Accessories (optionnal) Optional duct covers Warranty 2 Stainless steel baffle filters (included) For ceiling heights up to 9'0" 120V / 60Hz / 2.7 Amps AD-884S (884mm, AVN-AVH compatible)		Speed 6, 6.2 sones
Duct transition Ducting Chimney (ducted out) Electrical Requirements Electrical requirements Accessories (optionnal) Optional duct covers Warranty 6" Round (Top) Ducted For ceiling heights up to 9'0" 120V / 60Hz / 2.7 Amps AD-884S (884mm, AVN-AVH compatible)	Filter type	2 aluminium micro hole filters (included)
Ducting Chimney (ducted out) Electrical Requirements Electrical requirements Accessories (optionnal) Optional duct covers Warranty Ducted For ceiling heights up to 9'0" 120V / 60Hz / 2.7 Amps AD-884S (884mm, AVN-AVH compatible)		2 Stainless steel baffle filters (included)
Chimney (ducted out) Electrical Requirements Electrical requirements Accessories (optionnal) Optional duct covers Warranty For ceiling heights up to 9'0" 120V / 60Hz / 2.7 Amps AD-884S (884mm, AVN-AVH compatible)	Duct transition	6" Round (Top)
Electrical Requirements Electrical requirements Accessories (optionnal) Optional duct covers Warranty 120V / 60Hz / 2.7 Amps AD-884S (884mm, AVN-AVH compatible)	Ducting	Ducted
Electrical requirements Accessories (optionnal) Optional duct covers Warranty 120V / 60Hz / 2.7 Amps AD-884S (884mm, AVN-AVH compatible)	Chimney (ducted out)	For ceiling heights up to 9'0"
Accessories (optionnal) Optional duct covers AD-884S (884mm, AVN-AVH compatible) Warranty	Electrical Requirements	
Optional duct covers AD-884S (884mm, AVN-AVH compatible) Warranty	Electrical requirements	120V / 60Hz / 2.7 Amps
Warranty	Accessories (optionnal)	
•	Optional duct covers	AD-884S (884mm, AVN-AVH compatible)
1-year Warranty Parts and labour, in-home service	Warranty	
	1-year Warranty	Parts and labour, in-home service


Model: 20-2095 END ALT B The Forbes

AVH-308CS/368CS


Dimensions

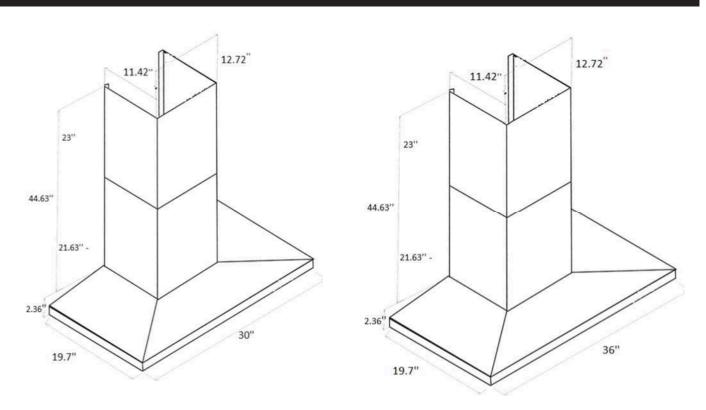

Installation



Α	Floor to ceiling height	variable
В	Floor to counter top height (standard)	36"
С	Recommended height between cooking surface and bottom of the hood	28" to 30"
D	Hood height	2.36"
Е	Chimney height	Max 44.63"



The information contained herein is based on sources that we believe to be reliable, but is not guaranteed by us, may be incomplete and/or may change without notice.

Model: 20-2095 END ALT B The Forbes

36 of 46



Whirtpool® 21 cu. ft. Top-Freezer Refrigerator WRT541SZD



Fingerprint-Resistant Stainless WRT541SZDZ

Also available in:

White	WRT541SZDW
Black	WRT541SZDB
Monochromatic Stainless Steel	WRT541SZDM

Capacity					
Total Capacity	21 cu. ft.				
Refrigerator Capacity	15 cu. ft.				
Freezer Capacity	6 cu. ft.				
General Features & Properties					
EZ Connect Icemaker Kit					
LED Interior Lighting					
ENERGY STAR® Certified	STAR® Certified				
Electronic Temperature Co	ntrols				
Freezer Temperature Controls Clear Door Bins					
					Adjustable Door Bins
Quiet Cooling					
Fingerprint Resistant					
Electrical Details					
Amps	6.5				
Volts	115				
Certifications					
ADA Compliant	Yes				
ENERGY STAR® Certified	Yes				

Technical Details			
Refrigerator Type	Top-Freezer		
Number of Doors	2		
Number of Interior Refrigerator Shelves	3		
Number of Refrigerator Door Bins	1 Fixed, 4 Adjustable		
Number of Interior Freezer Shelves	1		
Number of Freezer Door Bins	2 Fixed		
Lighting Type	LED		
Ice Maker	Optional		
Ice Maker Location	Freezer		
Dispenser Type	N/A		
Dimensions			
Product Dimensions (H x W x D)	66-1/4" x 32-3/4" x 34"		
Depth with Door Open 90°	62-1/4"		
Cutout Dimensions	Allow extra 1/2" on sides and top Allow extra 1" on rear		
Reference Material			

Key Features & Benefits

Frameless Glass Shelves


Store more items on wall-to-wall shelves for greater storage flexibility.

Flexi-Slide™ Bin

Make space for tall items with the bin that quickly and easily moves side to side.

Humidity-Controlled Crispers

Store fruits and vegetables in their ideal environment.

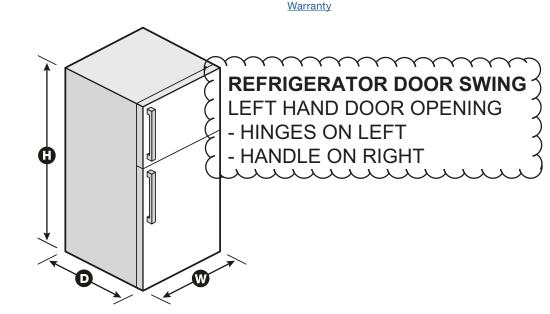

Dimension Guide Use & Care Guide

Energy Guide

NOTE: Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

®/™ © 2020. All rights reserved. Printed in the U.S.A. D200052XXC. WRT541SZDSPECSHEETV01.

Model: 20-2095 END ALT B The Forbes

37 of 46



Top Mount Refrigerator

PRODUCT MODEL NUMBERS

WRT311FZD WRT511SZD WRT541SZD

Electrical: A 115-volt, 60-Hz, AC-only, 15-or 20-amp fused, grounded electrical supply is required. It is recommended that a separate circuit serving only your refrigerator be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.


NOTE: Before performing any type of installation, cleaning, or removing a light bulb, turn the control (Thermostat, Refrigerator or Freezer Control depending on the model) to OFF and then disconnect the refrigerator from the electrical source. When you are finished, reconnect the refrigerator to the electrical source and reset the control (Thermostat, Refrigerator or Freezer Control depending on the model) to the desired setting. See "Using the Controls."

Water: A cold water supply with water pressure between 30 and 120 psi (207 and 827 kPa) is required to operate ice maker and water dispenser. If you have questions about your water pressure, call a licensed, qualified plumber.

IMPORTANT: The pressure of the water coming out of a reverse osmosis system going to the water inlet valve of the refrigerator needs to be between 30 and 120 psi (207 and 827 kPa).


Reverse Osmosis Water Supply: If a reverse osmosis water filtration system is connected to your cold water supply, the water pressure to the reverse osmosis system needs to be a minimum of 40 to 60 psi (276 to 414 kPa).

PRODUCT DIMENSIONS

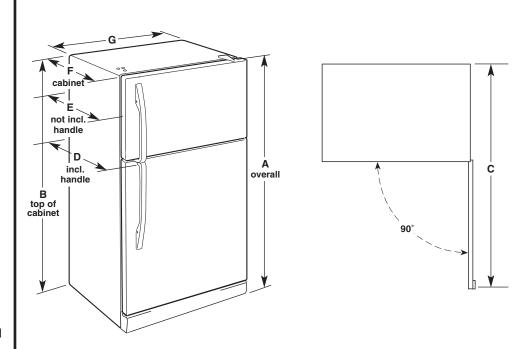

Model Number	Model Size	Reversible Door	Height - Overall "A"	Height - Top of Cabinet "B"	Depth - Door Open 90° "C"	Depth - With Handles "D"	Depth - Without Handles "E"	Depth - Cabinet Only "F"	Width - Cabinet "G"
WRT311FZD	20.5 cu. ft.	Yes	661/4" (168.3 cm)	65½" (166.4 cm)	621/4" (158.1 cm)	32 ⁷ / ₈ " (83.5 cm)	30 ⁵ %" (77.8 cm)	28½" (72.4 cm)	32¾" (83.2 cm)
WRT511SZD WRT541SZD	21.3 cu. ft.	Yes	66½" (168.3 cm)	65½" (166.4 cm)	62½" (158.1 cm)	34" (86.4 cm)	32½" (82.3 cm)	28½" (72.4 cm)	32¾" (83.2 cm)

LOCATION REQUIREMENTS



To ensure proper ventilation for your refrigerator, allow for a ½" (1.25 cm) space on each and between overhead cabinets and refrigerator top. Allow at least 1" (2.5 cm) between back of cabinet and the wall. If your refrigerator has an ice maker, make sure you leave some extra space at the back for the water line connections.

If you are installing your refrigerator next to a fixed wall, leave 2" (5 cm) minimum on the hinge side (depending on your model) to allow for the door to swing open.

NOTE: This refrigerator is intended for use in a location where the temperature ranges from a minimum of 55°F (13°C) to a maximum of 110°F (43°C). The preferred room temperature range for optimum performance, which reduces electricity usage and provides superior cooling, is between 60°F (15°C) and 90°F (32°C). It is recommended that you do not install the refrigerator near a heat source, such as an oven or radiator.

Model: 20-2095 END ALT B The Forbes





Available Finishes/Colours



YWFE515S0JB Black



YWFF515S0JS Stainless Steel



YWFE515S0JW

Manuals & Literature:





<u> Warranty</u>

5.3 cu. ft. Whirlpool® electric range with Frozen Bake™ technology

YWFE515S0JS

This Whirlpool® electric range with a dual element stove top helps you get dinner to the table. Skip preheating for favorites like pizza with Frozen Bake™ technology. This self cleaning oven also prevents cooked food from getting cold with the Keep Warm setting. Closed door broiling helps keep the kitchen comfortable.

Top Features

FlexHeat™ Dual Radiant Element

Get two elements in one with a 6" inner ring that's great for smaller pots and pans and a 9" expandable outer ring that makes room for larger cookware.

Frozen Bake™ technology
Skip preheating and cook frozen favorites like pizza in fewer steps with preprogrammed settings that automatically adjust cooking times for you.

Keep Warm setting

Keep dishes from getting cold with this setting that delivers low heat to the oven.

Closed Door Broiling
Maintain the optimal cooking temperature for food while still keeping the kitchen comfortable and cool using this broiling temperature management system that helps prevent overheating.

Dimensions	
Depth	27 3/4
Height	36
Width	29 7/8

Configuration and Overview		
Range Type	Freestanding	
Fuel Type	Electric	
Size (IN,inches)	30	

Exterior	
Door Removable	Yes
Drawer Type	Storage Drawer
Oven Door	Glass Window
Oven Window Size	Extra Large
Handle Color	Stainless Steel
Handle Material	Metal

Exterior	
Handle Type	Reach-Through Handle
Features	
Hot Surface Indicator Light	Yes


Features	
Hot Surface Indicator Light	Yes
Heating Element On Indicator Light	Yes
Power On Indicator Light	No
Griddle	NA
Automatic Convection Conversion Temperature Adjust	No
Power Outage Compatible	No

Model: 20-2095 END ALT B The Forbes

39 of 46

WHIRLPOOL 30" (76.0 CM) FREESTANDING ELECTRIC RANGES Model YWFE515S0JS

Product Dimensions



- A. 273/4" (70.5 cm) max. depth with handle
- B. 46⁷/₈" (119.1 cm) overall height (max.) with leveling legs screwed all the way in*
- C. 36" (91.4 cm) cooktop height (max.) with leveling legs screwed all the way in*
- D. 297/8" (75.9 cm) width
- E. 25⁵/₁₆" (64.3 cm) depth back of range to front of cooktop**
- F. Model/serial/rating plate (located on the frame behind a top corner of the door or either side of the drawer)

IMPORTANT: Range must be level after installation. Follow the instructions in the "Level Range" section. Using the cooktop as a reference for leveling the range is not recommended.


- *Range can be raised approximately 1" (2.5 cm) by adjusting the leveling legs.
- **Front of door and drawer may extend further forward depending on styling.

Cabinet Dimensions

Cabinet opening dimensions shown are for 25" (64.0 cm) countertop depth, 24" (61.0 cm) base cabinet depth and 36" (91.4 cm) countertop height.

IMPORTANT: If installing a range hood or microwave hood combination above the cooking surface, follow the range hood or microwave hood combination installation instructions for dimensional clearances above the cooktop surface.

A freestanding range may be installed next to combustible walls with zero clearance.



- A. 13" (33.0 cm) max. upper cabinet depth
- B. 30" (76.2 cm) min. opening width
- C. For minimum clearance to top of cooktop, see NOTE*
- D. 30" (76.2 cm) min. opening width
- E. Outlet 8" (20.3 cm) to 22" (55.9 cm) from either cabinet, 7" (17.8 cm) max. from floor.
- F. Cabinet door or hinges should not extend into the cutout.

*NOTE: 24" (61.0 cm) minimum when bottom of wood or metal cabinet is covered by not less than 1/4" (6.4 mm) flame retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015" (0.4 mm) stainless steel, 0.024" (0.6 mm) aluminum or 0.020" (0.5 mm) copper.

30" (76.2 cm) minimum clearance between the top of the cooking platform and the bottom of an uncovered wood or metal cabinet.

Model: 20-2095 END ALT B The Forbes

40 of 46

WHIRLPOOL 30" (76.0 CM) FREESTANDING ELECTRIC RANGES Model YWFE515S0JS

Electrical Requirements - Canada Only

AWARNING



Electrical Shock Hazard

Electrically ground range.

Failure to do so can result in death, fire, or electrical shock.

If codes permit and a separate ground wire is used, it is recommended that a qualified electrical installer determine that the ground path is adequate and wire gauge are in accordance with local codes.

Be sure that the electrical connection and wire size are adequate and in conformance with CSA Standard C22.1, Canadian Electrical Code, Part 1 - latest edition, and all local codes and ordinances.

A copy of the above code standards can be obtained from:

Canadian Standards Association 178 Rexdale Blvd. Toronto, ON M9W 1R3 CANADA

 Check with a qualified electrical installer if you are not sure the range is properly grounded.

Range Rating*		Specified Rating of Power Supply Cord Kit and Circuit Protection
120/240 V	120/208 V	Amps
8.8 - 16.5 KW 16.6 - 22.5 KW	7.8 - 12.5 KW 12.6 - 18.5 KW	40 or 50** 50

^{*}The NEC calculated load is less than the total connected load listed on the model/serial/rating plate.

- A time-delay fuse or circuit breaker is recommended.
- This range is equipped with a CSA International Certified Power Cord intended to be plugged into a standard 14-50R wall receptacle. Be sure the wall receptacle is within reach of range's final location.



Do not use an extension cord.

INSTALLATION INSTRUCTIONS


Unpack Range

AWARNING

Excessive Weight Hazard

Use two or more people to move and install range. Failure to do so can result in back or other injury.


- 1. Remove shipping materials, tape and film from range.
- 2. Remove oven racks and parts package from inside oven.
- 3. Do not remove the shipping base at this time.



A. Shipping base

4. On Ranges Equipped with a Storage Drawer:


Remove the storage drawer. See the "Storage Drawer" section. Use a 1/4" (6.4 mm) drive ratchet to lower the rear leveling legs one-half turn. Use a wrench or pliers to lower front leveling legs one-half turn.



- A. 1/4" (6.4 mm) drive ratchet
- B. Rear leveling leg
- C. Wrench or pliers
- D. Front leveling leg

On Ranges Equipped with a Warming Drawer or Premium Storage Drawer:

On ranges equipped with a warming drawer or premium storage drawer, the rear legs cannot be accessed by removing the warming drawer or premium storage drawer. It will be necessary to adjust the rear legs from outside the range. Use wrench or pliers to lower the front and rear leveling legs one half turn.



- A. Rear leveling leg
- B. Wrench or pliers
- C. Front leveling leg

^{**}If connecting to a 50 A circuit, use a 50 A rated cord with kit. For 50 A rated cord kits, use kits that specify use with a nominal 13/8" (3.5 cm) diameter connection opening.

Model: 20-2095 END ALT B The Forbes

41 of 46

WHIRLPOOL 30" (76.0 CM) FREESTANDING ELECTRIC RANGES Model YWFE515S0JS

Install Anti-Tip Bracket

AWARNING

Tip Over Hazard

A child or adult can tip the range and be killed.

Install anti-tip bracket to floor or wall per installation instructions.


Slide range back so rear range foot is engaged in the slot of the anti-tip bracket.

Re-engage anti-tip bracket if range is moved.

Do not operate range without anti-tip bracket installed and engaged.

Failure to follow these instructions can result in death or serious burns to children and adults.


- Remove the anti-tip bracket from where it is taped inside the storage drawer or warming drawer.
- 2. Determine which mounting method to use: floor or wall. If you have a stone or masonry floor, you can use the wall mounting method. If you are installing the range in a mobile home, you must secure the range to the floor.
- 3. Determine and mark centerline of the cutout space. The mounting can be installed on either the left-side or right-side of the cutout. Position mounting bracket against the wall in the cutout so that the V-notch of the bracket is 129/16" (31.9 cm) from centerline as shown.



A. 129/16" (31.9 cm) B. Bracket V-notch

 Drill two 1/8" (3 mm) holes that correspond to the bracket holes of the determined mounting method. See the following illustrations.

Floor Mounting



Wall Mounting



- 5. Using the Phillips screwdriver, mount anti-tip bracket to the wall or floor with the two #12 x $1^5/8$ " (4.1 cm) screws provided.
- **6.** Move range close enough to opening to allow for final electrical connections. Remove shipping base, cardboard or hardboard from under range.
- Move range into its final location, making sure rear leveling leg slides into anti-tip bracket.



8. Move range forward onto shipping base, cardboard or hardboard to continue installing the range using the following installation instructions.

Model: 20-2095 END ALT B The Forbes

42 of 46





Monochromatic Stainless Steel WDF540PADM

Also available in:

White	WDF540PADW
Black	WDF540PADB

Capacity		
Total Place Settings	15	
General Features & Properties		
Soil Sensor		
In-Door Silverware Basket		
Sani Rinse Option		
Normal Cycle		
Heavy Cycle		
High Temperature Wash Option		
Heated Dry Option		
ENERGY STAR® Certified		
Industry's Best Selling Dishwasher Brand [†]		
Electrical Details		
Amps	15	
Volts	120	
Hz	60	
Certifications		
ENERGY STAR® Certified	Yes	

Technical Details	
Dishwasher Type	Built-in
Control Location	Front
Control Type	Electronic
Number of Wash Cycles	5
Number of Options	5
dBA [*]	53
Number of Racks	2
Tub Material	Plastic
Wash System	Filter
Wash System Type	Removable Filter
Number of Wash Arms	3
Dimensions	
Product Dimensions (H x W x D)	34-1/2" x 23-7/8" x 24-1/2"
Depth with Door Open 90°	49-1/2"
Reference Material	

Dimension Guide

Install Guide

Use & Care Guide

Energy Guide

Warranty

Key Features & Benefits

Sensor Cycle


Automatically get the right wash and dry settings for each load with two sensors that measure temperature, soil level and load size during prewash and the wash cycle.

1-Hour Wash Cycle

Clean the dishes you need fast with a cycle that thoroughly takes care of plates, pans and glasses in just an hour."

Cycle Memory

Quickly start your dishwasher with one button. It automatically remembers the last cycle you picked so it's stored and ready to go.



^{*}Per IEC standards. **Compared to Normal cycle with lightly soiled loads. †Based on 12-month average of unit sales. TraQline 2018. NOTE: Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

®/™ © 2020. All rights reserved. Printed in the U.S.A. D200052XXA. WDF540PADSPECSHEETV01.

Model: 20-2095 END ALT B The Forbes

43 of 46



PRODUCT MODEL NUMBERS

WDF110PAB	WDF310PLA	WDF530PSY
WDF111PAB	WDF320PAD	WDF540PAD
WDF120PAF	WDF510PAY	WDF730PAY
WDF121PAF	WDF520PAD	WDT710PAY
WDF310PAA	WDF530PAY	WDT720PAD
WDF310PCA	WDF530PLY	WDT770PAY

Electrical Requirements: 120-volt, 60-Hz, AC only, 15- or 20-amp. fused electrical supply. Copper wire only. A time delay fuse or circuit breaker and separate circuit is recommended.

If direct wiring dishwasher: Use flexible, armored,

or nonmetallic, sheathed copper wire with grounding wire that meets the wiring requirements for

your home and local codes and ordinances.

Use a UL listed or CSA approved conduit connector.

If connecting dishwasher with a power supply cord:

Use Power Supply Cord Kit (Part No. 4317824) marked for use with dishwashers. Follow the kit




instructions for installing the power supply cord. Power supply cord must plug into a grounded 3 prong, outlet, located in the cabinet next to the dishwasher opening. Outlet must meet all local codes and ordinances.



Water Supply Requirements: A hot water line with 20 to 120 psi (138 to 862 kPa) water pressure. Water temperature must be 120°F (49°C) water at dishwasher. Use 3/8" O.D. copper tubing with compression fitting or flexible braided water supply line (1/2" minimum plastic tubing is not recommended). Use a 90°elbow with ¾"N.P.T. external pipe threads on one end. Do not solderwithin 6" (15.2 cm) from water inlet valve.

Drain Requirements: A new drain hose is supplied with your dishwasher. If this is not long enough, use a new drain hose with a maximum length of 12' (3.7 m) (Part No. 3385556) that meets all current AHAM/IAPMO test standards, is resistant to heat and detergent, and fits the 1" (2.5 cm) drain connector of the dishwasher.

Make sure to connect the drain hose to waste tee or disposer inlet above drain trap in house plumbing and (50.8 cm) minimum above the floor. It is recommended




that the drain hose either be looped up and securely fastened to the underside of the counter or be connected to an air gap.

Make sure to use an air gap if the drain hose is connected to house plumbing lower than 20" (50.8 cm) above subfloor or floor.

Use ½" (1.3 cm) minimum I.D. drain line fittings. If required, the air gap should be installed in accordance with the air gap installation instructions. When connecting the air gap, a rubber hose (not provided) will be needed to connect to the waste tee or disposer inlet.

PRODUCT DIMENSIONS

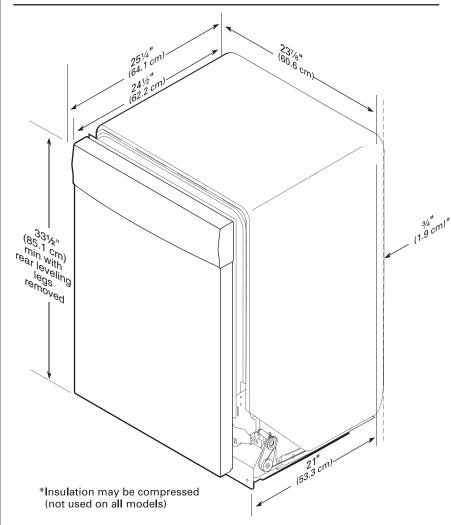


Project: Wallaceton
Unit: 3186A-1, Phase: 3
Model: 20-2095 END ALT B The Forbes

44 of 46

CABINET CUTOUT DIMENSIONS

NOTE: Shaded areas of cabinet walls show where utility connections may be installed.

- *Measure from the lowest point on the underside of the countertop. May be reduced to 33½" (85.1 cm) by removing the rear leveling legs from dishwasher.
- **Minimum, measured from narrowest point of opening.

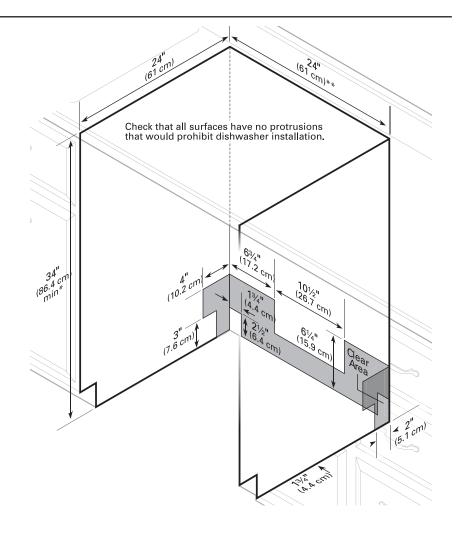

Model: 20-2095 END ALT B The Forbes

45 of 46

WHIRLPOOL WASHER Model #: WFW5620HW

Whirlpool Brand Canada English | Washer and Dryers | Washers | Front Load Washers | WFW5620HW



5.2 cu. ft. I.E.C. Closet-Depth Front Load Washer with Load & Go™ Dispenser



5.2 cu. ft. I.E.C. Closet-Depth Front Load Washer with Load & Go™ Dispenser

Model #: WFW5620HW

Dimensions

Depth	80.17 cm, 31-9/16 in
Depth With Door Open 90 Degree	143.51 cm, 56-1/2 in
Minimum Height	98.11 cm, 38-5/8 in
Width	68.58 cm, 27.0 in
Appearance	
LCD Touch Screen	No
Window	Yes

Details

Drum Material	Stainless Steel

Cycles and Options

Electrical

Hz	60
Power Cord Included	Yes

Model: 20-2095 END ALT B The Forbes

46 of 46

WHIRLPOOL DRYER Model #: YWED5620HW

Whirlpool Brand Canada English | Washer and Dryers | Dryers | Electric Dryers | YWED5620HW



Define Your Style

7.4 cu. ft. Front Load Electric Dryer with Intuitive Touch Controls



7.4 cu. ft. Front Load Electric Dryer with Intuitive Touch Controls

Model #: YWED5620HW

Dimensions

Electrical

Power Cord Included

Hz

Dimensions	
Depth	78.74 cm, 31.0 in
Depth With Door Open 90 Degree	138.43 cm, 54-1/2 in
Height	98.42 cm, 38-3/4 in
Width	68.58 cm, 27.0 in
Configuration and Overview	
Fuel Type	Electric
Cycles and Options	
Cycle Time Remaining	Yes
Lint Filter Indicator	No
Number of Dryer Cycles	36
Number of Dryness Levels	3
Ventilation System	
Long Vent	No
Maximum Vent Length	64
Venting Direction	Left, Right, Bottom, Rear

60

Yes