

1 of 21

S. No

[illegible]

EXTRA # 9

CABINETRY/ELECTRICAL

TBC

KITCHEN -OPTIONAL LIGHT VALANCE TRIM AND  
LUMINEZ LED STRIP LIGHT

ELECTRICAL  
ADDITIONAL 240V 40AMP PLUG FOR BUILT-IN  
MICROWAVE/OVEN TOWER

EXTRA # 8

CERAMICE TILE KITCHEN VIGNETTE

\$

UPPLY AND INSTALL UPGRADE 7  
1 X 3 ETERNA IMPERIAL GREY HERRINGBONE MATTE  
OV.ET.IGY.1X3 MT.HER. BACKPSLASH TILE  
WITH UPGRADE ALABASTER GROUT

EXTRA # 7

HARDWOOD- KITCHEN VIGNETTE AND GREAT ROOM

\$

SUPPLY AND INSTALL VINTAGE NORTHERN SOLID SAWN  
SCULPTED CHARACTER UVF WHITE OAK- CANVAS  
HARDWOOD 3/4" X 5"

EXTRA # 6

GRANITE - KITCHEN VIGNETTE

TBC

SUPPLY AND INSTALL CAESARSTONE GROUP 6  
MONTBLANC # 5043 3/4" WITH BUILT-UP EDGE  
QUARTZ COUNTERTOPS

EXTRA # 5

GRANITE- KITCHEN VIGNETTE

TBC

CUT -OUT FOR UNDERMOUNT KITCHEN SINK

CUT -OUT FOR 36" COOKTOP

EXTRA # 4

PLUMBING- KITCHEN VIGNETTE

TBC

UPGRADE BLANCO SILGRANIT PRECIS U SUPER SINGLE  
MODEL 400890 ANTHRACITE UNDERMOUNT KITCHEN  
SINK

EXTRA # 3

PLUMBING - KITCHEN VIGNETTE

TBC

MOEN ALIGN SINGLE HANDLE PULLDOWN KITCHEN  
FAUCET MODEL 7565 BG- BRUSHED GOLD

EXTRA NO. 14

APPLIANCES- KITCHEN VIGNETTE

KITCHEN AID 36" BLACK /STAINLESS CHIMNEY HOODFAN  
MODEL KVWB606DBS  
ON CONSIGNMENT FOR MODEL HOME  
SEE SPECS

EXTRA NO. 15

APPLIANCES- KITCHEN VIGNETTE

KITCHEN AID- BLACK STAINLESS APPLIANCES  
SUPPLIED BY APPLIANCE CANADA ON CONSIGNMENT  
FOR MODEL HOME /SALES OFFICE

36" KITCHENAID SMOOTH TOP COOKTOP

30" KITCHENAID MICROWAVE/WALL OVEN COMBO

24" KITCHEN AID DISHWASHER

KITCHEN AID FRENCH DOOR BOTTOM FREEZER FRIDGE

EXTRA NO. 16

GREAT ROOM VIGNETTE  
FIREPLACE

DELETE MAJESTIC MERC32 STD GAS FIRPLACE

SUPPLY AND INSTALL NEW ELECTRIC FIREPLACE  
DIMPLEX ELECTRIC PF3033HL WITH STANDARD NF-17  
WHITE PAINT GRADE CABINET MANTLE

EXTRA NO. 17

GREAT ROOM VIGNETTE

INSTALL WAFFLE CEILING

NOTE: SEE ELECTRICAL PLAN FOR POT LIGHTS

EXTRA NO. 18

WASHROOM

SUPPLY AND INSTALL AMERICAN STANDARD DECORUM  
WALL-HUNG WHITE LAVATORY SINK  
MODEL 9134001EC WITH SHROUD/KNEE CONTACT GUARD  
MODEL 0059 020EC

TOILET FROM WALLACETON SALES CENTER TO BE  
INSTALLED

The Vendor will undertake to incorporate the work covered by the sales extra in the construction of the house but will not be liable to the purchaser in any way if, for any reason, the work covered by the extra is not carried out. In the event, any monies paid in connection with same shall be returned to the purchaser. Where I have elected to upgrade or select an extra option I agree that in the event of delay in delivery or installation I will not hold Heathwood Homes responsible and will close the purchase of the above noted property as per the date on the Agreement of Purchase and Sale. In the event of cancellation of this order or non-completion of the Agreement of Purchase and Sale for any reason whatsoever the Purchaser shall be liable for the cost of the ordered upgrades and extras.

This Sales Selection Sheet when properly executed forms part of our Agreement of Purchase and Sale. I acknowledge that I have read and approved the authorization of the above extras.

Dated at \_\_\_\_\_ this \_\_\_\_\_ day of \_\_\_\_\_ 2023.

Witness \_\_\_\_\_

Sales Representative \_\_\_\_\_


Date \_\_\_\_\_

Purchaser \_\_\_\_\_

Purchaser \_\_\_\_\_


HEATHWOOD HOMES \_\_\_\_\_

REFER TO ROOF TRUSS  
MANUFACTURER'S DRAWINGS  
FOR LAYOUT, SPACING,  
INSTALLATION DETAILS AND  
MAINTENANCE.



1(B)	3'-0" x 0'-0" x 1'-3/4" (45" x 2440 x 49) ALUMINUM THERMALLY BROKEN DOOR CLOSER, MAIN BOTTOM AND DOOR OPERATOR (0.3LG, 3.5/3.3) PLANK HARDWARE, DEADBOLT, BARRIERS FREE THRESHOLD, NIE CONNECTION FOR SECURITY SYSTEM	3'-0" x 0'-0" x 1'-3/4" (45" x 2440 x 49) ALUMINUM THERMALLY BROKEN DOOR CLOSER, MAIN BOTTOM AND DOOR OPERATOR (0.3LG, 3.5/3.3) PLANK HARDWARE, DEADBOLT, BARRIERS FREE THRESHOLD, NIE CONNECTION FOR SECURITY SYSTEM
2(B)	3'-0" x 0'-0" x 1'-3/8" (45" x 2440 x 39) PUSH BUTTON AND DOOR OPERATOR (0.3LG, 3.5/3.3), PRIVACY SET - LEVER HANDLE	3'-0" x 0'-0" x 1'-3/8" (45" x 2440 x 39) PUSH BUTTON AND DOOR OPERATOR (0.3LG, 3.5/3.3), PRIVACY SET - LEVER HANDLE
2(C)	3'-0" x 0'-0" x 1'-3/8" (45" x 2440 x 35)	3'-0" x 0'-0" x 1'-3/8" (45" x 2440 x 35)
5(B)	2'-6" x 0'-0" x 1'-3/8" (400 x 2440 x 35)	2'-6" x 0'-0" x 1'-3/8" (400 x 2440 x 35)

ROOF DESIGN LOAD  
DL = 10 PSF  
LL = 52 PSF

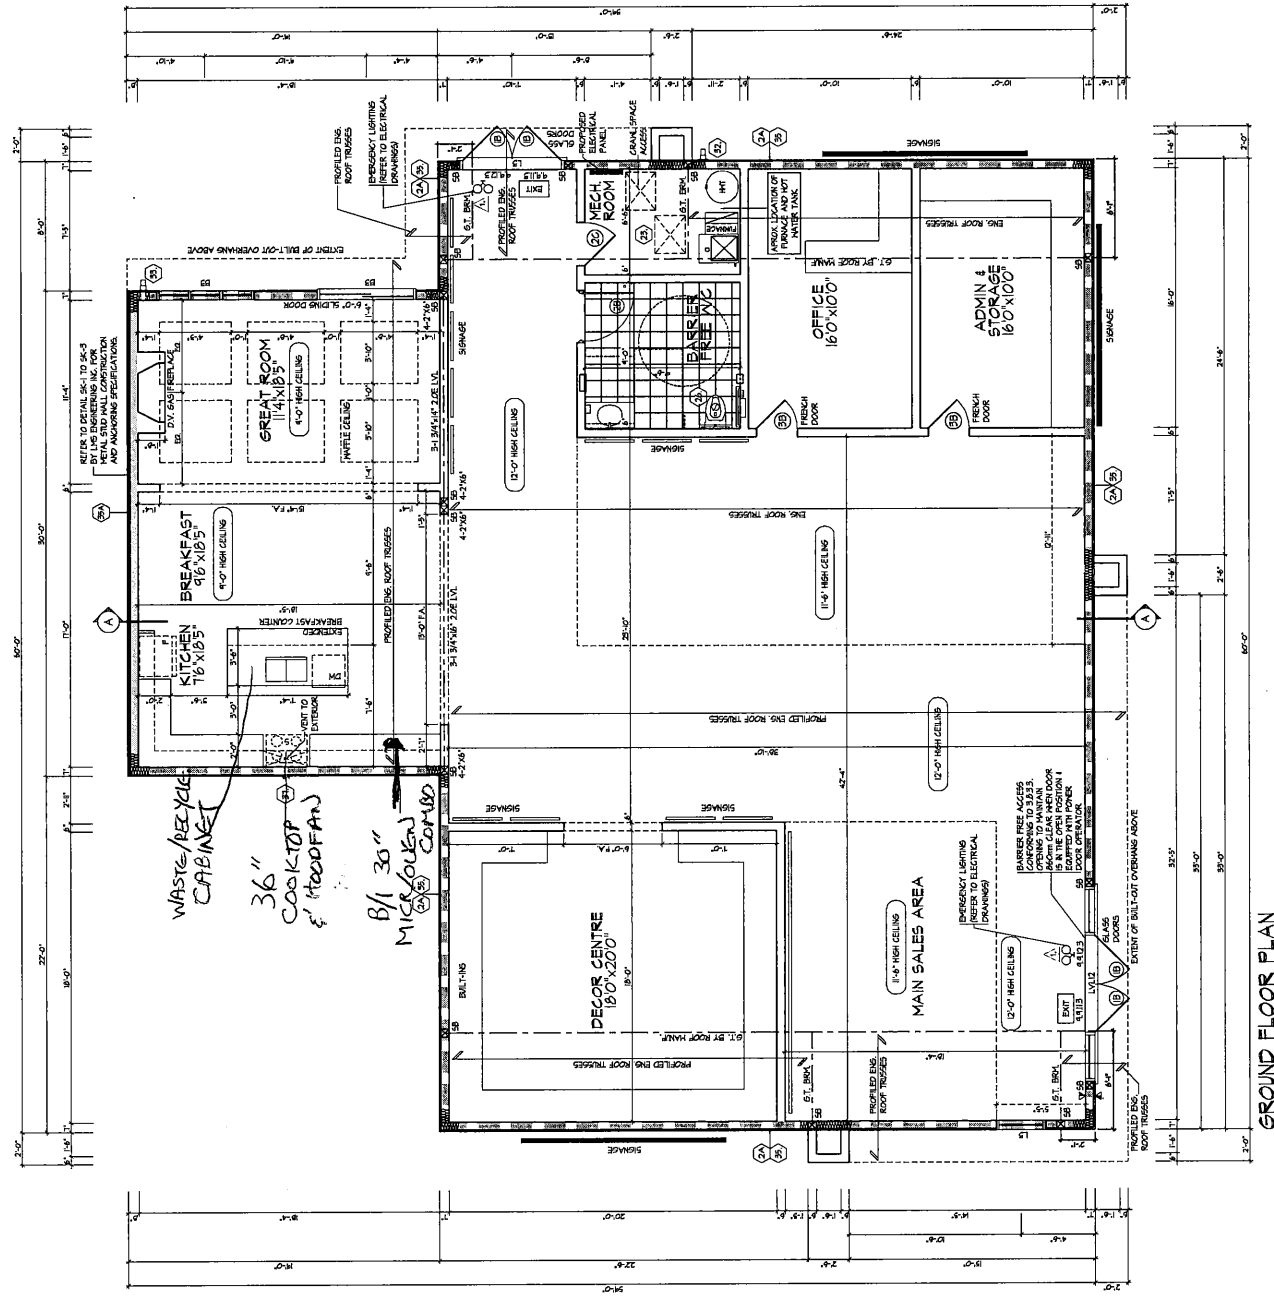


GROUND FLOOR PLAN

WB WILLIAMSBURG SALES OFFICE VIGNETTE

KitchenAid®

36" Wall-Mount Canopy Hood  
KVWB606D

BLACK/STAINLESS

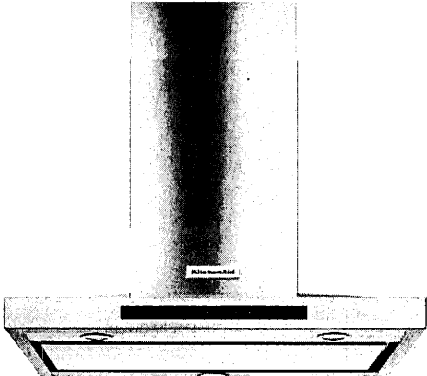

Stainless Steel  
KVWB606DSS

General Features & Properties

- LED Task Lights
- Halogen Night Lights
- Easy In-line Conversion
- Whisper Quiet® System @ 49 dBA (1.5 Sones) at Low Speed
- Dishwasher Safe Commercial-Style Baffle Filters
- 3-Speed Electronic Glass Touch Control with Boost Function (10 Min.)

Electrical Details

Amps	15
Volts	120

Technical Details

Blower Power	Centrifugal
Hood Type	Wall Mount
CFMs	600
Lighting Type	LED
Number of Speeds	3
Venting Type	Exterior or Recirculating

Dimensions

Product Dimensions (H x W x D)	24-5/8" x 36" x 19-11/16"
-----------------------------------	---------------------------------

Reference Material

[Dimension Guide](#)

[Install Guide](#)

[Use & Care Guide](#)

[Warranty](#)

Key Features & Benefits

600 CFM/65K BTU Threshold


Allows installation over any KitchenAid® regular 36- or 30-inch range or cooktop, and some commercial-style cooking surfaces with outputs up to 65K BTU.

Perimeter Ventilation

Increases ventilation system efficiency by pulling air from the edges of the hood and speeding up the movement of air at the center, allowing it to efficiently handle up to a 65K BTU total output.

Auto Speed Setting

Takes the guesswork out of protecting cabinets from steam, grease, and moisture by automatically adjusting fan speed to ventilation needs depending on the heat being produced.

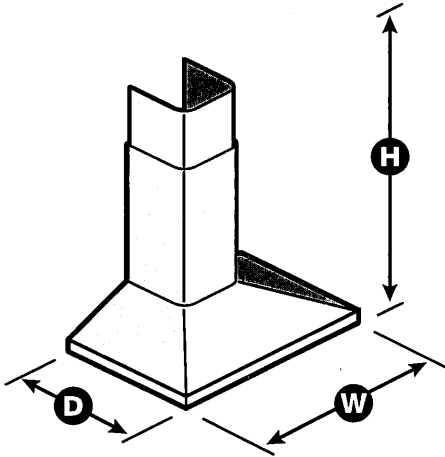

NOTE: Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

©/™ © 2020. All rights reserved. Printed in the U.S.A. D200104XXE. KVWB606DSpecSheetV01.

**KitchenAid®**  
FOR THE WAY IT'S MADE.

**30" (72.6 cm) and 36" (91.4 cm) Wall-Mount Canopy Range Hood**


**PRODUCT MODEL NUMBERS**  
KVWB600D    KVWB606D

**Electrical:** A 120 volt, 60 Hz., AC only, 15-amp, fused electrical circuit is required.

**VENTING METHODS**  
This canopy range hood is factory set for venting through the roof or through the wall.  
A 6" (15.2 cm) round vent system is needed for installation (not included). The hood exhaust opening is 6" (15.2 cm) round.  
**NOTE:** Flexible vent is not recommended. Flexible vent creates back pressure and air turbulence that greatly reduce performance.  
Vent system can terminate either through the roof or wall. To vent through a wall, a 90° elbow is needed.



**Rear Discharge**  
A 90° elbow may be installed immediately above the hood.

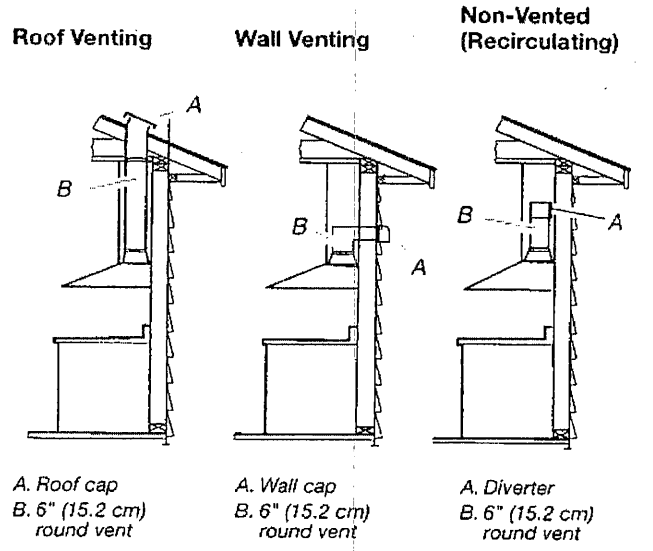**For Non-Vented (Recirculating) Installations**  
If it is not possible to vent cooking fumes and vapors to the outside, the hood can be used in the non-vented (recirculating) version, using a Recirculation Kit (which includes charcoal filters and a deflector). To order, see the "Assistance or Service" section.




**Calculating Vent System Length**  
To calculate the length of the system you need, add the equivalent feet (meters) for each vent piece used in the system.

Vent System	
Vent Piece	6" (15.2 cm) Round
45° elbow	2.5 ft (0.8 m)
90° elbow	5.0 ft (1.5 m)




Maximum equivalent vent length is 35 ft (10.7 m).

**Example Vent System**

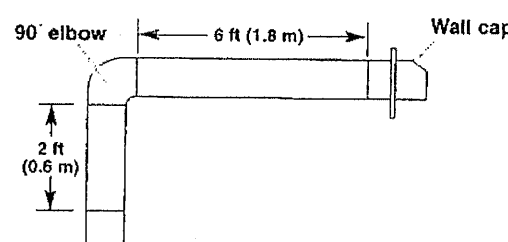


The following example falls within the maximum recommended vent length of 35 ft (10.7 m).

1 - 90° elbow	= 5.0 ft (1.5 m)
1 - wall cap	= 0.0 ft (0.0 m)
8 ft (2.4 m) straight	= 8.0 ft (2.4 m)
Length of system	= 13.0 ft (3.9 m)

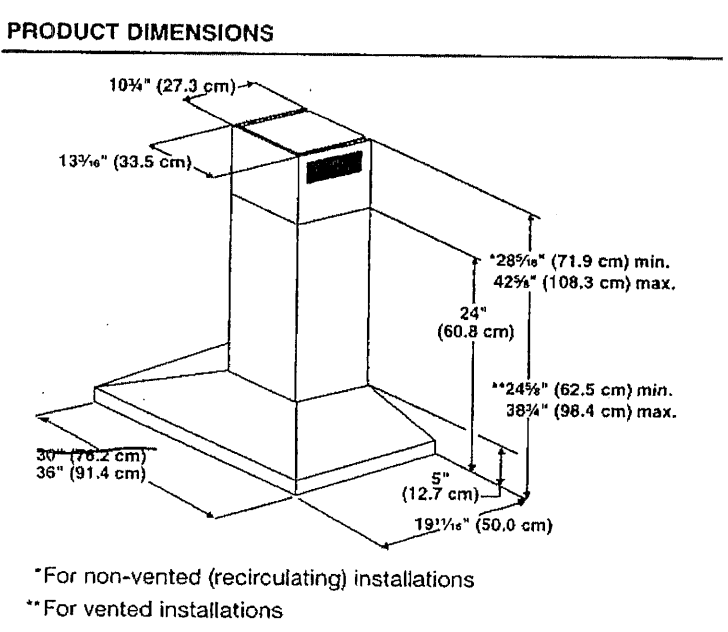

CABINET DIMENSIONS

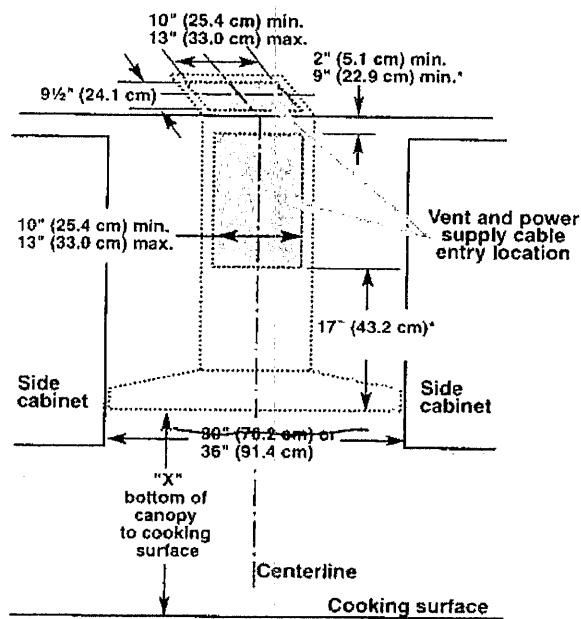

\*For non-vented (recirculating) installations

The chimneys can be adjusted for different ceiling heights. See the following chart.

Vented Installations		
	Min. ceiling height	Max. ceiling height
Electric cooking surface	7' 1" (2.16 m)	9' 2" (2.79 m)
Gas cooking surface	7' 4" (2.23 m)	9' 2" (2.79 m)
Non-vented (recirculating) Installations		
	Min. ceiling height	Max. ceiling height
Electric cooking surface	7' 1" (2.16 m)	9' 6" (2.9 m)
Gas cooking surface	7' 4" (2.23 m)	9' 6" (2.9 m)


**\*NOTE:** The range hood chimneys are adjustable and designed to meet varying ceiling or soffit heights depending on the distance "X" between the bottom of the range hood and the cooking surface. For higher ceilings, a Chimney Extension Kit is available from your dealer or an authorized parts distributor. The chimney extension replaces the chimney shipped with the range hood. To order, see the "Assistance or Service" section.

IMPORTANT:


- Minimum distance "X": 24" (61.0 cm) from electric cooking surface.
- Minimum distance "X": 27" (68.6 cm) from gas cooking surfaces.
- Suggested maximum distance "X": 36" (91.4 cm)

WB WILLIAMSBURG  
SALES OFFICE VIGNETTE  
KITCHENAID - BLACK/STAINLESS

## Product Dimensions

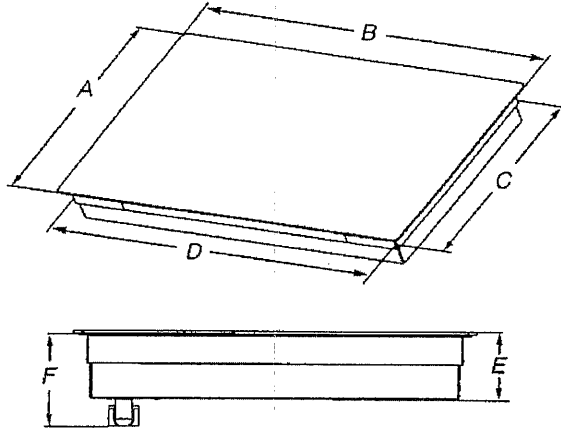

- A. Glass depth - black and white models -  $21\frac{3}{4}$ " (55.2 cm)  
Glass depth - Whirlpool and Maytag stainless steel models -  $22\frac{7}{8}$ " (58.0 cm)  
Glass depth - KitchenAid stainless steel models -  $21\frac{5}{8}$ " (54.9 cm)
- B. Glass width - 24" (60.9 cm) models -  $23\frac{13}{16}$ " (60.5 cm)  
Glass width - 30" black and white (76.2 cm) models -  $30\frac{13}{16}$ " (78.4 cm)  
Glass width - Whirlpool and Maytag 30" stainless steel (76.2 cm) models -  $30\frac{13}{16}$ " (78.4 cm)  
Glass width - KitchenAid 30" stainless steel (76.2 cm) models -  $30\frac{3}{8}$ " (77.1 cm)  
Glass width - 36" black and white (91.4 cm) models -  $36\frac{5}{16}$ " (92.3 cm)  
Glass width - Whirlpool 36" stainless steel (91.4 cm) models -  $36\frac{1}{16}$ " (92.3 cm)  
Glass width - Maytag 36" stainless steel (91.4 cm) models -  $36\frac{1}{16}$ " (91.5 cm)  
Glass width - KitchenAid 36" stainless steel (91.4 cm) models -  $35\frac{7}{8}$ " (91.0 cm)
- C. Frame depth -  $20\frac{5}{16}$ " (51.6 cm)
- D. Frame width - 24" (60.9 cm) models -  $21\frac{59}{64}$ " (55.7 cm)  
Frame width - 30" (76.2 cm) models - 29" (73.7 cm)  
Frame width - 36" (91.4 cm) models -  $34\frac{7}{16}$ " (87.5 cm)
- E. Cooktop height with bottom heat shield -  $3\frac{7}{8}$ " (9.8 cm)  
Cooktop height lighted knobs -  $4\frac{15}{16}$ " (12.55 cm)
- F. Cooktop height including conduit (located at rear of cooktop, right side) - 5" (12.7 cm)  
Cooktop height lighted knobs, including conduit (located at rear of cooktop, right side) -  $6\frac{1}{16}$ " (15.4 cm)

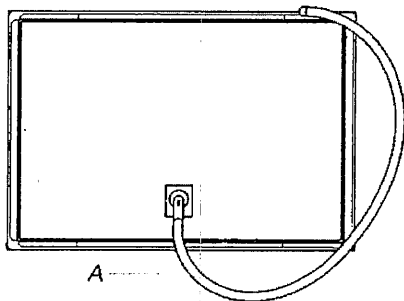


A. Location of Power Cord (length of power cord is 48" (121.9 cm), including the conduit)

## Cabinet Dimensions

36" COOKTOP

**IMPORTANT:** If installing a range hood or microwave hood combination above cooking surface, follow the range hood or microwave hood combination installation instructions for dimensional clearances above the cooktop surface.

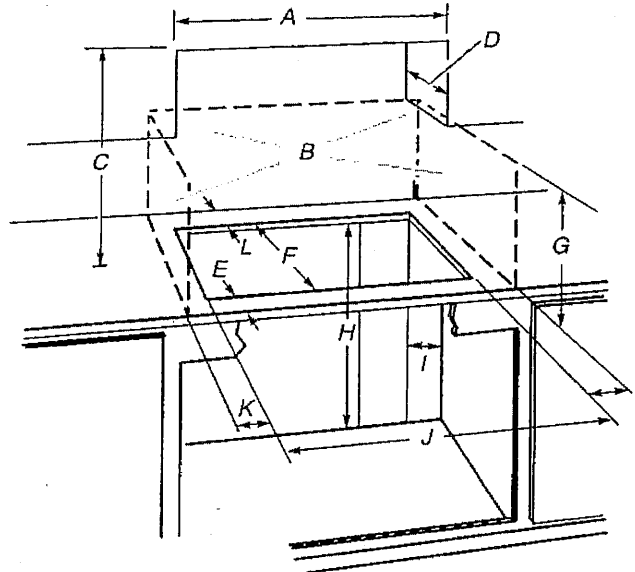

- A. 24" (60.9 cm) on 24" models; 30" (76.2 cm) on 30" models; 36" (91.4 cm) on 36" models
- B. Side and rear surfaces illustrated by dashed box above, must meet the minimum clearances to combustible material as defined in dimensions K and L below.
- C. 30" (76.2 cm) minimum clearance between top of cooktop platform and bottom of uncovered wood or metal cabinet (24" [61 cm] minimum clearance if bottom of wood or metal cabinet is covered by not less than  $\frac{1}{4}$ " [0.6 cm] flame retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015" [0.04 cm] stainless steel, or 0.024" [0.06 cm] aluminum or 0.020" [0.05 cm] copper)
- D. 13" (33 cm) recommended upper cabinet depth
- E. 2" (5.1 cm)
- F.  $20\frac{1}{2}$ " (52.0 cm) recommended cutout.  
Will fit in cutout from  $20\frac{1}{16}$ "- $20\frac{9}{16}$ " (51.8-52.2 cm).
- G. 18" (45.7 cm) minimum clearance from upper cabinet to countertop within minimum horizontal clearances to cooktop
- H. Junction box or outlet: 7" (17.8 cm) minimum from top of countertop
- I. Junction box or outlet: 9" (23.0 cm) maximum from right side of cabinet
- J.  $29\frac{1}{2}$ " (74.9 cm) recommended cutout on 30" (76.2 cm) models.  
Will fit in cutout from  $29\frac{1}{16}$ "- $29\frac{9}{16}$ " (73.8-75.1 cm) on 30" (76.2 cm) models.  
 $35\frac{1}{2}$ " (90.2 cm) recommended cutout on 36" (91.4 cm) models.  
Will fit in cutout from  $34\frac{9}{16}$ "- $35\frac{9}{16}$ " (87.8-90.3 cm) on 36" (91.4 cm) models.  
 $22\frac{5}{16}$ " (56.67 cm) recommended cutout on 24" (61.0 cm) models.  
Will fit in cutout from  $22\frac{1}{4}$ "-  $22\frac{3}{4}$ " (56.4 - 57.0 cm) on 24" (61.0 cm) models.
- K.  $2\frac{1}{2}$ " (6.35 cm) minimum distance to nearest left and right side combustible surface above cooktop
- L.  $1\frac{1}{2}$ " (3.81 cm) minimum distance from the back of the cooktop cutout to the nearest back side combustible surface above cooktop.


**NOTES:** After making the countertop cutout, some installations may require notching down the base cabinet side walls to clear the cooktop base. To avoid this modification, use a base cabinet with sidewalls wider than the cutout.

If cabinet has a drawer, a  $5\frac{1}{2}$ " (14.0 cm) depth clearance from the top of the countertop to the top of the drawer (or other obstruction) in base cabinet is required.



Electrical Requirements

**⚠ WARNING**



**Electrical Shock Hazard**

**Disconnect power before servicing.**

**Use 8 gauge copper wire.**

**Electrically ground cooktop.**

**Failure to follow these instructions can result in death, fire, or electrical shock.**

If codes permit and a separate ground wire is used, it is recommended that a qualified electrical installer determine that the ground path and wire gauge are in accordance with local codes.

Check with a qualified electrical installer if you are not sure the cooktop is properly grounded.

Make sure that the electrical connection and wire size are adequate and in conformance with the National Electrical Code, ANSI/NFPA 70-latest edition or CSA Standards C22.1-94, Canadian Electrical Code, Part 1 and C22.2 No. O-M91-latest edition, and all local codes and ordinances.

A copy of the above code standards can be obtained from:


National Fire Protection Association  
1 Batterymarch Park  
Quincy, MA 02169-7471

CSA International  
8501 East Pleasant Valley Road  
Cleveland, OH 44131-5575

Before You Make the Electrical Connection:

To properly install your cooktop, you must determine the type of electrical connection you will be using and follow the instructions provided for it here.

- A 3-wire or 4-wire, single phase, 120/208 V or 120/240 V, 60 Hz, AC only electrical supply is required on a separate, 40 A or 50 A circuit, fused on both sides of the line. The model/serial number rating plate is located on the metal cabinet underneath the cooktop. See the following illustration.

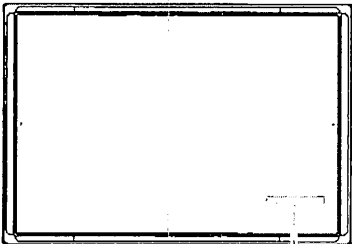

A

A. Model/serial number plate

- The cooktop is rated for 120/208 V or 120/240 V. Some models have a neutral (white) wire.

For power requirements, refer to the following table:

Family Model Number	Electrical Ratings at 60 Hz	
	208 V~	240 V~
WCE55US0H	5.0 kW	6.7 kW
WCE55US4H	5.0 kW	6.7 kW
WCE55US6H	6.0 kW	8.0 kW
WCE77US0H	6.4 kW	8.5 kW
WCE77US6H	6.4 kW	8.5 kW
WCE97US0K	6.8 kW	9.1 kW
WCE97US6K	6.8 kW	9.1 kW
MEC8830H	6.5 kW	8.6 kW
MEC8836H	7.4 kW	9.9 kW
KCES550H	7.9 kW	10.5 kW
KCES556H	7.9 kW	10.5 kW
KCES950K	7.2 kW	9.6 kW
KCES956K	7.2 kW	9.6 kW
JEC3430H	6.4 kW	8.5 kW
JEC3536H	7.9 kW	10.5 kW
JEC4424K	5.5 kW	7.3 kW
JEC4430K	7.2 kW	9.6 kW
JEC4536K	7.2 kW	9.6 kW

- The cooktop should be connected directly to the junction box through flexible, armored or nonmetallic sheathed, copper cable. The flexible, armored cable extending from the fuse box or circuit breaker box should be connected directly to the junction box.
- Locate the junction box to allow as much slack as possible between the junction box and the cooktop so that the cooktop can be moved if servicing becomes necessary in the future.
- Do not cut the conduit. Use the length of conduit provided. A UL listed or CSA approved conduit connector must be provided at each end of the power supply cable (at the cooktop and at the junction box). A listed conduit connector is already provided at the cooktop.
- If the house has aluminum wiring follow the procedure below:  
Connect the aluminum wiring using special connectors and/or tools designed and UL listed for joining copper to aluminum.

Follow the electrical connector manufacturer's recommended procedure. Aluminum/copper connection must conform with local codes and industry accepted wiring practices.

181 102

INSTALLATION INSTRUCTIONS

Prepare Cooktop for Installation

⚠ WARNING


Excessive Weight Hazard

Use two or more people to move and install cooktop.  
Failure to do so can result in back or other injury.

Decide on the final location for the cooktop. Avoid drilling into or severing existing wiring during installation.


- 1. Using 2 or more people, place the cooktop upside down on a covered surface using the foam end posts from the packaging. Make sure that the knobs are not resting on the foam.
- 2. Remove foam strip roll from the package containing literature. The roll contains four 1/4" (6.4 mm) strips of foam. Remove one strip at a time. Apply the foam strip adhesive around bottom of the four edges of the cooktop glass, following the edges of the glass.

NOTE: The foam strip helps avoid damage to the underside of the cooktop glass from debris and helps the cooktop sit flat on uneven counters.

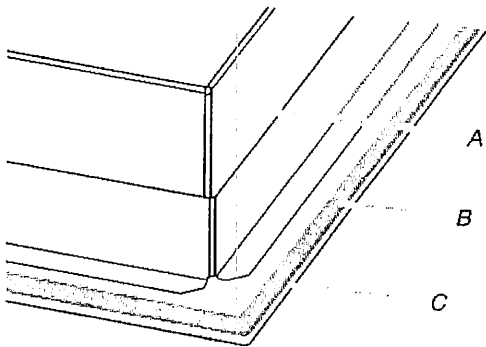

A. Cooktop base  
B. 1/4" (6.4 mm) Foam strip  
C. Cooktop

NOTE: For some models with trim on the front glass edge, apply the foam strip side down around bottom of the cooktop glass only on LEFT, RIGHT and BACK SIDE.

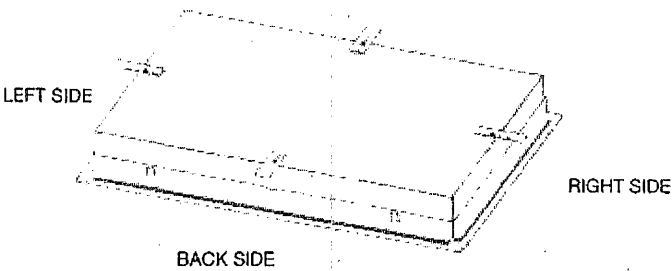

Install Cooktop

Style 1: Cooktop over undercounter built-in oven

IMPORTANT: Clamping brackets should not be used.


- 1. Using 2 or more people, place cooktop right side up into the cutout.

NOTE: Make sure that the front edge of the cooktop is parallel to the front edge of the countertop. If repositioning is needed, lift entire cooktop up from cutout to avoid scratching the countertop.

Style 2: Cooktop over cabinets

- 1. Determine whether your cabinet construction provides clearance for installing clamping brackets at cooktop base ends.

24" (60.9 cm), 30" (76.2 cm) and 36" (91.4 cm) traditional models

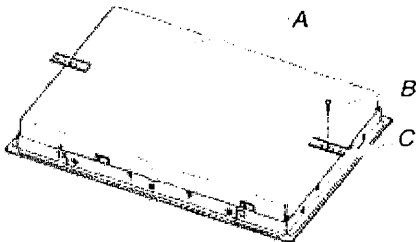


A. Cooktop base bottom  
B. Attachment screw  
C. Clamping bracket

- 2. The clamping brackets can be installed before or after the cooktop is placed into the cutout. Complete the following steps for the option you choose.

## Installing Brackets Before Placing Cooktop in Cutout

1. Using 2 or more people, place the cooktop upside down on a covered surface using the foam end posts from the packaging. Make sure that the knobs are not resting on the foam.
2. Remove the attachment screws for the bracket locations from the bottom of the cooktop base.
3. Select bracket mounting holes that will allow the bracket to extend far enough out from the cooktop for the installation of 2½" (6.4 cm) clamping screws. See the "Attach Cooktop to Countertop" section for illustration of clamping screw installation.

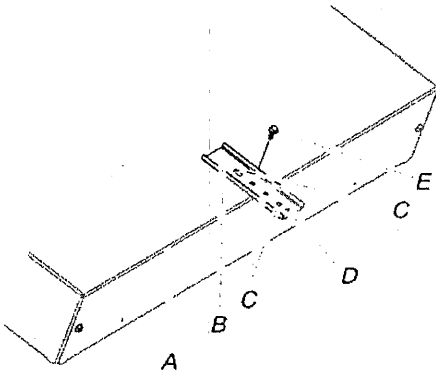

- A. Edge of cooktop base bottom
- B. Clamping bracket
- C. Bracket mounting holes
- D. Bracket clamping hole
- E. Attachment screw


4. Attach brackets to cooktop base bottom with bracket attachment screws using the bracket mounting holes selected in Step 3.
5. Rotate brackets so they do not extend beyond edge of cooktop base.
6. Tighten attachment screws enough to hold brackets in place when cooktop is placed in cutout.
7. Using 2 or more people, turn the cooktop right side up and place in cutout.  
**NOTE:** Make sure that the front edge of the cooktop is parallel to the front edge of the countertop. If repositioning is needed, lift entire cooktop up from cutout to avoid scratching the countertop.
8. Loosen the screws and rotate the brackets so that they are perpendicular to the edge of the cooktop base and extend beyond its edge. Securely tighten screws.

## Installing Brackets After Placing Cooktop in Cutout

1. Using 2 or more people, place cooktop right side up into the cutout.

**NOTE:** Make sure that the front edge of the cooktop is parallel to the front edge of the countertop. If repositioning is needed, lift entire cooktop up from cutout to avoid scratching the countertop.


2. Remove the attachment screws for the selected bracket locations from the bottom of the cooktop base.
3. Select bracket mounting holes that will allow the bracket to extend far enough out from the cooktop for the installation of 2½" (6.4 cm) clamping screws.

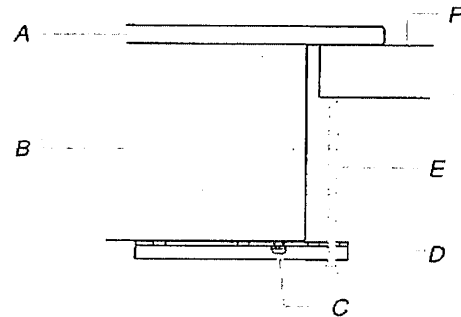

- A. Cooktop
- B. Cooktop base
- C. Attachment screw
- D. Clamping bracket (extends far enough beyond cooktop base to allow installation of clamping screws)
- E. 2½" (6.4 cm) clamping screw (to be installed in "Attach Cooktop to Countertop")
- F. Countertop

4. Attach brackets to cooktop base bottom with bracket attachment screws using the bracket mounting holes selected in Step 3. Securely tighten screws.

**⚠ WARNING**



**Electrical Shock Hazard**

Disconnect power before servicing.

Use 8 gauge copper wire.



Electrically ground cooktop.

Failure to follow these instructions can result in death, fire, or electrical shock.



This cooktop is manufactured with a frame connected, green or bare ground wire. Connect the cooktop cable to the junction box through the UL listed or CSA approved conduit connector.

Electrical Connection Options

For cooktops with a 4-wire cable


If your home has:	And you will be connecting to:	Go to Section:
4-wire direct 	A fused disconnect or circuit breaker box	4-Wire Cable from Power Supply to 4-Wire Cable from Cooktop
3-wire direct 	A fused disconnect or circuit breaker box	3-Wire Cable from Power Supply to 4-Wire Cable from Cooktop

For cooktops with a 3-wire cable:

If your home has:	And you will be connecting to:	Go to Section:
4-wire direct 	A fused disconnect or circuit breaker box	4-Wire Cable from Power Supply to 3-Wire Cable from Cooktop
3-wire direct 	A fused disconnect or circuit breaker box	3-Wire Cable from Power Supply to 3-Wire Cable from Cooktop

4-Wire Cable from Power Supply to 4-Wire Cable from Cooktop

**IMPORTANT:** Use the 4-wire cable from power supply where local codes do not permit connecting the frame-ground conductor to the neutral (white) junction box wire.

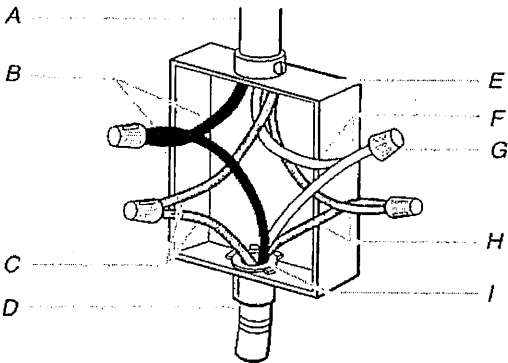

- A. 4-wire cable from power supply

B. Black wires

C. Bare or green wires

D. 4-wire cable from cooktop

E. Junction box

F. White wires

G. UL listed wire connector

H. Red wires

I. UL listed or CSA approved conduit connector
1. Disconnect power.
  2. Remove junction box cover, if present.
  3. Connect the flexible cable conduit from the cooktop to the junction box using a UL listed or CSA approved connector for 1/2" (1.3 cm) conduit.
  4. Tighten screws on conduit connector if present.
  5. Connect the two black wires together using the UL listed wire connectors.
  6. Connect the two red wires together using the UL listed wire connectors.
  7. Connect the two white wires together using the UL listed wire connectors.
  8. Connect the green or bare ground wire from the cooktop cable to the green or bare ground wire (in the junction box) using the UL listed wire connectors.
  9. Install junction box cover.
  10. Reconnect power.

WB - WILLIAMSBURG  
SALES OFFICE VIGNETTE  
BLACK/STAINLESS

# KitchenAid® 27" (68.6 cm) and 30" (76.2 cm) Electric Built-In Microwave/Oven Combination

## PRODUCT MODEL NUMBERS

KEMS309E KOCE500E KOCE507E

## ELECTRICAL CONNECTION


If codes permit and a separate ground wire is used, it is recommended that a qualified electrical installer determine that the ground path and the wire gauge are in accordance with local codes. Check with a qualified electrical installer if you are not sure the oven is properly grounded.

This oven must be connected to a grounded metal, permanent wiring system.

Be sure that the electrical connection and wire size are adequate and in conformance with the National Electrical Code, ANSI/NFPA 70-latest edition or CSA Standards C22.1-94, Canadian Electrical Code, Part 1 and C22.2 No. 0-M91-latest edition, and all local codes and ordinances.

To properly install your oven, you must determine the type of electrical connection you will be using and follow the instructions provided for it here.

- Oven must be connected to the proper electrical voltage and frequency as specified on the model/serial/rating plate. See the following illustration.



A. Model/serial/rating plate

- Models rated from 7.3 to 9.6 kW at 240 volts (5.4 to 7.4 kW at 208 volts) require a separate 40-amp circuit. Models rated at 4.8 kW and below at 240 volts (3.6 kW and below at 208 volts) require a separate 30-amp circuit.
- A circuit breaker is recommended.
- Connect directly to the fused disconnect (or circuit breaker box) through flexible, armored or nonmetallic sheathed, copper cable (with grounding wire). See "Make Electrical Connection" section.
- Flexible conduit from the oven should be connected directly to the junction box.
- Do not cut the conduit. The length of conduit provided is for serviceability of the oven.
- A UL listed or CSA approved conduit connector must be provided.
- If the house has aluminum wiring, follow the procedure below:
  1. Connect a section of solid copper wire to the pigtail leads,
  2. Connect the aluminum wiring to the added section of copper wire using special connectors and/or tools designed and UL listed for joining copper to aluminum.

Follow the electrical connector manufacturer's recommended procedure. Aluminum/copper connection must conform with local codes and industry accepted wiring practices.


For power requirements, refer to the following table.

Model	Voltage	Amperage (L1)*	Amperage (L2)*	Rating (W)
KOCE507E/KOCE500E	120/240	32	30	8000
KOCE507E/KOCE500E	120/208	30	28	6600


\*Amperage values noted above are for information purposes only: the units are rated in watts.

Because Whirlpool Corporation includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

## PRODUCT DIMENSIONS

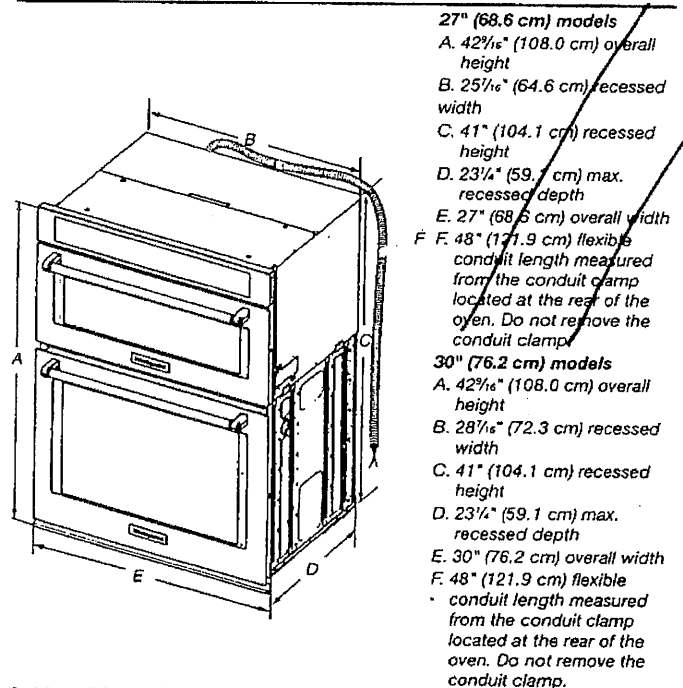

## Cabinet Dimensions

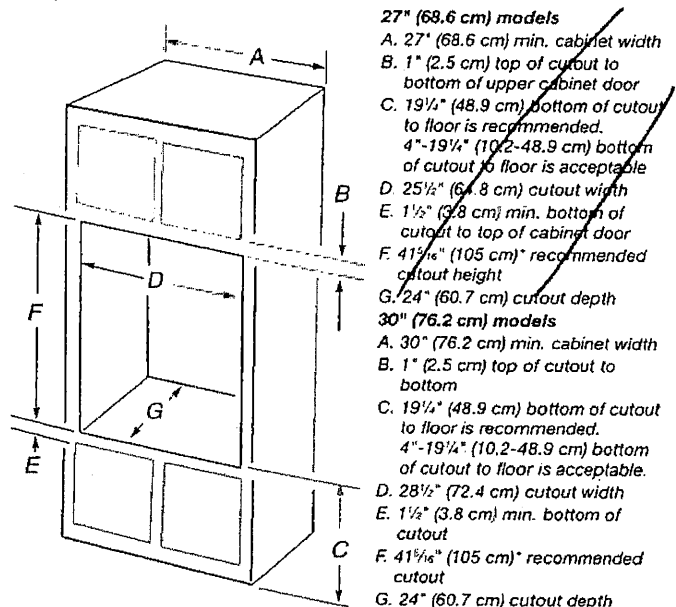

\* NOTE: The cabinet height can be between 41" (104.1 cm) and 41<sup>1</sup>/<sub>2</sub>" (105.6 cm) for microwave/oven combination.


Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

Ref. W10725683B  
2/13/15

WB WILLIAMSBURG  
SALES OFFICE VIGNETTE  
BLACK STAINLESS

KitchenAid®

20 cu. ft. Counter Depth French Door Refrigerator  
KRFC300E

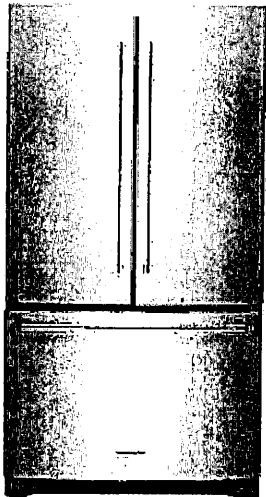

~~Stainless Steel  
KRFC300ESS~~

Also available in:

- ☐ White
- KRFC300EWH ~~X~~
- ☒ Black Stainless  
Steel with  
PrintShield™ Finish
- KRFC300EBS ✓

Key Features & Benefits

- ExtendFresh™ Temperature Management System**

Separately monitors the temperatures in the refrigerator and freezer with sensors.
- Interior Water Dispenser**

Provides easy access to filtered water inside the refrigerator.
- Professionally-Inspired Design**

Features Satin Textured Handles with iconic KitchenAid Brand Medallions and a beautiful chrome frame.

Capacity

Total Capacity	20 cu. ft.
Refrigerator Capacity	14 cu. ft.
Freezer Capacity	6 cu. ft.

General Features & Properties

- Produce Preserver
- Humidity-Controlled Crispers
- FreshChill™ Temperature-Controlled Full-Width Pantry
- Automatic Ice Maker
- Max Cool
- LED Lighting
- ENERGY STAR® Certified
- Metallic Accents on Shelf Trim
- Metal Wine Rack

Electrical Details

Amps	15
Volts	120

Certifications

ENERGY STAR® Certified	Yes
------------------------	-----

Technical Details


Refrigerator Type	French Door
Number of Doors	3
Number of Interior Refrigerator Shelves	5
Number of Refrigerator Door Bins	3 Fixed, 3 Adjustable
Number of Interior Freezer Shelves	2 Wire
Lighting Type	LED
Ice Maker	Factory Installed
Ice Maker Location	Freezer
Dispenser Type	Interior Water

Dimensions

Product Dimensions (H x W x D)	70-1/8" x 35-3/4" x 29-3/8"
Depth with Door Open 90°	43-1/8"
Cutout Dimensions	Allow extra 1/2" on sides and top Allow extra 1" on rear

Reference Material

- [Dimension Guide](#)
- [Use & Care Guide](#)
- [Energy Guide](#)
- [Warranty](#)

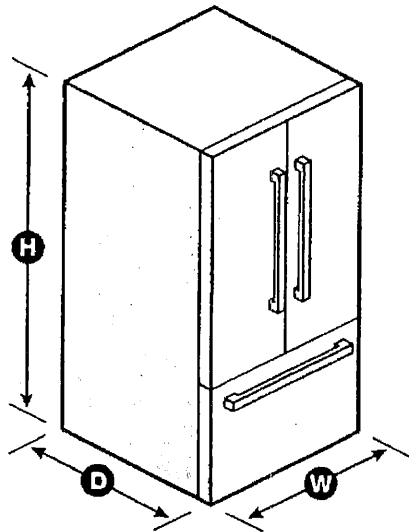

NOTE: Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

©/™ © 2020. All rights reserved. Printed in the U.S.A. D200052XXC. KRFC300ESPECSHEETV01.

WB - WILLIAMSBURG

SALES OFFICE VIGNETTE LOT # 173  
BLACK / STAINLESS

**KitchenAid®**


## 24" Dishwasher

### DETAILED PLANNING DIMENSIONS GUIDE

Applies to all model numbers starting with;

KDFE104K, KDTE104K, KDFE204K, KDTE204K, KDTE304LPA,  
KDFM404K, KDTM404K, KDPM604K, KDTM604K, KDPM704K,  
KDTM704K, KDTM704LPA, KDPM804K, KDTM804K

#### PRODUCT DIMENSIONS

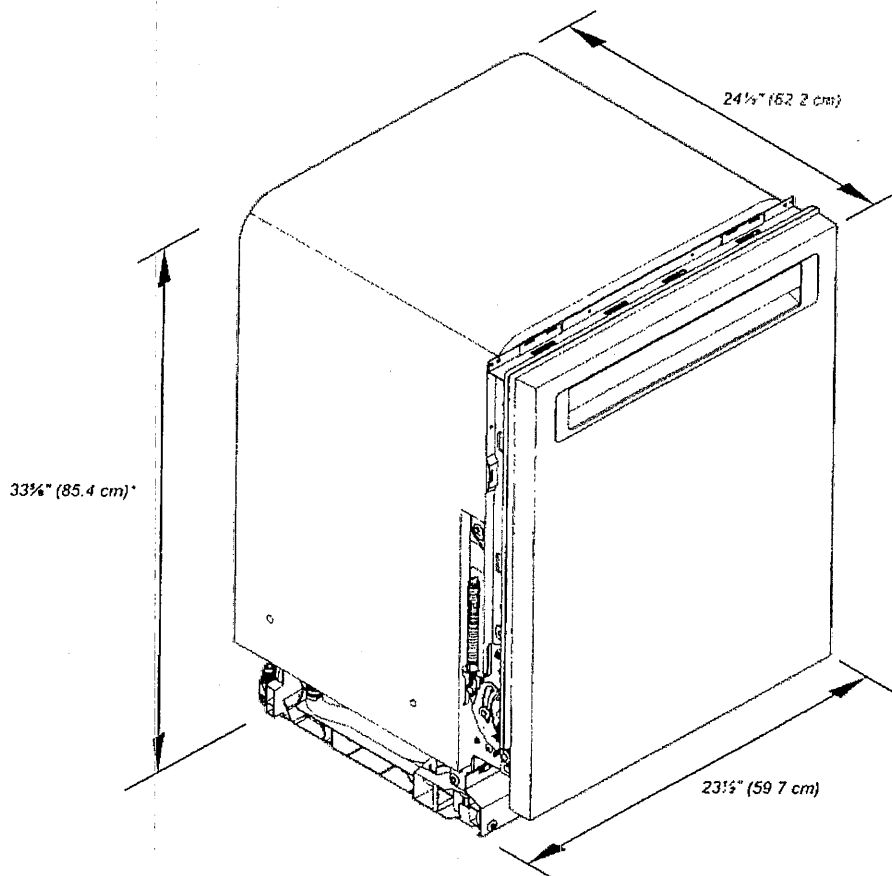

\*Dishwasher can be raised  $1\frac{1}{8}$ " (3.7 cm) with feet fully extended.

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.


Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

LOT # 123

**KitchenAid®**

**24" Dishwasher**  
DETAILED PLANNING DIMENSIONS GUIDE

PRODUCT DIMENSIONS (CONTD.)

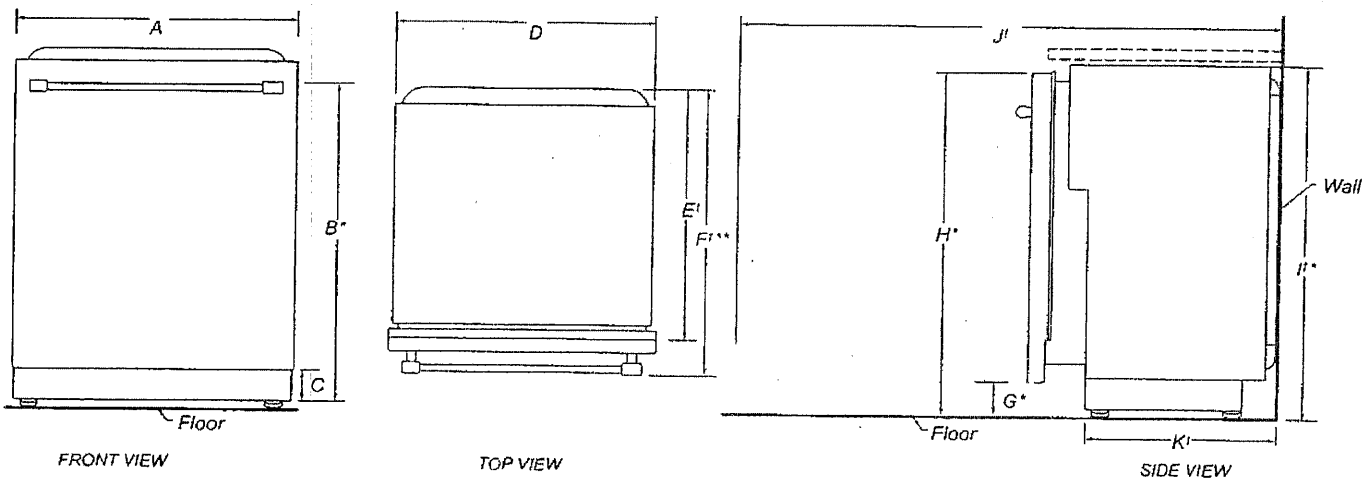

	DESCRIPTION	DIMENSIONS
A	Width of door	23½" (59.7 cm)
B*	Height to top of handle	30⅞" (78.3 cm)
C	Height of adjustable toe kick	3⅞" (8.4 cm) - min. 4⅞" (11.8 cm) - max.
D	Width of recessed dishwasher	22⅝" (57.4 cm)
E†	Depth without door	22⅝" ( 57.5 cm)
F†**	Depth with Towel Bar Handle	26⅞" (68.3 cm)
	Depth with Pocket Handle	24½" (62.6 cm)
	Depth of Panel-Ready Models	24" (61.0 cm)
G*	Height to bottom of door (min.)	3⅞" (8.4 cm)
H*	Height to top of door (min.)	33⅞" (84.9 cm)
I**	Height of recessed dishwasher (min.)	33⅝" (85.4 cm)
J†	Depth with door fully open (min.)	50⅞" (127.4 cm)
K†	Depth with toe kick (min.)	20⅞" (52.9 cm)

†Insulation blanket thickness not included, can be crushed up to 1/8" (0.3 cm), or removed along the top perforate section for additional clearance.

\*Dishwasher can be raised 1⅞" (3.7 cm) with feet fully extended.

\*\*For panel-ready models, dishwasher depth is 24" (61.0 cm), not including the 3/4" (1.9 cm) custom door panel.

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice




12-13-88

## KitchenAid® 24" Dishwasher

### DETAILED PLANNING DIMENSIONS GUIDE

#### OPENING/CLEARANCE DIMENSIONS

**IMPORTANT:** Check that all surfaces have no protrusions that would prohibit dishwasher installation.

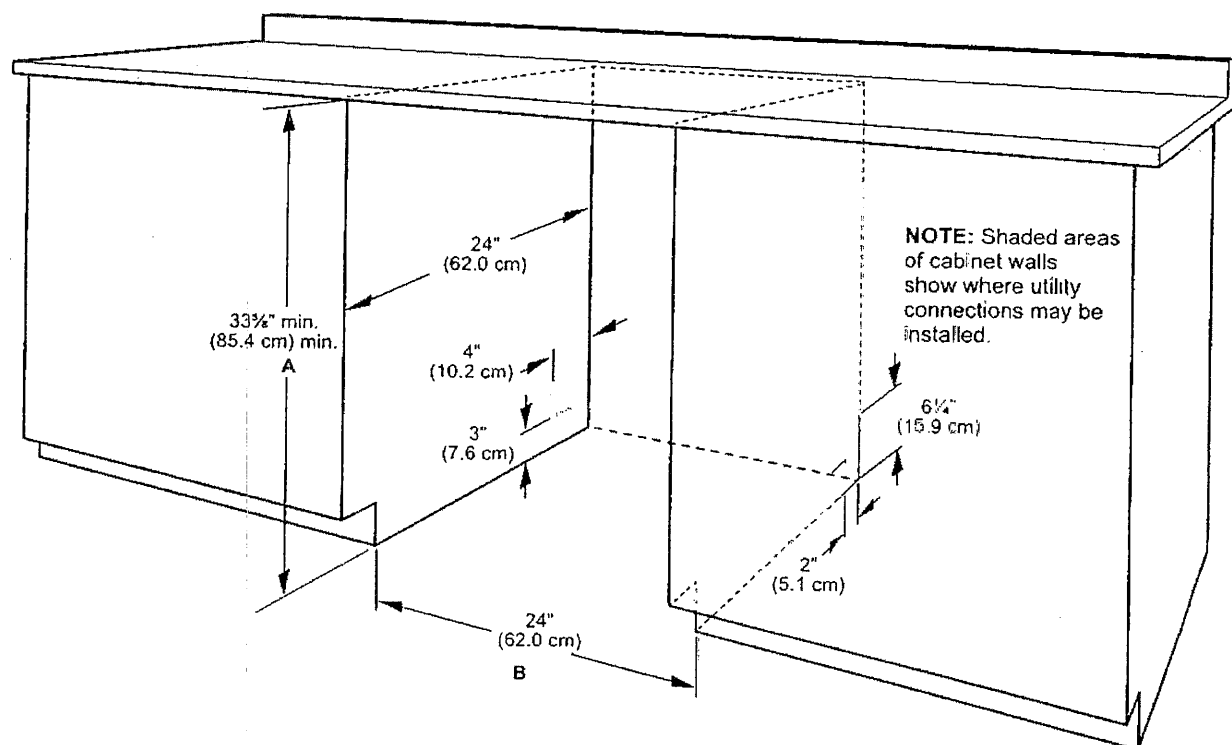

A. Measured from the lowest point on the underside of the countertop. May be reduced to 33 3/4" min. (85.4 cm) min. by removing the feet and perforated area of insulation (blanket) on dishwasher.

B. Minimum, measured from narrowest point of opening.

**NOTE:** Corner locations require a 2" (5.1 cm) minimum clearance between the side of the dishwasher door and the wall or cabinet.

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

Dimensions are for planning purposes only. For complete details, see installation instructions packed with product. Specifications subject to change without notice.

Decorum® 21" x 20-1/4"  
Wall-Hung Lavatory With Everclean®

- 21" x 20-1/4" vitreous china lavatory with EverClean
- Rear overflow
- Recessed self-draining deck with minimal backsplash
- For concealed arm or wall support (wall hanger included)
- Optional vitreous china shroud/knee contact guard 0059.020EC available
- Optional acrylic shroud/knee contact guard 0062.000 available
- ADA and TAS compliant
- Shown with drain grid (sold separately)

- ☒ 9134001EC Center hole only (CHO)  
☐ 9134004EC 4" centers  
☐ 9134008EC 8" centers

Nominal Dimensions:


533mm (21") deep, 514mm (20-1/4") wide

Bowl sizes:

381mm (15") wide, 370mm (14-9/16") front to back,  
127mm (5") deep

- ☐ 0062.000 Acrylic Shroud/Knee Contact Guard  
(Must be purchased separately)

- ☒ 0059.020EC Shroud/Knee Contact Guard  
(Vitreous China with EverClean)  
(Must be purchased separately)

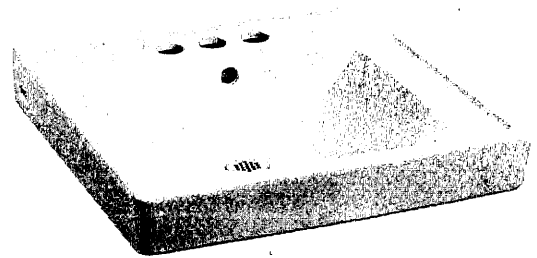

9134004EC shown

SEE NEXT PAGE FOR ROUGHING-IN DIMENSIONS

To Be Specified:




- ☐ Color: ☒ White  
☐ Optional Acrylic Shroud/Knee Contact Guard:  
0062.000  
☐ Optional Vitreous China Shroud/Knee Contact  
Guard: 0059.020EC  
☐ Faucet:  
☐ Faucet Finish:  
☐ Supplies:  
☐ 1-1/4" Trap:

\* See faucet section for additional models available

Compliance Certifications -  
Meets or Exceeds the Following Specifications:  
• ASME A112.19.2 for Vitreous China Fixtures





MEETS THE AMERICANS WITH DISABILITIES ACT GUIDE-  
LINES AND ANSI A117.1 ACCESSIBLE AND USABLE  
BUILDINGS AND FACILITIES - CHECK LOCAL CODES.  
Top of front rim mounted 864mm (34") from finished floor.

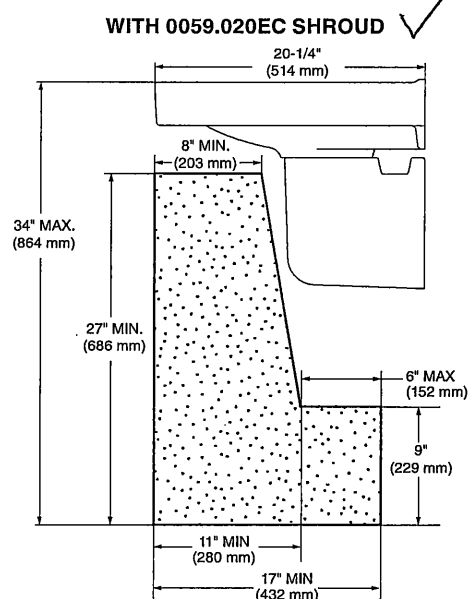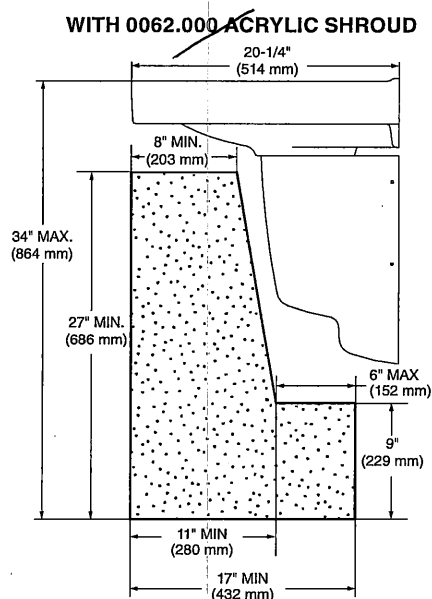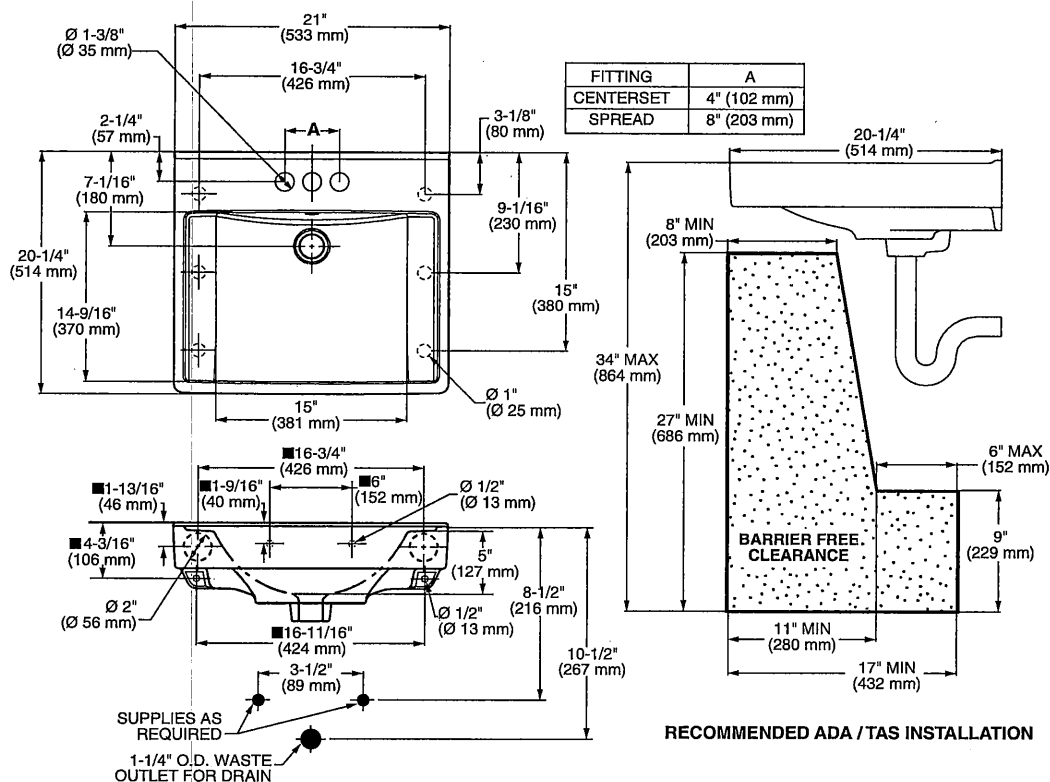

**NOTES:**  
 ● LOOSE KEY ANGLE STOPS, LESS WALL ESCUTCHEONS, SUPPLIES REQUIRED.  
 DIMENSIONS SHOWN FOR LOCATION OF SUPPLIES AND "P" TRAP ARE SUGGESTED.  
 ■ SUITABLE FOR REINFORCEMENT ONLY, ACTUAL DIMENSIONS MUST BE TAKEN FROM FIXTURE.  
 FITTINGS NOT INCLUDED AND MUST BE ORDERED SEPARATELY.  
 PROVIDE SUITABLE REINFORCEMENT FOR ALL WALL SUPPORTS.  
 INSTALLATION INSTRUCTIONS SUPPLIED WITH LAVATORY.  
**IMPORTANT:** Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard A112.19.2.  
 These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

KITCHEN OPTION 1

CROWN - NO FASCIA  
LIGHT VALANCE

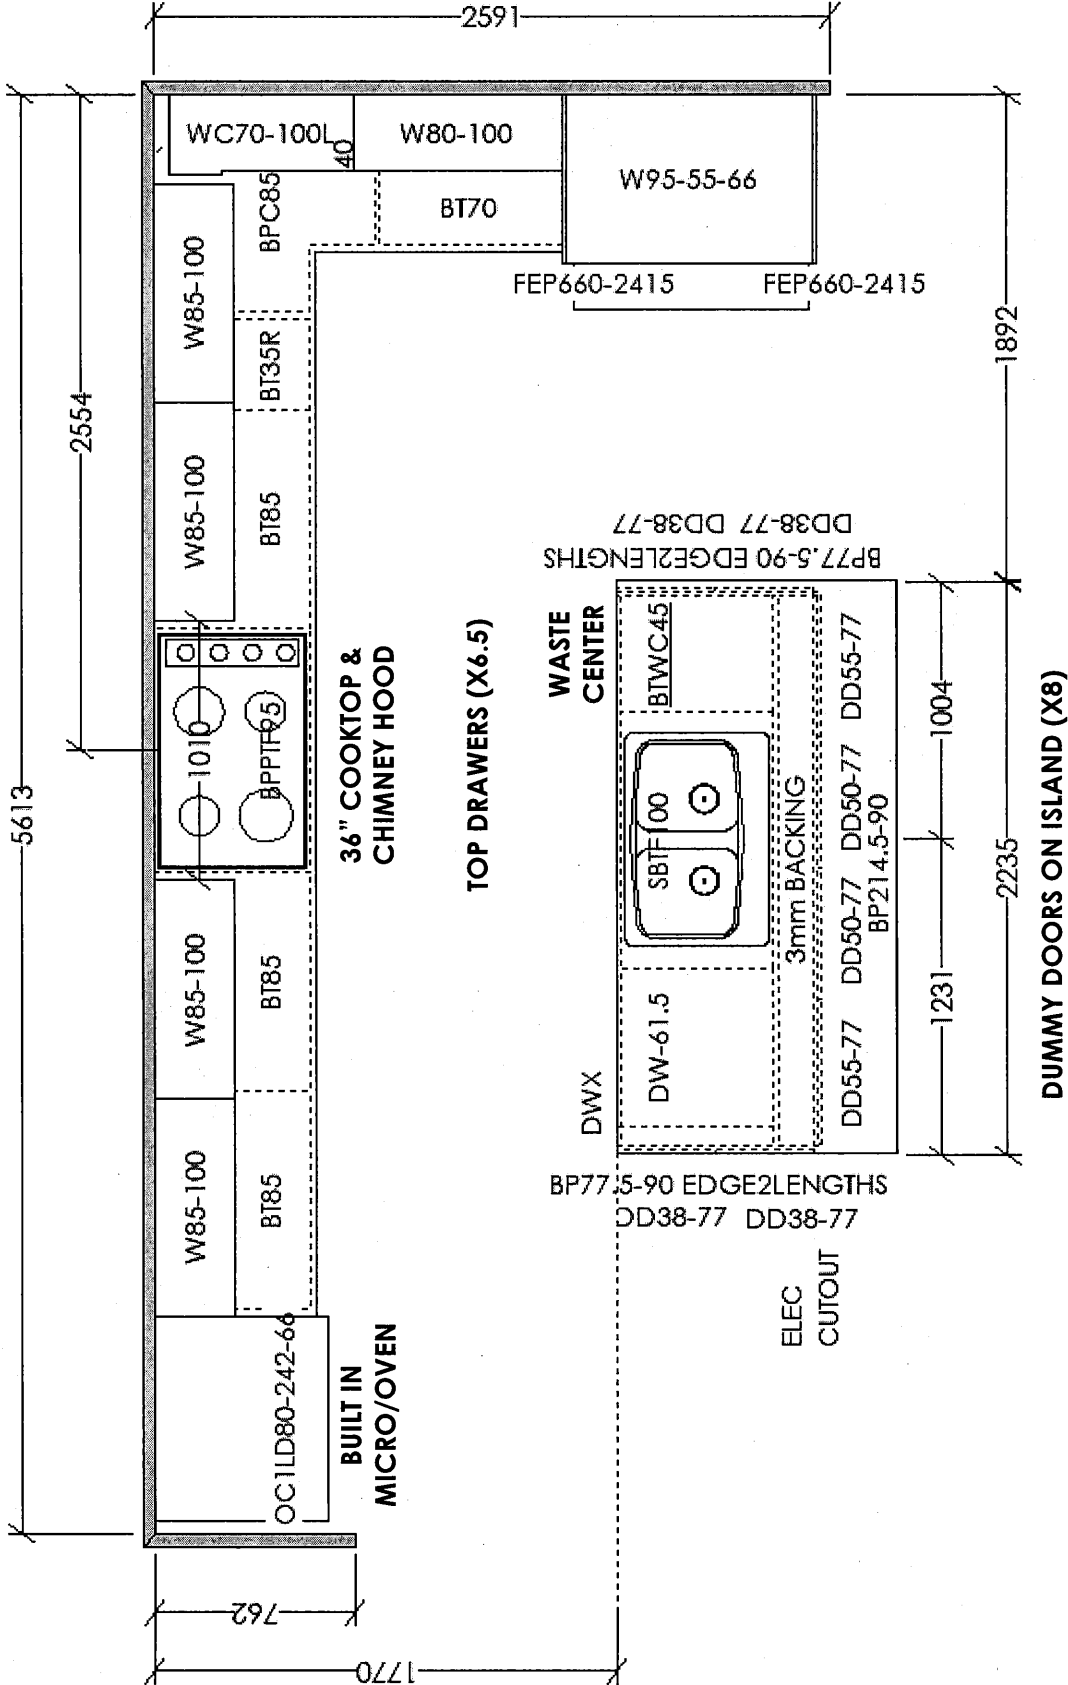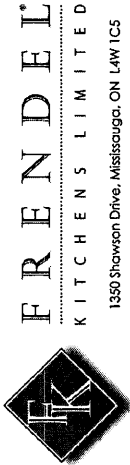

HEATHWOOD HOMES  
WILLIAMSBURG  
MODEL: SALES OFFICE

STANDARD CONTRACT INCLUDES:

Appliance Openings

- Hood: 36"W Builder Hood
- Fridge Opening: 37 3/8 "W X 73 3/8"
- Fridge cabinet & gables: 66cm Deep
- Stove Opening: 36" Freestanding
- Dishwasher Opening: 24"

Standard Kitchens Scope:


- 100cm H wall Cabinets
- Base Pie Cut Corner Cabinets
- Top Drawer Construction
- Std. Blumotion Hinges- **Soft Close** Doors
- Std. Tandem Drawers- **Soft Close** Doors
- Backing on All Cabinets Except Sink Cabinet
- Countertop by Others for Kitchen

Drawn By: Sepideh B & Saeid G  
Date: April 25, 2023  
Revision:  
Scale: Not To Scale

THIS DRAWING IS FOR DESIGN PURPOSES ONLY.  
IT IS NOT AN EXACT RENDITION.

This sketch is for DESIGN PURPOSES ONLY – It is not meant to be an exact rendition.

KITCHEN OPTION 1

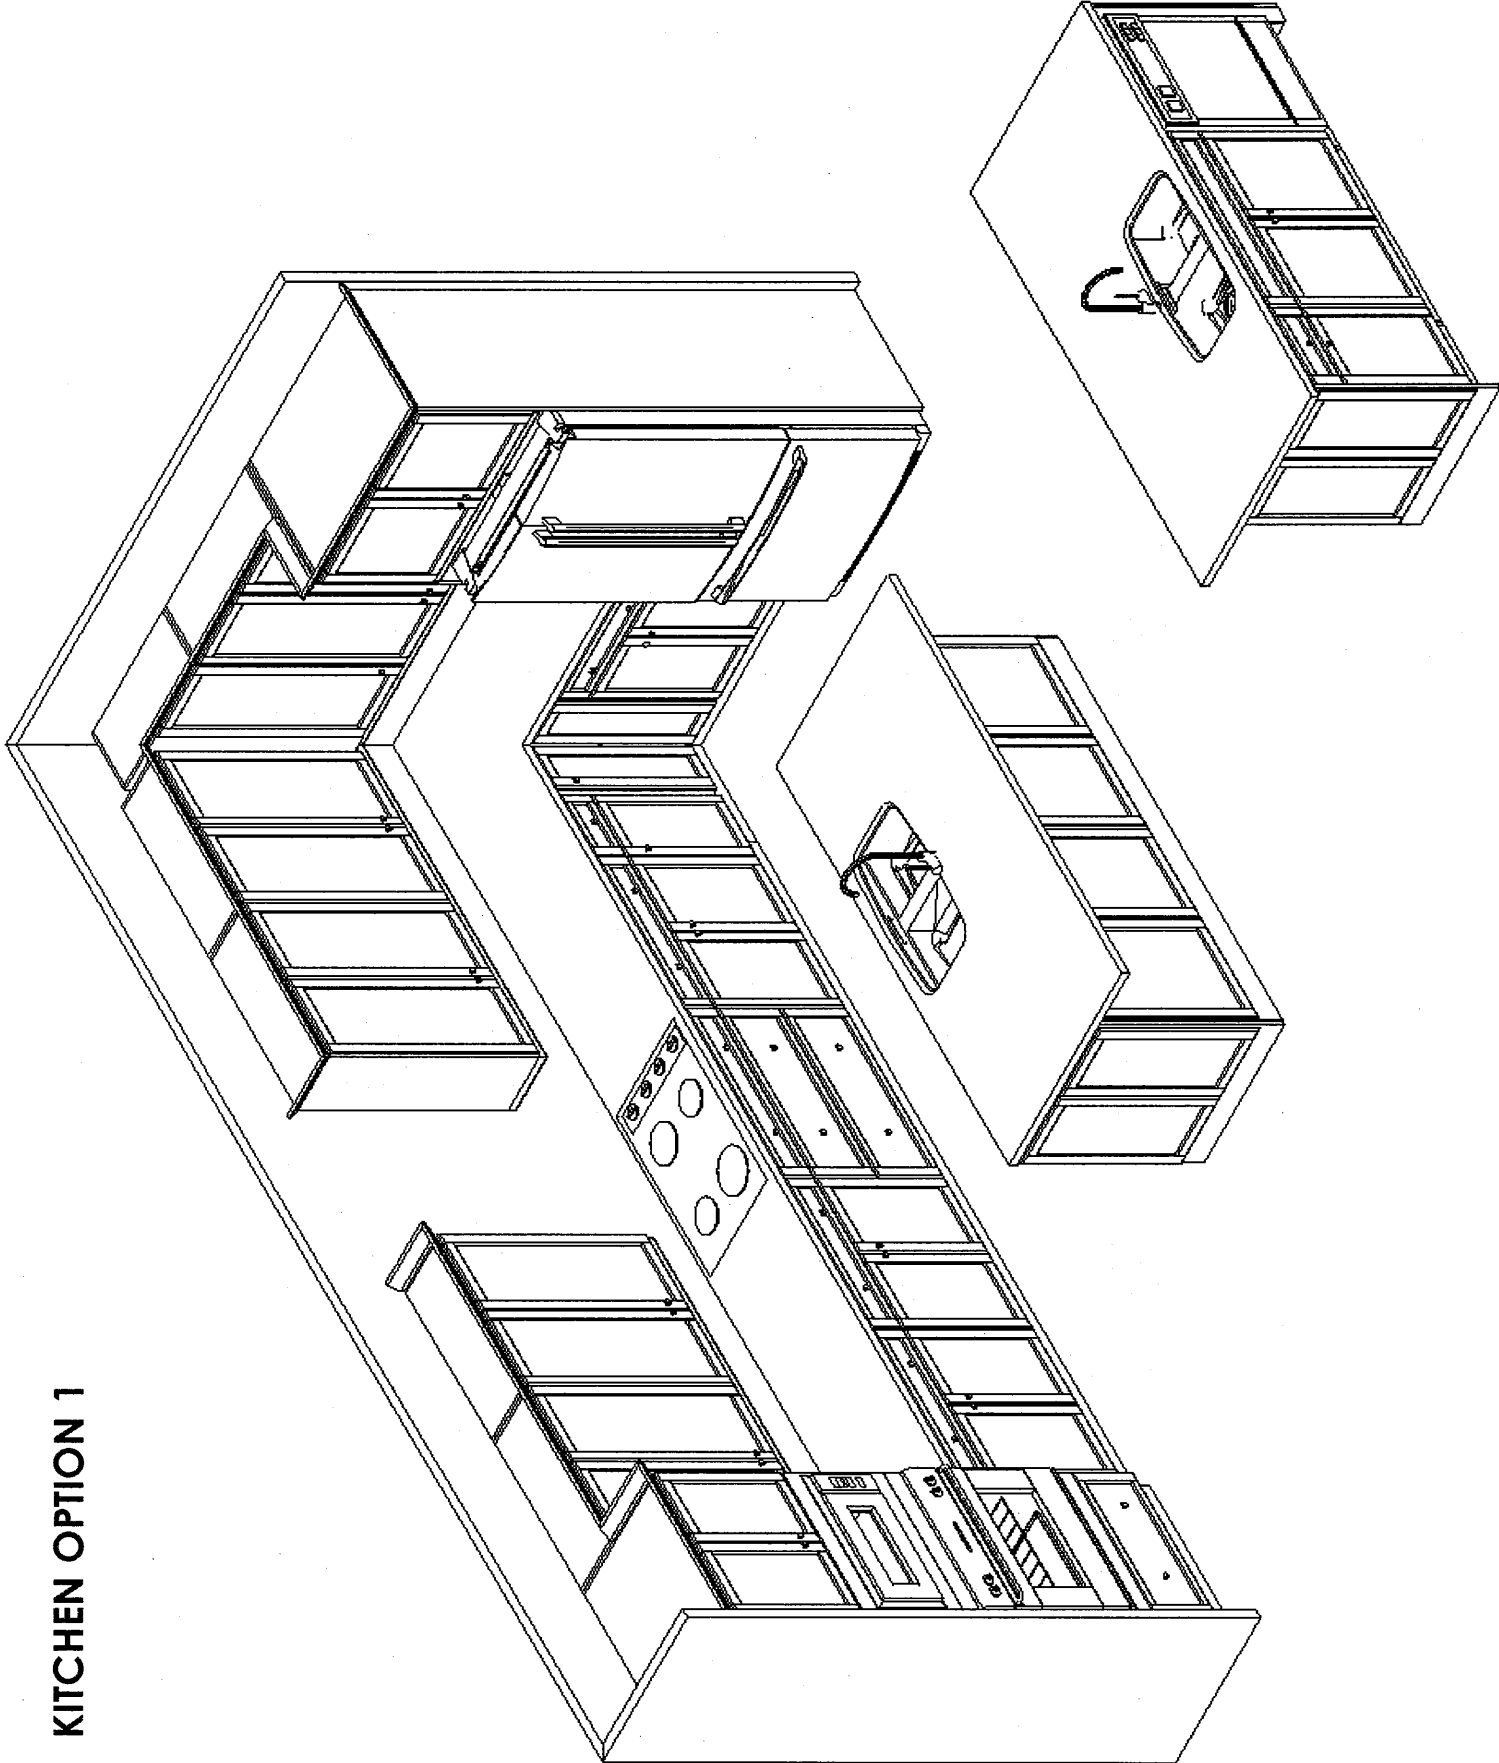

FRENDEL  
KITCHENS LIMITED  
1350 Shawson Drive, Mississauga, ON L4W 1C5

HEATHWOOD HOMES  
WILLIAMSBURG  
MODEL: SALES OFFICE

STANDARD CONTRACT INCLUDES:

Appliance Openings

- Hood: 36"W Builder Hood
- Fridge Opening: 37 3/8 "W X 73 3/8"
- Fridge cabinet & gables: 66cm Deep
- Stove Opening: 36" Freestanding
- Dishwasher Opening: 24"

Standard Kitchens Scope:

- 100cm H wall Cabinets
- Base Pie Cut Corner Cabinets
- Top Drawer Construction
- Std. Blumotion Hinges- **Soft Close** Doors
- Std. Tandem Drawers- **Soft Close** Drawers
- Backing on All Cabinets Except Sink Cabinet
- Countertop by Others for Kitchen

Drawn By: Sepideh B & Saeid G  
Date: April 25, 2023  
Revision:  
Scale: Not To Scale

THIS DRAWING IS FOR DESIGN PURPOSES ONLY.  
IT IS NOT AN EXACT REPRESENTATION.