Sales Selection Sheet Checklist

Model: 20-2095 END ALT A The Forbes

PURCHASERS: MEHDI, MOHAMMAD VALJI/NAHEED, MEHDI VALJI

LOT 3191D-22

VENDOR: Heathwood Homes (Huron) Limited **DECK LOT** FINISHED BASEMENT COLD CELLAR **UPGRADED / MODIFIED ELEVATION CORNER UPGRADE REAR UPGRADE CEILING UPGRADE - SMOOTH** MAIN FLOOR SECOND FLOOR **BASEMENT** ADDITIONAL ROUGH-INS 200 AMP SERVICE (UPG FOR TOWNS) WET BAR ROUGH-IN **HUMIDIFIER** AIR CONDITIONING (SITE STD) GAS ROUGH-IN STOVE **DRYER** BBQ ADDITIONAL FIREPLACE KITCHEN: HOODFAN VENTING SIZE **6 IN ROUND DUCT** 7 IN ROUND DUCT **FULL BASEMENT STAIRS:** Carpet Grade **UPPER BASEMENT STAIRS:** N/A N/A LOWER BASEMENT STAIRS: MAIN STAIRS: All Oak MEDIA STAIRS (if applicable): N/A LOFT STAIRS (if applicable): N/A Decor Consultant: C ENTRETE? -04- 19 2022 Purchaser: Date Heathwood Homes (Huron) Limited Date **Locked Date:**

MEHDI, MOHAMMAD VALJI/NAHEED, MEHDI VALJI Project: Wallaceton Unit: 3191D-22, Phase: 3 Model: 20-2095 END ALT A The Forbes

Page 1 of 10

Locked:

Closed:

en		
Cabinet Colour/Style	6265	Viking III-MANCHESTER-SHALE GREY CL-MAPLE ***STD***
Countertop	8595	Group 2-Quartz-Caesarstone-OCEAN FOAM #6141-3/4 inch with built-up edge ***2***
Countertop Edge	4005	DOUBLE MITRE 1 1/2 INCH ***UPG***
Cabinet Hardware	2086	9677-HARDWARE ***STD***
sland Cabinet Colour/Style	6265	Viking III-MANCHESTER-SHALE GREY CL-MAPLE ***STD***
Island Countertop	8595	Group 2-Quartz-Caesarstone-OCEAN FOAM #6141-3/4 inch with built-up edge ***2***
Backsplash	1111	N/A *****
Backsplash Grout	1111	N/A *****
Backsplash Tile Pattern	1111	N/A *****
HoodFan	9413	AVN-308CS-AVG 30 inch STAINLESS STEEL CHIMNEY WALL MOUNTED HOODFAN
Appliance	9413	Purchasers have been advised: standard fridge opening is a minimum 37 3/8 x 73 3/8". Ice Waterline Rough-In is
Appliance	9413	Standard stove opening is 30" and standard dishwasher opening is 24". Any gas stove will require backsplash or stainless steel backing to avoid fire hazards.
Appliance	9413	Purchasers acknowledge: Heathwood Homes and its contractors will not be responsible for any kitchen cabinet changes due to appliances dimension changes after
Comment		
	100-000	
nen/Breakfast	2	
Flooring	9413	GE.MD.WHT.1818.MT Madison Series White Matte 18
Floor Tile Grout	2225	Grout-(27) Silver ***STD***
Floor Tile Pattern	3000	STANDARD SQUARE ***STD***
The fattern	0000	M.

MEHDI, MOHAMMAD VALJI/NAHEED, MEHDI VALJI Project: Wallaceton Unit: 3191D-22, Phase: 3 Model: 20-2095 END ALT A The Forbes

Locked:

С	lo	os	е	d
			1000	Spice

Comment		
Foyer		
Flooring	3000	GE.MD.WHT.1818.MT Madison Series White Matte 18
Floor Tile Grout	2225	Grout-(27) Silver ***STD***
Floor Tile Pattern	3000	STANDARD SQUARE ***STD***
Comment		
Laundry Room		
Flooring	3000	GE.BY.AZR.1313 New Byzantine Azzuro 13
Floor Tile Grout	2225	Grout-(27) Silver ***STD***
Floor Tile Pattern	3000	STANDARD SQUARE ***STD***
Comment	200	
Laundry Room Opt.		
Cabinet - Uppers	1111	N/A *****
Cabinet Hardware	1111	N/A *****
Comment	***************************************	
Mud Room		ALC te
Flooring	1111	GE.MD.WHT.1818.MT Madison Series White Matte 18

MEHDI, MOHAMMAD VALJI/NAHEED, MEHDI VALJI Project: Wallaceton Unit: 3191D-22, Phase: 3 Model: 20-2095 END ALT A The Forbes

Page 3 of 10

Locked:

Closed:

A CONTRACTOR OF THE STATE OF TH		The state of the s
Floor Tile Grout	2225	Grout-(27) Silver ***STD***
Floor Tile Pattern	3000	STANDARD SQUARE ***STD***
Comment	1995 - 50-	
owder Room		
Flooring	3000	GE.MD.WHT.1818.MT Madison Series White Matte 18
Floor Tile Grout	2225	Grout-(27) Silver ***STD***
Floor Tile Pattern	3000	STANDARD SQUARE ***STD***
Plumbing Fixture (Colour) Comment	1737	Plumbing Fixtures-WHITE ***STD***
Flooring	1737	GE.MD.WHT.1818.MT Madison Series White Matte 18
Grout	2225	Grout-(27) Silver ***STD***
Floor Tile Pattern	3000	STANDARD SQUARE ***STD***
Comment		
reat Room		
Flooring	7498	Red Oak Pearl-Vintage Engineered-GRYPHON/IRONGATE-3/4 inch x 3 1/4 inch
Comment		hl

MEHDI, MOHAMMAD VALJI/NAHEED, MEHDI VALJI Project: Wallaceton Unit: 3191D-22, Phase: 3 Model: 20-2095 END ALT A The Forbes

Page 4 of 10

Locked: Closed:

Upper Hall			
Flooring	The state of the s	9247	DY 16611-Dvnastv Tex-SANDY BEIGE-40 oz
3			DY 16611-Dynasty Tex-SANDY BEIGE-40 oz Poly***STD***
Comment			
Finished Basem	ent (Rec) Room/Hall		
Flooring		9247	DY 16611-Dynasty Tex-SANDY BEIGE-40 oz
		-	DY 16611-Dynasty Tex-SANDY BEIGE-40 oz Poly***STD***
Comment			
Master Bedroon	1		
British Comments of the Comments			
Flooring		9247	DY 16611-Dynasty Tex-SANDY BEIGE-40 oz Poly***STD***
0	:.		
Comment			
			(4)
Bedroom 2			
Flooring		9247	DY 16611-Dynasty Tex-SANDY BEIGE-40 oz Poly***STD***
Comment		***************************************	
Bedroom 3			
Flooring		9247	DY 16611-Dynasty Tex-SANDY BEIGE-40 oz Poly***STD***
			Poly***STD***
Comment	11.000		
11			
Bedroom 4		_,	
		00.17	DV 40044 D
Flooring		9247	DY 16611-Dynasty Tex-SANDY BEIGE-40 oz Poly***STD***
Comment			
Commont	5.5		- 1

MEHDI, MOHAMMAD VALJI/NAHEED, MEHDI VALJI Project: Wallaceton Unit: 3191D-22, Phase: 3 Model: 20-2095 END ALT A The Forbes

Cabinet Hardware

Page 5 of 10

Locked: Closed:

14 to 150 min		
Ensuite 2		e e e e e e e e e e e e e e e e e e e
Cabinet Colour/Style	6265	Viking III-MANCHESTER-SHALE GREY CL-MAPLE ***STD***
Countertop	8822	4924-38-Countertop-WHITE CARRARA-Wilsonart ***STD***
Countertop Edge	1111	N/A *****
Cabinet Hardware	2086	9677-HARDWARE ***STD***
Floor Tile	2086	GE.BY.AZR.1313 New Byzantine Azzuro 13
Floor Tile Grout	2225	Grout-(27) Silver ***STD***
Floor Tile Pattern	3000	STANDARD SQUARE ***STD***
Plumbing Fixture (colour)	1737	Plumbing Fixtures-WHITE ***STD***
Tub Wall Tile	9020	QT.WV.WHT.0810-Weave-White-8 x 10 ***STD***
Tub Wall Tile Grout	2226	Grout-(00) White ***STD***
Tub Wall Tile Pattern	3090	VERTICAL STACKED ***STD***
Comment	7. 4. 8. 0. 0. 5.	
Monton Enquit		
Master Ensuite		
Cabinet Colour/Style	6265	Viking III-MANCHESTER-SHALE GREY CL-MAPLE ***STD***
Countertop	8595	Group 2-Quartz-Caesarstone-OCEAN FOAM #6141-3/4 inch with built-up edge ***3***
Countertop Edge	4007	GROUP 2 TO 7 - DOUBLE MITRE 1 1/2 INCH ***3***

9677-HARDWARE ***STD***

2086

MEHDI, MOHAMMAD VALJI/NAHEED, MEHDI VALJI Project: Wallaceton Unit: 31910-22, Phase: 3

Locked:

: 20-2095 END ALT A The Forbes		Closed:
Floor Tile	2086	GE.BY.AZR.1313 New Byzantine Azzuro 13
Floor Tile Grout	2225	Grout-(27) Silver ***STD***
Floor Tile Pattern	3000	STANDARD SQUARE ***STD***
Shower Floor Tile	8661	OD.ON.SWT.0202.MT.N-Ontario Series Mosaic-Snow White Matte-2 x 2 ***STD***
Shower Floor Tile Grout	2226	Grout-(00) White ***STD***
Shower Floor Tile Pattern	3000	STANDARD SQUARE ***STD***
Shower Wall Tile	9020	QT.WV.WHT.0810-Weave-White-8 x 10 ***STD***
Shower Wall Tile Grout	2226	Grout-(00) White ***STD***
Shower Wall Tile Pattern	3090	VERTICAL STACKED ***STD***
Shower Jamb(s) and Sill(s)	8923	Shower Jamb / Sill-Thassos White ***STD***
Plumbing Fixture (colour)	1737	Plumbing Fixtures-WHITE ***STD***
Comment		
Bathroom		
Cabinet Colour/Style	6265	Viking III-MANCHESTER-SHALE GREY CL-MAPLE ***STD***
Countertop	8822	4924-38-Countertop-WHITE CARRARA-Wilsonart ***STD***
Countertop Edge	1111	N/A *****

Flooring

Cabinet Hardware

2086

2086

9677-HARDWARE ***STD***

GE.BY.AZR.1313 New Byzantine Azzuro 13

MEHDI, MOHAMMAD VALJI/NAHEED, MEHDI VALJI

Project: Wallaceton Unit: 3191D-22, Phase: 3

Model: 20-2095 END ALT A The Forbes

Locked:

Closed: Floor Tile Grout 2225 Grout-(27) Silver ***STD*** Floor Tile Pattern 3000 STANDARD SQUARE ***STD*** Wall Tile 9020 QT.WV.WHT.0810-Weave-White-8 x 10 ***STD*** Wall Tile Grout Grout-(00) White ***STD*** 2226 Main Bathroom Tile Pattern VERTICAL STACKED ***STD*** 3090 Plumbing Fixture (Colour) 1737 Plumbing Fixtures-WHITE ***STD*** Comment Finished Basement Bathroom Cabinet Colour/Style 6265 Viking III-MANCHESTER-SHALE GREY CL-MAPLE ***STD*** Countertop 8822 4924-38-Countertop-WHITE CARRARA-Wilsonart ***STD** N/A ***** Countertop Edge 1111 Cabinet Hardware 2086 9677-HARDWARE ***STD*** Flooring 2086 GE.BY.AZR.1313 New Byzantine Azzuro 13 Floor Tile Grout 2225 Grout-(27) Silver ***STD*** Floor Tile Pattern 3000 STANDARD SQUARE ***STD*** Shower Floor Tile 8661 OD.ON.SWT.0202.MT.N-Ontario Series Mosaic-Snow White Matte-2 x 2 ***STD*** Shower Floor Tile Grout 2226 Grout-(00) White ***STD*** Shower Floor Tile Pattern 3000 STANDARD SQUARE ***STD***

MEHDI, MOHAMMAD VALJI/NAHEED, MEHDI VALJI Project: Wallaceton Unit: 3191D-22, Phase: 3 Model: 20-2095 END ALT A The Forbes

Locked:

Closed:

	DANS AND ASS		
	2 17 18 18 18 18 18 18 18 18 18 18 18 18 18		
Shower Wall Tile	9020	QT.WV.WHT.0810-Weave-White-8 x 10 ***STD***	
			
		L	
Shower Wall Tile Grout	2226	Grout-(00) White ***STD***	
Shower Wall Tile Pattern	3090	VERTICAL STACKED ***STD***	0
onewer wan the rattern	0000	VERTIONE OTHER STE	
Shower Jamb(s)	8923	Shower Jamb / Sill-Thassos White ***STD***	
Discobing Fisher (Colour)	4707	Diversion Fixtures WHITE ***OTD***	}
Plumbing Fixture (Colour)	1737	Plumbing Fixtures-WHITE ***STD***	
Comment			
		· ·	
Great Room Fireplace			
Tipo control de la control de	STUDENCE STORES		
Туре	8865	Dimplex-Electric Fireplace-PF3033HL ***STD***	
Mantle	8891	NF-17-Paint Grade Mantle- Cabinet (Per Plan)-WHITE	PG 19
		STD	
Surround Opt.	1111	N/A *****	
Programme and the programme an			
Disclaimer	1111	N/A *****	
Disclaimer	1111	Heathwood and its contractors will not be liable for any	
Discialifier	1111	damage on items placed/installed above a FP after closing.	
0			
Comment			

Basement Stairs			
Туре	1714	Carpet Grade Stairs ***STD BASEMENT STAIRS***	
Colour	7912	Irongate (Gryphon) STAIN TO COMPLIMENT HARDWOOD AND WILL VARY FROM FLOORING	
		. WILL WILL THOM EGGIANG	
Carpet Runner	1111	N/A *****	
		6	
Handrail/Pickets/Post Type	9119	Handrail only on closed walls (one or two sides per building code) ***STD***	
Handrail/Pickets/Post Colours	7762	Carnet Grade Stain handrail atringers posing post(s) (Ma	
Handrall/Florets/Fust Colours	1102	Carpet Grade-Stain handrail, stringers, nosing post(s). (Me	
Carpet	9247	DY 16611-Dynasty Tex-SANDY BEIGE-40 oz	

MEHDI, MOHAMMAD VALJI/NAHEED, MEHDI VALJI Project: Wallaceton Unit: 3191D-22, Phase: 3 Model: 20-2095 END ALT A The Forbes

Page 9 of 10

Locked: Closed:

Custom Stain/Paint	1111	N/A *****
Comment	AWISS	
	1892-1897	
Basement Stairs Landings (Upper a	and Lo	
Flooring	1111	N/A *****
Comment no landings	117-10	
		46 (f)
Main Stairs		
Туре	1712	Oak Stairs ***STD MAIN STAIRS***
Colour	7912	Irongate (Gryphon) STAIN TO COMPLIMENT HARDWOOD AND WILL VARY FROM FLOORING
Carpet Runner	1111	N/A *****
Handrail/Pickets/Posts Type	8148	Single Collar Alt. Plain w/ Shoes with 3 1/2" Square/Cap Post(s)-BLACK ***2***
Handrail/Pickets/Posts Colour	7761	Oak Grade-Stain handrail,stringers,treads,risers,nosingpost
Custom Stain/Paint	1111	N/A *****
Comment		
Main Stairs Landing(s) (Lower)		
Flooring	1111	N/A *****
	55 111	
Comment no landings		
Throughout		
Walls - Paint Colour	1717	22-Wall-WARM GREY ***STD***
Underpad	1079	500 Series-Underpad ***STD***
Thresholds	2232	Metal Thresholds ***STD***
		W/

MEHDI, MOHAMMAD VALJI/NAHEED, MEHDI VALJI Project: Wallaceton Unit: 3191D-22, Phase: 3 Model: 20-2095 END ALT A The Forbes

Locked:

Closed:

Switches and Plug	5796	Decora W	nite Switches and Plugs	SID***
Trim Size	8705	4 ¼ Baset	poard and 2 ¾ Casings ***S	TD***
Trim - Paint Colour	1716	Trim-WHI	ΓΕ ***STD***	
Comment	STREET STREET		1000	
		7		
Purchaser: MEHDI, MOHAMMAD	VALJI	Date	Decor Consultant	2 Mushi122 Date
Purchaser:	~ -	-	Mosen	-04- 1 9 2022
NAHEED, MEHDI VALJ	11	Date	Wallaceton	Date Approved

construction summary of 46



Lot: 3191D-22

Model: 20-2095 END ALT A The Forbes

Project/Phase: Wallaceton / 3

Offer	Five Appliances: SS Fridge, Stove, Dishwasher: White Front Loader Washer/Dryer - Townhomes
Worksheet	Note:
Offer	The Purchaser(s) acknowledge that they have NOT been referred by an existing Heathwood Homeowner and therefor are not
	entitled to a referral fee under Heathwood Homes Referral program.
Worksheet	Note:
Offer	THIS IS A DECK LOT COMPLETE WITH A 4 FT DEEP DECK WITH STAIRS TO GRADE AMENDMENT MARCH
	11, 2022.
Worksheet	Note:

DisciplineMS.rpt 13dec21 Page 1 of 4

13 of 46 construction summary



Lot: 3191D-22

Model: 20-2095 END ALT A The Forbes

Project/Phase: Wallaceton / 3

APPLIANCES

Invoice	Qty.	Description
1027	1	KITCHEN - APPLIANCES - AVN 308CS 30 INCH STAINLESS STEEL CHIMNEY WALL MOUNT
313,483		
19Apr22		- AVN 308CS 30 INCH STAINLESS STEEL CHIMNEY WALL MOUNT
		CABINETRY-delete stove uppers; ELECTRICAL-delete std range hood; HEATING/AIR CONDITIONING-Duct
		change to 6 in

CABINETRY

Invoice	Qty.	cription		
1027 313,483	1	LITCHEN - APPLIANCES - AVN 308CS 30 INCH STAINLESS STEEL CHIMNEY WALL MOUNT		
19Apr22 **		- AVN 308CS 30 INCH STAINLESS STEEL CHIMNEY WALL MOUNT CABINETRY-delete stove uppers; ELECTRICAL-delete std range hood; HEATING/AIR CONDITIONING-E change to 6 in		
1027 311,074 19Apr22 **	1	MASTER ENSUITE - GRANITE - COUNTERTOP WITH 4 INCH BACKSPLASH - 3/4 INCH GROUP 2 WITH MITRE EDGE - ENSUITE MASTER - UPG CABINETRY-delete std countertop; GRANITE-see upgraded single hole faucet and undermount sink		
1027 314,279 19Apr22 **	1	MASTER ENSUITE - GRANITE - GRANITE CUTOUT W/ STRAIGHT EDGE POLISH TO ACCOMMODATE UNDER MOUNT VANITY SINK		

CERAMICS

Invoice	Qty.	. Description	
1027 309,203 19Apr22	1	FOYER - CERAMICS - FLOOR - FOYER - UPGRADE 1	
1027 309,220 19Apr22	1	KITCHEN/BREAKFAST - CERAMICS - FLOOR - KITCHEN / BREAKFAST - UPGRADE 1	
1027 309,241 19Apr22	1	MAIN HALL - CERAMICS - FLOOR - MAIN HALL - UPGRADE 1	
1027 309,248 19Apr22	1	MUD ROOM - CERAMICS - FLOOR - MUD ROOM - UPGRADE 1	
1027 309,255 19Apr22	1	POWDER ROOM - CERAMICS - FLOOR - POWDER ROOM - UPGRADE 1	

DRYWALL

	avoice Qty. Description		
Invoice			
1027	1	- DRYWALL - SMOOTH CEILING IN MAIN FLOOR	
310,713			
19Apr22			
	l	PAINTING-Notify	

DisciplineMS.rpt 13dec21 Page 2 of 4

14 of 46 CONSTRUCTION SUMMARY



Lot: 3191D-22

Model: 20-2095 END ALT A The Forbes Project/Phase: Wallaceton / 3

ELECTRICAL

Invoice	Qty.	Description	
1027	1	XITCHEN - APPLIANCES - AVN 308CS 30 INCH STAINLESS STEEL CHIMNEY WALL MOUNT	
313,483			
19Apr22		- AVN 308CS 30 INCH STAINLESS STEEL CHIMNEY WALL MOUNT	
**		CABINETRY-delete stove uppers; ELECTRICAL-delete std range hood; HEATING/AIR CONDITIONING-Duct	
		ange to 6 in	
1027	2	- ELECTRICAL - CEILING ROUGH-IN (CAPPED)	
314,224			
19Apr22		1X GREAT ROOM-TO BE INSTALL IN THE CENTRE +/- OF THE ROOM- USE EXISTING SWITCH PLUD	
		1X-KITCHEN- TO BE INSTALLED ABOVE THE BREAKFAST BAR- USE SAME SWITCH AS KITCHEN	
		SEE SKETCH # 2	

GRANITE

OIM III			
Invoice	Qty.	Description	
1027 314,369 19Apr22 **	1	MASTER ENSUITE - PLUMBING - AMERICAN STANDARD - SINK OPTIONS - UNDERMOUNT SINK - OVALYN MODEL 0496 221 020 (19 ¼ INCH X 16 ¼ INCH) - GRANITE-cutout to accommodate undermount sinks	
	! 		
1027 311,074 19Apr22	1	MASTER ENSUITE - GRANITE - COUNTERTOP WITH 4 INCH BACKSPLASH - 3/4 INCH GROUP 2 WITH MITRE EDGE - ENSUITE MASTER - UPG	
	CABINETRY-delete std countertop; GRANITE-see upgraded single hole faucet and undermount sink		
1027 314,279 19Apr22	1	MASTER ENSUITE - GRANITE - GRANITE CUTOUT W/ STRAIGHT EDGE POLISH TO ACCOMMODATE UNDER MOUNT VANITY SINK	
1027 311,058 19Apr22	1	KITCHEN - GRANITE - COUNTERTOP - 3/4 INCH GROUP 2 WITH MITRE EDGE - KITCHEN / ISLAND - UPG	

HEATING / AIR CONDITIONING

HEATING / AIR CONDITIONING		
Invoice	Qty.	Description
1027	1	KITCHEN - APPLIANCES - AVN 308CS 30 INCH STAINLESS STEEL CHIMNEY WALL MOUNT
313,483		
19Apr22 **		- AVN 308CS 30 INCH STAINLESS STEEL CHIMNEY WALL MOUNT CABINETRY-delete stove uppers; ELECTRICAL-delete std range hood; HEATING/AIR CONDITIONING-Duct
		change to 6 in

INTERIOR RAILINGS

	INTERIOR RAILINGS				
Invoice	Qty.	. Description			
1027 312,304 19Apr22	_	MAIN STAIR - INTERIOR RAILINGS - BLACK METAL - SINGLE COLLAR ALT. PLAIN W/ SHOES WITH 3 1/2 INCH SQUARE/CAP POST(S) AS PER PLAN - MAIN STAIR - UPG			
		PAINTING-Notify			

DisciplineMS.rpt 13dec21 Page 3 of 4

15 of 46 construction summary



Lot: 3191D-22

 $\label{eq:model: 20-2095 END ALT A The Forbes} \ \ \,$

Project/Phase: Wallaceton / 3

PAINTING

Invoice	Qty.	Description	
1027	1	DRYWALL - SMOOTH CEILING IN MAIN FLOOR	
310,713			
19Apr22			
**		PAINTING-Notify	
1027 312,304	-	MAIN STAIR - INTERIOR RAILINGS - BLACK METAL - SINGLE COLLAR ALT. PLAIN W/ SHOES WITH 3 1/2 INCH SQUARE/CAP POST(S) AS PER PLAN - MAIN STAIR - UPG	
19Apr22 **		PAINTING-Notify	

PLUMBING

Invoice	Qty.	Description
1027 314,369		MASTER ENSUITE - PLUMBING - AMERICAN STANDARD - SINK OPTIONS - UNDERMOUNT SINK - OVALYN MODEL 0496 221 020 (19 ¼ INCH X 16 ¼ INCH) -
19Apr22		
		GRANITE-cutout to accommodate undermount sinks

DisciplineMS.rpt 13dec21 Page 4 of 4

Unit: 3191D-22, Phase: 3

Model: 20-2095 END ALT A The Forbes

20-2095 END ALT ELEV. A

16 of 46


THE FORBES

Sketch #1

ELEVATION A | 2,733 SQ. FT.

Includes 638 sq. ft. of Finished Lower Level

WALLACETON

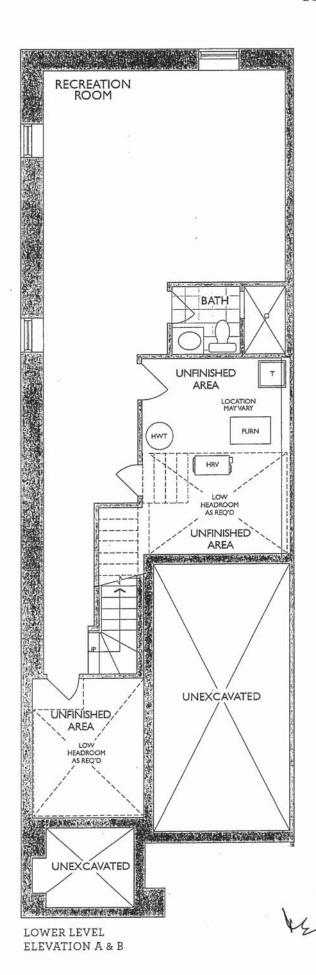

Legal Plan Dec. 3, 2020

Unit: 3191D-22, Phase: 3

Model: 20-2095 END ALT A The Forbes

17 of 46

Sketch #2


THE FORBES

ELEVATION A | 2,733 SQ. FT.

Includes 638 sq. ft. of Finished Lower Level

WALLACETON

20-2095 END ALT ELEV. A

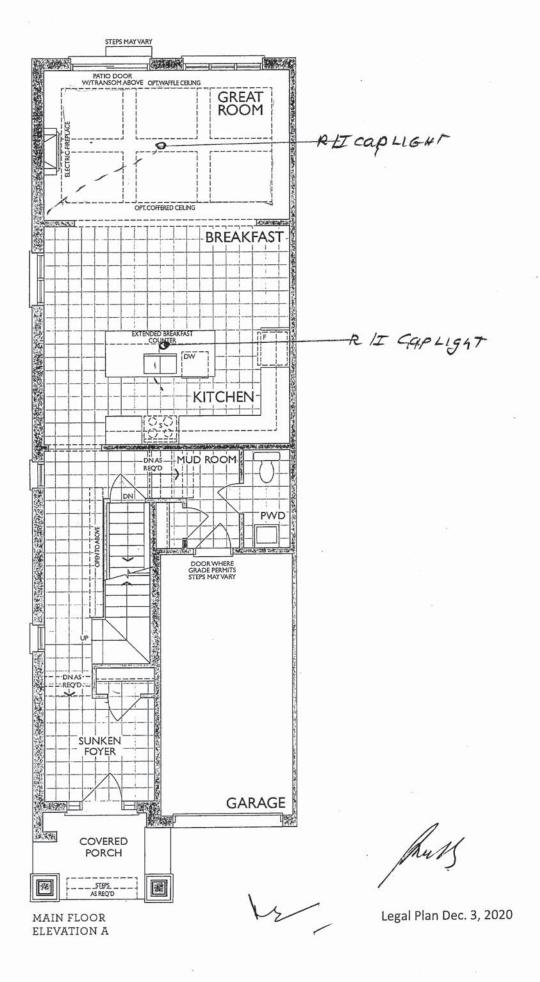

Unit: 3191D-22, Phase: 3

Model: 20-2095 END ALT A The Forbes

20-2095 END ALT ELEV. A

18 of 46


THE FORBES

Sketch #3

ELEVATION A | 2,733 SQ. FT.

Includes 638 sq. ft. of Finished Lower Level

WALLACETON

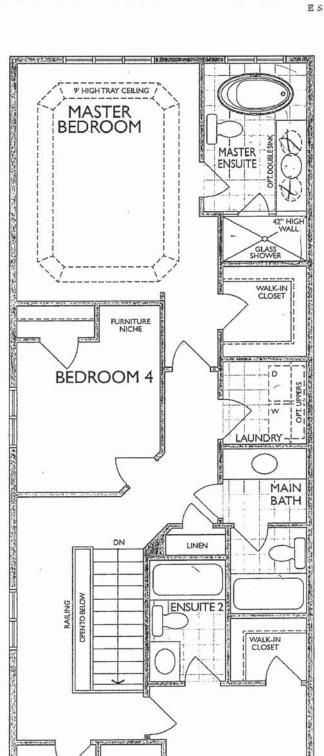

BEDROOM 2

ALT. SECOND FLOOR ELEVATION A

BEDROOM 3

Legal Plan Dec. 3, 2020

Unit: 3191D-22, Phase: 3

Model: 20-2095 END ALT A The Forbes

19 of 46






NFAS NF17 Mantel CABINET

Unit: 3191D-22, Phase: 3 Model: 20-2095 END ALT A The Forbes 20 of 46

(Keginox


ND1831UA/9





- 30 7/8" (78cm)

14" (36 cm)



ND1831UA/9 SPECIFICATION

Model ND1831UA/9 is a double (two equal size) bowl undermount sink manufactured by Franke Kindred Canada Limited from 18 gauge stainless steel. Product has silk finished rims and linear brush finished bowls. Sink is fully undercoated. Basket strainer waste fittings (3 1/2", 89 mm) are included. Sink is backed with a limited lifetime warranty.

O.D. 17 3/4" x 30 7/8" x 8 1/2" (45 x 78 x 22 cm)

14" (36 cm)

Recommended for minimum 36" cabinet

Franke Kindred Canada Limited

P.O. Box 190, 1000 Franke Kindred Road, Midland, Ontario, Canada, L4R 4K9 Phone: 866-687-7465 Fax: 800-361-8408

Unit: 3191D-22, Phase: 3

Model: 20-2095 END ALT A The Forbes

21 of 46

MOEN

FAUCET DESCRIPTION

Reflex™ pulldown system offers smooth operation, easy movement and secure docking Power Clean™ spray technology Metal construction with various finishes identified by suffix

Quick connect installation

Pulldown spray with 68" braided hose Flexible supply lines with 3/8" compression fittings

High arc spout provides height and reach to fill or clean large pots while pulldown wand provides the maneuverability for cleaning or rinsing 360° rotating spout

Faucet designed for handle to be mounted on right side only

OPERATION

Lever style handle

Temperature controlled by 100° arc of handle travel

Operates with less than 5 lbs. of force

• Operates in stream or spray mode in the pullout or retracted position **FLOW**

Flow is limited to 1.5 gpm (5.7 L/min) max at 60 psi

CARTRIDGE

• 1255™ Duralast™ cartridge

STANDARDS


Third party certified to IAPMO Green, ASME A112.18.1/CSA B125.1 and all applicable requirements therein including NSF 61/9G & 372

- Meets CalGreen and Georgia SB370 requirements Complies with California Proposition 65 and with the Federal Safe Drinking
- The backflow protection system in the device consists of two independently operating check valves, a primary and a secondary which prevent backflow
- ADA 🖒 for lever handle

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the
- 10 year limited warranty when used in a multifamily installation 5 year limited warranty when used in a commercial installation
- Visit www.moen.com/support for complete details and limitations

Specifications




ALIGN™ **Single Handle High Arc Pulldown Kitchen Faucet**

Models: 7565 series

NOTE: THIS FAUCET IS DESIGNED TO BE INSTALLED THROUGH 1 HOLE, 1-1/2" (38mm) MIN. DIA. (OPTIONAL 3-HOLE ESCUTCHEON 141002 AVAILABLE)



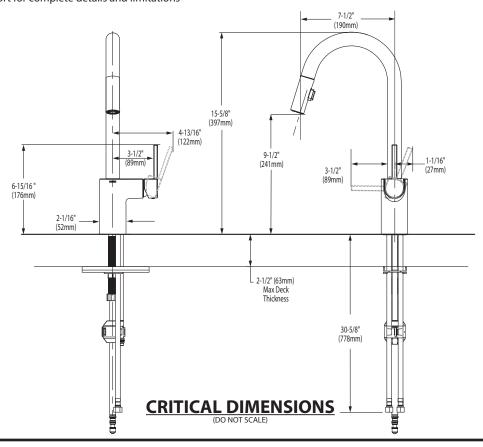

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN

www.moen.com

Rev. 6/20

Unit: 3191D-22, Phase: 3

Model: 20-2095 END ALT A The Forbes

22 of 46



BARRIER FREE (ABOVE COUNTER OR DROP-IN ONLY)

BOULEVARD® PEDESTAL SINK VITREOUS CHINA

BOULEVARD® PEDESTAL SINK

☐ 0641.800 Faucet holes on 8" (203mm) centers (Illustrated)

STD • 0641.400 Faucet holes on 4" (102mm) centers

☐ 0641.100 Center hole only

- · Classic styled rectangular pedestal lavatory
- · Vitreous china
- Rear overflow
- Supplied with mounting kit
- Right Height® for greater comfort during use
- Faucet ledge with large deck area (faucet not included)
- Design coordinates with Boulevard® Toilet
- Basin has flat bottom to also allow use as an **above counter** sink or a **drop-in** sink (with u-shaped cut out)

Nominal Dimensions:

24" x 19" x 35-1/2" (610 x 483 x 902mm)

- ☐ 0641.008 Pedestal top-8" (203mm) centers
- ☐ 0641.004 Pedestal top-4" (102mm) centers
- ☐ 0641.001 Pedestal top-center hole only
- □ **0010.000** Pedestal only

Bowl sizes:

17" (432mm) wide, 12-1/2" (318mm) front to back, 5" (127mm) deep

Compliance Certifications -

Meets or Exceeds the Following Specifications:

• ASME A112.19.2 - 2008/CSA B45.1-08

To Be Specified:

- ☐ Color: ☐ White ☐ Linen
- ☐ Faucet Finish:
- Supplies:
- ☐ 1-1/4" Trap:
- □ Nipple:



SEE REVERSE FOR ROUGHING-IN DIMENSIONS

^{*} See faucet section for additional models available


Unit: 3191D-22, Phase: 3

Model: 20-2095 END ALT A The Forbes

23 of 46

4merican tandard

BOULEVARD® PEDESTAL SINK

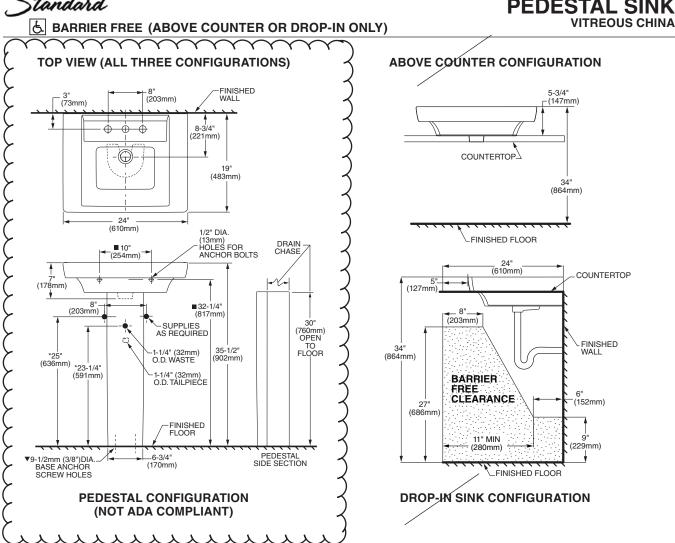

ABOVE COUNTER AND DROP-IN SINK CONFIGURATIONS MEET THE AMERICANS WITH DISABILITIES ACT GUIDELINES AND ANSI A117.1 ACCESSIBLE AND USABLE BUILDINGS AND FACILITIES - CHECK LOCAL CODES.

Top of sink installed at 34" (864mm) height from finished floor. Sink installed 5" (127mm) minimum from front edge of countertop. Provide 27" (686mm) knee clearance area.

NOTES:

* DIMENSIONS SHOWN FOR LOCATION OF SUPPLIES AND "P" TRAPS ARE SUGGESTED.

▼ PEDESTAL ANCHORING SCREWS NOT INCLUDED.

■ SUITABLE FOR REINFORCEMENT ONLY. ACTUAL DIMENSIONS MUST BE TAKEN FROM FIXTURE.

FITTING NOT INCLUDED AND MUST BE ORDERED SEPARATELY.

PROVIDE SUITABLE REINFORCEMENT FOR ALL WALL SUPPORTS.

NETAL ATTOM INSTRUCTIONS SUBPLIED WITH LANGUAGO V. INSTALLATION INSTRUCTIONS SUPPLIED WITH LAVATORY.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerance established by ANSI Standard A112.19.2 These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

© 2018 AS America Inc.

Unit: 3191D-22, Phase: 3

Model: 20-2095 END ALT A The Forbes

24 of 46

MASTER ENSUITE X 1

American Standard

Style That Works Better

BARRIER FREE

OVALYNTM UNDERCOUNTER SINK VITREOUS CHINA

OVALYN™ UNDERCOUNTER SINK

- · Classic oval undermount sink
- Made from vitreous china
- Front overflow
- Supplied with mounting kit (047194-0070A) and template
- **□ 0495.221 Unglazed rim** 435 x 359mm

(17-1/8" x 14-1/8")

☐ 0495.300 Glazed underside

Bowl size:

382mm (15-1/16") wide 306mm (12-1/16") front to back 140mm (5-1/2") deep

□ **0496.221 Unglazed rim** 489 x 413mm (19-1/4" x 16-1/4")

☐ 0496.300 Glazed underside

Bowl size:

432mm (17") wide 356mm (14") front to back 140mm (5-1/2") deep

Quadratic Section Quadratic Section Quadr

☐ 0497.300 Glazed underside

Bowl size:

483mm (19") wide 391mm (15-3/8") front to back 140mm (5-1/2") deep

Compliance Certifications -

Meets or Exceeds the Following Specifications:

- ASME A112.19.2M for Vitreous China Fixtures
- CAN/CSA B45 series

© 2008 AS America Inc.

To Be Specified: □ Color: □ White □ Bone □ Linen □ Silver □ Fawn Beige □ Black □ Faucet*: □ Faucet Finish: □ Supplies: □ 1-1/4" Trap:

* See faucet section for additional mode	els available
--	---------------

SEE REVERSE FOR ROUGHING-IN DIMENSIONS

Unit: 3191D-22, Phase: 3


Model: 20-2095 END ALT A The Forbes

25 of 46

American Standard

Style That Works Better

OVALYNTM UNDERCOUNTER SINK **VITREOUS CHINA**

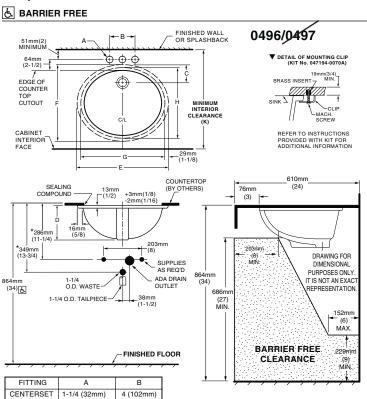

NOTES:

* DIMENSIONS SHOWN FOR LOCATION OF SUPPLIED AND "P"
TRAP ARE SUGGESTED.


▼ UNDERCOUNTER MOUNTING KIT SUPPLIED WITH SINK.
PLEASE NOTE MINIMUM INTERIOR CLEARANCE DIMENSION (K).
FITTINGS NOT INCLUDED AND MUST BE ORDERED SEPARATELY.
USE ENCLOSED TEMPLATE FOR COUNTERTOP CUTOUT
SEALING COMPOUND SUPPLIED BY OTHERS.


IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard A112.19.2. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.



MEETS THE AMERICANS WITH DISABILITIES ACT GUIDELINES AND ANSI A117.1 ACCESSIBLE AND USEABLE BUILDINGS AND FACILITIES -CHECK LOCAL CODES.

Countertop 864mm (34") from finished floor. Lavatory installed 76mm (3") from front edge of countertop. Countertop thickness to be 25mm (1") maximum.



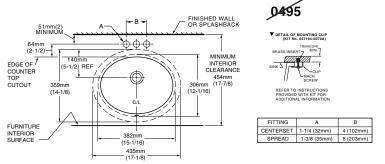

NOTES:
USE ENCLOSED TEMPLATE FOR COUNTER TOP CUTOUT.
FITTINGS NOT INCLUDED WITH FIXTURE AND MUST BE
ORDERED SEPARATELY.

* DIMENSIONS SHOWN FOR LOCATION OF SUPPLIED AND "P"
TRAP ARE SUGGESTED.


▼ UNDERCOUNTER MOUNTING KIT SUPPLIED WITH SINK.
PLEASE NOTE MINIMUM INTERIOR CLEARANCE DIMENSION (K).
SEALING COMPOUND SUPPLIED BY OTHERS.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard A112.19.2. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages



MEETS THE AMERICANS WITH DISABILITIES ACT GUIDELINES AND ANSI A117.1 ACCESSIBLE AND **USABLE BUILDINGS AND FACILITIES -**CHECK LOCAL CODES.

Countertop 864mm (34") from finished floor. Lavatory installed 51mm (2") from front edge of countertop. Countertop thickness to be 25mm (1") maximum.

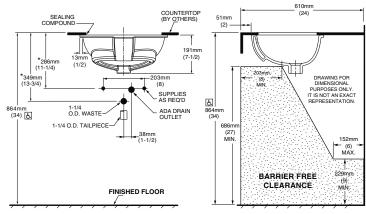

Unit: 3191D-22, Phase: 3

Model: 20-2095 END ALT A The Forbes

26 of 46

MAIN BATH **ENSUITE 2** FINISHED BASEMENT BATHROOM






COLONY™ COUNTERTOP SINK

VITREOUS CHINA

COLONY COUNTERTOP SINK

- · Vitreous china
- · Self-rimming
- · Front overflow
- · Supplied with template
- Faucet deck (Faucet shown not included)



Centre hole only

Nominal Dimensions: 521 x 448mm (20-1/2" x 17-5/8")


Bowl sizes:

422mm (16-5/8") wide, 279mm (11") front to back, 143mm (5-5/8") deep

COMPLIANCE CERTIFICATIONS -Meets or exceeds the following Specifications:

- ASME A112.19.2M for Vitreous China Fixtures.
- · CAN/CSA B45 Series.

To Be Specified ☐ Colour: ☐ White ☐ Bone ☐ Silver Gray ☐ Linen □ Faucet*: □ Faucet Finish: Supplies & Stops: ☐ Trap 1-1/4" (32 mm):

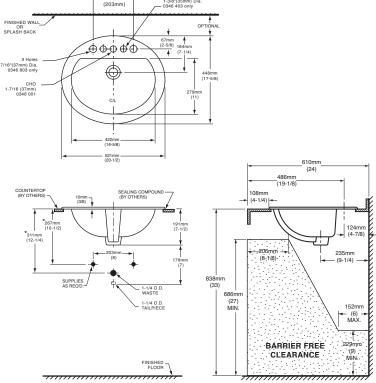

* DIMENSIONS SHOWN FOR LOCATION OF SUPPLIES AND "P" TRAP ARE SUGGESTED. FOR COUNTERTOP CUTOUT AND INSTALLATION INSTRUCTIONS USE TEMPLATE SUPPLIED WITH SINK.

SUPPLIED WITH SINK.

FAUCETS NOT INCLUDED AND MUST BE ORDERED SEPARATELY.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard A112.19.2.

These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

BAS-198

^{*} See faucet section for additional models available

Unit: 3191D-22, Phase: 3

Model: 20-2095 END ALT A The Forbes

27 of 46



DEMI™ **Product Specification Sheet**

Two Piece Freestanding Collection

CF2007 Two Piece Freestanding Soaker


Size: 60" x 32" x 22"

1524 mm x 813 mm x 559 mm




- Vacuum formed acrylic reinforced with fiberglass
- Scratch, stain and fade resistant high gloss finish
- Installation friendly two piece design
- Accepts deck mounted faucet
- Includes integral pop up drain and rectangular overflow
- Includes levelling feet


TWO PIECE ASSEMBLY

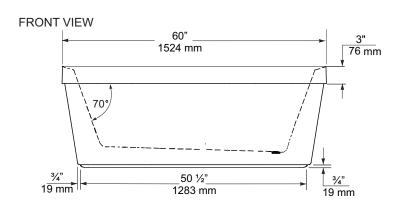

END VIEW



TOP VIEW

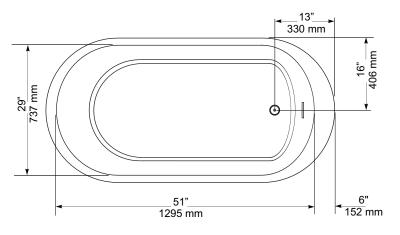

GENERAL SPECIFICATIONS

Average Weight 90 lb 41 kg Bathing Well at bottom 43"x 20" 1092 x 508 mm 195 litres Capacity Drain to Overflow Water Depth Drain to Overflow 406 mm Drain Opening (dia.) 51 mm Overflow Opening 2 1/4"x 1/2" 57 x 13 mm Drain to Floor Clearance

NOTES: Please confirm measurements on actual product to ensure proper identification. Bathtub to be installed on the floor supported by 5 self levelling feet. Adjust if required to level the bathtub for adequate drainage. Refer to installation instructions for additional information.

IMPORTANT: Dimensions of fixtures are nominal and may vary \pm %" (6 mm). Weight may vary \pm 5 lb (2.3 kg). Drawing is not to scale. These measurements are subject to change at manufacturer's discretion.

Compliance Certifications -

Meets or Exceeds the following Specifications:

CAN/CSA - B45 Series





Fax: 416.231.0929 www.mirolin.com

Customer Service: 416.231.5790 Canada, U.S.A.: 800.**MIROLIN**(647-6546) Fax, Canada: 800.463.2236

R0084162 25 Sep. 2018

© 2018 Mirolin Industries Corp.

Unit: 3191D-22, Phase: 3

Model: 20-2095 END ALT A The Forbes

28 of 46

American Standard

Style That Works Better

FloWise™ DUAL FLUSH **ELONGATED TOILET**

VITREOUS CHINA


FloWise™ DUAL FLUSH ELONGATED TOILET

2476 216

- Vitreous china
- · Low-consumption Dual Flush Full flush 6.0 Lpf/1.3 gpf, Partial flush 3.0 Lpf/0.66 gpf.
- · Elongated wash down bowl
- · Internal trapway fully-glazed, 2-1/4" (57mm) ballpass
- · Concealed trapway bowl
- · Chrome-plated top mounted push button actuator
- Easy to clean sanitary dam on bowl
- Includes Elongated Slow Close Seat
- 100% factory flush tested
- · 2 bolt caps

Separate Component Parts:

- ☐ 3067 316 Elongated Bowl with Slow Close Seat
- **4035 216** Unlined Tank



- **☐** 3067 316 Elongated Bowl
- **4035 516** Lined Tank


Nominal Dimensions: 794 x 432 x 765mm (31-1/4" x 17" x 30-1/8")


Compliance Certifications -Meets or Exceeds the Following Specifications:

- ASME A112.19.2M (and 19.6M)
- · CAN/CSA B45 series

To Be Specified

- Colour: 020 White
- Supply with stop:





LFINISHED

NOTES:
THIS TOILET IS DESIGNED TO ROUGH-IN AT A MINIMUM DIMENSION OF 305MM (12")
FROM FINISHED WALL TO C/L OF OUTLET.
SUPPLY NOT INCLUDED WITH FIXTURE AND MUST BE ORDERED SEPARATELY.
* DIMENSION SHOWN FOR LOCATION OF SUPPLY IS SUGGESTED.
FOR ADDITIONAL INFORMATION REFER TO INSTALLATION INSTRUCTIONS SUPPLIED.
IMPORTANT. Dimensions of fixture are peripaid and may use within the prepare of the present IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerance established by ANSI Standard A112.19.2

established by Anki Graindan A 112.19.2. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

UPGRADED VALUE ADDED FEATURES AT NO EXTRA CHARGE

TOI-284

© 2008 American Standard

Unit: 3191D-22, Phase: 3

Model: 20-2095 END ALT A The Forbes

MOEN[®]

DESCRIPTION

- Metal construction with various finishes identified by suffix
- 16" long 3/8" tubing connections Includes metal or 50/50 pop-up type waste assembly where noted

OPERATION

- Pivot action lever style handle Temperature controlled through 180° degree arc of handle travel **FLOW**

Flow is limited to 1.5 gpm max (5.7L/min) at 60 psi

CARTRIDGE

- 1225 cartridge design
- Nonmetallic/nonferrous and stainless steel material
- Can accommodate reversed piping and back to back installations

- Third party certified to WaterSense®, CSA B-125.1, ASME A112.18.1 and all applicable requirements referenced therein including NSF61/9
- Complies with California Proposition 65 and with the Federal Safe
- Drinking Water Act

 ADA for lever handle

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations

Specifications



CHATEAU® Single-Handle Lavatory Faucet

with Metal Waste Assembly

Model: L4625 series L4631BC **Bulk Packed (12 per carton):**

L64624 series


with 50/50 Waste Assembly **Bulk Packed (12 per carton):**

L64625 series

Less Waste **Bulk Packed (12 per carton):** L64600 series

NOTE: THIS FAUCET IS DESIGNED TO BE INSTALLED THRU 3-1" DIA. HOLES, 2" ON CENTER



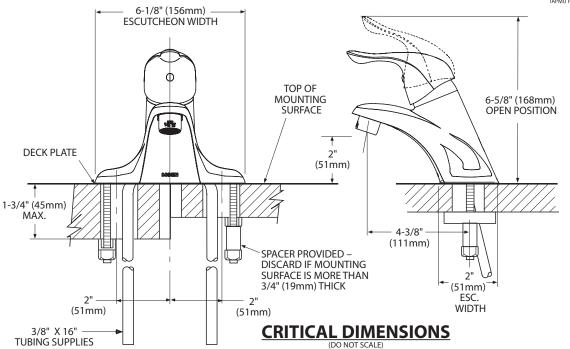

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN

www.moen.com

Rev 8/15

Unit: 3191D-22, Phase: 3

Model: 20-2095 END ALT A The Forbes

30 of 46



Buy it for looks. Buy it for life.®

There is more than 1 version of this model. Page down to identify the version you have.

- Metal construction with various finishes identified by suffix
- Includes non-metalic showerhead, arm, flange and non-metalic diverter tub spout

OPERATION

- Handle operates counterclockwise through a 270° arc with off at 6 o'clock and maximum hot at the 9 o'clock position. Shut off in clockwise direction
- Adjustable temperature limit stop to control maximum hot water temperature
- Pressure balancing mechanism maintains selected discharge temperature to $\pm\,3^\circ$

- Showerhead is limited to 2.5 gpm (9.5 L/min) at 80 psi EP suffix models are limited to 1.75 gpm (6.6 L/min) at 80 psi
- NH suffix models contain no showerhead

CARTRIDGE

- 1222 cartridge design Accommodates back to back installations
- Nonmetallic/nonferrous and stainless steel material

STANDARDS

- Third party certified to meet ASME A112.18.1/CSA B125.1 and all applicable requirements referenced therein
- EP suffix models are third party certified to WaterSense®

ADA (for lever handle

6.5" (165mm) ESC. DIAM.

WARRANTY

Lifetime limited warranty against leaks, drips and finish defects

2"CC (51mm) 1 7/8" IPS (48mm) MAX WALL

FINISHED WALL LINE

4-1/2" (114mm)

WALL OPENING

(133mm

7-1/2" (190mm)

to the original consumer purchaser 5 year warranty if used in commercial installations

Specifications






CHATEAU° POSI-TEMP° **Single-Handle Tub/Shower Trim Kit**

Models: TL181 series - valve trim only (Bulk Packed 12 per carton) TL182 series - shower trim only (Bulk Packed 12 per carton) TL183 series - tub/shower trim (Bulk Packed 12 per carton)

Valves: 62300 series 2500 series

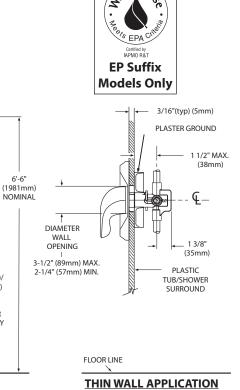

THICK WALL APPLICATION CRITICAL DIMENSIONS

— 1/2" MIN. CC (13mm) 5/8" MIN. IPS (16mm)

2 1/2" MAX. (63mm)

SHOWER

48" (1219mm) 32" (813mm)

AND TUB ONLY

(DO NOT SCALE)

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN

www.moen.com

TL183sp: Rev. 5/13

Unit: 3191D-22, Phase: 3

Model: 20-2095 END ALT A The Forbes

31 of 46

MOEN[®]

DESCRIPTION

 Metal construction with various finishes identified by suffix OPERATION

- Lever style handles with hot and cold color indicator
- Rotate hot side handle counterclockwise to open (clockwise to close) and the cold side handle (clockwise to open) and (counterclockwise to close)


STANDARDS

- Third party certified to: ASME A112.18.1/CSA B-125.1, and all applicable requirements referenced therein
- ADA 🕒 for lever handles

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
- 10 year limited warranty when used in a multi-family installation
- 5 year limited warranty when used in a commercial installation Visit www.moen.com/support for complete details and limitations


Specifications




CHATEAU® Two-Handle Garden Tub Trim

Models: T994 series

Valves: 4792, 4793, 4794, 4796, 4797, 4798

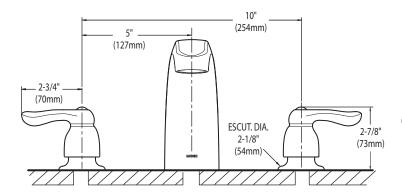



CRITICAL DIMENSIONS

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN

www.moen.com

Rev. 3/19


Unit: 3191D-22, Phase: 3

Model: 20-2095 END ALT A The Forbes

32 of 46







AVN-308CS 30" Wall mount hood - Professional design

ocieotea model	
Model number	AVN-308CS
Dimensions	
Dimensions	29 1/2" (W) x 19 3/4" (D) x 7 1/3" (H)
Exterior Appearence	
Stainless steel grade	201
Features	
Control	Soft touch with LED display
Lighting	2 bulbs, 3W LED (bulbs included)
Blower type	860 CFM, 6-Speed
Blower performance	Speed 1, 0.7 sones
	Speed 6, 6.5 sones
Filter type	2 Stainless steel baffle filters (included)
Duct transition	6" Round (Top)
Ducting	Ducted
Electrical Requirements	
Electrical requirements	120V / 60Hz / 2.7 Amps
Accessories (optionnal)	
Optional duct covers	AD-884S (884mm, AVN-AVH compatible)
Warranty	
1-year Warranty	Parts and labour, in-home service




Unit: 3191D-22, Phase: 3

Model: 20-2095 END ALT A The Forbes


33 of 46

AVN-308/368CS

Dimensions

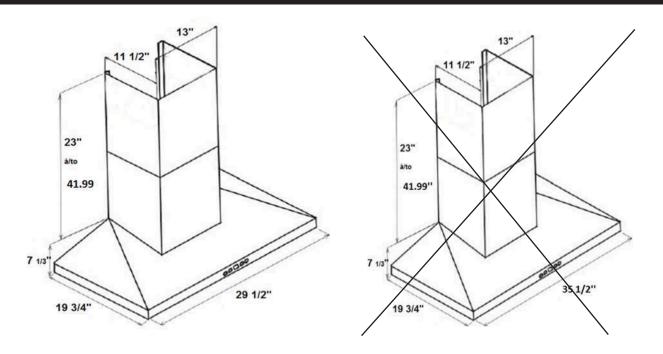

Installation



Α	Floor to ceiling height	variable
В	Floor to counter top height (standard)	36"
С	Recommended height between cooking surface and bottom of the hood	28" to 30"
D	Hood height	7 1/3"
Е	Chimney height	19" to 41.99"



The information contained herein is based on sources that we believe to be reliable, but is not guaranteed by us, may be incomplete and/or may change without notice.

Unit: 3191D-22, Phase: 3

Model: 20-2095 END ALT A The Forbes

34 of 46



Whirtpool® 21 cu. ft. Top-Freezer Refrigerator WRT541SZD



Fingerprint-Resistant Stainless WRT541SZDZ

Also available in:

White	WRT541SZDW
Black	WRT541SZDB
Monochromatic Stainless Steel	WRT541SZDM

Capacity		
Total Capacity	21 cu. ft.	
Refrigerator Capacity	15 cu. ft.	
Freezer Capacity	6 cu. ft.	
General Features & Properti	es	
EZ Connect Icemaker Kit		
LED Interior Lighting		
ENERGY STAR® Certified		
Electronic Temperature Controls		
Freezer Temperature Controls		
Clear Door Bins		
Adjustable Door Bins		
Quiet Cooling		
Fingerprint Resistant		
Electrical Details		
Amps	6.5	
Volts 115		
Certifications		
ADA Compliant	Yes	
ENERGY STAR® Certified	Yes	

Technical Details			
Refrigerator Type	Top-Freezer		
Number of Doors	2		
Number of Interior Refrigerator Shelves	3		
Number of Refrigerator Door Bins	1 Fixed, 4 Adjustable		
Number of Interior Freezer Shelves	1		
Number of Freezer Door Bins	2 Fixed		
Lighting Type	LED		
Ice Maker	Optional		
Ice Maker Location	Freezer		
Dispenser Type	N/A		
Dimensions			
Product Dimensions (H x W x D)	66-1/4" x 32-3/4" x 34"		
Depth with Door Open 90°	62-1/4"		
Cutout Dimensions	Allow extra 1/2" on sides and top Allow extra 1" on rear		
Reference Material			

Key Features & Benefits

Frameless Glass Shelves


Store more items on wall-to-wall shelves for greater storage flexibility.

Flexi-Slide™ Bin

Make space for tall items with the bin that quickly and easily moves side to side.

Humidity-Controlled Crispers

Store fruits and vegetables in their ideal environment.

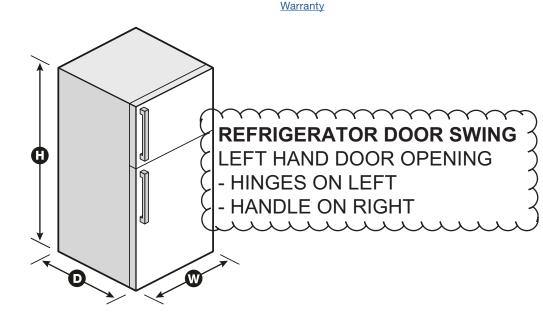

Dimension Guide Use & Care Guide

Energy Guide

NOTE: Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

®/™ © 2020. All rights reserved. Printed in the U.S.A. D200052XXC. WRT541SZDSPECSHEETV01.

Unit: 3191D-22, Phase: 3

Model: 20-2095 END ALT A The Forbes

35 of 46



Top Mount Refrigerator

PRODUCT MODEL NUMBERS

WRT311FZD WRT511SZD WRT541SZD

Electrical: A 115-volt, 60-Hz, AC-only, 15-or 20-amp fused, grounded electrical supply is required. It is recommended that a separate circuit serving only your refrigerator be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.


NOTE: Before performing any type of installation, cleaning, or removing a light bulb, turn the control (Thermostat, Refrigerator or Freezer Control depending on the model) to OFF and then disconnect the refrigerator from the electrical source. When you are finished, reconnect the refrigerator to the electrical source and reset the control (Thermostat, Refrigerator or Freezer Control depending on the model) to the desired setting. See "Using the Controls."

Water: A cold water supply with water pressure between 30 and 120 psi (207 and 827 kPa) is required to operate ice maker and water dispenser. If you have questions about your water pressure, call a licensed, qualified plumber.

IMPORTANT: The pressure of the water coming out of a reverse osmosis system going to the water inlet valve of the refrigerator needs to be between 30 and 120 psi (207 and 827 kPa).


Reverse Osmosis Water Supply: If a reverse osmosis water filtration system is connected to your cold water supply, the water pressure to the reverse osmosis system needs to be a minimum of 40 to 60 psi (276 to 414 kPa).

PRODUCT DIMENSIONS

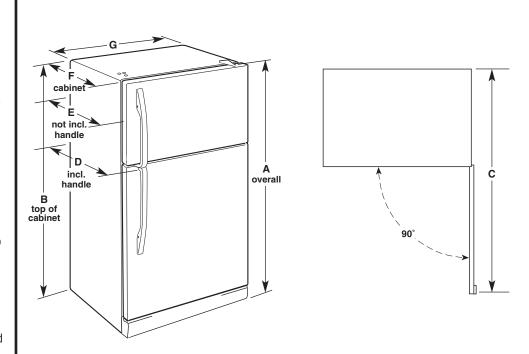

Model Number	Model Size	Reversible Door	Height - Overall "A"	Height - Top of Cabinet "B"	Depth - Door Open 90° "C"	Depth - With Handles "D"	Depth - Without Handles "E"	Depth - Cabinet Only "F"	Width - Cabinet "G"
WRT311FZD	20.5 cu. ft.	Yes	661/4" (168.3 cm)	65½" (166.4 cm)	621/4" (158.1 cm)	32 ⁷ / ₈ " (83.5 cm)	30 ⁵ / ₈ " (77.8 cm)	28½" (72.4 cm)	32¾" (83.2 cm)
WRT511SZD WRT541SZD	21.3 cu. ft.	Yes	66½" (168.3 cm)	65½" (166.4 cm)	62½" (158.1 cm)	34" (86.4 cm)	32½" (82.3 cm)	28½" (72.4 cm)	32¾" (83.2 cm)

LOCATION REQUIREMENTS



To ensure proper ventilation for your refrigerator, allow for a $\frac{1}{2}$ " (1.25 cm) space on each and between overhead cabinets and refrigerator top. Allow at least 1" (2.5 cm) between back of cabinet and the wall. If your refrigerator has an ice maker, make sure you leave some extra space at the back for the water line connections.

If you are installing your refrigerator next to a fixed wall, leave 2" (5 cm) minimum on the hinge side (depending on your model) to allow for the door to swing open.

NOTE: This refrigerator is intended for use in a location where the temperature ranges from a minimum of 55°F (13°C) to a maximum of 110°F (43°C). The preferred room temperature range for optimum performance, which reduces electricity usage and provides superior cooling, is between 60°F (15°C) and 90°F (32°C). It is recommended that you do not install the refrigerator near a heat source, such as an oven or radiator.

Unit: 3191D-22, Phase: 3

Model: 20-2095 END ALT A The Forbes







Available Finishes/Colours



YWFE515S0JB Black



YWFF515S0JS Stainless Steel



YWFE515S0JW

Manuals & Literature:





Use and Care

Warranty

5.3 cu. ft. Whirlpool® electric range with Frozen Bake™ technology

YWFE515S0JS

This Whirlpool® electric range with a dual element stove top helps you get dinner to the table. Skip preheating for favorites like pizza with Frozen Bake™ technology. This self cleaning oven also prevents cooked food from getting cold with the Keep Warm setting. Closed door broiling helps keep the kitchen comfortable.

Top Features

FlexHeat™ Dual Radiant Element

Get two elements in one with a 6" inner ring that's great for smaller pots and pans and a 9" expandable outer ring that makes room for larger cookware.

Frozen Bake™ technology
Skip preheating and cook frozen favorites like pizza in fewer steps with preprogrammed settings that automatically adjust cooking times for you.

Keep Warm setting

Keep dishes from getting cold with this setting that delivers low heat to the oven.

Closed Door Broiling
Maintain the optimal cooking temperature for food while still keeping the kitchen comfortable and cool using this broiling temperature management system that helps prevent overheating.

Exterior

Dimensions	
Depth	27 3/4
Height	36
Width	29 7/8

Configuration and Overview			
Range Type	Freestanding		
Fuel Type	Electric		
Size (IN,inches)	30		
Exterior			

Exterior	
Door Removable	Yes
Drawer Type	Storage Drawer
Oven Door	Glass Window
Oven Window Size	Extra Large
Handle Color	Stainless Steel
Handle Material	Metal

Handle Type	Reach-Through Handle
Features	
Hot Surface Indicator Light	Yes
Heating Element On Indicator Light	Yes
Power On Indicator Light	No
Griddle	NA
Automatic Convection Conversion Temperature Adjust	No
Power Outage Compatible	No

CANADIAN APPLIANCE SOURCE LP


Unit: 3191D-22, Phase: 3

Model: 20-2095 END ALT A The Forbes

37 of 46

WHIRLPOOL 30" (76.0 CM) FREESTANDING ELECTRIC RANGES Model YWFE515S0JS

Product Dimensions



- A. 27³/₄" (70.5 cm) max. depth with handle
- B. 46⁷/₈" (119.1 cm) overall height (max.) with leveling legs screwed all the way in*
- C. 36" (91.4 cm) cooktop height (max.) with leveling legs screwed all the way in*
- D. 29⁷/₈" (75.9 cm) width
- E. 255/16" (64.3 cm) depth back of range to front of cooktop**
- F. Model/serial/rating plate (located on the frame behind a top corner of the door or either side of the drawer)

IMPORTANT: Range must be level after installation. Follow the instructions in the "Level Range" section. Using the cooktop as a reference for leveling the range is not recommended.

*Range can be raised approximately 1" (2.5 cm) by adjusting the leveling legs.


**Front of door and drawer may extend further forward depending on styling.

Cabinet Dimensions

Cabinet opening dimensions shown are for 25" (64.0 cm) countertop depth, 24" (61.0 cm) base cabinet depth and 36" (91.4 cm) countertop height.

IMPORTANT: If installing a range hood or microwave hood combination above the cooking surface, follow the range hood or microwave hood combination installation instructions for dimensional clearances above the cooktop surface.

A freestanding range may be installed next to combustible walls with zero clearance.



- A. 13" (33.0 cm) max. upper cabinet depth
- B. 30" (76.2 cm) min. opening width
- C. For minimum clearance to top of cooktop, see NOTE*
- D. 30" (76.2 cm) min. opening width
- E. Outlet 8" (20.3 cm) to 22" (55.9 cm) from either cabinet, 7" (17.8 cm) max. from floor.
- F. Cabinet door or hinges should not extend into the cutout.

*NOTE: 24" (61.0 cm) minimum when bottom of wood or metal cabinet is covered by not less than 1/4" (6.4 mm) flame retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015" (0.4 mm) stainless steel, 0.024" (0.6 mm) aluminum or 0.020" (0.5 mm) copper.

30" (76.2 cm) minimum clearance between the top of the cooking platform and the bottom of an uncovered wood or metal cabinet.

Unit: 3191D-22, Phase: 3

Model: 20-2095 END ALT A The Forbes

38 of 46

WHIRLPOOL 30" (76.0 CM) FREESTANDING ELECTRIC RANGES Model YWFE515S0JS

Electrical Requirements - Canada Only

AWARNING



Electrical Shock Hazard

Electrically ground range.

Failure to do so can result in death, fire, or electrical shock.

If codes permit and a separate ground wire is used, it is recommended that a qualified electrical installer determine that the ground path is adequate and wire gauge are in accordance with local codes.

Be sure that the electrical connection and wire size are adequate and in conformance with CSA Standard C22.1, Canadian Electrical Code, Part 1 - latest edition, and all local codes and ordinances.

A copy of the above code standards can be obtained from:

Canadian Standards Association 178 Rexdale Blvd. Toronto, ON M9W 1R3 CANADA

 Check with a qualified electrical installer if you are not sure the range is properly grounded.

Range Rating*		Specified Rating of Power Supply Cord Kit and Circuit Protection		
120/240 V	120/208 V	Amps		
8.8 - 16.5 KW 16.6 - 22.5 KW	7.8 - 12.5 KW 12.6 - 18.5 KW	40 or 50** 50		

^{*}The NEC calculated load is less than the total connected load listed on the model/serial/rating plate.

- A time-delay fuse or circuit breaker is recommended.
- This range is equipped with a CSA International Certified Power Cord intended to be plugged into a standard 14-50R wall receptacle. Be sure the wall receptacle is within reach of range's final location.



Do not use an extension cord.

INSTALLATION INSTRUCTIONS


Unpack Range

AWARNING

Excessive Weight Hazard

Use two or more people to move and install range. Failure to do so can result in back or other injury.


- 1. Remove shipping materials, tape and film from range.
- 2. Remove oven racks and parts package from inside oven.
- 3. Do not remove the shipping base at this time.



A. Shipping base

4. On Ranges Equipped with a Storage Drawer:


Remove the storage drawer. See the "Storage Drawer" section. Use a 1/4" (6.4 mm) drive ratchet to lower the rear leveling legs one-half turn. Use a wrench or pliers to lower front leveling legs one-half turn.



- A. 1/4" (6.4 mm) drive ratchet
- B. Rear leveling leg
- C. Wrench or pliers
- D. Front leveling leg

On Ranges Equipped with a Warming Drawer or Premium Storage Drawer:

On ranges equipped with a warming drawer or premium storage drawer, the rear legs cannot be accessed by removing the warming drawer or premium storage drawer. It will be necessary to adjust the rear legs from outside the range. Use wrench or pliers to lower the front and rear leveling legs one half turn.



- A. Rear leveling leg
- B. Wrench or pliers
- C. Front leveling leg

^{**}If connecting to a 50 A circuit, use a 50 A rated cord with kit. For 50 A rated cord kits, use kits that specify use with a nominal 13/8" (3.5 cm) diameter connection opening.

Unit: 3191D-22, Phase: 3

Model: 20-2095 END ALT A The Forbes

39 of 46

WHIRLPOOL 30" (76.0 CM) FREESTANDING ELECTRIC RANGES Model YWFE515S0JS

Install Anti-Tip Bracket

AWARNING

Tip Over Hazard

A child or adult can tip the range and be killed.

Install anti-tip bracket to floor or wall per installation instructions.


Slide range back so rear range foot is engaged in the slot of the anti-tip bracket.

Re-engage anti-tip bracket if range is moved.

Do not operate range without anti-tip bracket installed and engaged.

Failure to follow these instructions can result in death or serious burns to children and adults.


- Remove the anti-tip bracket from where it is taped inside the storage drawer or warming drawer.
- 2. Determine which mounting method to use: floor or wall. If you have a stone or masonry floor, you can use the wall mounting method. If you are installing the range in a mobile home, you must secure the range to the floor.
- 3. Determine and mark centerline of the cutout space. The mounting can be installed on either the left-side or right-side of the cutout. Position mounting bracket against the wall in the cutout so that the V-notch of the bracket is 12⁹/₁₆" (31.9 cm) from centerline as shown.



A. 129/16" (31.9 cm) B. Bracket V-notch

 Drill two 1/8" (3 mm) holes that correspond to the bracket holes of the determined mounting method. See the following illustrations.

Floor Mounting



Wall Mounting



- 5. Using the Phillips screwdriver, mount anti-tip bracket to the wall or floor with the two #12 x $1^5/8$ " (4.1 cm) screws provided.
- **6.** Move range close enough to opening to allow for final electrical connections. Remove shipping base, cardboard or hardboard from under range.
- 7. Move range into its final location, making sure rear leveling leg slides into anti-tip bracket.



8. Move range forward onto shipping base, cardboard or hardboard to continue installing the range using the following installation instructions.

Unit: 3191D-22, Phase: 3

Model: 20-2095 END ALT A The Forbes

40 of 46





Stainless Steel

Also available in:

White	WDF330PAHW
Black	WDF330PAHB

Capacity			
Total Place Settings	13		
General Features & Properti	es		
Heavy Cycle			
High Temperature Wash Op	tion		
Heated Dry Option	Heated Dry Option		
ENERGY STAR® Certified	ENERGY STAR® Certified		
Industry's Best Selling Dishwasher Brand [†]			
Designed, Engineered and Assembled in the U.S.A. with American Pride			
Electrical Details			
Amps	10		
Volts	120		
Hz	60		
Certifications			
ENERGY STAR® Certified	Yes		

Dishwasher Type Control Location Front Control Type Push Button Number of Wash Cycles 3 Number of Options dBA' 55 Number of Racks 2 Tub Material Plastic Wash System Filter Wash System Type Removable Filter Number of Wash Arms 2 Dimensions Product Dimensions (H x W x D) Depth with Door Open 90° 49-1/2"	Technical Details	
Control Type Push Button Number of Wash Cycles 3 Number of Options 4 dBA' 55 Number of Racks 2 Tub Material Plastic Wash System Filter Wash System Type Removable Filter Number of Wash Arms 2 Dimensions Product Dimensions (H x W x D) 34-1/2" x 23-7/8" x 24-1/2"	Dishwasher Type	Built-in
Number of Wash Cycles 3 Number of Options 4 dBA' 55 Number of Racks 2 Tub Material Plastic Wash System Filter Wash System Type Removable Filter Number of Wash Arms 2 Dimensions Product Dimensions (H x W x D) 3 34-1/2" x 23-7/8" x 24-1/2"	Control Location	Front
Number of Options dBA' 55 Number of Racks 2 Tub Material Wash System Filter Wash System Type Removable Filter Number of Wash Arms 2 Dimensions Product Dimensions (H x W x D) 34-1/2" x 23-7/8" x 24-1/2"	Control Type	Push Button
dBA' 55 Number of Racks 2 Tub Material Plastic Wash System Filter Wash System Type Removable Filter Number of Wash Arms 2 Dimensions Product Dimensions (H x W x D) 34-1/2" x 23-7/8" x 24-1/2"	Number of Wash Cycles	3
Number of Racks 2 Tub Material Plastic Wash System Filter Wash System Type Removable Filter Number of Wash Arms 2 Dimensions Product Dimensions (H x W x D) 34-1/2" x 23-7/8" x 24-1/2"	Number of Options	4
Tub Material Plastic Wash System Filter Wash System Type Removable Filter Number of Wash Arms 2 Dimensions Product Dimensions (H x W x D) 34-1/2" x 23-7/8" x 24-1/2"	dBA	55
Wash System Wash System Type Removable Filter Number of Wash Arms 2 Dimensions Product Dimensions (H x W x D) 34-1/2" x 23-7/8" x 24-1/2"	Number of Racks	2
Wash System Type Removable Filter Number of Wash Arms 2 Dimensions Product Dimensions (H x W x D) 34-1/2" x 23-7/8" x 24-1/2"	Tub Material	Plastic
Wash System Type Filter Number of Wash Arms 2 Dimensions Product Dimensions (H x W x D) 34-1/2" x 23-7/8" x 24-1/2"	Wash System	Filter
Dimensions Product Dimensions (H x W x D) 34-1/2" x 23-7/8" x 24-1/2"	Wash System Type	
Product Dimensions 34-1/2" x 23-7/8" x 24-1/2"	Number of Wash Arms	2
(H x W x D) 23-7/8" x 24-1/2"	Dimensions	
Depth with Door Open 90° 49-1/2"		23-7/8" x
	Depth with Door Open 90°	49-1/2"

Reference Material

Dimension Guide

Install Guide

Use & Care Guide

Energy Guide

Warranty

Key Features & Benefits

1-Hour Wash Cycle


Clean dishes in half the time so your plates, pans and glasses are thoroughly cleaned up and taken care of in just an hour.*

Soil Sensor

Determines how dirty dishes are and adjusts the Normal cycle as needed to make sure dishes come out clean.

Normal Cycle

Use for normal amounts of food soil to clean up leftover messes from your day-to-day meals.



^{*}Per IEC standards. **Compared to Normal cycle with lightly soiled loads. †Based on 12-month average of sales. TraQline 2018. NOTE: Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

®/™ © 2020. All rights reserved. Printed in the U.S.A. D200052XXA. WDF330PAHSPECSHEETV01.

Unit: 3191D-22, Phase: 3

Model: 20-2095 END ALT A The Forbes






Undercounter Dishwasher

PRODUCT MODEL NUMBERS

WDF110PAB	WDF320PAD	WDT710PAH
WDF111PAB	WDF330PAH	WDT720PAD
WDF120PAF	WDF331PAH	WDT730PAH
WDF121PAF	WDF520PAD	WDT735PAG
WDF130PAH	WDF540PAD	WDT735PAH
WDF131PAH	WDF545PAF	

DRAIN REQUIREMENTS

- A new drain hose is supplied with your dishwasher. If drain hose is not long enough, use a new drain hose with a maximum length of 12 ft (3.7 m) that meets all current AHAM/IAPMO test standards, is resistant to heat and detergent, and fits the 1" (25 mm) drain connector of the dishwasher. See the "Tools and Parts" section at the front of the guide for part details and orders.
- Make sure to connect drain hose to waste tee or disposer inlet above drain trap in house plumbing and 20" (508 mm) minimum above the floor. It is recommended that the drain hose either be looped up and securely fastened to the underside of the counter or be connected to an air gap.
- Make sure to use an air gap if the drain hose is connected to house plumbing lower than 20" (508 mm) above subfloor or floor.

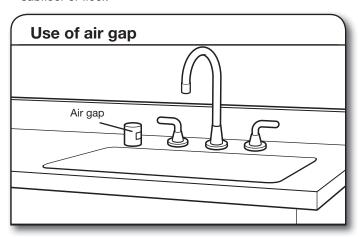

- If required, the air gap should be installed in accordance with the air gap installation instructions. When you are connecting the air gap, a rubber hose (not provided) will be needed to connect to the waste tee or disposer inlet.
- Use 1/2" minimum I.D. drain line fittings.

WATER SUPPLY REQUIREMENTS

- This dishwasher has a water heating feature and also requires a connection to a hot water supply line.
- A hot water line with 20 to 120 psi (138 to 862 kPa) water pressure can be verified by a licensed plumber.
- 120°F (49°C) water at dishwasher
- ³/8" O.D. copper tubing with compression fitting or flexible braided water supply line. See the "Tools and Parts" section at the front of the guide for part details and orders.

NOTE: 1/2" minimum plastic tubing is not recommended.

- A 90° elbow with ³/₄" hose connection with rubber washer. See the "Tools and Parts" section at the front of the guide for part details and orders.
- Do not solder within 6" (152 mm) of the water inlet valve.
- If installed in new construction, make sure the house water supply lines have been flushed prior to connecting the dishwasher to remove any debris that may exist in the supply line.

NOTE: If replacing an existing dishwasher, it is recommended to install a new water line (see the "Tools and Parts" section at the front of the guide for part details) and drain hose (supplied) with the new dishwasher.

ELECTRICAL REQUIREMENTS

You Must Have:


- 120-volt, 60 Hz, AC-only, 15- or 20-amp, fused electrical supply
- Copper wire only
- A maximum of 2 field wiring supply conductors (12 AWG largest size) plus 1 grounding conductor are permitted in the terminal box.

We Recommend:

- A time-delay fuse or circuit breaker
- A separate circuit

If Connecting Dishwasher with a Power Cord:

- Use a UL Listed power cord kit marked for use with dishwasher. See the "Tools and Parts" section at the front of the guide for part details and orders.
- Plug into a grounded 3 prong outlet. Outlet must meet all local codes and ordinances.



If Connecting Dishwasher with Direct Wiring:

- Use flexible, armored, or nonmetallic sheathed copper wire with grounding wire that meets the wiring requirements for your home and local codes and ordinances.
- Use a UL Listed/CSA Approved metallic strain relief.

Unit: 3191D-22, Phase: 3

Model: 20-2095 END ALT A The Forbes

PRODUCT AND CABINET OPENING DIMENSIONS — 23⁷/8" -(606 mm) — 25¹/₄" -(641 mm) — ³/₄" (19 mm) 30" (762 mm) 331/2" 301 (851 mm) min. with (762 mm) leveling legs removed **4**−3³/₄" (94 mm) 31/2" - 41/2" (88 mm - 106 mm) (533 mm) For 4" (100 mm) toe kick, height of cabinet opening is 341/2" (863 mm). A. Insulation may be compressed (not used on all models). B. Door handles may protrude forward of the face of the dishwasher, (varies by model). Check that all surfaces have no protrusions that would prohibit dishwasher installation. 101/2" NOTE: Shaded areas (864 mm) of cabinet walls show where utility -6³/₄" (102 mm) (172 mm) connections may be installed. (76 mm (159 mm) 2¹/₄" (64 mm) 24" / (620 mm) (44 mm) 2" (51 mm) 24' (620 mm) D C. Measured from the lowest point on the underside of the countertop. May be reduced to 33¹/₂" (851 mm) by removing the wheels and perforated area of insulation (blanket) on dishwasher.

D. Minimum, measured from narrowest point of opening.


Unit: 3191D-22, Phase: 3

Model: 20-2095 END ALT A The Forbes

43 of 46

5.0 cu.ft I.E.C. Closet-Depth Front Load Washer with Intuitive Controls

Model: WFW560CHW

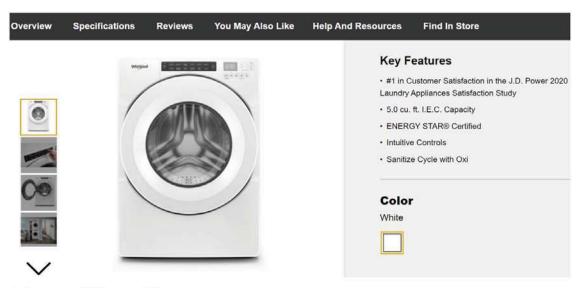

Specifications

Width: 6858.00, 27.0" Centimeters, Inches

Depth: 8016.88, 31-9/16" Centimeters, Inches

Dimensions	
Capacity	4-3/10
Depth	8016.88 cm, 31-9/16 in
Gross Weight	97068688.00 kg, 214 lbs
Net Weight	92532768.00 kg, 204 lbs
Width Appearance	6858.00 cm, 27.0 ir
LCD Touch Screen	No
Window	Yes
Details	
Advanced Vibration Control™	No
Dispense System	Detergent, Fabric Softener & Bleach
Eco Monitor/Efficiency Monitor	No
Hoses Included	4ft 4in Drain Hose Included
Internal Heater	No
Maximum Spin Speed	1160
Out Of Balance Sensing	Yes
Water Factor	3-1/5
Cycles and Options	
Number Of Wash Cycles	35
Electrical	
Power Cord Included	Yes
Controls	
Automatic Temperature Controls	Yes
Control Location	Front
LCD Touch Screen	No


Compatibility Works With No **Options** Number Of Washer Options **Features** Stackable Yes Water Faucet No Cycles Number Of Wash Cycles 35 Exterior Lid/Door Lock Yes Lid/Door Swing Left Modifiers Delay Start No Number Of Rinse Options Number Of Soil Levels 3 Number Of Spin Speeds Number Of Wash/Rinse Temperatures 4 Pre Soak Yes Temperature Selections Hot, Cold, Cool, Warm

Unit: 3191D-22, Phase: 3


Model: 20-2095 END ALT A The Forbes

44 of 46


Recessed area or closet installation (stacked washer and dryer)

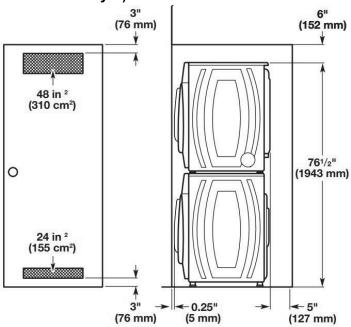


Custom under counter installation



Recessed area or closet installation (washer only)

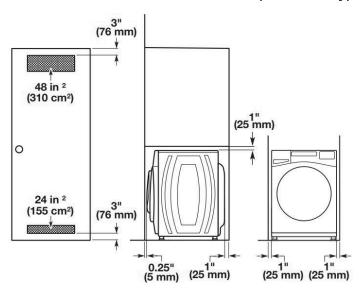

Custom cabinet installation

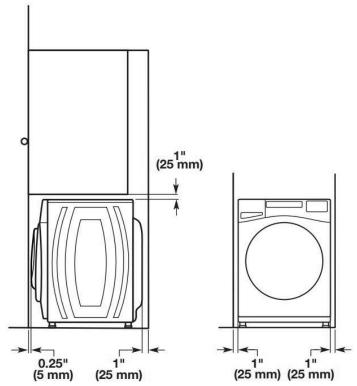


Drain System

It is the responsibility of the installer to install and secure the drain hose in to the provided plumbing/drain in a manner that will avoid the drain hose coming out of o leaking from the plumbing/drain.

Drain system can be installed using a floor drain, wall standpipe, floor standpipe, or laundry tub. Select the method you need.

IMPORTANT: To avoid siphoning, only 4.5" (114 mm) of drain hose should be inside standpipe. Always secure drain hose with cable tie.

Floor standpipe drain system

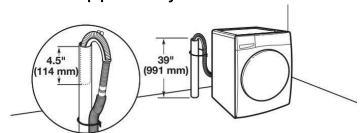


Minimum diameter for a standpipe drain: 2" (51 mm). Minimum carry-away capacity: 17 gallons (64 L) per minute. A 1/4" (6 mm) diameter to 1" (25 mm) diameter Standpipe Adapter Kit is available; refer to the Quick Start Guide for online ordering information. Top of standpipe must be at least 39" (762 mm) high; install no higher than 96" (2.4 m) from bottom of washer. If you have an overhead sewer and need to pump higher than 96" (2.4 m), a sump pump and associated hardware are needed. See "Alternate Parts"

Unit: 3191D-22, Phase: 3

Model: 20-2095 END ALT A The Forbes


45 of 46

Wall standpipe drain system

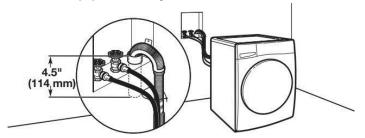


See requirements in "Floor standpipe drain system."


Laundry tub drain system



Minimum capacity: 20 gallons (76 L). Top of laundry tub must be at least 39" (991 mm) from the floor; install no higher than 96" (2.4 m) from bottom of washer.

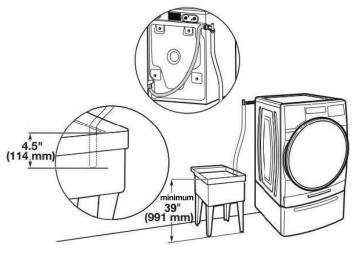

Floor drain system

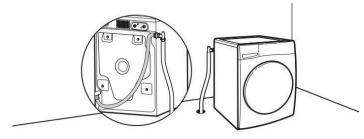

Floor drain system requires a Siphon Break Kit, 2 Connector Kits, and an Extension Drain Hose that may be purchased separately; refer to the Quick Start Guide for online ordering information. Minimum siphon break height: 28" (710 mm) from bottom of washer. (Additional hoses may be needed.)

Electrical Requirements

AWARNING



Electrical Shock Hazard

Plug into a grounded 3 prong outlet.

Do not remove ground prong.

Do not use an adapter.

Do not use an extension cord.

Failure to follow these instructions can result in death, fire. or electrical shock.

- A 120 V, 60 Hz, AC only, 15 or 20 A, fused electrical supply is required. A time-delay fuse or circuit breaker is recommended. It is recommended that a separate circuit breaker serving only this appliance be provided.
- This washer is equipped with a power supply cord having a 3-prong grounding plug.
- To minimize possible shock hazard, the cord must be plugged into a mating, 3-prong, grounding-type outlet, grounded in accordance with local codes and ordinances. If a mating outlet is not available, it is the personal responsibility and obligation of the customer to have the properly grounded outlet installed by a qualified electrician.
- If codes permit and a separate ground wire is used, it is recommended that a qualified electrician determine that the ground path is adequate.
- Do not ground to a gas pipe.
- Check with a qualified electrician if you are not sure the washer is properly grounded.
- Do not have a fuse in the neutral or ground circuit.

GROUNDING INSTRUCTIONS

For a grounded, cord-connected appliance:

This appliance must be grounded. In the event of a malfunction or breakdown, grounding will reduce the risk of electric shock by providing a path of least resistance for electric current. This appliance is equipped with a cord having an equipment-grounding conductor and a grounding plug. The plug must be plugged into an appropriate outlet that is properly installed and grounded in accordance with all local codes and ordinances.

WARNING: Improper connection of the equipment-grounding conductor can result in a risk of electric shock. Check with a qualified electrician or serviceman if you are in doubt as to whether the appliance is properly grounded. Do not modify the plug provided with the appliance: If it will not fit the outlet, have a proper outlet installed by a qualified electrician.

For a permanently connected appliance:

This appliance must be connected to a grounded metal, permanent wiring system, or an equipment-grounding conductor must be run with the circuit conductors and connected to the equipment-grounding terminal or lead on the appliance.

SAVE THESE INSTRUCTIONS

Unit: 3191D-22, Phase: 3

Model: 20-2095 END ALT A The Forbes

46 of 46

WHIRLPOOL DRYER Model #: YWED5620HW

Whirlpool Brand Canada English | Washer and Dryers | Dryers | Electric Dryers | YWED5620HW



Define Your Style

7.4 cu. ft. Front Load Electric Dryer with Intuitive Touch Controls



Whiripool 7.4 cu. ft. Front Load Electric Dryer with Intuitive Touch Controls

Model #: YWED5620HW

Dimensions

Depth	78.74 cm, 31.0 in
Depth With Door Open 90 Degree	138.43 cm, 54-1/2 in
Height	98.42 cm, 38-3/4 in
Width	68.58 cm, 27.0 in
Configuration and Overview	
Fuel Type	Electric
Cycles and Options	
Cycle Time Remaining	Yes
Lint Filter Indicator	No

Ventilation System

Number of Dryness Levels

Long Vent	No
Maximum Vent Length	64
Venting Direction	Left, Right, Bottom, Rear

3

Electrical

Hz	60

Power Cord Included You