

Sales Selection Sheet  
Checklist

1 of 38

LOT 696-3    Model: 20-1841 A ARLINGTON  
PURCHASERS: ANKARAN KUNARATNAM/  
VENDOR:        Heathwood Homes (Whitby) Limited

BALCONY AND SLIDING DOOR OFF MASTER BEDROOM  
OPTIONAL DOUBLE SINKS IN MASTER ENSUITE BATHROOM

- ☐ WOB
- ☐ DECK
- ☐ FINISHED BASEMENT
- ☐ COLD CELLAR

UPGRADED / MODIFIED ELEVATION

- ☐ CORNER UPGRADE
- ☐ REAR UPGRADE
- ☐ SIDE UPGRADE

CEILING UPGRADE - SMOOTH

- ☒ MAIN FLOOR
- ☐ SECOND FLOOR
- ☐ BASEMENT
- ☐ LOWER LEVEL

ADDITIONAL ROUGH-INS

- ☒ 200 AMP SERVICE (STD 200AMP TOWNS)
- ☐ WET BAR ROUGH-IN
- ☐ HUMIDIFIER
- ☒ AIR CONDITIONING (SITE STD)

GAS ROUGH-IN

- ☐ STOVE
- ☐ DRYER
- ☐ BBQ
- ☐ ADDITIONAL FIREPLACE

KITCHEN: HOODFAN VENTING SIZE

- ☐ 6 IN ROUND DUCT
- ☒ 7 IN ROUND DUCT (STD FOR TOWNS)

|                               |             |
|-------------------------------|-------------|
| FULL BASEMENT STAIRS:         | Paint Grade |
| UPPER BASEMENT STAIRS:        | N/A         |
| LOWER LEVEL STAIRS:           | All Oak     |
| LOWER BASEMENT STAIRS:        | N/A         |
| MAIN STAIRS:                  | All Oak     |
| MEDIA STAIRS (if applicable): | N/A         |
| LOFT STAIRS (if applicable):  | N/A         |

OCT 7/22

Date

Signature

Purchaser:

on file

OCT 7/22

Date

IRIT SALEM

Decor Consultant:

-10- 07 2022

Date




Heathwood Homes (Whitby) Limited

Customer Colours

ANKARAN KUNARATNAM/  
Project: Country Lane  
Unit: 696-3, Phase: 6  
Model: 20-1841 A ARLINGTON

Created: 8/15/2022 11:09:24  
Locked:  
Closed:

Kitchen

|                              |      |                                                                                                                                       |
|------------------------------|------|---------------------------------------------------------------------------------------------------------------------------------------|
| Cabinet Colour/Style         | 9157 | Viking III-SIMCOE-MOONLIGHT-3DL ***STD***                                                                                             |
| Island Cabinet Colour/Style  | 9157 | Viking III-SIMCOE-MOONLIGHT-3DL ***STD***                                                                                             |
| Cabinet Hardware             | 2086 | 9677-HARDWARE ***STD***                                                                                                               |
| Countertop                   | 9069 | MSI Quartz GROUP 1 ICED WHITE ***STD***                                                                                               |
| Island Countertop            | 9069 | MSI Quartz GROUP 1 ICED WHITE ***STD***                                                                                               |
| Countertop Edge              | 4010 | SINGLE POLISHED STRAIGHT EDGE 3/4 INCH ***STD***<br> |
| Sink                         | 9488 | Plumbing-KINDRED Kitchen Sink Collection - Reginox NS1930 U/9-Single Bowl Undermount Sink (or equivalent)-Stainless Steel PG 17       |
| Crumb Vac Color              | 9483 | Vacuum-Crumb Vac (Dust Pan)-Black                                                                                                     |
| HoodFan                      | 34   | AV1308 Air King 30 STAINLESS STEEL UNDER CABINET RANGE HOOD **STD** PG 25                                                             |
| Opt. Backsplash              | 5721 | QT.CD.ARW.0306.BR-Colour and Dimension Bright-Arctic White-3 x 6 ***1***                                                              |
| Opt. Backsplash Grout        | 2226 | Grout-(00) White ***STD***                                                                                                            |
| Opt. Backsplash Tile Pattern | 3060 | HORIZONTAL BRICK ***STD***<br>                     |
| Flooring                     | 9255 | TR.SP.WHITE.1313 SEMPRE White Matte 13 x 13 ***STD***                                                                                 |
| Floor Tile Grout             | 2225 | Grout-(27) Silver ***STD***                                                                                                           |
| Floor Tile Pattern           | 3000 | STANDARD SQUARE ***STD***<br>                      |

- Purchasers have been advised: standard fridge opening is a minimum 37 3/8 x 73 3/8 inches. Ice Waterline Rough-In is included.

- Standard stove opening is 30 inches and standard dishwasher opening is 24 inches. Any gas stove will require backsplash or stainless steel backing to avoid fire hazards.

- Purchasers acknowledge: Heathwood Homes and its contractors will not be responsible for any kitchen cabinet changes due to appliances dimension changes after sign-off.

Comment

Foyer

|                    |      |                                                                                                                  |
|--------------------|------|------------------------------------------------------------------------------------------------------------------|
| Flooring           | 9255 | TR.SP.WHITE.1313 SEMPRE White Matte 13 x 13 ***STD***                                                            |
| Floor Tile Grout   | 2225 | Grout-(27) Silver ***STD***                                                                                      |
| Floor Tile Pattern | 3000 | STANDARD SQUARE ***STD***<br> |

AK

Customer Colours

ANKARAN KUNARATNAM/  
Project: Country Lane  
Unit: 696-3, Phase: 6  
Model: 20-1841 A ARLINGTON

Locked:  
Closed:

|  |  |  |  |
|--|--|--|--|
|  |  |  |  |
|  |  |  |  |
|  |  |  |  |

Comment

Powder Room

|                    |      |                                                          |
|--------------------|------|----------------------------------------------------------|
| Flooring           | 9255 | TR.SP.WHITE.1313 SEMPRE White Matte 13 x 13<br>***STD*** |
| Floor Tile Grout   | 2225 | Grout-(27) Silver ***STD***                              |
| Floor Tile Pattern | 3000 | STANDARD SQUARE ***STD***                                |

|  |  |  |
|--|--|--|
|  |  |  |
|  |  |  |
|  |  |  |

|                           |      |                                   |
|---------------------------|------|-----------------------------------|
| Plumbing Fixture (Colour) | 1737 | Plumbing Fixtures-WHITE ***STD*** |
| Comment                   |      |                                   |

Dining Room

|          |                                                  |                                                                                       |
|----------|--------------------------------------------------|---------------------------------------------------------------------------------------|
| Flooring | 7498                                             | Red Oak Pearl-Vintage<br>Engineered-GRYPHON/IRONGATE-3/4 inch x <del>3 1/4 inch</del> |
| Comment  | New size due to revised colour chart see page 39 |                                                                                       |

Great Room

|          |                                                  |                                                                                       |
|----------|--------------------------------------------------|---------------------------------------------------------------------------------------|
| Flooring | 7498                                             | Red Oak Pearl-Vintage<br>Engineered-GRYPHON/IRONGATE-3/4 inch x <del>3 1/4 inch</del> |
| Comment  | New size due to revised colour chart see page 39 |                                                                                       |

Great Room Fireplace

|               |      |                                                                 |
|---------------|------|-----------------------------------------------------------------|
| Type          | 8865 | Dimplex-Electric Fireplace-PF3033HL ***STD***                   |
| Mantle        | 9114 | NF 15-Paint Grade Mantle- Cabinet (Per Plan)-WHITE<br>***STD*** |
| Opt. Surround | 1111 | N/A *****                                                       |

PG 16

- Purchasers have been advised: heat from the FP can damage TV above a FP and items placed on mantle.

- Heathwood and its contractors will not be liable for any damage on items placed/@installed above a FP after closing.

Comment

Upper Hall

|          |                                                  |                                                                                       |
|----------|--------------------------------------------------|---------------------------------------------------------------------------------------|
| Flooring | 7498                                             | Red Oak Pearl-Vintage<br>Engineered-GRYPHON/IRONGATE-3/4 inch x <del>3 1/4 inch</del> |
| Comment  | New size due to revised colour chart see page 39 |                                                                                       |

Am

Customer Colours

ANKARAN KUNARATNAM/  
Project: Country Lane  
Unit: 696-3, Phase: 6  
Model: 20-1841 A ARLINGTON

Created: 8/15/2022 11:09:24

Locked:

Closed:

Master Bedroom

Flooring 7498

~~Red Oak Pearl-Vintage  
Engineered-GRYPHON/IRONGATE-3/4 inch x 3 1/4 inch  
\*\*\*STD\*\*\*~~

Comment

New size due to revised colour chart see page 39  
SEE REVISED COLOUR CHART PGS 40

Bedroom 2

Flooring 9252

DY 16787 -Dynasty Tex-MYSTIC BEIGE-40 oz  
Poly\*\*\*STD\*\*\*

Comment

Bedroom 3

Flooring 9252

DY 16787 -Dynasty Tex-MYSTIC BEIGE-40 oz  
Poly\*\*\*STD\*\*\*

Comment

Master Ensuite

Cabinet Colour/Style 9158

Viking III-SIMCOE-NAVY BLUE-3DL \*\*\*STD\*\*\*

Cabinet Hardware 2086

9677-HARDWARE \*\*\*STD\*\*\*

Countertop 8796

6698-46-Countertop-PALOMA POLAR ETCHINGS  
FINISH-Formica \*\*\*STD\*\*\*

Countertop Edge 1111

N/A \*\*\*\*\*

Floor Tile 9255


TR.SP.WHITE.1313 SEMPRES White Matte 13 x 13  
\*\*\*STD\*\*\*

Floor Tile Grout 2225

Grout-(27) Silver \*\*\*STD\*\*\*

Floor Tile Pattern 3000

STANDARD SQUARE \*\*\*STD\*\*\*



Shower Wall Tile 5420


QT.SP.DGR.0810-Splendour-Dark Grey-8 inch x 10 inch  
\*\*\*STD\*\*\*

Shower Wall Tile Grout 2226

Grout-(00) White \*\*\*STD\*\*\*

Shower Wall Tile Pattern 3090

VERTICAL STACKED \*\*\*STD\*\*\*



Shower Floor Tile 8661

OD.ON.SWT.0202.MT.N-Ontario Series Mosaic-Snow  
White Matte-2 x 2 \*\*\*STD\*\*\*

AK

Customer Colours

ANKARAN KUNARATNAM/  
Project: Country Lane  
Unit: 696-3, Phase: 6  
Model: 20-1841 A ARLINGTON

Created: 8/15/2022 11:19:24  
Locked:  
Closed:

|                            |      |                                                                                                                             |  |  |  |  |  |  |  |  |  |
|----------------------------|------|-----------------------------------------------------------------------------------------------------------------------------|--|--|--|--|--|--|--|--|--|
| Shower Floor Tile Grout    | 2226 | Grout-(00) White ***STD***                                                                                                  |  |  |  |  |  |  |  |  |  |
| Shower Floor Tile Pattern  | 3000 | STANDARD SQUARE ***STD***                                                                                                   |  |  |  |  |  |  |  |  |  |
|                            |      | <table><tr><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td></tr></table> |  |  |  |  |  |  |  |  |  |
|                            |      |                                                                                                                             |  |  |  |  |  |  |  |  |  |
|                            |      |                                                                                                                             |  |  |  |  |  |  |  |  |  |
|                            |      |                                                                                                                             |  |  |  |  |  |  |  |  |  |
| Shower Jamb(s) and Sill(s) | 8923 | Shower Jamb / Sill-Thassos White ***STD***                                                                                  |  |  |  |  |  |  |  |  |  |
| Plumbing Fixture (colour)  | 1737 | Plumbing Fixtures-WHITE ***STD***                                                                                           |  |  |  |  |  |  |  |  |  |
| Comment                    |      |                                                                                                                             |  |  |  |  |  |  |  |  |  |

Main Bathroom

|                                 |      |                                                                                                                                                          |  |  |  |  |  |  |  |  |  |
|---------------------------------|------|----------------------------------------------------------------------------------------------------------------------------------------------------------|--|--|--|--|--|--|--|--|--|
| Cabinet Colour/Style            | 9111 | Viking III-SIMCOE ORCHID 3DL ***STD***                                                                                                                   |  |  |  |  |  |  |  |  |  |
| Cabinet Hardware                | 2086 | 9677-HARDWARE ***STD***                                                                                                                                  |  |  |  |  |  |  |  |  |  |
| Countertop                      | 8806 | 4987K-07-Countertop-LECHE VESTA-Wilsonart ***STD***                                                                                                      |  |  |  |  |  |  |  |  |  |
| Countertop Edge                 | 1111 | N/A *****                                                                                                                                                |  |  |  |  |  |  |  |  |  |
| Floor Tile                      | 8262 | TR.ST.GRY.1313-Serpentine-Grey-13x13 ***STD***                                                                                                           |  |  |  |  |  |  |  |  |  |
| Floor Tile Grout                | 7704 | Grout-(19) Pearl Gray ***STD***                                                                                                                          |  |  |  |  |  |  |  |  |  |
| Floor Tile Pattern              | 3000 | STANDARD SQUARE ***STD***<br><table><tr><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td></tr></table> |  |  |  |  |  |  |  |  |  |
|                                 |      |                                                                                                                                                          |  |  |  |  |  |  |  |  |  |
|                                 |      |                                                                                                                                                          |  |  |  |  |  |  |  |  |  |
|                                 |      |                                                                                                                                                          |  |  |  |  |  |  |  |  |  |
| Wall Tile                       | 8258 | TR.ST.GRY.0810-Serpentine-Grey-8 x 10 ***STD***                                                                                                          |  |  |  |  |  |  |  |  |  |
| Wall Tile Grout                 | 7704 | Grout-(19) Pearl Gray ***UPG***                                                                                                                          |  |  |  |  |  |  |  |  |  |
| Wall Tile Pattern               | 3090 | VERTICAL STACKED ***STD***<br><table><tr><td></td><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td><td></td></tr></table>                  |  |  |  |  |  |  |  |  |  |
|                                 |      |                                                                                                                                                          |  |  |  |  |  |  |  |  |  |
|                                 |      |                                                                                                                                                          |  |  |  |  |  |  |  |  |  |
| Opt. Shower Floor Tile          | 1111 | N/A *****                                                                                                                                                |  |  |  |  |  |  |  |  |  |
| Opt. Shower Floor Tile Grout    | 1111 | N/A *****                                                                                                                                                |  |  |  |  |  |  |  |  |  |
| Opt. Shower Floor Tile Pattern  | 1111 | N/A *****                                                                                                                                                |  |  |  |  |  |  |  |  |  |
| Opt. Shower Jamb(s) and Sill(s) | 1111 | N/A *****                                                                                                                                                |  |  |  |  |  |  |  |  |  |
| Plumbing Fixture (colour)       | 1737 | Plumbing Fixtures-WHITE ***STD***                                                                                                                        |  |  |  |  |  |  |  |  |  |
| Comment                         |      |                                                                                                                                                          |  |  |  |  |  |  |  |  |  |

Am

Customer Colours

ANKARAN KUNARATNAM/  
Project: Country Lane  
Unit: 696-3, Phase: 6  
Model: 20-1841 A ARLINGTON

Created: 8/15/2022 11:10:24

Locked:

Closed:

Lower Level Family Room

Flooring 9252

DY 16787 -Dynasty Tex-MYSTIC BEIGE-40 oz  
Poly\*\*\*STD\*\*\*

Comment

Lower Level Laundry Mud Room

Flooring 5594

GE.KL.GRY.1313-Kelly-Grey-13 inch X 13 inch \*\*\*STD\*\*\*

Floor Tile Grout 2222

Grout-(105) Driftwood \*\*\*STD\*\*\*

Floor Tile Pattern 3000

STANDARD SQUARE \*\*\*STD\*\*\*

|  |  |  |
|--|--|--|
|  |  |  |
|  |  |  |
|  |  |  |

Opt. Cabinet Colour/Style - Uppers 1111

N/A \*\*\*\*\*

Opt. Cabinet Hardware - Uppers 1111

N/A \*\*\*\*\*

Opt. Cabinet Colour/Style - Base 1111

N/A \*\*\*\*\*

Opt. Cabinet Hardware - Base 1111

N/A \*\*\*\*\*

Opt. Countertop 1111

N/A \*\*\*\*\*

Opt. Countertop Edge 1111

N/A \*\*\*\*\*

1

- Optional Bedroom 4 Layout Laundry Rough in Relocated to Unfinished Basement (No Opt. Cabinet)

Comment

Opt. Lower Level Bedroom 4

Flooring 1111

N/A \*\*\*\*\*

Comment

Opt. Lower Level Bedroom 4 Hallway

Flooring 1111

N/A \*\*\*\*\*

Comment

Opt. Lower Level Bedroom 4 Mud Room

Flooring 1111

N/A \*\*\*\*\*

Floor Tile Grout 1111

N/A \*\*\*\*\*

AC

Customer Colours

ANKARAN KUNARATNAM/  
Project: Country Lane  
Unit: 696-3, Phase: 6  
Model: 20-1841 A ARLINGTON

7 of 38

501

Created: 8/15/2022 11:19:24

Locked:

Closed:

|                    |      |           |
|--------------------|------|-----------|
| Floor Tile Grout   | 1111 | N/A ***** |
| Floor Tile Pattern | 1111 | N/A ***** |

Comment

Opt. Lower Level Bedroom 4 Bathroom

|                      |      |           |
|----------------------|------|-----------|
| Cabinet Colour/Style | 1111 | N/A ***** |
| Cabinet Hardware     | 1111 | N/A ***** |
| Countertop           | 1111 | N/A ***** |
| Countertop Edge      | 1111 | N/A ***** |
| Floor Tile           | 1111 | N/A ***** |
| Floor Tile Grout     | 1111 | N/A ***** |
| Floor Tile Pattern   | 1111 | N/A ***** |

|                   |      |           |
|-------------------|------|-----------|
| Wall Tile         | 1111 | N/A ***** |
| Wall Tile Grout   | 1111 | N/A ***** |
| Wall Tile Pattern | 1111 | N/A ***** |

|                                |      |           |
|--------------------------------|------|-----------|
| Opt. Shower Floor Tile         | 1111 | N/A ***** |
| Opt. Shower Floor Tile Grout   | 1111 | N/A ***** |
| Opt. Shower Floor Tile Pattern | 1111 | N/A ***** |

|                                 |      |           |
|---------------------------------|------|-----------|
| Opt. Shower Jamb(s) and Sill(s) | 1111 | N/A ***** |
| Plumbing Fixture (colour)       | 1111 | N/A ***** |
| Comment                         |      |           |

Lower Level and Main Stairs

|        |      |                                       |
|--------|------|---------------------------------------|
| Type   | 1712 | Oak Stairs ***STD***                  |
| Colour | 7010 | Imperata (Corken) STAIN TO COMPLEMENT |

du

Customer Colours

ANKARAN KUNARATNAM/  
Project: Country Lane  
Unit: 696-3, Phase: 6  
Model: 20-1841 A ARLINGTON

Created: 8/15/2022 11:19:24

Locked:

Closed:

|                               |      |                                                                                |
|-------------------------------|------|--------------------------------------------------------------------------------|
| Colour                        | 7912 | Irongate (Gryphon) STAIN TO COMPLEMENT HARDWOOD AND WILL VARY FROM FLOORING    |
| Handrail/Pickets/Posts Type   | 8148 | Single Collar Alt. Plain w/ Shoes with 3 1/2" Square/Cap Post(s)-BLACK ***2*** |
| Handrail/Pickets/Posts Colour | 7912 | Irongate (Gryphon) STAIN TO COMPLEMENT HARDWOOD AND WILL VARY FROM FLOORING    |
| Custom Stain/Paint            | 1111 | N/A *****                                                                      |
| Landing(s)                    | 7498 | Red Oak Pearl-Vintage Engineered-GRYPHON/IRONGATE-3/4 inch x 3 1/4 inch        |
| Opt. Carpet Runner            | 1111 | N/A *****                                                                      |
| Comment                       |      |                                                                                |

New size due to revised colour chart see page 39

Basement Stairs

|         |      |                                              |
|---------|------|----------------------------------------------|
| Type    | 1713 | Paint Grade Stairs ***STD BASEMENT STAIR *** |
| Comment |      |                                              |

Throughout

|                      |      |                                             |
|----------------------|------|---------------------------------------------|
| Switches and Plug    | 5796 | Decora White Switches and Plugs ***STD***   |
| Thresholds           | 2232 | Metal Thresholds ***STD***                  |
| Underpad             | 1079 | 500 Series-Underpad ***STD***               |
| Trim Size            | 8705 | 4 1/4 Baseboard and 2 3/4 Casings ***STD*** |
| Trim - Paint Colour  | 1716 | Trim-WHITE ***STD***                        |
| Walls - Paint Colour | 1717 | 22-Wall-WARM GREY ***STD***                 |
| Comment              |      |                                             |

Purchaser:

ANKARAN KUNARATNAM

Date

Decor Consultant

Date

Purchaser:

Date

Country Lane

Date Approved



CONSTRUCTION SUMMARY

Lot: 696-3  
Model: 20-1841 A ARLINGTON  
Project/Phase: Country Lane / 6

|                    |                                                                                                                                                                                                                                       |
|--------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Offer<br>Worksheet | Five Appliances: SS Fridge, Stove, Dishwasher: White Front Loader Washer/Dryer ? Townhomes<br>Note:                                                                                                                                   |
| Offer<br>Worksheet | Five Thousand Dollars (\$5,000) at D?cor. (No Cash Value) - Townhomes<br>Note:                                                                                                                                                        |
| Offer<br>Worksheet | Two Men and a Truck Credit of One Thousand Dollars (\$1000.00) for moving services only, Into your Heathwood Home (No Cash Value) The Credit is Non-Transferable and cannot be combined with any other offer.<br>- Townhomes<br>Note: |
| Offer<br>Worksheet | The Purchaser(s) are a 2 <sup>nd</sup> Time Heathwood buyer, whom lived or have lived at LOT 2131 and are entitled to \$1000 to spend at The Décor Store ( No Cash Value).                                                            |



CONSTRUCTION SUMMARY

Lot: 696-3  
Model: 20-1841 A ARLINGTON  
Project/Phase: Country Lane / 6

ADMIN FEE

| Invoice | Qty. | Description |
|---------|------|-------------|
|---------|------|-------------|

CABINETRY

| Invoice | Qty. | Description |
|---------|------|-------------|
|---------|------|-------------|

|                                  |   |                                                                                                                                                                                                                                                                                              |
|----------------------------------|---|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1141<br>335,871<br>07Oct22<br>** | 1 | MASTER ENSUITE - PLUMBING - OPTION FROM ONE SINK TO DOUBLE SINKS INCLUDING ONE ADDITIONAL STD CHATEAU FAUCET OVERMOUNT COLONY SINK ONE EXTRA VANITY LIGHT AND CABINET CONVERSION 2D VIKING<br>SKETCH # 4<br><b>CABINETRY-2D Convert Cabinetry Viking; ELECTRICAL-Additional Vanity Light</b> |
|----------------------------------|---|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

CERAMICS

| Invoice | Qty. | Description |
|---------|------|-------------|
|---------|------|-------------|

|                            |   |                                                                                                           |
|----------------------------|---|-----------------------------------------------------------------------------------------------------------|
| 1141<br>339,035<br>07Oct22 | 1 | Kitchen Optional Backsplash - Ceramics - Upgrade 1 Tile - Kitchen Optional Backsplash - UPG               |
| 1141<br>339,139<br>07Oct22 | 1 | Kitchen Optional Backsplash - Ceramics - Install in Specified Pattern - Kitchen Optional Backsplash - UPG |
| 1141<br>339,134<br>07Oct22 | 1 | Main Bath Wall - Ceramics - Upgrade Grout - Main Bath Wall - UPG                                          |

DRYWALL

| Invoice | Qty. | Description |
|---------|------|-------------|
|---------|------|-------------|

|                            |   |                                                                              |
|----------------------------|---|------------------------------------------------------------------------------|
| 1141<br>337,747<br>07Oct22 | 1 | - Drywall - Smooth Ceilings - Main Floor - UPG<br><br><b>PAINTING-Notify</b> |
|----------------------------|---|------------------------------------------------------------------------------|

ELECTRICAL

| Invoice | Qty. | Description |
|---------|------|-------------|
|---------|------|-------------|

|                                  |   |                                                                                                                                                                                                                                                                                              |
|----------------------------------|---|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1141<br>335,570<br>07Oct22       | 2 | THROUGHOUT - ELECTRICAL - CEILING ROUGH-IN (CAPPED)<br><br>1X TO BE INSTALLED IN THE CENTRE OF GREAT ROOM - USE STD. SWITCH PLUG<br>1X TO BE INSTALLED ABOVE THE BREAKFAST BAR- USE KITCHEN TOGETHER WITH SWITCH<br>SEE SKETCH # 3                                                           |
| 1141<br>335,578<br>07Oct22       | 1 | GREAT ROOM - ELECTRICAL - EXTRA WALL INTERIOR OUTLET ON EXISTING CIRCUIT (DOES NOT INCLUDE KITCHEN OUTLETS)<br><br>TO BE INSTALLED ABOVE THE CENTRE OF THE FIRE PLACE 70" +/- FROM FLOOR<br>SEE SKETCH # 3                                                                                   |
| 1141<br>335,871<br>07Oct22<br>** | 1 | MASTER ENSUITE - PLUMBING - OPTION FROM ONE SINK TO DOUBLE SINKS INCLUDING ONE ADDITIONAL STD CHATEAU FAUCET OVERMOUNT COLONY SINK ONE EXTRA VANITY LIGHT AND CABINET CONVERSION 2D VIKING<br>SKETCH # 4<br><b>CABINETRY-2D Convert Cabinetry Viking; ELECTRICAL-Additional Vanity Light</b> |

PAINTING

| Invoice | Qty. | Description |
|---------|------|-------------|
|---------|------|-------------|

|                                  |   |                                                                              |
|----------------------------------|---|------------------------------------------------------------------------------|
| 1141<br>337,747<br>07Oct22<br>** | 1 | - Drywall - Smooth Ceilings - Main Floor - UPG<br><br><b>PAINTING-Notify</b> |
|----------------------------------|---|------------------------------------------------------------------------------|



CONSTRUCTION SUMMARY

Lot: 696-3  
Model: 20-1841 A ARLINGTON  
Project/Phase: Country Lane / 6

PLUMBING

| Invoice                    | Qty. | Description                                                                                                                                                                                                                                                                        |
|----------------------------|------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1141<br>335,871<br>07Oct22 | 1    | MASTER ENSUITE - PLUMBING - OPTION FROM ONE SINK TO DOUBLE SINKS INCLUDING ONE ADDITIONAL STD CHATEAU FAUCET OVERMOUNT COLONY SINK ONE EXTRA VANITY LIGHT AND CABINET CONVERSION 2D VIKING SKETCH # 4<br>CABINETRY-2D Convert Cabinetry Viking; ELECTRICAL-Additional Vanity Light |


SKETCH #1

20-1841 ELEV. A

For BLK 696-2 & 696-3

*The Arlington*  
ELEVATION A & B: 1,841 SQ. FT.  
THE TRAILS OF  
COUNTRY LANE

Sunken 4R condition for:  
BLK 696-2, 696-3, 697-2, 697-3

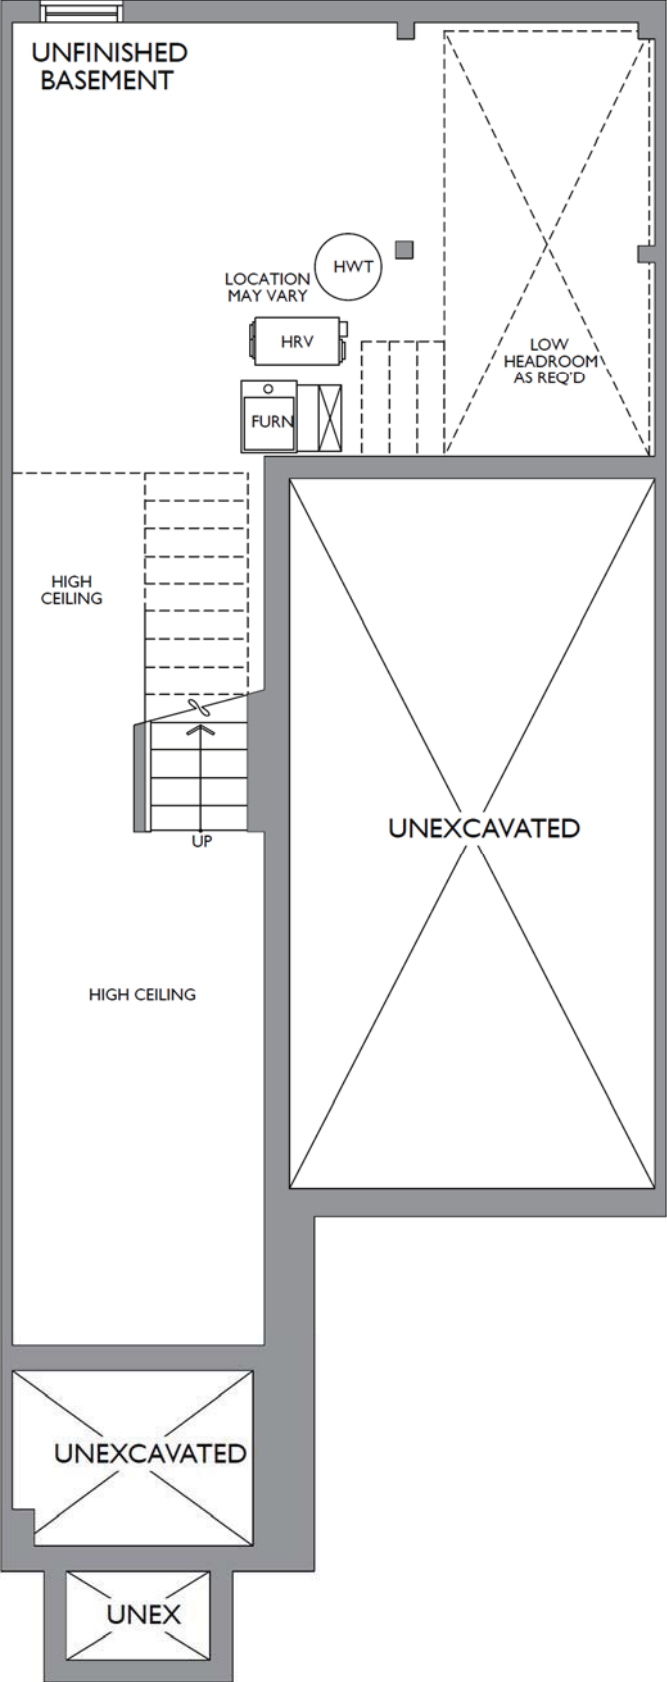

BASEMENT  
ELEVATION A & B


SKETCH #2

20-1841 ELEV. A

For BLK 696-2 & 696-3

*The Arlington*  
ELEVATION A & B: 1,841 SQ. FT.  
THE TRAILS OF  
COUNTRY LANE

Sunken 4R condition for:  
BLK 696-2, 696-3, 697-2, 697-3

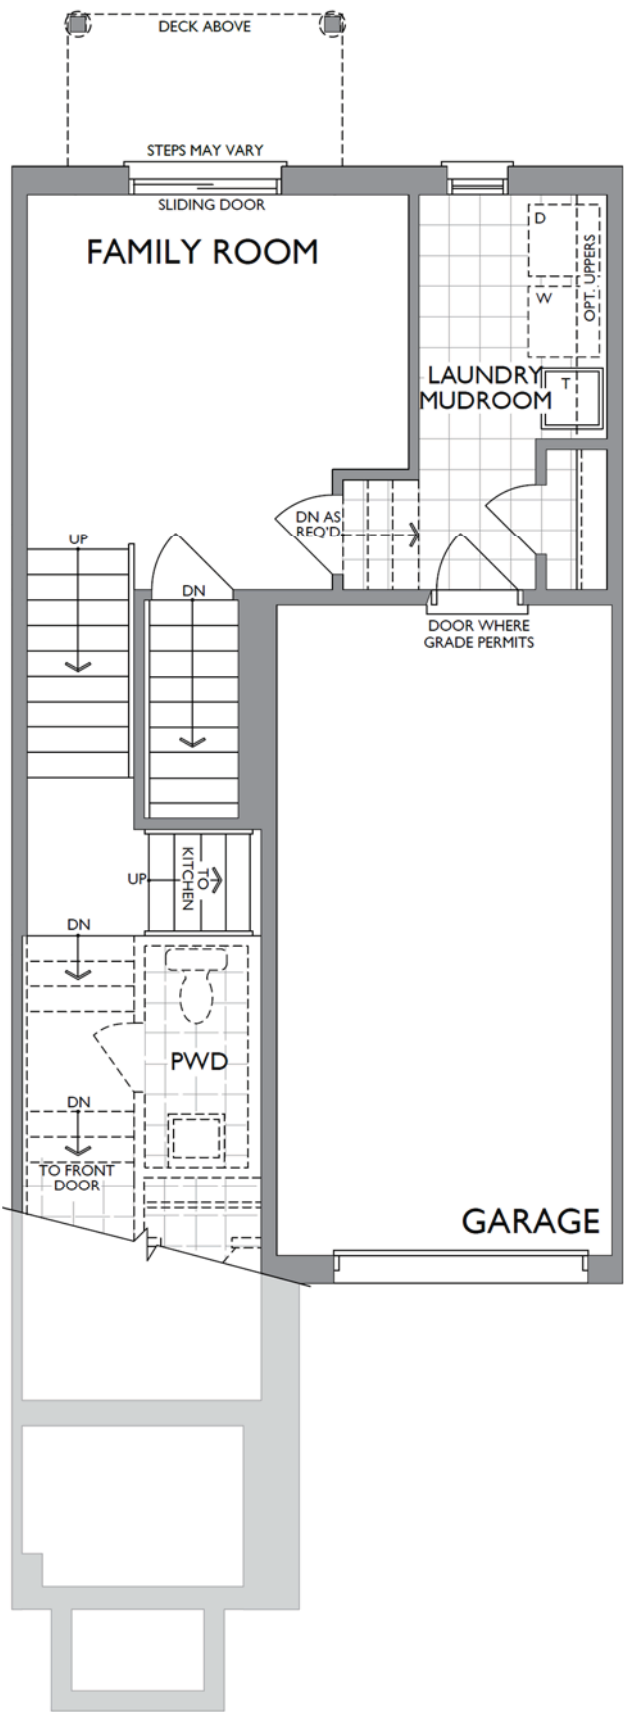


LOWER LEVEL  
ELEVATION A & B

SKETCH #3

20-1841 ELEV. A

For BLK 696-2 & 696-3


*The Arlington*  
ELEVATION A & B: 1,841 SQ. FT.  
THE TRAILS OF  
COUNTRY LANE

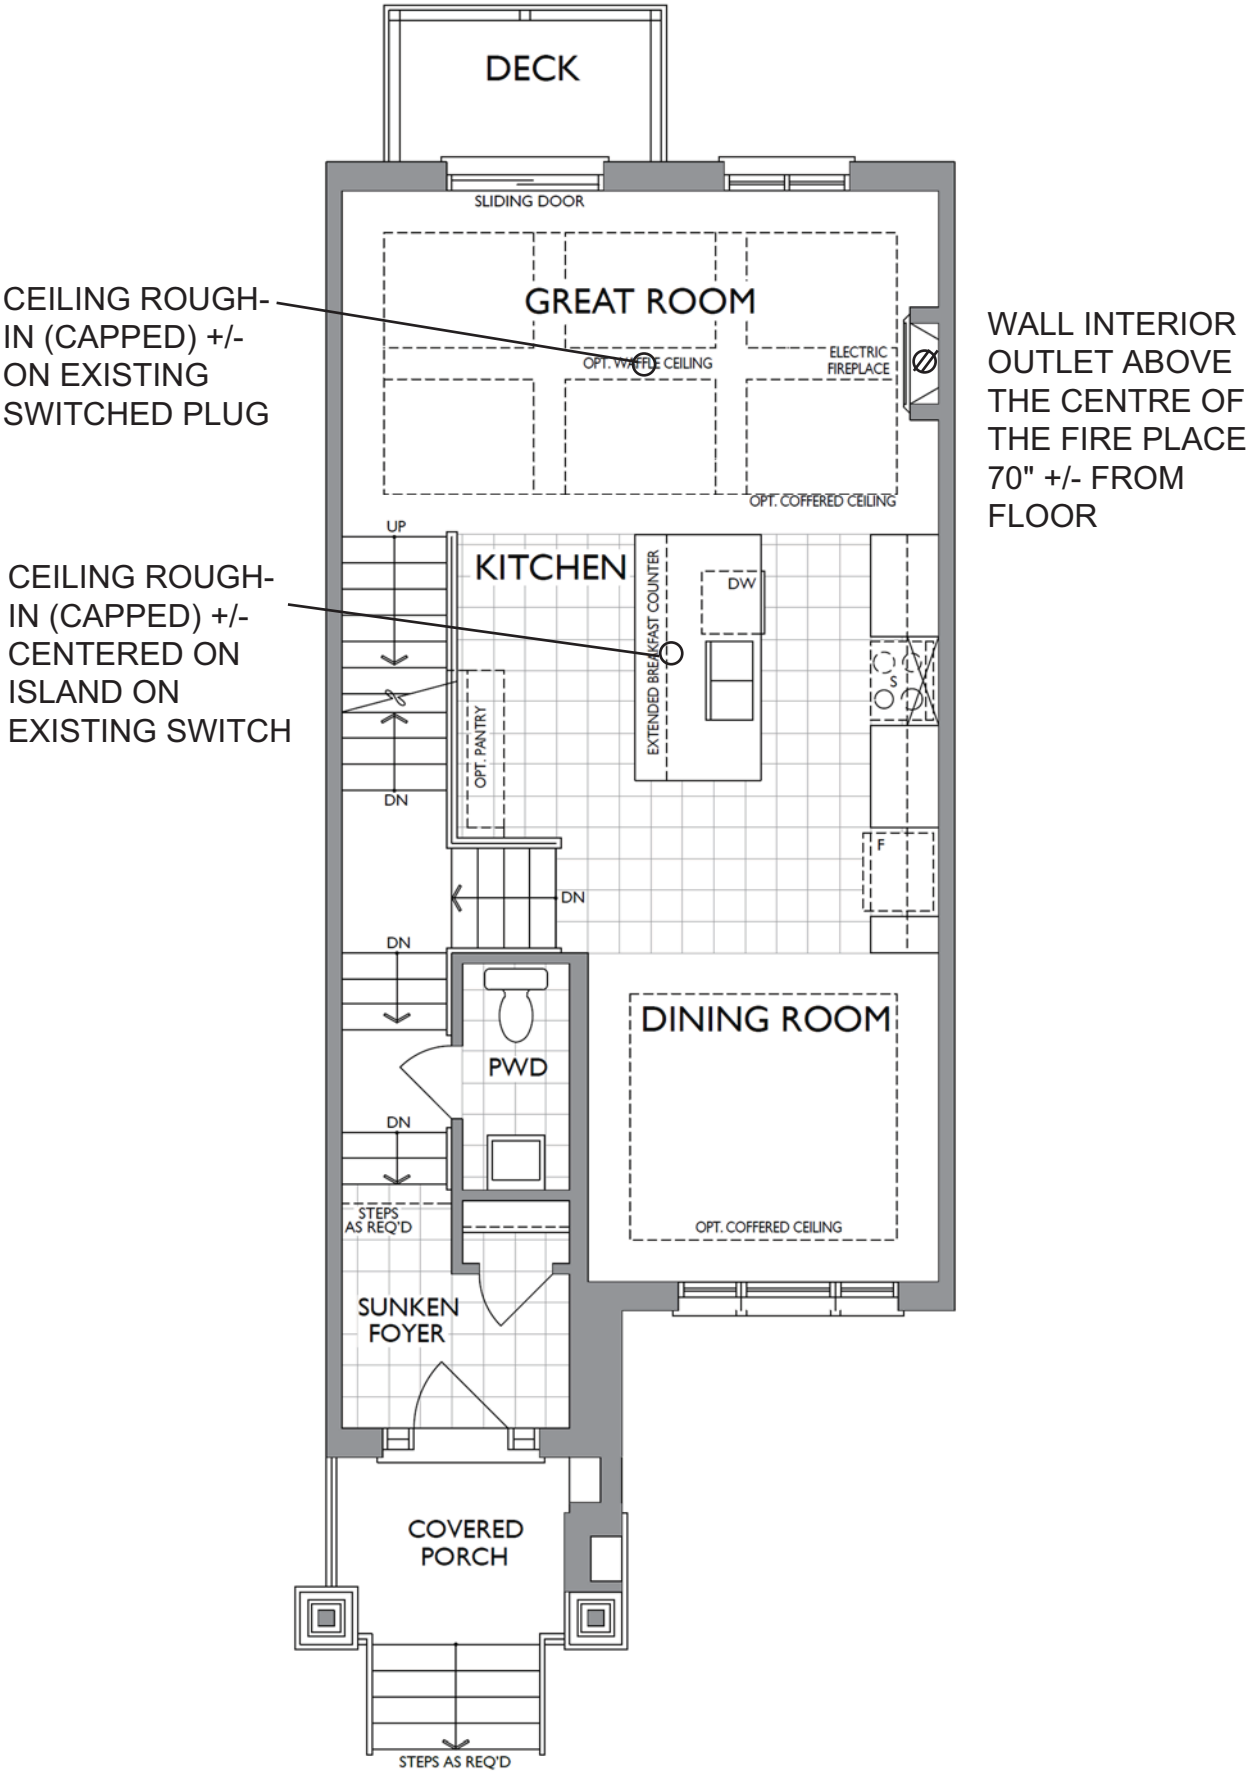

MAIN LEVEL  
ELEVATION A

SKETCH #4  
20-1841 ELEV. A  
For BLK 696-2 & 696-3


*The Arlington*  
ELEVATION A & B: 1,841 SQ. FT.  
THE TRAILS OF  
COUNTRY LANE

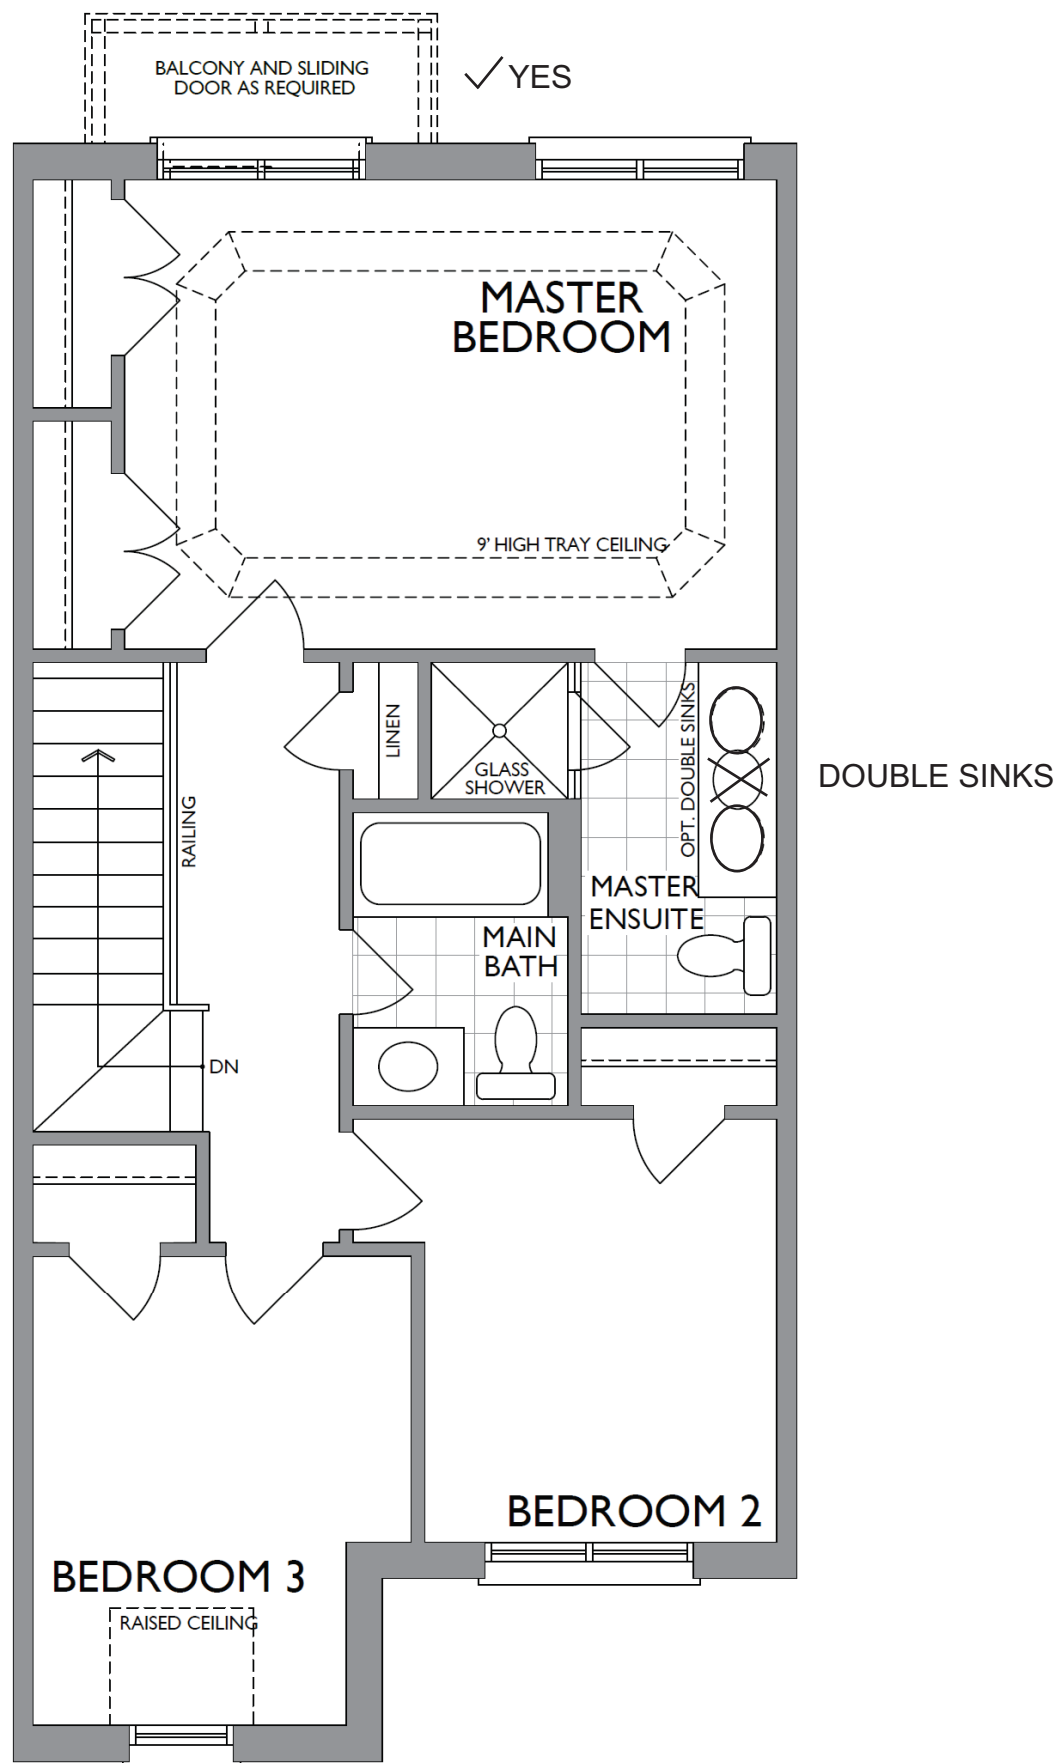

UPPER LEVEL  
ELEVATION A



**NFAS NF15 Mantel**

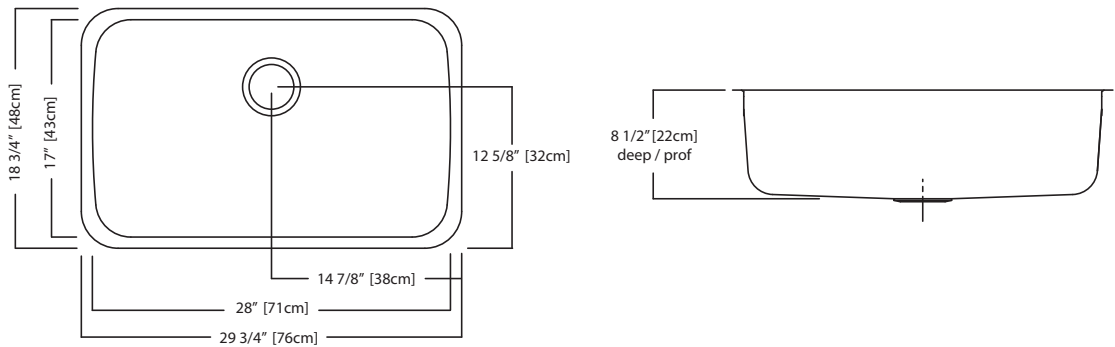

NS1930U/9 SPECIFICATION

Model NS1930U/9 is a single bowl, undermount sink manufactured for Franke Kindred Canada Limited from 18 gauge, 18-10 stainless steel. Product has mirror finished rim and brush finished bowl. Sink is fully undercoated. Basket strainer waste fitting (3 1/2", 89 mm) are included. Sink is backed with a limited buyer lifetime warranty.

- O.D. 18 3/4" x 29 3/4" x 8 1/2" (48 x 76 x 22 cm)
- **Recommended for minimum 36" cabinet**



Specifications

FAUCET DESCRIPTION

- Reflex™ pulldown system offers smooth operation, easy movement and secure docking
- Power Clean™ spray technology
- Metal construction with various finishes identified by suffix
- Quick connect installation
- Pulldown spray with 68" braided hose
- Flexible supply lines with 3/8" compression fittings
- High arc spout provides height and reach to fill or clean large pots while pulldown wand provides the maneuverability for cleaning or rinsing
- 360° rotating spout
- Faucet designed for handle to be mounted on right side only

OPERATION

- Lever style handle
- Temperature controlled by 100° arc of handle travel
- Operates with less than 5 lbs. of force
- Operates in stream or spray mode in the pullout or retracted position

FLOW

- Flow is limited to 1.5 gpm (5.7 L/min) max at 60 psi

CARTRIDGE

- 1255™ Duralast™ cartridge


STANDARDS

- Third party certified to IAPMO Green, ASME A112.18.1/CSA B125.1 and all applicable requirements therein including NSF 61/9G & 372
- Meets CalGreen and Georgia SB370 requirements
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- The backflow protection system in the device consists of two independently operating check valves, a primary and a secondary which prevent backflow

- ADA  for lever handle

WARRANTY


- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
  - 10 year limited warranty when used in a multifamily installation
  - 5 year limited warranty when used in a commercial installation
- Visit [www.moen.com/support](http://www.moen.com/support) for complete details and limitations

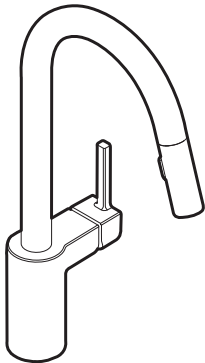

**ALIGN™**  
**Single Handle High Arc**  
**Pulldown Kitchen Faucet**

**Models:** 7565 series

**NOTE:** THIS FAUCET IS DESIGNED TO BE INSTALLED  
THROUGH 1 HOLE, 1-1/2" (38mm) MIN. DIA.  
(OPTIONAL 3-HOLE ESCUTCHEON 141002 AVAILABLE)

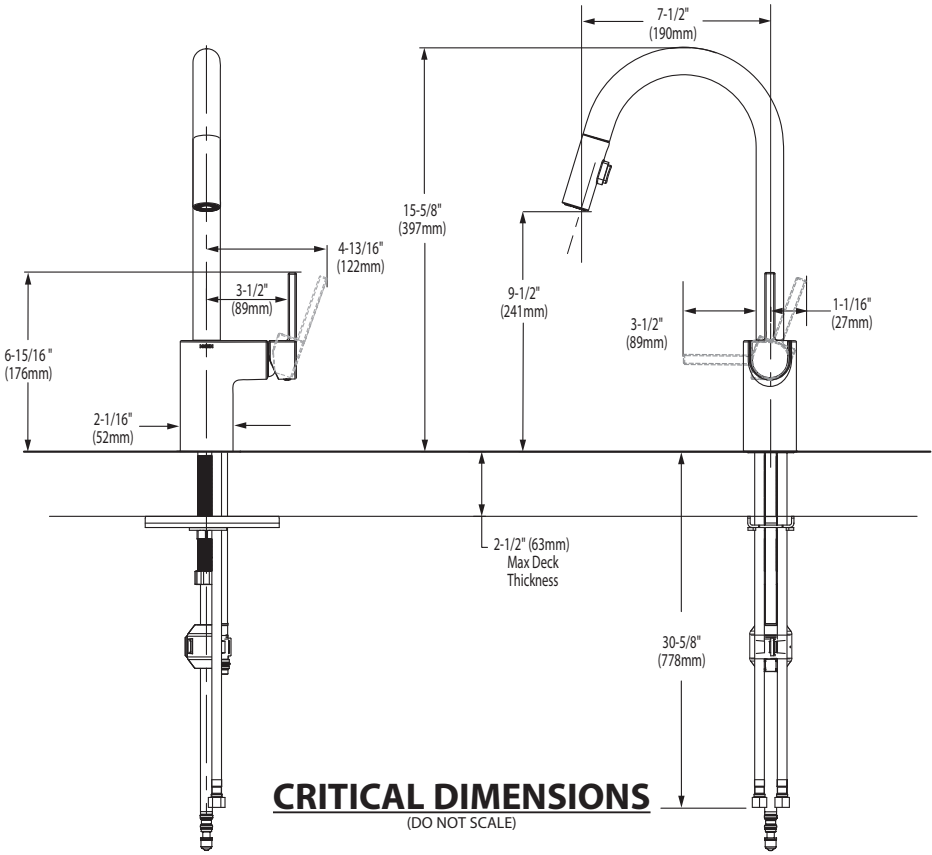



 **BARRIER FREE (ABOVE COUNTER OR DROP-IN ONLY)**

**BOULEVARD®  
PEDESTAL SINK**  
VITREOUS CHINA

**BOULEVARD® PEDESTAL SINK**

- STD
- ☐

~~0641.800~~

~~Faucet holes on 8" (203mm) centers (illustrated)~~
- ☐

0641.400

Faucet holes on 4" (102mm) centers
- ☐

~~0641.100~~

~~Center hole only~~

- Classic styled rectangular pedestal lavatory
  - Vitreous china
  - Rear overflow
  - Supplied with mounting kit
  - Right Height® for greater comfort during use
  - Faucet ledge with large deck area (faucet not included)
  - **Design coordinates with Boulevard® Toilet**
  - Basin has flat bottom to also allow use as an **above counter** sink or a **drop-in** sink (with u-shaped cut out)

**Nominal Dimensions:**  
24" x 19" x 35-1/2"  
(610 x 483 x 902mm)

- ☐

0641.008

Pedestal top-8" (203mm) centers
- ☐

0641.004

Pedestal top-4" (102mm) centers
- ☐

0641.001

Pedestal top-center hole only
- ☐

0010.000

Pedestal only

**Bowl sizes:**  
17" (432mm) wide,  
12-1/2" (318mm) front to back,  
5" (127mm) deep

**Compliance Certifications -  
Meets or Exceeds the Following Specifications:**  
• ASME A112.19.2 - 2008/CSA B45.1-08



SEE REVERSE FOR ROUGHING-IN DIMENSIONS

**To Be Specified:**

- ☐ Color:

☐ White

☐ Linen
- ☐ Faucet Finish:
- ☐ Supplies:
- ☐ 1-1/4" Trap:
- ☐ Nipple:


\* See faucet section for additional models available

**BOULEVARD®  
PEDESTAL SINK**  
VITREOUS CHINA




**BARRIER FREE (ABOVE COUNTER OR DROP-IN ONLY)**

**TOP VIEW (ALL THREE CONFIGURATIONS)**

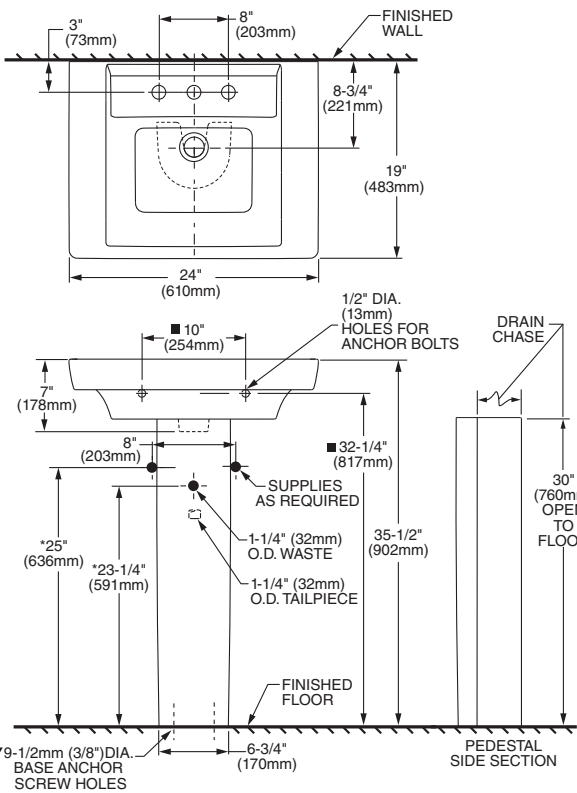

**PEDESTAL CONFIGURATION  
(NOT ADA COMPLIANT)**

**ABOVE COUNTER CONFIGURATION**

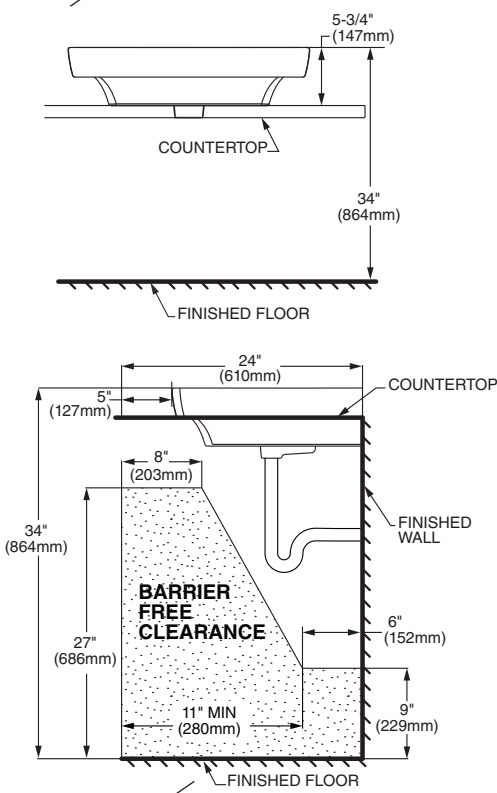

**DROP-IN SINK CONFIGURATION**

**ABOVE COUNTER AND DROP-IN SINK CONFIGURATIONS  
MEET THE AMERICANS WITH DISABILITIES ACT GUIDELINES  
AND ANSI A117.1 ACCESSIBLE AND USABLE  
BUILDINGS AND FACILITIES - CHECK LOCAL CODES.**

Top of sink installed at 34" (864mm) height from finished floor.  
Sink installed 5" (127mm) minimum from front edge of countertop.  
Provide 27" (686mm) knee clearance area.

**NOTES:**  
\* DIMENSIONS SHOWN FOR LOCATION OF SUPPLIES AND "P" TRAPS ARE SUGGESTED.  
▼ PEDESTAL ANCHORING SCREWS NOT INCLUDED.  
■ SUITABLE FOR REINFORCEMENT ONLY. ACTUAL DIMENSIONS MUST BE TAKEN FROM FIXTURE.  
FITTING NOT INCLUDED AND MUST BE ORDERED SEPARATELY.  
PROVIDE SUITABLE REINFORCEMENT FOR ALL WALL SUPPORTS.  
INSTALLATION INSTRUCTIONS SUPPLIED WITH LAVATORY.

**IMPORTANT:** Dimensions of fixtures are nominal and may vary within the range of tolerance established by ANSI Standard A112.19.2  
These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.



COLONY™  
COUNTERTOP SINK  
VITREOUS CHINA

COLONY COUNTERTOP SINK


- Vitreous china
- Self-rimming
- Front overflow
- Supplied with template
- Faucet deck  
(Faucet shown not included)



- ☐ 0346 803  
Faucet holes on 203mm (8") centres
- STD** ☐ 0346 403 (Illustrated)  
Faucet holes on 102mm (4") centres
- ☐ 0346 001  
Centre hole only

Nominal Dimensions:  
521 x 448mm (20-1/2" x 17-5/8")

Bowl sizes:  
422mm (16-5/8") wide, 279mm (11") front to back, 143mm (5-5/8") deep

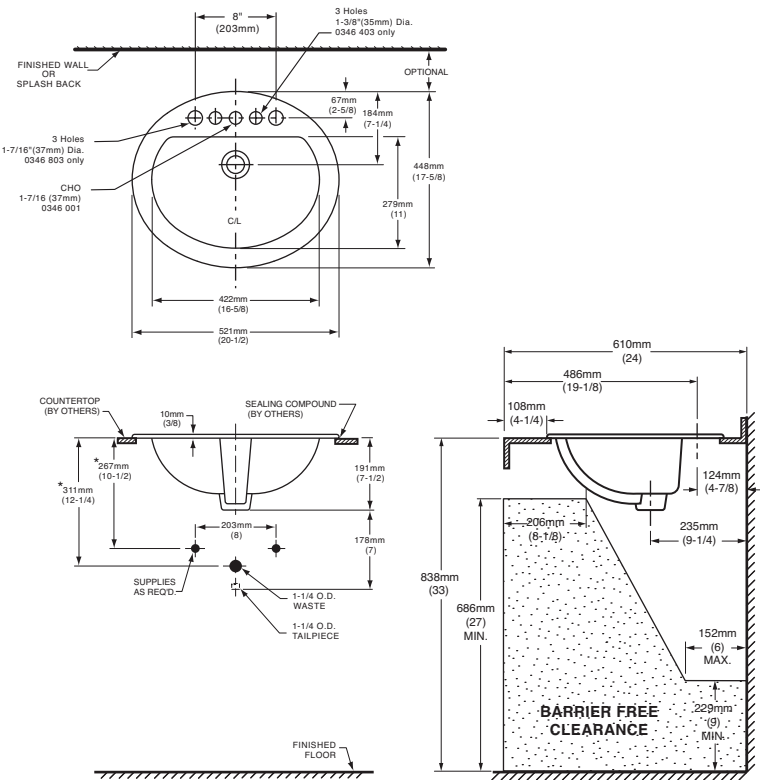

COMPLIANCE CERTIFICATIONS –  
Meets or exceeds the following Specifications:  
• ASME A112.19.2M for Vitreous China Fixtures.  
• CAN/CSA B45 Series.

- To Be Specified
- ☐ Colour: ☐ White ☐ Bone ☐ Silver Gray  
☐ Linen
- ☐ Faucet\*:
- ☐ Faucet Finish:
- ☐ Supplies & Stops:
- ☐ Trap 1-1/4" (32 mm):

NOTES:  
★ DIMENSIONS SHOWN FOR LOCATION OF SUPPLIES AND "P" TRAP ARE SUGGESTED. FOR COUNTERTOP CUTOUT AND INSTALLATION INSTRUCTIONS USE TEMPLATE SUPPLIED WITH SINK.  
FAUCETS NOT INCLUDED AND MUST BE ORDERED SEPARATELY.  
IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard A112.19.2.  
These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

\* See faucet section for additional models available



FloWise™ DUAL FLUSH  
ELONGATED TOILET  
VITREOUS CHINA

FloWise™ DUAL FLUSH ELONGATED TOILET

- ☐ 2476 216
- Vitreous china
  - Low-consumption Dual Flush  
Full flush 6.0 Lpf/1.3 gpf,  
Partial flush 3.0 Lpf/0.66 gpf.
  - Elongated wash down bowl
  - Internal trapway fully-glazed,  
2-1/4" (57mm) ballpass
  - Concealed trapway bowl
  - Chrome-plated top mounted  
push button actuator
  - Easy to clean sanitary dam on bowl
  - Includes Elongated Slow Close Seat
  - 100% factory flush tested
  - 2 bolt caps

Separate Component Parts:

- ☐ 3067 316 Elongated Bowl with Slow Close Seat
- ☐ 4035 216 Unlined Tank




- ☐ 2476 516 Same as above with Lined tank
- ☐ 3067 316 Elongated Bowl
- ☐ 4035 516 Lined Tank

Nominal Dimensions:  
794 x 432 x 765mm  
(31-1/4" x 17" x 30-1/8")

- Compliance Certifications -  
Meets or Exceeds the Following Specifications:
- ASME A112.19.2M (and 19.6M)
  - CAN/CSA B45 series

To Be Specified

- ☐ Colour: 020 White
- ☐ Supply with stop:

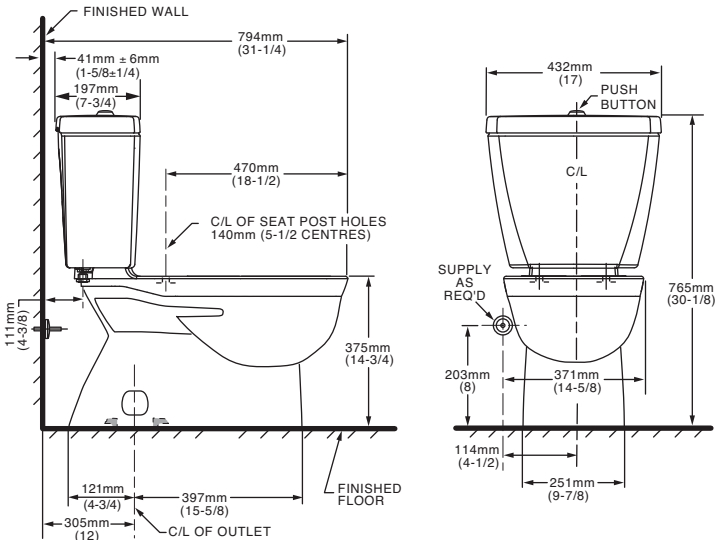

**NOTES:**  
THIS TOILET IS DESIGNED TO ROUGH-IN AT A MINIMUM DIMENSION OF 305MM (12") FROM FINISHED WALL TO C/L OF OUTLET.  
SUPPLY NOT INCLUDED WITH FIXTURE AND MUST BE ORDERED SEPARATELY.  
\* DIMENSION SHOWN FOR LOCATION OF SUPPLY IS SUGGESTED.  
FOR ADDITIONAL INFORMATION REFER TO INSTALLATION INSTRUCTIONS SUPPLIED.  
IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerance established by ANSI Standard A112.19.2  
These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

UPGRADED VALUE ADDED FEATURES AT NO EXTRA CHARGE



Specifications

DESCRIPTION

- Metal construction with various finishes identified by suffix
- 16" long 3/8" tubing connections
- Includes metal or 50/50 pop-up type waste assembly where noted

OPERATION

- Pivot action lever style handle
- Temperature controlled through 180° degree arc of handle travel

FLOW

- Flow is limited to 1.5 gpm max (5.7L/min) at 60 psi

CARTRIDGE

- 1225 cartridge design
- Nonmetallic/nonferrous and stainless steel material
- Can accommodate reversed piping and back to back installations


STANDARDS

- Third party certified to WaterSense®, CSA B-125.1, ASME A112.18.1 and all applicable requirements referenced therein including NSF61/9
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act

- **ADA**  for lever handle

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations



**CHATEAU®**  
Single-Handle Lavatory Faucet

with Metal Waste Assembly

**Model:** L4625 series

L4631BC

**Bulk Packed (12 per carton):**

L64624 series

with 50/50 Waste Assembly

**Bulk Packed (12 per carton):**


L64625 series

Less Waste

**Bulk Packed (12 per carton):**

L64600 series

**NOTE:** THIS FAUCET IS DESIGNED TO BE  
INSTALLED THRU 3-1" DIA. HOLES, 2" ON CENTER

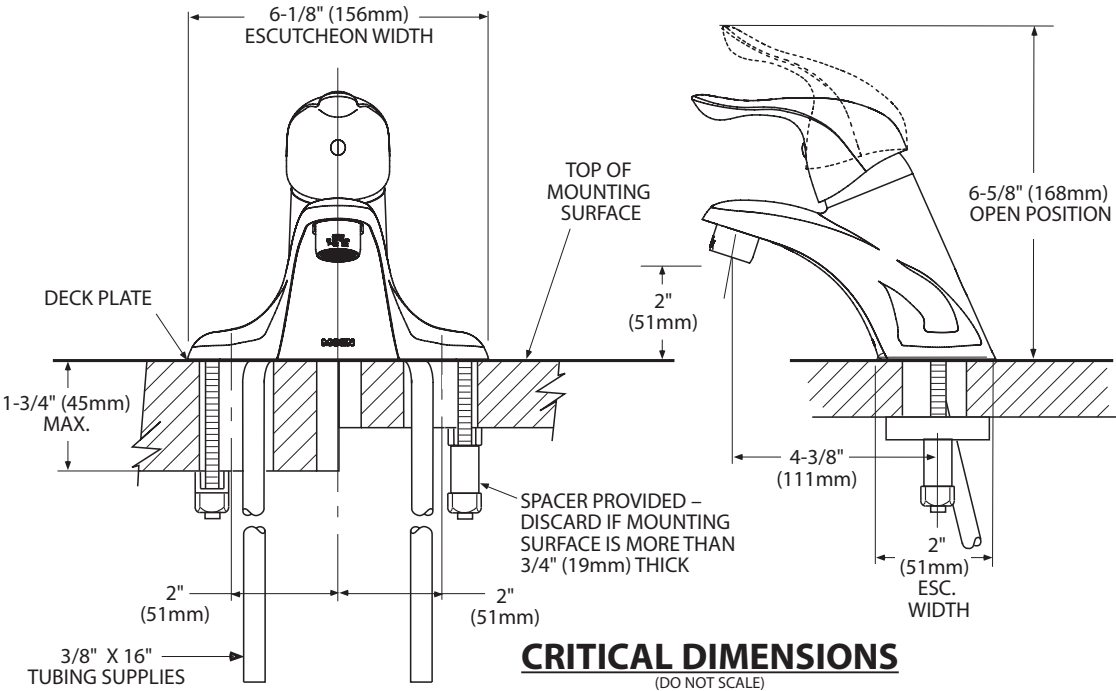



Buy it for looks. Buy it for life.®

There is more than 1 version of this model.  
Page down to identify the version you have.

DESCRIPTION

- Metal construction with various finishes identified by suffix
- Includes non-metalic showerhead, arm, flange and non-metalic diverter tub spout

OPERATION

- Handle operates counterclockwise through a 270° arc with off at 6 o'clock and maximum hot at the 9 o'clock position. Shut off in clockwise direction
- Adjustable temperature limit stop to control maximum hot water temperature
- Pressure balancing mechanism maintains selected discharge temperature to ± 3°

FLOW

- Showerhead is limited to 2.5 gpm (9.5 L/min) at 80 psi
- EP suffix models are limited to 1.75 gpm (6.6 L/min) at 80 psi
- NH suffix models contain no showerhead

CARTRIDGE

- 1222 cartridge design
- Accommodates back to back installations
- Nonmetallic/nonferrous and stainless steel material

STANDARDS

- Third party certified to meet ASME A112.18.1/CSA B125.1 and all applicable requirements referenced therein
- EP suffix models are third party certified to WaterSense®

- ADA  for lever handle

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations


Specifications



CHATEAU® POSI-TEMP®  
Single-Handle Tub/Shower Trim Kit

Models: TL181 series - valve trim only  
(Bulk Packed 12 per carton)  
TL182 series - shower trim only  
(Bulk Packed 12 per carton)  
TL183 series - tub/shower trim  
(Bulk Packed 12 per carton)

Valves: 62300 series  
2500 series

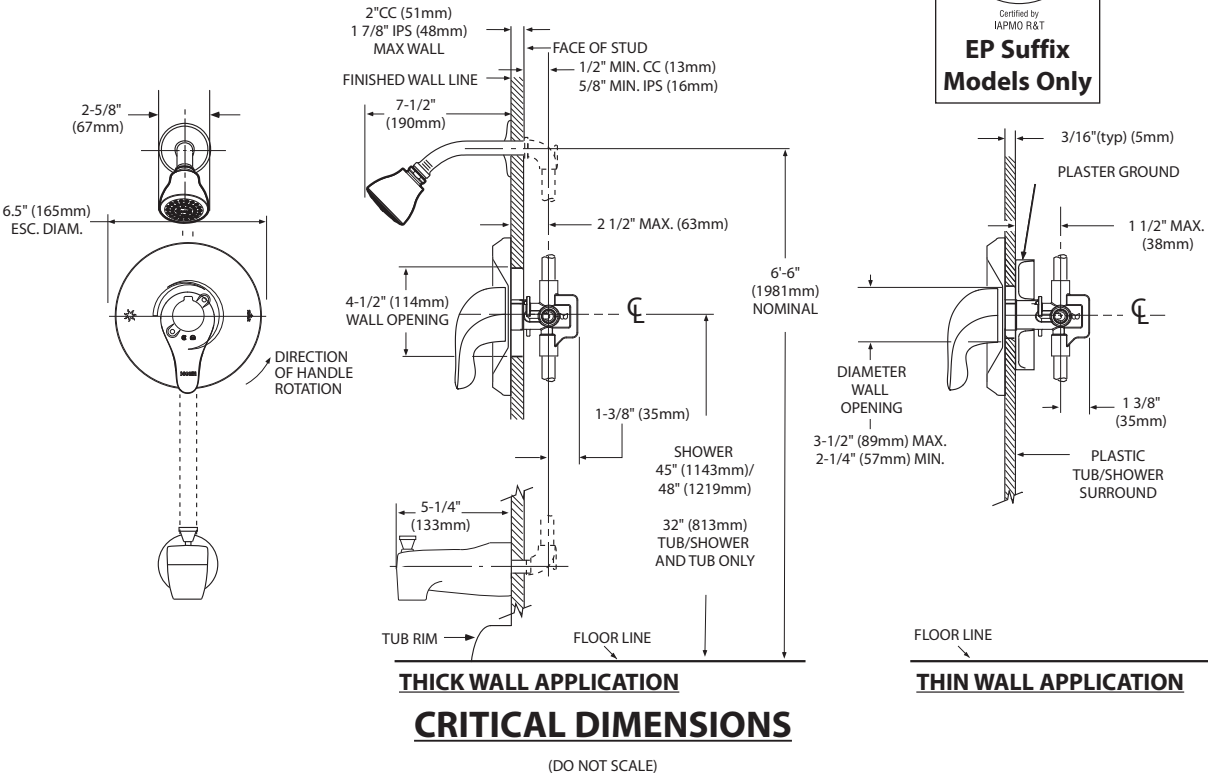




SPECIFICATIONS  
**AV SERIES**  
RANGE HOODS




**180 CFM/7.0 Sones @ 0.10" SP. Horizontal**  
**180 CFM/7.5 Sones @ 0.10" SP. Vertical**

- Dimensions**  
Overall bottom projection - 18<sup>3</sup>/<sub>8</sub>"  
Overall top projection - 12"  
Height - 6"  
Available widths: 21", 24", 30", 36" & 42"
- Hood Body**  
Stainless Steel: 24 gauge, grade 430 stainless steel.  
Painted: 23 gauge cold rolled commercial grade (CRCQ) steel, auto welded, coated with a baked enamel finish.
- Motor**  
2 speed, single coil, thermally protected, permanently lubricated.  
Rated 120 volts, 60 hz. Complete with 200°C lead wires.
- Lighting**  
Single 60 watt cook light capacity (bulb not included).
- Ducting Options**  
Horizontal ducting: 3<sup>1</sup>/<sub>4</sub>"x10" (duct adapter and damper included).  
Vertical ducting: 3<sup>1</sup>/<sub>4</sub>"x10" (duct adapter and damper included).  
Vertical ducting: 7" round (duct adapter and damper not included).  
Ductless: removable front vent (charcoal filter not included).
- Fan Blade**  
One piece polymeric, electronically balanced blade. 6<sup>5</sup>/<sub>8</sub>" diameter with 5 paddles.
- Electrical connection**  
Hood top - 7/8" knockout hole for use with 1/2" cable clamp  
Hood back - 7/8" knockout hole for use with 1/2" cable clamp

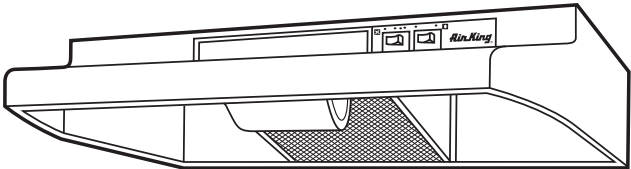

AV SERIES

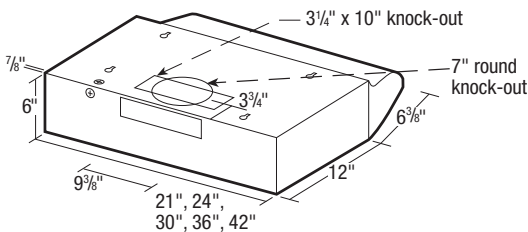

- Filters**  
UL rated, class 2 filter.  
Grease Filter: RF35 - 8<sup>7</sup>/<sub>8</sub>"x10<sup>3</sup>/<sub>8</sub>" (included).  
Charcoal Filter: RF34 (not included).  
Combo Grease/Charcoal: RF55 (not included).
- Available Finishes**  
White, Biscuit, Almond, Black & Stainless Steel.

| EXPANDED PERFORMANCE    |                                  |      |     |      |     |      |               |               |             |      |
|-------------------------|----------------------------------|------|-----|------|-----|------|---------------|---------------|-------------|------|
| Air Flow - CFM          | Static Pressure (inches of w.g.) |      |     |      |     |      | Sones @ .1 SP | Fan Speed RPM | Power Watts | Apms |
|                         | 0                                | 0.05 | 0.1 | 0.15 | 0.2 | 0.25 |               |               |             |      |
| Vertical Ducting High   | 246                              | 232  | 218 | 203  | 181 | 147  | 7.5           | 2973          | 87.0        | 2.1  |
| Horizontal Ducting High | 225                              | 210  | 180 | 175  | 155 | 120  | 7.0           | 3024          | 87.0        | 2.1  |

|            |              |     |         |     |       |      |              |     |                              |  |
|------------|--------------|-----|---------|-----|-------|------|--------------|-----|------------------------------|--|
| PROJECT    |              |     |         |     |       |      | ARCHITECT    |     |                              |  |
| LOCATION   |              |     |         |     |       |      | ENGINEER     |     |                              |  |
| CONTRACTOR |              |     |         |     |       |      | SUBMITTED BY |     | DATE                         |  |
| FAN NUMBER | MODEL NUMBER | CFM | IN W.C. | RPM | WATTS | AMPS | SONES        | QTY | OPTIONAL EQUIPMENT & REMARKS |  |
|            |              |     |         |     |       |      |              |     |                              |  |



**Air King:** 820 Lincoln Avenue  
West Chester, Pennsylvania 19380-4466  
Tel: (610) 692-7400 • 877-304-3785  
Fax: (610) 696-8048

**Canada:**  
Brampton, Ontario  
Tel: 905-456-2033  
Fax: (905) 456-1015

Whirlpool®

21 cu. ft. Top-Freezer Refrigerator  
WRT541SZD



Fingerprint-Resistant Stainless  
WRT541SZDZ

Also available in:

- White
- WRT541SZDW
- Black
- WRT541SZDB
- Monochromatic  
Stainless Steel
- WRT541SZDM

Key Features & Benefits

**Frameless Glass Shelves**  
Store more items on wall-to-wall shelves for greater storage flexibility.

**Flexi-Slide™ Bin**  
Make space for tall items with the bin that quickly and easily moves side to side.

**Humidity-Controlled Crispers**  
Store fruits and vegetables in their ideal environment.

| Capacity                        |            |
|---------------------------------|------------|
| Total Capacity                  | 21 cu. ft. |
| Refrigerator Capacity           | 15 cu. ft. |
| Freezer Capacity                | 6 cu. ft.  |
| General Features & Properties   |            |
| EZ Connect Icemaker Kit         |            |
| LED Interior Lighting           |            |
| ENERGY STAR® Certified          |            |
| Electronic Temperature Controls |            |
| Freezer Temperature Controls    |            |
| Clear Door Bins                 |            |
| Adjustable Door Bins            |            |
| Quiet Cooling                   |            |
| Fingerprint Resistant           |            |
| Electrical Details              |            |
| Amps                            | 6.5        |
| Volts                           | 115        |
| Certifications                  |            |
| ADA Compliant                   | Yes        |
| ENERGY STAR® Certified          | Yes        |


| Technical Details                       |                                                             |
|-----------------------------------------|-------------------------------------------------------------|
| Refrigerator Type                       | Top-Freezer                                                 |
| Number of Doors                         | 2                                                           |
| Number of Interior Refrigerator Shelves | 3                                                           |
| Number of Refrigerator Door Bins        | 1 Fixed, 4 Adjustable                                       |
| Number of Interior Freezer Shelves      | 1                                                           |
| Number of Freezer Door Bins             | 2 Fixed                                                     |
| Lighting Type                           | LED                                                         |
| Ice Maker                               | Optional                                                    |
| Ice Maker Location                      | Freezer                                                     |
| Dispenser Type                          | N/A                                                         |
| Dimensions                              |                                                             |
| Product Dimensions (H x W x D)          | 66-1/4" x 32-3/4" x 34"                                     |
| Depth with Door Open 90°                | 62-1/4"                                                     |
| Cutout Dimensions                       | Allow extra 1/2" on sides and top<br>Allow extra 1" on rear |
| Reference Material                      |                                                             |

[Dimension Guide](#)

[Use & Care Guide](#)

[Energy Guide](#)

[Warranty](#)

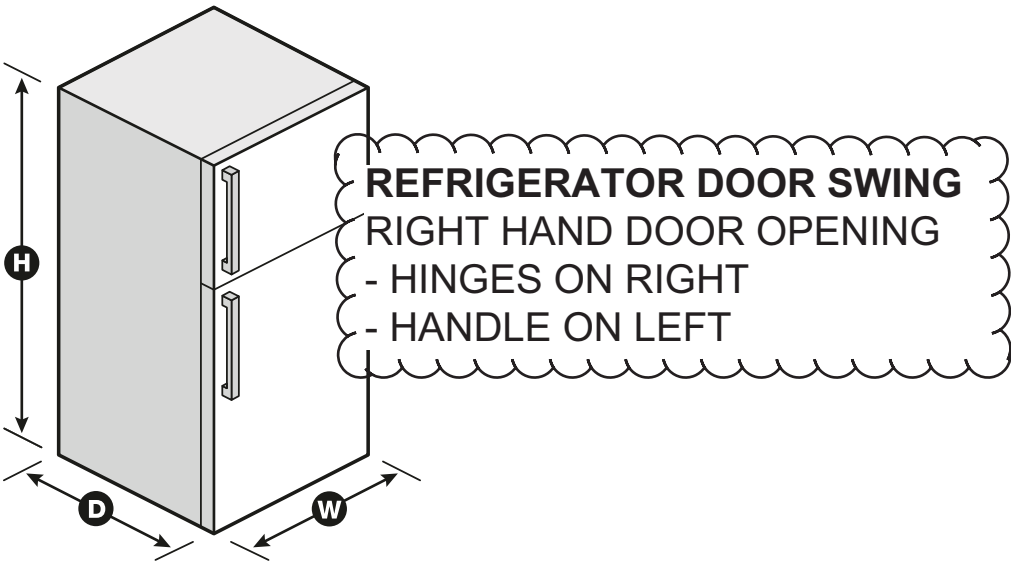

NOTE: Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.  
®/™ © 2020. All rights reserved. Printed in the U.S.A. D200052XXC. WRT541SZDSPECSHEETV01.

Top Mount Refrigerator

PRODUCT MODEL NUMBERS

WRT311FZD                      WRT541SZD  
WRT511SZD

**Electrical:** A 115-volt, 60-Hz, AC-only, 15- or 20-amp fused, grounded electrical supply is required. It is recommended that a separate circuit serving only your refrigerator be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.


**NOTE:** Before performing any type of installation, cleaning, or removing a light bulb, turn the control (Thermostat, Refrigerator or Freezer Control depending on the model) to OFF and then disconnect the refrigerator from the electrical source. When you are finished, reconnect the refrigerator to the electrical source and reset the control (Thermostat, Refrigerator or Freezer Control depending on the model) to the desired setting. See “Using the Controls.”

**Water:** A cold water supply with water pressure between 30 and 120 psi (207 and 827 kPa) is required to operate ice maker and water dispenser. If you have questions about your water pressure, call a licensed, qualified plumber.

**IMPORTANT:** The pressure of the water coming out of a reverse osmosis system going to the water inlet valve of the refrigerator needs to be between 30 and 120 psi (207 and 827 kPa).


**Reverse Osmosis Water Supply:** If a reverse osmosis water filtration system is connected to your cold water supply, the water pressure to the reverse osmosis system needs to be a minimum of 40 to 60 psi (276 to 414 kPa).

PRODUCT DIMENSIONS

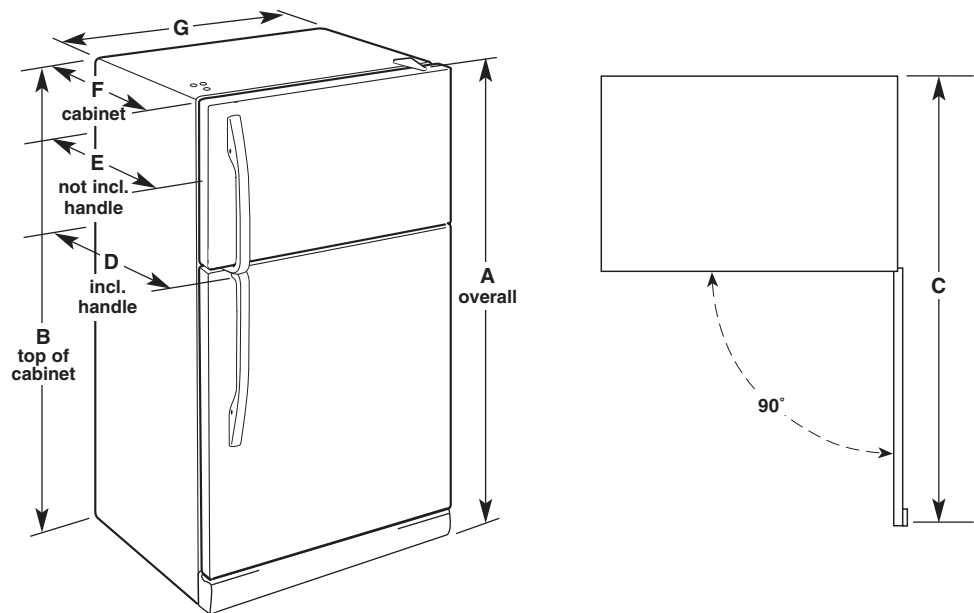

| Model Number           | Model Size   | Reversible Door | Height - Overall "A" | Height - Top of Cabinet "B" | Depth - Door Open 90° "C" | Depth - With Handles "D" | Depth - Without Handles "E" | Depth - Cabinet Only "F" | Width - Cabinet "G" |
|------------------------|--------------|-----------------|----------------------|-----------------------------|---------------------------|--------------------------|-----------------------------|--------------------------|---------------------|
| WRT311FZD              | 20.5 cu. ft. | Yes             | 66¼" (168.3 cm)      | 65½" (166.4 cm)             | 62¼" (158.1 cm)           | 32⅞" (83.5 cm)           | 30⅝" (77.8 cm)              | 28½" (72.4 cm)           | 32¾" (83.2 cm)      |
| WRT511SZD<br>WRT541SZD | 21.3 cu. ft. | Yes             | 66¼" (168.3 cm)      | 65½" (166.4 cm)             | 62¼" (158.1 cm)           | 34" (86.4 cm)            | 32½" (82.3 cm)              | 28½" (72.4 cm)           | 32¾" (83.2 cm)      |

LOCATION REQUIREMENTS

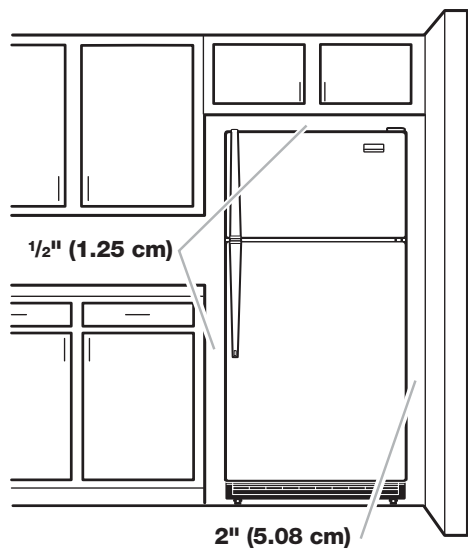

To ensure proper ventilation for your refrigerator, allow for a ½" (1.25 cm) space on each and between overhead cabinets and refrigerator top. Allow at least 1" (2.5 cm) between back of cabinet and the wall. If your refrigerator has an ice maker, make sure you leave some extra space at the back for the water line connections.

If you are installing your refrigerator next to a fixed wall, leave 2" (5 cm) minimum on the hinge side (depending on your model) to allow for the door to swing open.

**NOTE:** This refrigerator is intended for use in a location where the temperature ranges from a minimum of 55°F (13°C) to a maximum of 110°F (43°C). The preferred room temperature range for optimum performance, which reduces electricity usage and provides superior cooling, is between 60°F (15°C) and 90°F (32°C). It is recommended that you do not install the refrigerator near a heat source, such as an oven or radiator.



5.3 cu. ft. Whirlpool® electric range with Frozen Bake™ technology

YWFE515S0JS

This Whirlpool® electric range with a dual element stove top helps you get dinner to the table. Skip preheating for favorites like pizza with Frozen Bake™ technology. This self cleaning oven also prevents cooked food from getting cold with the Keep Warm setting. Closed door broiling helps keep the kitchen comfortable.

Top Features

**FlexHeat™ Dual Radiant Element**  
Get two elements in one with a 6" inner ring that's great for smaller pots and pans and a 9" expandable outer ring that makes room for larger cookware.

**Frozen Bake™ technology**  
Skip preheating and cook frozen favorites like pizza in fewer steps with preprogrammed settings that automatically adjust cooking times for you.

**Keep Warm setting**  
Keep dishes from getting cold with this setting that delivers low heat to the oven.

**Closed Door Broiling**  
Maintain the optimal cooking temperature for food while still keeping the kitchen comfortable and cool using this broiling temperature management system that helps prevent overheating.

Available Finishes/Colours

- YWFE515S0JB  
Black
- YWFE515S0JS  
Stainless Steel
- YWFE515S0JW  
White

Manuals & Literature:

- [Installation Instructions](#)
- [Use and Care](#)
- [Warranty](#)

| Dimensions |        |
|------------|--------|
| Depth      | 27 3/4 |
| Height     | 36     |
| Width      | 29 7/8 |

| Configuration and Overview |              |
|----------------------------|--------------|
| Range Type                 | Freestanding |
| Fuel Type                  | Electric     |
| Size (IN,inches)           | 30           |

| Exterior         |                 |
|------------------|-----------------|
| Door Removable   | Yes             |
| Drawer Type      | Storage Drawer  |
| Oven Door        | Glass Window    |
| Oven Window Size | Extra Large     |
| Handle Color     | Stainless Steel |
| Handle Material  | Metal           |


| Exterior    |                      |
|-------------|----------------------|
| Handle Type | Reach-Through Handle |

| Features                                           |     |
|----------------------------------------------------|-----|
| Hot Surface Indicator Light                        | Yes |
| Heating Element On Indicator Light                 | Yes |
| Power On Indicator Light                           | No  |
| Griddle                                            | NA  |
| Automatic Convection Conversion Temperature Adjust | No  |
| Power Outage Compatible                            | No  |

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice. Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

WHIRLPOOL 30" (76.0 CM) FREESTANDING ELECTRIC RANGES  
Model YWFE515S0JS

Product Dimensions

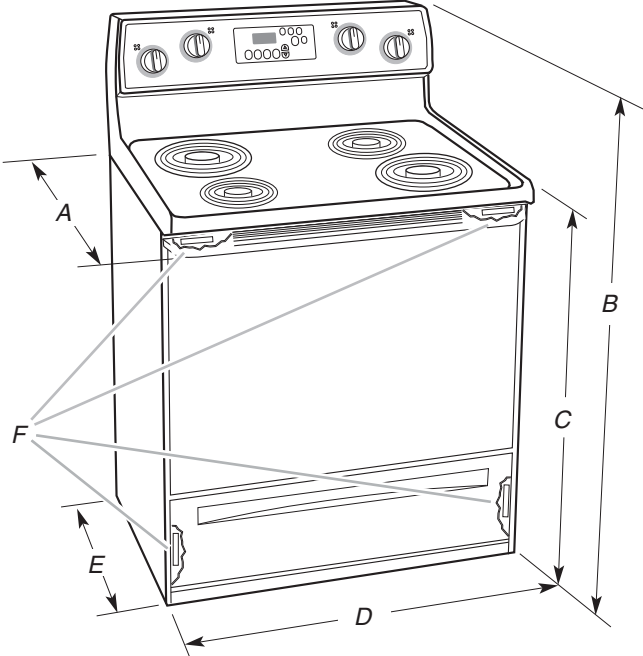

A. 27<sup>3</sup>/<sub>4</sub>" (70.5 cm) max. depth with handle

B. 46<sup>7</sup>/<sub>8</sub>" (119.1 cm) overall height (max.) with leveling legs screwed all the way in\*

C. 36" (91.4 cm) cooktop height (max.) with leveling legs screwed all the way in\*

D. 29<sup>7</sup>/<sub>8</sub>" (75.9 cm) width

E. 25<sup>5</sup>/<sub>16</sub>" (64.3 cm) depth - back of range to front of cooktop\*\*

F. Modell/serial/rating plate (located on the frame behind a top corner of the door or either side of the drawer)

**IMPORTANT:** Range must be level after installation. Follow the instructions in the “Level Range” section. Using the cooktop as a reference for leveling the range is not recommended.

\*Range can be raised approximately 1" (2.5 cm) by adjusting the leveling legs.


\*\*Front of door and drawer may extend further forward depending on styling.

Cabinet Dimensions

Cabinet opening dimensions shown are for 25" (64.0 cm) countertop depth, 24" (61.0 cm) base cabinet depth and 36" (91.4 cm) countertop height.

**IMPORTANT:** If installing a range hood or microwave hood combination above the cooking surface, follow the range hood or microwave hood combination installation instructions for dimensional clearances above the cooktop surface.

A freestanding range may be installed next to combustible walls with zero clearance.

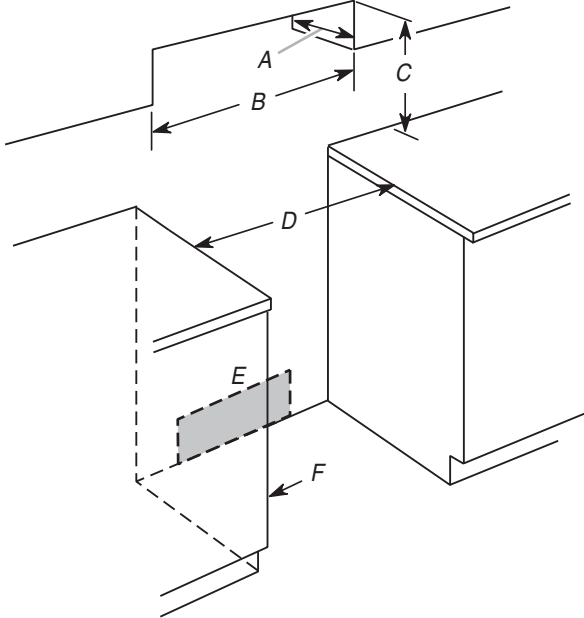

A. 13" (33.0 cm) max. upper cabinet depth

B. 30" (76.2 cm) min. opening width

C. For minimum clearance to top of cooktop, see NOTE\*

D. 30" (76.2 cm) min. opening width

E. Outlet - 8" (20.3 cm) to 22" (55.9 cm) from either cabinet, 7" (17.8 cm) max. from floor.

F. Cabinet door or hinges should not extend into the cutout.

**\*NOTE:** 24" (61.0 cm) minimum when bottom of wood or metal cabinet is covered by not less than 1/4" (6.4 mm) flame retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015" (0.4 mm) stainless steel, 0.024" (0.6 mm) aluminum or 0.020" (0.5 mm) copper.

30" (76.2 cm) minimum clearance between the top of the cooking platform and the bottom of an uncovered wood or metal cabinet.

WHIRLPOOL 30" (76.0 CM) FREESTANDING ELECTRIC RANGES  
Model YWFE515S0JS

Electrical Requirements - Canada Only

⚠️

WARNING



Electrical Shock Hazard

Electrically ground range.

Failure to do so can result in death, fire, or electrical shock.

If codes permit and a separate ground wire is used, it is recommended that a qualified electrical installer determine that the ground path is adequate and wire gauge are in accordance with local codes.

Be sure that the electrical connection and wire size are adequate and in conformance with CSA Standard C22.1, Canadian Electrical Code, Part 1 - latest edition, and all local codes and ordinances.

A copy of the above code standards can be obtained from:

Canadian Standards Association  
178 Rexdale Blvd.  
Toronto, ON M9W 1R3 CANADA

■

Check with a qualified electrical installer if you are not sure the range is properly grounded.

| Range Rating*  |                | Specified Rating of Power Supply Cord Kit and Circuit Protection |
|----------------|----------------|------------------------------------------------------------------|
| 120/240 V      | 120/208 V      | Amps                                                             |
| 8.8 - 16.5 KW  | 7.8 - 12.5 KW  | 40 or 50**                                                       |
| 16.6 - 22.5 KW | 12.6 - 18.5 KW | 50                                                               |

\*The NEC calculated load is less than the total connected load listed on the model/serial/rating plate.


\*\*If connecting to a 50 A circuit, use a 50 A rated cord with kit. For 50 A rated cord kits, use kits that specify use with a nominal 1<sup>3</sup>/<sub>8</sub>" (3.5 cm) diameter connection opening.

■

A time-delay fuse or circuit breaker is recommended.

■

This range is equipped with a CSA International Certified Power Cord intended to be plugged into a standard 14-50R wall receptacle. Be sure the wall receptacle is within reach of range's final location.



- Do not use an extension cord.

INSTALLATION INSTRUCTIONS

Unpack Range

⚠️

WARNING

Excessive Weight Hazard

Use two or more people to move and install range.


Failure to do so can result in back or other injury.

1.

Remove shipping materials, tape and film from range.
2.

Remove oven racks and parts package from inside oven.
3.


Do not remove the shipping base at this time.



A. Shipping base

4.


On Ranges Equipped with a Storage Drawer:
- Remove the storage drawer. See the “Storage Drawer” section. Use a 1/4" (6.4 mm) drive ratchet to lower the rear leveling legs one-half turn. Use a wrench or pliers to lower front leveling legs one-half turn.

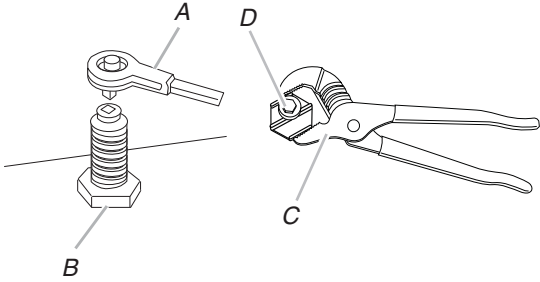

A. 1/4" (6.4 mm) drive ratchet  
B. Rear leveling leg  
C. Wrench or pliers  
D. Front leveling leg

On Ranges Equipped with a Warming Drawer or Premium Storage Drawer:

On ranges equipped with a warming drawer or premium storage drawer, the rear legs cannot be accessed by removing the warming drawer or premium storage drawer. It will be necessary to adjust the rear legs from outside the range. Use wrench or pliers to lower the front and rear leveling legs one half turn.

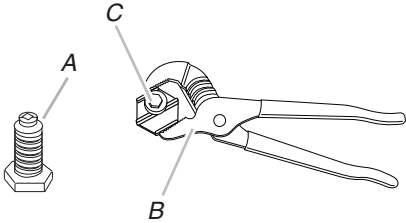

A. Rear leveling leg  
B. Wrench or pliers  
C. Front leveling leg

WHIRLPOOL 30" (76.0 CM) FREESTANDING ELECTRIC RANGES  
Model YWFE515S0JS

Install Anti-Tip Bracket

**⚠ WARNING**



**Tip Over Hazard**

A child or adult can tip the range and be killed.

Install anti-tip bracket to floor or wall per installation instructions.


Slide range back so rear range foot is engaged in the slot of the anti-tip bracket.

Re-engage anti-tip bracket if range is moved.

Do not operate range without anti-tip bracket installed and engaged.

Failure to follow these instructions can result in death or serious burns to children and adults.


1. Remove the anti-tip bracket from where it is taped inside the storage drawer or warming drawer.
2. Determine which mounting method to use: floor or wall.  
If you have a stone or masonry floor, you can use the wall mounting method. If you are installing the range in a mobile home, you must secure the range to the floor.
3. Determine and mark centerline of the cutout space. The mounting can be installed on either the left-side or right-side of the cutout. Position mounting bracket against the wall in the cutout so that the V-notch of the bracket is 12<sup>9</sup>/<sub>16</sub>" (31.9 cm) from centerline as shown.

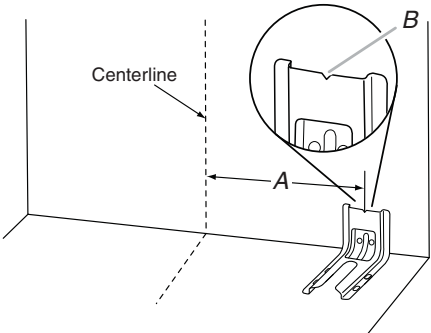


A. 12<sup>9</sup>/<sub>16</sub>" (31.9 cm)  
B. Bracket V-notch

4. Drill two 1/8" (3 mm) holes that correspond to the bracket holes of the determined mounting method. See the following illustrations.


**Floor Mounting**

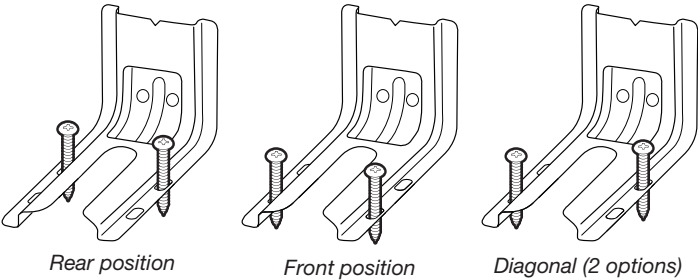

**Wall Mounting**



5. Using the Phillips screwdriver, mount anti-tip bracket to the wall or floor with the two #12 x 1<sup>5</sup>/<sub>8</sub>" (4.1 cm) screws provided.
6. Move range close enough to opening to allow for final electrical connections. Remove shipping base, cardboard or hardboard from under range.
7. Move range into its final location, making sure rear leveling leg slides into anti-tip bracket.



8. Move range forward onto shipping base, cardboard or hardboard to continue installing the range using the following installation instructions.



55 dBA\* Front Control Dishwasher  
WDF330PAH



Stainless Steel  
WDF330PAHS

Also available in:

- White
- Black

WDF330PAHW  
WDF330PAHB

Capacity

Total Place Settings 13

General Features & Properties

Heavy Cycle

High Temperature Wash Option

Heated Dry Option

ENERGY STAR® Certified

Industry's Best Selling Dishwasher Brand†

Designed, Engineered and Assembled in the U.S.A. with American Pride

Electrical Details

Amps 10

Volts 120

Hz 60

Certifications

ENERGY STAR® Certified Yes

Technical Details

Dishwasher Type Built-in

Control Location Front

Control Type Push Button

Number of Wash Cycles 3

Number of Options 4

dBA\* 55

Number of Racks 2

Tub Material Plastic

Wash System Filter

Wash System Type Removable Filter

Number of Wash Arms 2

Dimensions

Product Dimensions (H x W x D) 34-1/2" x 23-7/8" x 24-1/2"

Depth with Door Open 90° 49-1/2"

Reference Material

[Dimension Guide](#)

[Install Guide](#)

[Use & Care Guide](#)

[Energy Guide](#)

[Warranty](#)

Key Features & Benefits

1-Hour Wash Cycle


Clean dishes in half the time so your plates, pans and glasses are thoroughly cleaned up and taken care of in just an hour.\*\*

Soil Sensor

Determines how dirty dishes are and adjusts the Normal cycle as needed to make sure dishes come out clean.

Normal Cycle

Use for normal amounts of food soil to clean up leftover messes from your day-to-day meals.

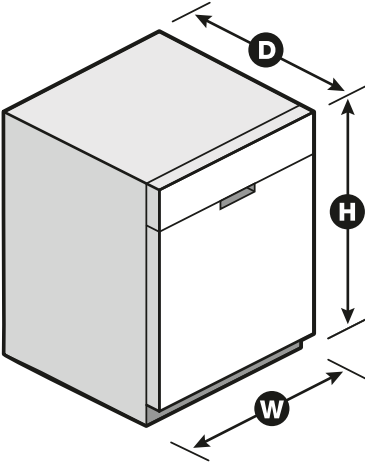

\*Per IEC standards. \*\*Compared to Normal cycle with lightly soiled loads. †Based on 12-month average of sales. TraQline 2018. NOTE: Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice. ®/™ © 2020. All rights reserved. Printed in the U.S.A. D200052XXA. WDF330PAHSPECSHEETV01.




Undercounter Dishwasher

PRODUCT MODEL NUMBERS

|           |           |           |
|-----------|-----------|-----------|
| WDF110PAB | WDF320PAD | WDT710PAH |
| WDF111PAB | WDF330PAH | WDT720PAD |
| WDF120PAF | WDF331PAH | WDT730PAH |
| WDF121PAF | WDF520PAD | WDT735PAG |
| WDF130PAH | WDF540PAD | WDT735PAH |
| WDF131PAH | WDF545PAF |           |

DRAIN REQUIREMENTS

- A new drain hose is supplied with your dishwasher. If drain hose is not long enough, use a new drain hose with a maximum length of 12 ft (3.7 m) that meets all current AHAM/ IAPMO test standards, is resistant to heat and detergent, and fits the 1" (25 mm) drain connector of the dishwasher. See the "Tools and Parts" section at the front of the guide for part details and orders.
- Make sure to connect drain hose to waste tee or disposer inlet above drain trap in house plumbing and 20" (508 mm) minimum above the floor. It is recommended that the drain hose either be looped up and securely fastened to the underside of the counter or be connected to an air gap.
- Make sure to use an air gap if the drain hose is connected to house plumbing lower than 20" (508 mm) above subfloor or floor.

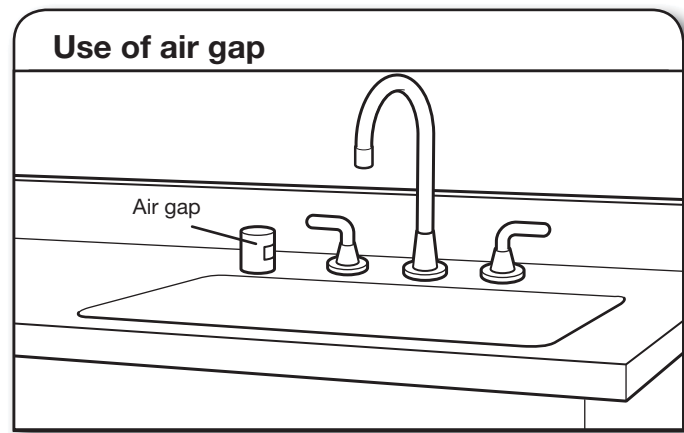

- If required, the air gap should be installed in accordance with the air gap installation instructions. When you are connecting the air gap, a rubber hose (not provided) will be needed to connect to the waste tee or disposer inlet.
- Use 1/2" minimum I.D. drain line fittings.

WATER SUPPLY REQUIREMENTS

- This dishwasher has a water heating feature and also requires a connection to a hot water supply line.
- A hot water line with 20 to 120 psi (138 to 862 kPa) water pressure can be verified by a licensed plumber.
- 120°F (49°C) water at dishwasher
- 3/8" O.D. copper tubing with compression fitting or flexible braided water supply line. See the "Tools and Parts" section at the front of the guide for part details and orders.

**NOTE:** 1/2" minimum plastic tubing is not recommended.

- A 90° elbow with 3/4" hose connection with rubber washer. See the "Tools and Parts" section at the front of the guide for part details and orders.
- Do not solder within 6" (152 mm) of the water inlet valve.
- If installed in new construction, make sure the house water supply lines have been flushed prior to connecting the dishwasher to remove any debris that may exist in the supply line.

**NOTE:** If replacing an existing dishwasher, it is recommended to install a new water line (see the "Tools and Parts" section at the front of the guide for part details) and drain hose (supplied) with the new dishwasher.

ELECTRICAL REQUIREMENTS

You Must Have:


- 120-volt, 60 Hz, AC-only, 15- or 20-amp, fused electrical supply
- Copper wire only
- A maximum of 2 field wiring supply conductors (12 AWG largest size) plus 1 grounding conductor are permitted in the terminal box.

We Recommend:

- A time-delay fuse or circuit breaker
- A separate circuit

If Connecting Dishwasher with a Power Cord:

- Use a UL Listed power cord kit marked for use with dishwasher. See the "Tools and Parts" section at the front of the guide for part details and orders.
- Plug into a grounded 3 prong outlet. Outlet must meet all local codes and ordinances.




If Connecting Dishwasher with Direct Wiring:


- Use flexible, armored, or nonmetallic sheathed copper wire with grounding wire that meets the wiring requirements for your home and local codes and ordinances.
- Use a UL Listed/CSA Approved metallic strain relief.



PRODUCT AND CABINET OPENING DIMENSIONS

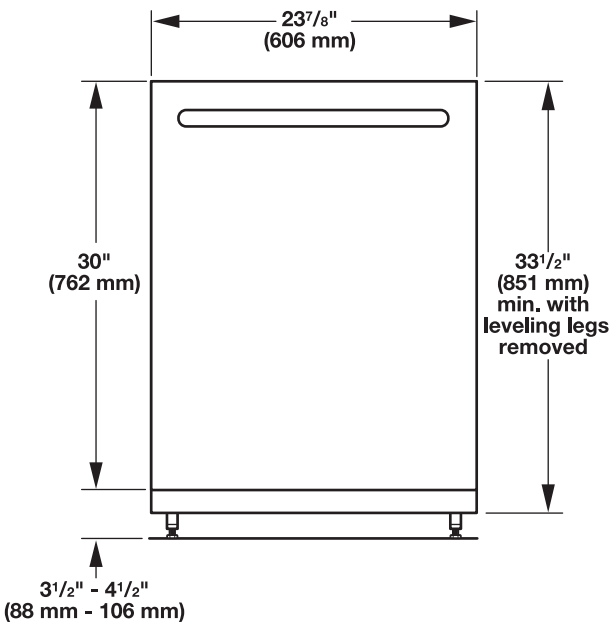


For 4" (100 mm) toe kick, height of cabinet opening is  $34\frac{1}{2}$ " (863 mm).

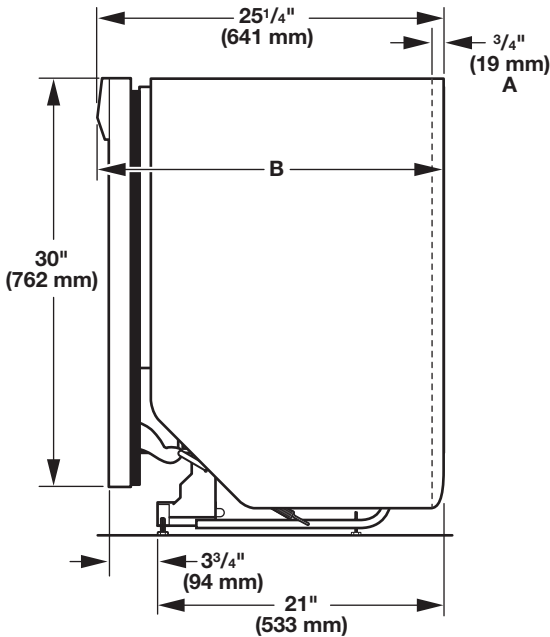

- A. Insulation may be compressed (not used on all models).
- B. Door handles may protrude forward of the face of the dishwasher, (varies by model).

Check that all surfaces have no protrusions that would prohibit dishwasher installation.

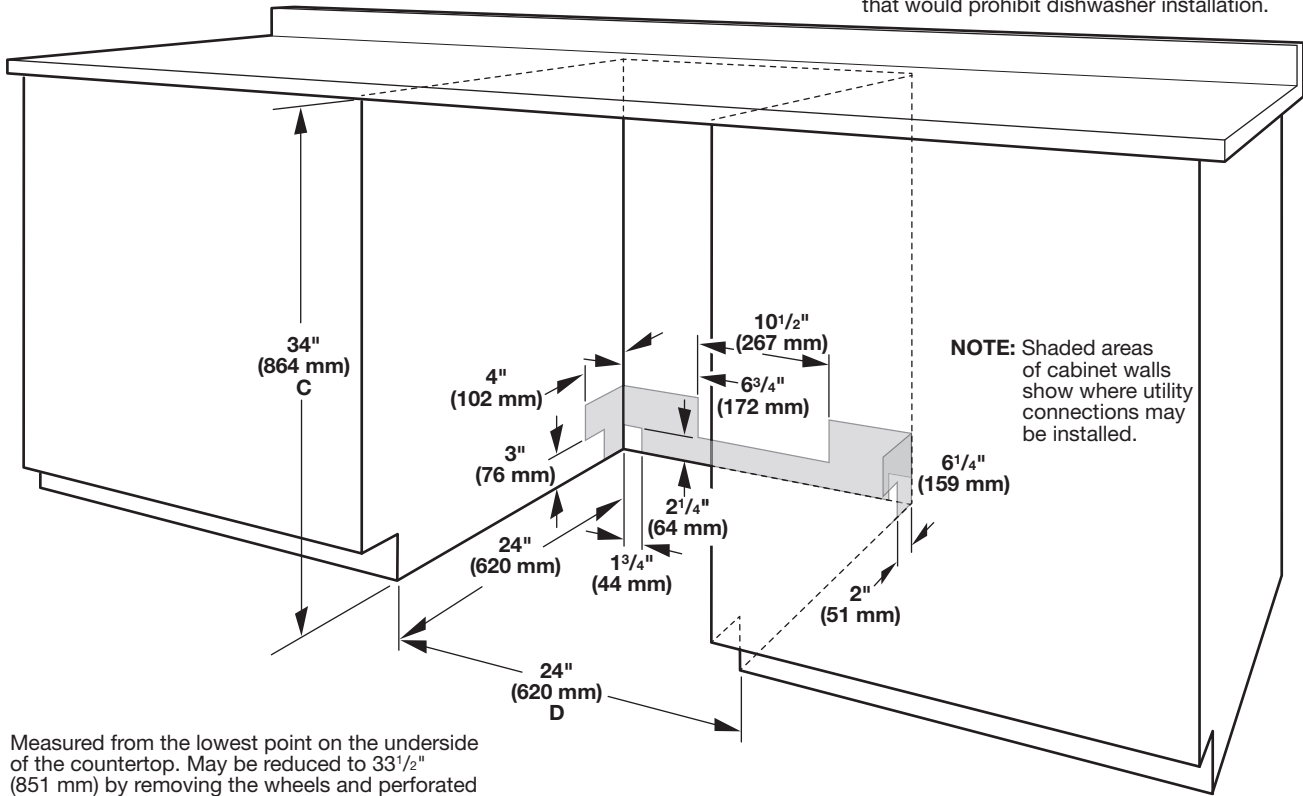

NOTE: Shaded areas of cabinet walls show where utility connections may be installed.

- C. Measured from the lowest point on the underside of the countertop. May be reduced to  $33\frac{1}{2}$ " (851 mm) by removing the wheels and perforated area of insulation (blanket) on dishwasher.
- D. Minimum, measured from narrowest point of opening.

5.0 cu.ft I.E.C. Closet-Depth Front Load Washer with Intuitive Controls

Model: WFW560CHW

OverviewSpecificationsReviewsYou May Also LikeHelp And ResourcesFind In Store



Key Features

- #1 in Customer Satisfaction in the J.D. Power 2020 Laundry Appliances Satisfaction Study
- 5.0 cu. ft. I.E.C. Capacity
- ENERGY STAR® Certified
- Intuitive Controls
- Sanitize Cycle with Oxi

Color

White

Specifications

Width:  
6858.00, 27.0”  
Centimeters, Inches

Depth:  
8016.88, 31-9/16”  
Centimeters, Inches

Dimensions

|              |                         |
|--------------|-------------------------|
| Capacity     | 4-3/10                  |
| Depth        | 8016.88 cm, 31-9/16 in  |
| Gross Weight | 97068688.00 kg, 214 lbs |
| Net Weight   | 92532768.00 kg, 204 lbs |
| Width        | 6858.00 cm, 27.0 in     |

Appearance

|                  |     |
|------------------|-----|
| LCD Touch Screen | No  |
| Window           | Yes |

Details

|                                |                                     |
|--------------------------------|-------------------------------------|
| Advanced Vibration Control™    | No                                  |
| Dispense System                | Detergent, Fabric Softener & Bleach |
| Eco Monitor/Efficiency Monitor | No                                  |
| Hoses Included                 | 4ft 4in Drain Hose Included         |
| Internal Heater                | No                                  |
| Maximum Spin Speed             | 1160                                |
| Out Of Balance Sensing         | Yes                                 |
| Water Factor                   | 3-1/5                               |

Cycles and Options

|                       |    |
|-----------------------|----|
| Number Of Wash Cycles | 35 |
|-----------------------|----|

Electrical

|                     |     |
|---------------------|-----|
| Power Cord Included | Yes |
|---------------------|-----|

Controls

|                                |       |
|--------------------------------|-------|
| Automatic Temperature Controls | Yes   |
| Control Location               | Front |
| LCD Touch Screen               | No    |

Compatibility

|            |    |
|------------|----|
| Works With | No |
|------------|----|

Options

|                          |   |
|--------------------------|---|
| Number Of Washer Options | 7 |
|--------------------------|---|

Features

|              |     |
|--------------|-----|
| Stackable    | Yes |
| Water Faucet | No  |

Cycles

|                       |    |
|-----------------------|----|
| Number Of Wash Cycles | 35 |
|-----------------------|----|


Exterior

|                |      |
|----------------|------|
| Lid/Door Lock  | Yes  |
| Lid/Door Swing | Left |


Modifiers

|                                   |                       |
|-----------------------------------|-----------------------|
| Delay Start                       | No                    |
| Number Of Rinse Options           | 2                     |
| Number Of Soil Levels             | 3                     |
| Number Of Spin Speeds             | 4                     |
| Number Of Wash/Rinse Temperatures | 4                     |
| Pre Soak                          | Yes                   |
| Temperature Selections            | Hot, Cold, Cool, Warm |


Recessed area or closet installation (stacked washer and dryer)

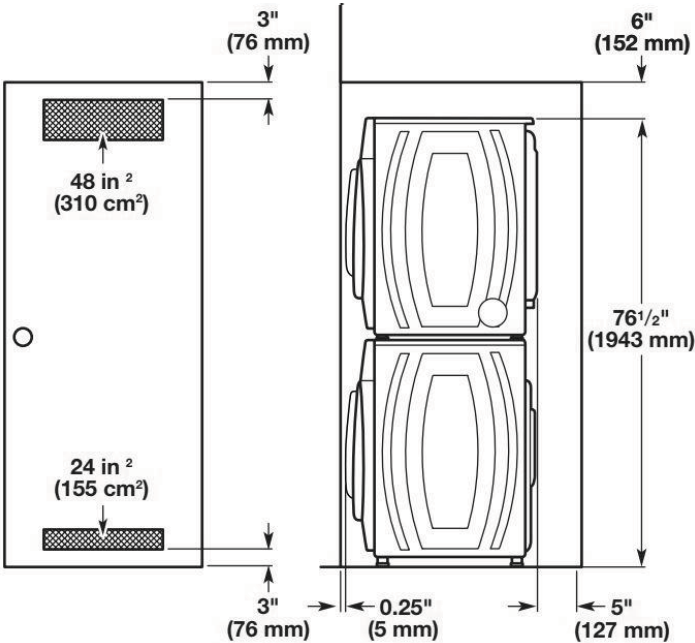


Custom under counter installation

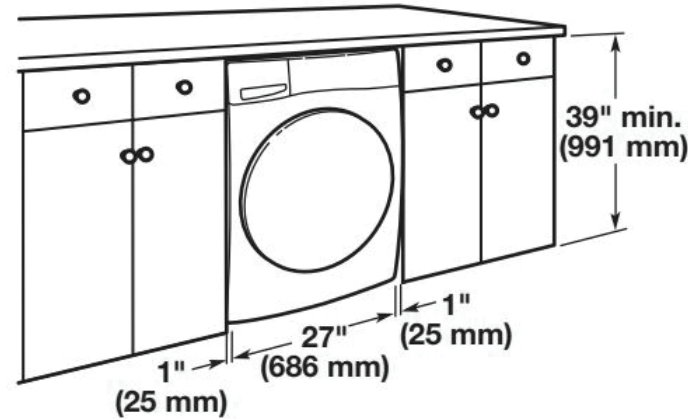

Recessed area or closet installation (washer only)

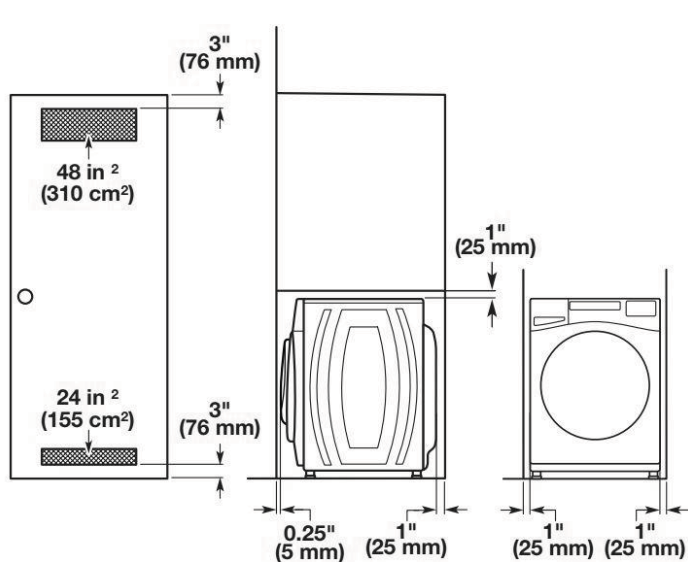

Custom cabinet installation

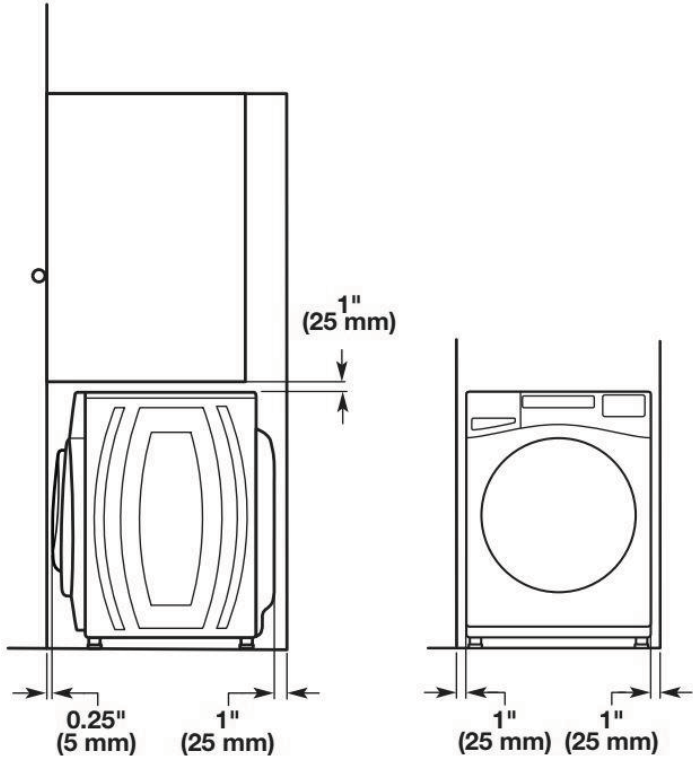


Drain System

It is the responsibility of the installer to install and secure the drain hose in to the provided plumbing/drain in a manner that will avoid the drain hose coming out of or leaking from the plumbing/drain.

Drain system can be installed using a floor drain, wall standpipe, floor standpipe, or laundry tub. Select the method you need.


**IMPORTANT:** To avoid siphoning, only 4.5" (114 mm) of drain hose should be inside standpipe. Always secure drain hose with cable tie.

Floor standpipe drain system

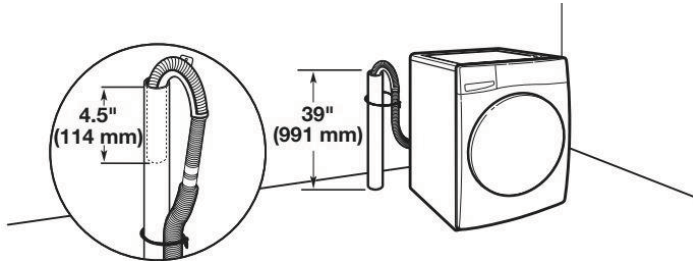


Minimum diameter for a standpipe drain: 2" (51 mm). Minimum carry-away capacity: 17 gallons (64 L) per minute. A 1/4" (6 mm) diameter to 1" (25 mm) diameter Standpipe Adapter Kit is available; refer to the Quick Start Guide for online ordering information. Top of standpipe must be at least 39" (762 mm) high; install no higher than 96" (2.4 m) from bottom of washer. If you have an overhead sewer and need to pump higher than 96" (2.4 m), a sump pump and associated hardware are needed. See "Alternate Parts."

Wall standpipe drain system

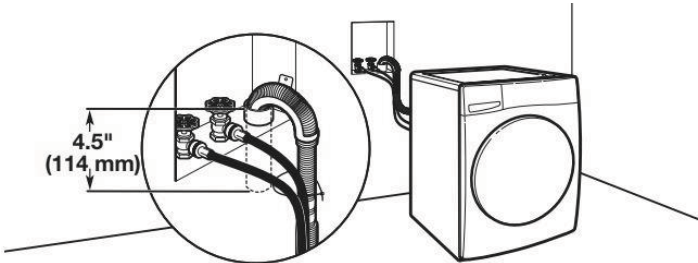


See requirements in “Floor standpipe drain system.”


Laundry tub drain system

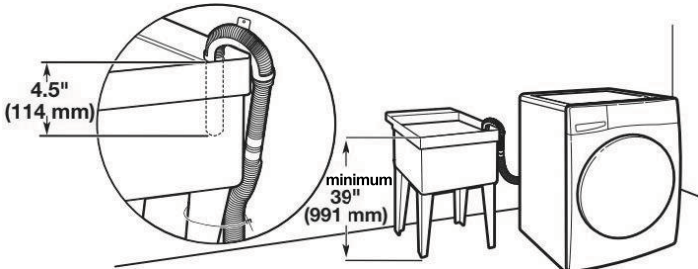

Minimum capacity: 20 gallons (76 L). Top of laundry tub must be at least 39" (991 mm) from the floor; install no higher than 96" (2.4 m) from bottom of washer.

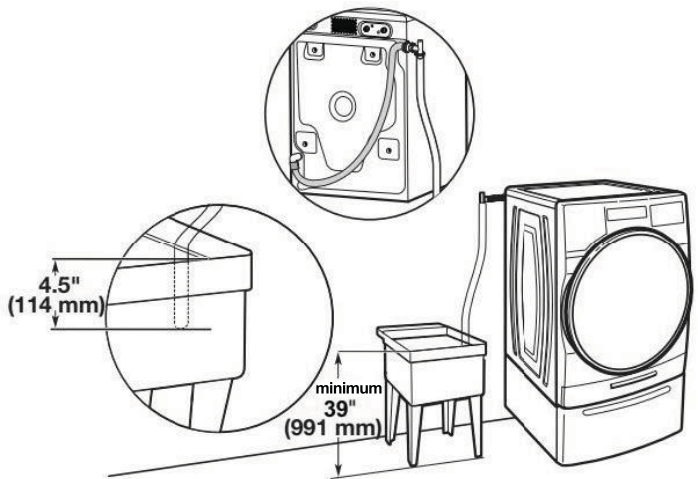

Floor drain system

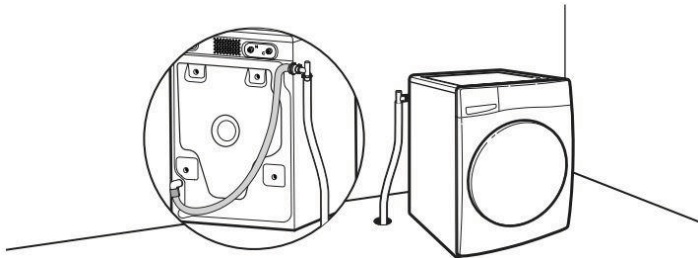

Floor drain system requires a Siphon Break Kit, 2 Connector Kits, and an Extension Drain Hose that may be purchased separately; refer to the Quick Start Guide for online ordering information. Minimum siphon break height: 28" (710 mm) from bottom of washer. (Additional hoses may be needed.)

Electrical Requirements

**⚠WARNING**

**Electrical Shock Hazard**

**Plug into a grounded 3 prong outlet.**

**Do not remove ground prong.**

**Do not use an adapter.**

**Do not use an extension cord.**

**Failure to follow these instructions can result in death, fire, or electrical shock.**

- A 120 V, 60 Hz, AC only, 15 or 20 A, fused electrical supply is required. A time-delay fuse or circuit breaker is recommended. It is recommended that a separate circuit breaker serving only this appliance be provided.
- This washer is equipped with a power supply cord having a 3-prong grounding plug.
- To minimize possible shock hazard, the cord must be plugged into a mating, 3-prong, grounding-type outlet, grounded in accordance with local codes and ordinances. If a mating outlet is not available, it is the personal responsibility and obligation of the customer to have the properly grounded outlet installed by a qualified electrician.
- If codes permit and a separate ground wire is used, it is recommended that a qualified electrician determine that the ground path is adequate.
- Do not ground to a gas pipe.
- Check with a qualified electrician if you are not sure the washer is properly grounded.
- Do not have a fuse in the neutral or ground circuit.

**GROUNDING INSTRUCTIONS**

**For a grounded, cord-connected appliance:**  
This appliance must be grounded. In the event of a malfunction or breakdown, grounding will reduce the risk of electric shock by providing a path of least resistance for electric current. This appliance is equipped with a cord having an equipment-grounding conductor and a grounding plug. The plug must be plugged into an appropriate outlet that is properly installed and grounded in accordance with all local codes and ordinances.

**WARNING:** Improper connection of the equipment-grounding conductor can result in a risk of electric shock. Check with a qualified electrician or serviceman if you are in doubt as to whether the appliance is properly grounded. Do not modify the plug provided with the appliance: If it will not fit the outlet, have a proper outlet installed by a qualified electrician.

**For a permanently connected appliance:**  
This appliance must be connected to a grounded metal, permanent wiring system, or an equipment-grounding conductor must be run with the circuit conductors and connected to the equipment-grounding terminal or lead on the appliance.

**SAVE THESE INSTRUCTIONS**

WHIRLPOOL DRYER Model #: YWED5620HW

Whirlpool Brand Canada English | Washer and Dryers | Dryers | Electric Dryers | YWED5620HW



Define  
Your Style  
Whirlpool®

7.4 cu. ft. Front Load Electric  
Dryer with Intuitive Touch  
Controls



7.4 cu. ft. Front Load Electric Dryer with Intuitive Touch Controls

Model #: YWED5620HW

Dimensions

|                                |                      |
|--------------------------------|----------------------|
| Depth                          | 78.74 cm, 31.0 in    |
| Depth With Door Open 90 Degree | 138.43 cm, 54-1/2 in |
| Height                         | 98.42 cm, 38-3/4 in  |
| Width                          | 68.58 cm, 27.0 in    |

Configuration and Overview

|           |          |
|-----------|----------|
| Fuel Type | Electric |
|-----------|----------|

Cycles and Options

|                          |     |
|--------------------------|-----|
| Cycle Time Remaining     | Yes |
| Lint Filter Indicator    | No  |
| Number of Dryer Cycles   | 36  |
| Number of Dryness Levels | 3   |

Ventilation System

|                     |                           |
|---------------------|---------------------------|
| Long Vent           | No                        |
| Maximum Vent Length | 64                        |
| Venting Direction   | Left, Right, Bottom, Rear |

Electrical

|                     |     |
|---------------------|-----|
| Hz                  | 60  |
| Power Cord Included | Yes |