

Sales Selection Sheet
Checklist

1 of 53

LOT 767 Model: 30-2794 A The Willowglen
PURCHASERS: RADHA NALLAVELLI/MOHAN REDDY BADALA
VENDOR: Heathwood Homes (Whitby) Limited

BUILT-IN KITCHEN LAYOUT

- ☒ WOB
- ☐ DECK

UPGRADED / MODIFIED ELEVATION

- ☐ CORNER UPGRADE
- ☒ REAR UPGRADE

CEILING UPGRADE - SMOOTH

- ☒ MAIN FLOOR (STD)
- ☐ SECOND FLOOR WITH RESILIENCE CHANEL
- ☐ LOWER LEVEL

ADDITIONAL ROUGH-INS

- ☒ 200 AMP SERVICE (STD)
- ☒ WET BAR ROUGH-IN
- ☒ HUMIDIFIER (STD)
- ☒ AIR CONDITIONING (STD)

GAS ROUGH-IN

- ☒ STOVE
- ☐ DRYER
- ☐ BBQ
- ☐ ADDITIONAL GAS FIREPLACE

KITCHEN HOODFAN VENTING SIZE

- ☒ 6 IN ROUND DUCT (STD WITH APPLIANCE PACKAGE)
- ☐ 7 IN ROUND DUCT

FULL LOWER LEVEL STAIRS	All Oak
UPPER LOWER LEVEL STAIRS	N/A
LOWER LOWER LEVEL STAIRS	N/A
MAIN STAIRS	All Oak

April 12/24 Signature
Date Purchaser: on file

April 12/24 IRIT SALEM
Date Decor Consultant:

Date Purchaser:


-04- 12 2024 mf
Date Heathwood Homes (Whitby) Limited
Approved

Locked Date:

RADHA NALLAVELLI/MOHAN REDDY BADALA
Project: Country Lane
Unit: 767, Phase: 7
Model: 30-2794 A The Willowglen

Created: 2/22/2024 09:41:15
Locked:
Closed:

Kitchen/Breakfast

Cabinet Colour/Style	9111	Viking III-SIMCOE ORCHID 3DL ***STD***	
Island Cabinet Colour/Style	9158	Viking III-SIMCOE-NAVY BLUE-3DL ***STD***	
Cabinet Hardware	2098	12801-HARDWARE ***STD***	
Countertop	9815	Group 2-Quartz-Caesarstone-GOLDEN SKY # 7524-3/4 inch B/U MITERED EDGE ***2***	
Island Countertop	9815	Group 2-Quartz-Caesarstone-GOLDEN SKY # 7524-3/4 inch B/U MITERED EDGE ***2***	
Countertop Edge	4005	DOUBLE MITRE 1 1/2 INCH ***UPG***	
Sink	9493	BLANCO QUATRUS U 1 SUPER SINGLE 401248 (min cabinet 36 in)	PG 29
Crumb Vac Color	9482	Vacuum-Crumb Vac (Dust Pan)-White	
HoodFan	9414	AVN-368CS-AVG 36 inch STAINLESS STEEL CHIMNEY WALL MOUNTED HOODFAN	PG 40-41
Backsplash	9774	OV.ET.VLK.2x6.PL.HER-Eterna Volkas Herringbone-White Polished-2 x 6 UPG B6 (only) ***UPG***	
Backsplash Grout	9836	Grout-Eggshell #5220 ***STD***	
Backsplash Tile Pattern	3100	VERTICAL HERRINGBONE ***UPG***	
Flooring	9008	Red Oak PEARL-Vintage Red Oak Solid Sculpted Character PEARL-SAND DUNE-3/4 inch X 5 inch ***STD**	
Floor Tile Grout	1111	N/A *****	
Floor Tile Pattern	1111	N/A *****	

- Purchasers have been advised: standard fridge opening is a minimum 37 3/8 x 73 3/8 inches. Ice Waterline Rough-In is included.
- Standard stove opening is 30 inches and standard dishwasher opening is 24 inches. Any gas stove will require backsplash or stainless steel backing to avoid fire hazards.
- Purchasers acknowledge: Heathwood Homes and its contractors will not be responsible for any kitchen cabinet changes due to appliances dimension changes after sign-off.

Comment

Servery

Cabinet Colour/Style	9111	Viking III-SIMCOE ORCHID 3DL ***STD***
Cabinet Hardware	2098	12801-HARDWARE ***STD***
Opt. Cabinet Colour/Style - Uppers	9111	VIKING III SIMCOE ORCHID 3DL ***UPG***
Opt. Cabinet Hardware - Uppers	2098	12801-HARDWARE ***STD***

Customer Colours


RADHA NALLAVELLI/MOHAN REDDY BADALA
Project: Country Lane
Unit: 767, Phase: 7
Model: 30-2794 A The Willowglen

Created: 2/22/2024 09:41:15
Locked:
Closed:

Opt. Cabinet Hardware - Uppers	2096	12801-HARDWARE STD
Countertop	9815	Group 2-Quartz-Caesarstone-GOLDEN SKY # 7524-3/4 inch B/U MITERED EDGE ***2***
Countertop Edge	4005	DOUBLE MITRE 1 1/2 INCH ***UPG*** 
Opt. Sink	1111	N/A *****
Opt. Backsplash	1111	N/A *****
Opt. Backsplash Grout	1111	N/A *****
Opt. Backsplash Tile Pattern	1111	N/A *****
Flooring	9008	Red Oak PEARL-Vintage Red Oak Solid Sculpted Character PEARL-SAND DUNE-3/4 inch X 5 inch ***STD**
Floor Tile Grout	1111	N/A *****
Floor Tile Pattern	1111	N/A *****


Comment

Foyer

Flooring	9072	GE.BY.AZR.1224 New Byzantine Azzuro 12 x24 *** 3 ***
Floor Tile Grout	9837	Grout-Warm Grey #5093 ***STD***
Floor Tile Pattern	3030	SIDE TO SIDE OFF SET 1/3 X 2/3 BRICK PATTERN ***UP S 2 

Comment

Powder Room

Flooring	9072	GE.BY.AZR.1224 New Byzantine Azzuro 12 x24 *** 3 ***
Floor Tile Grout	9837	Grout-Warm Grey #5093 ***STD***
Floor Tile Pattern	3030	SIDE TO SIDE OFF SET 1/3 X 2/3 BRICK PATTERN ***UP S 2 

Customer Colours

RADHA NALLAVELLI/MOHAN REDDY BADALA
Project: Country Lane
Unit: 767, Phase: 7
Model: 30-2794 A The Willowglen

Created: 2/22/2024 09:41:15
Locked:
Closed:

Plumbing Fixture (Colour)	1737	Plumbing Fixtures-WHITE ***STD***
Comment		

Dining Room

Flooring	9008	Red Oak PEARL-Vintage Red Oak Solid Sculpted Character PEARL-SAND DUNE-3/4 inch X 5 inch ***STD**
Comment		

Great Room

Flooring	9008	Red Oak PEARL-Vintage Red Oak Solid Sculpted Character PEARL-SAND DUNE-3/4 inch X 5 inch ***STD**
Comment		

Great Room Fireplace

Type	8869	Majestic MERC32 ***STD***	PG 28
Mantle	1435	NF 15-Paint Grade Mantle- Flat (Per Plan)-WHITE ***STD***	
Surround (STD)	8874	3 pc- 4 inch Marble Surround-Grigio Carnico ***STD***	
- Purchasers have been advised: heat from the FP can damage TV above a FP and items placed on mantle. - Heathwood and its contractors will not be liable for any damage on items placed/@installed above a FP after closing.			
Comment			

Mud Room

Flooring	9071	GE.BY.AZR.1313 New Byzantine Azzuro 13x13 ***STD***									
Floor Tile Grout	9837	Grout-Warm Grey #5093 ***STD***									
Floor Tile Pattern	3000	STANDARD SQUARE ***STD***									
		<table><tr><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td></tr></table>									
Comment											

Main Hall

Flooring	9008	Red Oak PEARL-Vintage Red Oak Solid Sculpted Character PEARL-SAND DUNE-3/4 inch X 5 inch ***STD**
Comment		

Customer Colours

RADHA NALLAVELLI/MOHAN REDDY BADALA
Project: Country Lane
Unit: 767, Phase: 7
Model: 30-2794 A The Willowglen

Created: 2/22/2024 09:41:15
Locked:
Closed:

Upper Hall											
Flooring	9008	Red Oak PEARL-Vintage Red Oak Solid Sculpted Character PEARL-SAND DUNE-3/4 inch X 5 inch ***STD**									
Comment											
Master Bedroom											
Flooring	9511	16787-MINOTAUR-MYSTIC BEIGE-40 oz Poly ***STD***									
Comment											
Bedroom 2											
Flooring	9511	16787-MINOTAUR-MYSTIC BEIGE-40 oz Poly ***STD***									
Comment											
Bedroom 3											
Flooring	9511	16787-MINOTAUR-MYSTIC BEIGE-40 oz Poly ***STD***									
Comment											
Bedroom 4											
Flooring	9511	16787-MINOTAUR-MYSTIC BEIGE-40 oz Poly ***STD***									
Comment											
Master Ensuite											
Cabinet Colour/Style	9166	Viking III-CHARLESTON-ORCHID-3DL ***STD***									
Cabinet Hardware	2084	171-HARDWARE ***STD***									
Countertop	8822	4924-38-Countertop-WHITE CARRARA-Wilsonart ***STD***									
Countertop Edge	1111	N/A *****									
Floor Tile	9056	OV.ET.IGY.2424.PL-Eterna-Imperial Grey Polished-24 x 24 ***G***									
Floor Tile Grout	9839	Grout-Silver #5027 ***STD***									
Floor Tile Pattern	3000	STANDARD SQUARE ***STD***									
		<table><tr><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td></tr></table>									

RADHA NALLAVELLI/MOHAN REDDY BADALA
Project: Country Lane
Unit: 767, Phase: 7
Model: 30-2794 A The Willowglen

Created: 2/22/2024 09:41:15
Locked:
Closed:

Shower Wall Tile	9430	TH.LT.LGR.1016.GL-Lindt Glossy-Light Grey-10 x 16 UPG 1 ***UPG***
Shower Wall Tile Grout	9839	Grout-Silver #5027 ***UPG***
Shower Wall Tile Pattern	3070	HORIZONTAL STACKED ***STD***
Shower Floor Tile	9097	OV.ET.IGY.0202.PL Eterna Series Imperial Grey 2 X 2 Polished ***6***
Shower Floor Tile Grout	9839	Grout-Silver #5027 ***STD***
Shower Floor Tile Pattern	3000	STANDARD SQUARE ***STD***
Shower Jamb(s) and Sill(s)	8925	Shower Jamb / Sill-Sky Grey (Light Grey) ***STD***
Plumbing Fixture (colour)	1737	Plumbing Fixtures-WHITE ***STD***
Comment		

Shared Ensuite

Cabinet Colour/Style	9166	Viking III-CHARLESTON-ORCHID-3DL ***STD***
Cabinet Hardware	7672	135-HARDWARE ***STD***
Countertop	8822	4924-38-Countertop-WHITE CARRARA-Wilsonart ***STD***
Countertop Edge	1111	N/A *****
Floor Tile	9057	OV.ET.IGY.1224.PL-Eterna-Imperial Grey Polished-12 x 24 See Tile Direction on Sketch Page ***5***
Floor Tile Grout	9839	Grout-Silver #5027 ***STD***
Floor Tile Pattern	3050	SIDE TO SIDE ***STD***
Wall Tile	9431	TH.LT.DGR.1016.GL-Lindt Glossy-Dark Grey-10 x 16 UPG 1 ***UPG***
Wall Tile Grout	9839	Grout-Silver #5027 ***UPG***
Wall Tile Pattern	3070	HORIZONTAL STACKED ***STD***
Opt. Shower Floor Tile	1111	N/A *****
Opt. Shower Floor Tile Grout	1111	N/A *****


Customer Colours

RADHA NALLAVELLI/MOHAN REDDY BADALA
Project: Country Lane
Unit: 767, Phase: 7
Model: 30-2794 A The Willowglen

Created: 2/22/2024 09:41:15
Locked:
Closed:

Opt. Shower Floor Tile Pattern	1111	N/A *****
Opt. Shower Jamb(s) and Sill(s)	1111	N/A *****
Plumbing Fixture (colour)	1737	Plumbing Fixtures-WHITE ***STD***
Comment		

Ensuite 4

Cabinet Colour/Style	9166	Viking III-CHARLESTON-ORCHID-3DL ***STD***								
Cabinet Hardware	7672	135-HARDWARE ***STD***								
Countertop	8822	4924-38-Countertop-WHITE CARRARA-Wilsonart ***STD***								
Countertop Edge	1111	N/A *****								
Floor Tile	9057	OV.ET.IGY.1224.PL-Eterna-Imperial Grey Polished-12 x 24 See Tile Direction on Sketch Page ***5***								
Floor Tile Grout	9839	Grout-Silver #5027 ***STD***								
Floor Tile Pattern	3070	HORIZONTAL STACKED ***STD***								
		<table><tr><td></td><td></td></tr><tr><td></td><td></td></tr><tr><td></td><td></td></tr><tr><td></td><td></td></tr></table>								
Shower Wall Tile	9430	TH.LT.LGR.1016.GL-Lindt Glossy-Light Grey-10 x 16 UPG 1 ***UPG***								
Shower Wall Tile Grout	9839	Grout-Silver #5027 ***UPG***								
Shower Wall Tile Pattern	3050	SIDE TO SIDE ***STD***								
		<table><tr><td></td><td></td></tr><tr><td></td><td></td></tr><tr><td></td><td></td></tr><tr><td></td><td></td></tr></table>								
Shower Floor Tile	8104	OD.ON.TPE.02.HEX.MT-ONTARIO HEXAGON MATTE-TAUPE ***UPG 2***								
Shower Floor Tile Grout	9840	Grout-Pearl Gray #5019 ***STD***								
Shower Floor Tile Pattern	3120	VERTICAL HEX ***STD***								
										
Shower Jamb(s) and Sill(s)	8925	Shower Jamb / Sill-Sky Grey (Light Grey) ***STD***								
Plumbing Fixture (colour)	1737	Plumbing Fixtures-WHITE ***STD***								
Comment										

RN MB

RADHA NALLAVELLI/MOHAN REDDY BADALA
Project: Country Lane
Unit: 767, Phase: 7
Model: 30-2794 A The Willowglen

Created: 2/22/2024 09:41:15
Locked:
Closed:

Flooring	9071	GE.BY.AZR.1313 New Byzantine Azzuro 13x13 ***STD***									
Floor Tile Grout	9837	Grout-Warm Grey #5093 ***STD***									
Floor Tile Pattern	3000	STANDARD SQUARE ***STD***									
		<table><tr><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td></tr></table>									
Opt. Cabinet Colour/Style - Uppers	9167	Viking III-CHARLESTON-RAIN CLOUD-3DL ***STD***									
Opt. Cabinet Hardware - Uppers	7672	135-HARDWARE ***STD***									
Comment											

Lower Level Finished Foyer

Flooring	9511	16787-MINOTAUR-MYSTIC BEIGE-40 oz Poly ***STD***
Comment		

Lower Level Recreation Room

Flooring	9511	16787-MINOTAUR-MYSTIC BEIGE-40 oz Poly ***STD***
Comment	STD FIRE PLACE: DIMPLEX ELECTRIC FIRE PLACE PF 3033HL. MANTLE NF 15 PAINT GRADE FLAT (PER PLAN) WHITE STD. NO SURROUND	

PG 28

Lower Level Bedroom

Flooring	9511	16787-MINOTAUR-MYSTIC BEIGE-40 oz Poly ***STD***
Comment		

Lower Level Bathroom

Cabinet Colour/Style	9166	Viking III-CHARLESTON-ORCHID-3DL ***STD***									
Cabinet Hardware	2084	171-HARDWARE ***STD***									
Countertop	8822	4924-38-Countertop-WHITE CARRARA-Wilsonart ***STD***									
Countertop Edge	1111	N/A *****									
Floor Tile	9071	GE.BY.AZR.1313 New Byzantine Azzuro 13x13 ***STD***									
Floor Tile Grout	9837	Grout-Warm Grey #5093 ***STD***									
Floor Tile Pattern	3000	STANDARD SQUARE ***STD***									
		<table><tr><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td></tr></table>									

RADHA NALLAVELLI/MOHAN REDDY BADALA
Project: Country Lane
Unit: 767, Phase: 7
Model: 30-2794 A The Willowglen

Created: 2/22/2024 09:41:15
Locked:
Closed:

Shower Wall Tile	9430	TH.LT.LGR.1016.GL-Lindt Glossy-Light Grey-10 x 16 UPG 1 ***UPG***	
Shower Wall Tile Grout	9839	Grout-Silver #5027 ***UPG***	
Shower Wall Tile Pattern	3070	HORIZONTAL STACKED ***STD***	
Shower Floor Tile	8665	OD.ON.TPE.0202.MT.N-Ontario Series Mosaic-Taupe Matte-2 x 2 ***1***	
Shower Floor Tile Grout	9840	Grout-Pearl Gray #5019 ***STD***	
Shower Floor Tile Pattern	3000	STANDARD SQUARE ***STD***	
Shower Jamb(s) and Sill(s)	8925	Shower Jamb / Sill-Sky Grey (Light Grey) ***STD***	
Plumbing Fixture (colour)	1737	Plumbing Fixtures-WHITE ***STD***	
Comment			

Main Stairs

Type	1712	Oak Stairs ***STD***
Colour	9802	Sand Dune (Dover) STAIN TO COMPLIMENT HARDWOOD AND WILL VARY FROM FLOORING
Handrail/Pickets/Posts Type	8148	Single Collar Alt. Plain w/ Shoes with 3 1/2 Square/Cap Post(s)-BLACK ***STD**
Handrail/Pickets/Posts Colour	9802	Sand Dune (Dover) STAIN TO COMPLIMENT HARDWOOD AND WILL VARY FROM FLOORING
Custom Stain/Paint	1111	N/A *****
Landing(s)	9008	Red Oak PEARL-Vintage Red Oak Solid Sculpted Character PEARL-SAND DUNE-3/4 inch X 5 inch ***STD**
Opt. Carpet Runner	1111	N/A *****
Comment		

Lower Level Stairs

Type	1712	Oak Stairs ***STD***
Colour	9802	Sand Dune (Dover) STAIN TO COMPLIMENT HARDWOOD AND WILL VARY FROM FLOORING
Handrail/Pickets/Posts Type	8148	Single Collar Alt. Plain w/ Shoes with 3 1/2 Square/Cap Post(s)-BLACK***STD**
Handrail/Pickets/Posts Colour	9802	Sand Dune (Dover) STAIN TO COMPLIMENT HARDWOOD AND WILL VARY FROM FLOORING
Custom Stain/Paint	1111	N/A *****

Customer Colours

RADHA NALLAVELLI/MOHAN REDDY BADALA
Project: Country Lane
Unit: 767, Phase: 7
Model: 30-2794 A The Willowglen

Created: 2/22/2024 09:41:15
Locked:
Closed:

Landing(s)	9008	Red Oak PEARL-Vintage Red Oak Solid Sculpted Character PEARL-SAND DUNE-3/4 inch X 5 inch ***STD**
Opt. Carpet Runner	1111	N/A *****
Comment		

Throughout		
Switches and Plug	5796	Decora White Switches and Plugs ***STD***
Thresholds	2232	Metal Thresholds ***STD***
Underpad	1079	500 Series-Underpad ***STD***
Trim Size	8704	5 1/4 inch Baseboard and 3 inch Integrated Backbend Casings ***UPG*** / ***STD in Singles***
Trim - Paint Colour	1716	Trim-WHITE ***STD***
Walls - Paint Colour	1717	22-Wall-WARM GREY ***STD***
Comment		

Purchaser:		03/22/2024		
	RADHA NALLAVELLI	Date	Decor Consultant	Date
Purchaser:		03/22/2024		
	MOHAN REDDY BADALA	Date	Country Lane	-04- 12 2024 Date Approved



CONSTRUCTION SUMMARY

Lot: 767
Model: 30-2794 A The Willowglen
Project/Phase: Country Lane / 7

Offer Worksheet	Supply and Install Central Air Conditioning Note:
Offer Worksheet	Two Men and a Truck Credit of One Thousand Dollars (\$1000.00) for moving services only, Into your Heathwood Home (No Cash Value) The Credit is Non-Transferable and cannot be combined with any other offer. - Singles Note:
Offer Worksheet	Classic Collection: Five Appliances: SS Fridge, Stove, Dishwasher: White Front Loader Washer/Dryer (Singles) Note:
Offer Worksheet	The Purchaser(s) acknowledge that they have NOT been referred by an existing Heathwood Homeowner and therefor are not entitled to a referral fee under Heathwood Homes Referral program. Note:
Offer Worksheet	This is a Walk Out Basement Grading Condition which includes a Balcony off the main floor. Note:
Offer Worksheet	ADDED BY AMENDMENT - SCHEDULE E: THIS HOUSE REQUIRES A REAR ELEVATION UPGRADE DUE TO ARCHITECT CONTROL Note:



CONSTRUCTION SUMMARY

Lot: 767
Model: 30-2794 A The Willowglen
Project/Phase: Country Lane / 7

ALUMINUM

Invoice	Qty.	Description
1784 08Nov24 ** NoCat	1.0	- This House requires a Rear Elevation Upgrade Due to Architect Control. Model 30-2794 A The Willowglen.
1784 08Nov24 ** NoCat	1.0	- This is a Walk Out Basement Grading Condition which includes a Balcony off the main floor. Model 30-2794 A The Willowglen.

APPLIANCES

Invoice	Qty.	Description
1648 389,736 01Nov24 **	1.0	KITCHEN - GRANITE - GRANITE CUTOUT w/ STRAIGHT EDGE POLISH TO ACCOMMODATE COOK TOP
1648 390,078 01Nov24	1.0	KITCHEN - AVN-368CS-AVG 36 inch STAINLESS STEEL CHIMNEY WALL MOUNTED HOODFAN ***UPG*** IN LIEU OF STD. 30" HOD FAN SEE SPECS CABINETRY-delete stove uppers; ELECTRICAL-Notify; HEATING/AIR CONDITIONING-Duct Size remains 6

CABINETRY

Invoice	Qty.	Description
1648 387,617 01Nov24	1.0	KITCHEN - Cabinetry - Opt. Light Valance Trim and Luminiz LED Slimline Strip Light - UPG ELECTRICAL-Complete Kitchen valaance light including switch (Luminiz LED slimline strip light)
1648 389,866 01Nov24 **	1.0	KITCHEN - PLUMBING - KITCHEN SINK UPGRADE - BLANCO QUATRUS U 1 SUPER SINGLE 401248 (MIN CABINET 36 IN) SEE SPEC CABINETRY-upgraded kitchen sink; GRANITE-upgraded kitchen sink
1648 389,736 01Nov24 **	1.0	KITCHEN - GRANITE - GRANITE CUTOUT w/ STRAIGHT EDGE POLISH TO ACCOMMODATE COOK TOP
1648 390,078 01Nov24 **	1.0	KITCHEN - AVN-368CS-AVG 36 inch STAINLESS STEEL CHIMNEY WALL MOUNTED HOODFAN ***UPG*** IN LIEU OF STD. 30" HOD FAN SEE SPECS CABINETRY-delete stove uppers; ELECTRICAL-Notify; HEATING/AIR CONDITIONING-Duct Size remains 6
1648 387,616 01Nov24 **	1.0	Kitchen/Breakfast - Hardwood - 5 in Vintage Sculpted NSS Red Oak UVF-Oil or Pearl - Kitchen/Breakfast - UPG CABINETRY-Raise Cabinet; CERAMICS-Delete Std Ceramics
1648 395,416 01Nov24 **	1.0	- Hardwood - 5 in Vintage Sculpted NSS Red Oak UVF-Oil or Pearl - Servery - UPG CABINETRY-Raise Cabinet; CERAMICS-Delete Std Ceramics
1648 387,619 01Nov24	1.0	Laundry Room - Cabinetry - VIKING II/III - Opt. Laundry Uppers - UPG SKETCH # 4 AND 5



CONSTRUCTION SUMMARY

Lot: 767
Model: 30-2794 A The Willowglen
Project/Phase: Country Lane / 7

CABINETRY

Invoice	Qty.	Description
1648 387,618 01Nov24	1.0	Servery - Cabinetry - VIKING II/III - Opt. Servery Uppers - UPG SKETCH # 3 no stacked no valance in servery DRYWAL-Notify; FRAMING-Modify Bulkhead; PAINTING-Notify
1648 387,884 01Nov24	1.0	KITCHEN - CABINETRY-3A-Stacked upper for 30cm standard depth (includes stack moulding between cabinets)-Built in Plan (66cm at deep fridge uppers and built in) VIKING SKETCH # 3 DRYWAL-Notify; FRAMING-Modify Bulkhead; PAINTING-Notify
1648 387,620 01Nov24	1.0	KITCHEN - Cabinetry - VIKING II/III - Opt. Built-Ins - UPG SKETCH # 3 DRYWAL-Notify; FRAMING-Modify Bulkhead; GRANITE-delete partial countertop due to Built-in; PAINTING-
1648 390,314 01Nov24	1.0	KITCHEN - CABINETRY-15B-PER UNIT 45CM WIDE PULL-OUT DOOR BASE CABINET WASTE/RECYCLE CENTRE WITH SOFT-CLOSE ([2] 35L BINS) (AVAILABLE ONLY WITH 45CM WIDE CABINET) VIKING SKETCH # 3
1648 390,482 01Nov24	1.0	KITCHEN - CABINETRY-1L-PER KITCHEN TWO-TONE COLOUR/STYLE SELECTION FOR ISLAND (MUST BE OF EQUAL OR LOWER LEVEL TO MAIN SELECTION) VIKING SKETCH # 3
1648 390,279 01Nov24	9.0	KITCHEN - CABINETRY-15A-GLASS DOOR (EACH) (SPECIFY CLEAR, FROSTED, OR SMOKED GLASS) (UNFINISHED CABINET INTERIOR) (NOT AVAILABLE IN SOME LAMINATES) CLASSIC CLEAR GLASS; TO BE INSTALLED IN THE EXTENDED UPPERS; SEE SKETCH # 3



CONSTRUCTION SUMMARY

Lot: 767
Model: 30-2794 A The Willowglen
Project/Phase: Country Lane / 7

CERAMICS

Invoice	Qty.	Description
1648 391,096 01Nov24	1.0	KITCHEN - CERAMICS - KITCHEN BACKSPLASH SINGLES - UG 6
1648 391,094 01Nov24	1.0	MASTER ENSUITE - CERAMICS - PRINCIPAL BATH FLOOR - UG 6
1648 390,567 01Nov24	1.0	FINISHED BASEMENT BATHROOM - CERAMICS - BASEMENT BATH WALL - UG 1
1648 390,569 01Nov24	1.0	ENSUITE 4 - CERAMICS - MAIN BATH 4 WALL - UG 1 ENSUITE 4
1648 390,570 01Nov24	1.0	MASTER ENSUITE - CERAMICS - PRINCIPAL SHOWER WALL - UG 1
1648 390,568 01Nov24	1.0	SHARED BATHROOM - CERAMICS - MAIN/SHRD BATH WALL - UG 1
1648 390,571 01Nov24	1.0	FINISHED BASEMENT BATHROOM - CERAMICS - BASEMENT SHOWER SHOWER FLOOR - UG 1
1648 387,616 01Nov24 **	1.0	Kitchen/Breakfast - Hardwood - 5 in Vintage Sculpted NSS Red Oak UVF-Oil or Pearl - Kitchen/Breakfast - UPG CABINETRY-Raise Cabinet; CERAMICS-Delete Std Ceramics
1648 395,416 01Nov24 **	1.0	- Hardwood - 5 in Vintage Sculpted NSS Red Oak UVF-Oil or Pearl - Servery - UPG CABINETRY-Raise Cabinet; CERAMICS-Delete Std Ceramics
1648 392,177 01Nov24	1.0	MASTER ENSUITE - CERAMICS - MASTER SHOWER WALL - UPG GROUT
1648 392,174 01Nov24	1.0	SHARED BATHROOM - CERAMICS - MAIN/SHRD BATH WALL - UPG GROUT
1648 392,172 01Nov24	1.0	ENSUITE 4 - CERAMICS - MAIN BATH 4 WALL - UPG GROUT
1648 392,164 01Nov24	1.0	FINISHED BASEMENT BATHROOM - CERAMICS - BASEMENT BATH WALL - UPG GROUT



CONSTRUCTION SUMMARY

Lot: 767
Model: 30-2794 A The Willowglen
Project/Phase: Country Lane / 7

CERAMICS

Invoice	Qty.	Description
1648 391,288 01Nov24	1.0	FOYER - CERAMICS - FOYER FLOOR - DIAG OR CHECKER INSTALLED IN OFFSET 1/3 X 2/3 BRICK PATTERN
1648 391,289 01Nov24	1.0	POWDER ROOM - CERAMICS - POWDER FLOOR - DIAG OR CHECKER INSTALL IN 1/3 X 2/3 OFFSET BRICK PATTERN
1648 390,775 01Nov24	1.0	FOYER - CERAMICS - FOYER FLOOR - UG 3
1648 390,776 01Nov24	1.0	POWDER ROOM - CERAMICS - POWDER FLOOR - UG 3
1648 390,989 01Nov24	1.0	ENSUITE 4 - CERAMICS - MAIN BATH 4 FLOOR - UG 5
1648 390,988 01Nov24	1.0	SHARED BATHROOM - CERAMICS - MAIN/SHRD BATH FLOOR - UG 5
1648 391,084 01Nov24	1.0	MASTER ENSUITE - CERAMICS - PRINCIPAL SHOWER SHOWER FLOOR - UG 6
1648 390,669 01Nov24	1.0	ENSUITE 4 - CERAMICS - MAIN BATH 4 SHOWER FLOOR - UG 2
1784 702,668 08Nov24	1.0	Kitchen - CERAMIC - KITCHEN - BACKSPLASH SINGLES - HERRINGBONE - UPG missed charge waiver by Marilyn Nov 8, 2024

CONCRETE AND DRAIN

Invoice	Qty.	Description
1648 389,561 01Nov24 **	1.0	FINISHED BASEMENT FAMILY (REC) ROOM - PLUMBING - OPTIONAL EXTRA - ROUGH- IN FOR FUTURE WET BAR - SEE SKETCH # 1 CONCRETE AND DRAIN-Additional Stack
1784 08Nov24 ** NoCat	1.0	- This is a Walk Out Basement Grading Condition which includes a Balcony off the main floor. Model 30-2794 A The Willowglen.



CONSTRUCTION SUMMARY

Lot: 767
Model: 30-2794 A The Willowglen
Project/Phase: Country Lane / 7

DECK

Invoice	Qty.	Description
1784 08Nov24 ** NoCat	1.0	- This is a Walk Out Basement Grading Condition which includes a Balcony off the main floor. Model 30-2794 A The Willowglen.

DRYWALL

Invoice	Qty.	Description
1648 387,619 01Nov24 **	1.0	Laundry Room - Cabinetry - VIKING II/III - Opt. Laundry Uppers - UPG SKETCH # 4 AND 5
1648 387,618 01Nov24 **	1.0	Servery - Cabinetry - VIKING II/III - Opt. Servery Uppers - UPG SKETCH # 3 no stacked no valance in servery DRYWAL-Notify; FRAMING-Modify Bulkhead; PAINTING-Notify
1648 387,884 01Nov24 **	1.0	KITCHEN - CABINETRY-3A-Stacked upper for 30cm standard depth (includes stack moulding between cabinets)-Built in Plan (66cm at deep fridge uppers and built in) VIKING SKETCH # 3 DRYWAL-Notify; FRAMING-Modify Bulkhead; PAINTING-Notify
1648 387,620 01Nov24 **	1.0	KITCHEN - Cabinetry - VIKING II/III - Opt. Built-Ins - UPG SKETCH # 3 DRYWAL-Notify; FRAMING-Modify Bulkhead; GRANITE-delete partial countertop due to Built-in; PAINTING-
1648 395,461 01Nov24 **	1.0	- CLASSIC COLLECTION SCHEDULE A - Choice of 20 LED (3000K) pot lights in finished areas (Second Floor Potlight(s) Require Smooth Ceiling) DRYWALL-Drywall Ceiling cutouts for potlights FRAMING-Frame to accommodate potlights 4X ON GREAT ROOM - USE SEPARATE SWITCH 3X IN BREAKFAST ROOM- USE SEPARATE SWITCH- RELOCATE STD. LIGHT 3X KITCHEN, USE STD. KITCHEN SWITH - RELOCATE STD. LIGHT 2X SERVERY R USE STD. LIGHT SWITCH - RELOCATE STD. LIGHT 2X MAIN HALL (DINING ROOM LANDING) USE STD. 3 WAY HALL SWITCH - RELOCATE STD. LIGHT 2X HALL WAY (POWDER ROOM LANDING) USE STD. HALLWAY 3 WAY SWITCH KEEP STD. LIGHT 4X DINING ROOM - USE SEPAARATE SWITCH - KEEP STD. R/I CAP LIGHT SEE SKETCH # 2



CONSTRUCTION SUMMARY

Lot: 767
Model: 30-2794 A The Willowglen
Project/Phase: Country Lane / 7

ELECTRICAL

Invoice	Qty.	Description
1648 390,519 01Nov24	2.0	THROUGHOUT - ELECTRICAL-OUTLET-EXTRA WALL INTERIOR OUTLET ON EXISTING CIRCUIT (DOES NOT INCLUDE KITCHEN OUTLETS) 1X GREAT ROOM 1X REC ROOM TO BE INSTALLED ABOVE THE FIRE PLACE 70" -+ FROM GLOOR SEE SKETCH # 1 AND 2
1648 390,494 01Nov24	1.0	- ELECTRICAL-CAR CHARGER-2 INCH CONDUIT WITH 8X8 BOX FOR FUTURE CAR CHARGER SKETCH # 2
1648 387,617 01Nov24 **	1.0	KITCHEN - Cabinetry - Opt. Light Valance Trim and Luminiz LED Slimline Strip Light - UPG ELECTRICAL-Complete Kitchen valaance light including switch (Luminiz LED slimline strip light)
1648 390,528 01Nov24	5.0	THROUGHOUT - ELECTRICAL-RELOCATION OF SWITCHES/LIGHTS (MUST SPECIFY LOCATION)-NOTE: PLUGS CANNOT BE RELOCATED- MUST PURCHASE ADDITIONAL OUTLET. RELOCATE STD. KITCHEN ,/BREAKFAST/. SERVERY LIGHT TO BE ABOVE BREAKFAST BAR - USE STD. BREAKFAST ROOM SWITCH RELOCATE HALL WAY LIGHT (DINING ROOM LANDING) TO BE ON SECOND FLOOR ABOVE STAIRES OPENING- USE TOGETHER STD. SECOND FLOOR HALLWAY 3 WAY LIGHT SWITCH RELOCATE 240V STD. STOVE ELECTRICAL TO A BUILT IN WALL OVEN LOCATION SEE SKETCH # 2 AND 4
1648 389,800 01Nov24 **	1.0	KITCHEN - HEATING/AIR - ROUGH-IN GAS LINE FOR GAS STOVE AT MAIN FLOOR (SEE SPECS) (HOOK-UP NOT INCLUDED) LEAVE STANDARD 120 VOLT ELECTRICAL OUTLET ON A SEPARATE CIRCUIT. * SPECIFY IF STANDARD 220V WILL STAY OR BE RELOCATED STANDARD 240v 40AMP PLUG TO BE RELOCATED TO BUILT-IN MICRO/OVEN SKETCH # 3 ELECTRICAL-Notify
1648 389,736 01Nov24 **	1.0	KITCHEN - GRANITE - GRANITE CUTOUT w/ STRAIGHT EDGE POLISH TO ACCOMMODATE COOK TOP
1648 390,078 01Nov24 **	1.0	KITCHEN - AVN-368CS-AVG 36 inch STAINLESS STEEL CHIMNEY WALL MOUNTED HOODFAN ***UPG*** IN LIEU OF STD. 30" HOD FAN SEE SPECS CABINETRY-delete stove uppers; ELECTRICAL-Notify; HEATING/AIR CONDITIONING-Duct Size remains 6
1648 390,527 01Nov24	1.0	UPPER HALL - ELECTRICAL-REINFORCE CELING BOX TO HOLD A LIGHT FIXTURE UP TO 75LBS TO BE INSTALLED ON SECOND FLOOR HALLWAY (RELOCATED LIGHT ,OPEN TO BELOW) SEE SKETCH # 4
1648 395,461 01Nov24	1.0	- CLASSIC COLLECTION SCHEDULE A - Choice of 20 LED (3000K) pot lights in finished areas (Second Floor Potlight(s) Require Smooth Ceiling) DRYWALL-Drywall Ceiling cutouts for potlights FRAMING-Frame to accommodate potlights 4X ON GREAT ROOM - USE SEPARATE SWITCH 3X IN BREAKFAST ROOM- USE SEPARATE SWITCH- RELOCATE STD. LIGHT 3X KITCHEN, USE STD. KITCHEN SWITH - RELOCATE STD. LIGHT 2X SERVERY R USE STD. LIGHT SWITCH - RELOCATE STD. LIGHT 2X MAIN HALL (DINING ROOM LANDING) USE STD. 3 WAY HALL SWITCH - RELOCATE STD. LIGHT 2X HALL WAY (POWDER ROOM LANDING) USE STD. HALLWAY 3 WAY SWITCH KEEP STD. LIGHT 4X DINING ROOM - USE SEPAARATE SWITCH - KEEP STD. R/I CAP LIGHT SEE SKETCH # 2



CONSTRUCTION SUMMARY

Lot: 767
Model: 30-2794 A The Willowglen
Project/Phase: Country Lane / 7

EXTERIOR BRICK

Invoice	Qty.	Description
1784 08Nov24 ** NoCat	1.0	- This House requires a Rear Elevation Upgrade Due to Architect Control. Model 30-2794 A The Willowglen.
1784 08Nov24 ** NoCat	1.0	- This is a Walk Out Basement Grading Condition which includes a Balcony off the main floor. Model 30-2794 A The Willowglen.

EXTERIOR CAULKING

Invoice	Qty.	Description
1784 08Nov24 ** NoCat	1.0	- This is a Walk Out Basement Grading Condition which includes a Balcony off the main floor. Model 30-2794 A The Willowglen.

EXTERIOR STUCCO

Invoice	Qty.	Description
1784 08Nov24 ** NoCat	1.0	- This House requires a Rear Elevation Upgrade Due to Architect Control. Model 30-2794 A The Willowglen.

FENCE

Invoice	Qty.	Description
1784 08Nov24 ** NoCat	1.0	- This is a Walk Out Basement Grading Condition which includes a Balcony off the main floor. Model 30-2794 A The Willowglen.

FORMING

Invoice	Qty.	Description
1784 08Nov24 ** NoCat	1.0	- This is a Walk Out Basement Grading Condition which includes a Balcony off the main floor. Model 30-2794 A The Willowglen.



CONSTRUCTION SUMMARY

Lot: 767
Model: 30-2794 A The Willowglen
Project/Phase: Country Lane / 7

FRAMING

Invoice	Qty.	Description
1648 387,618 01Nov24 **	1.0	Servery - Cabinetry - VIKING II/III - Opt. Servery Uppers - UPG SKETCH # 3 no stacked no valance in servery DRYWAL-Notify; FRAMING-Modify Bulkhead; PAINTING-Notify
1648 387,884 01Nov24 **	1.0	KITCHEN - CABINETRY-3A-Stacked upper for 30cm standard depth (includes stack moulding between cabinets)-Built in Plan (66cm at deep fridge uppers and built in) VIKING SKETCH # 3 DRYWAL-Notify; FRAMING-Modify Bulkhead; PAINTING-Notify
1648 387,620 01Nov24 **	1.0	KITCHEN - Cabinetry - VIKING II/III - Opt. Built-Ins - UPG SKETCH # 3 DRYWAL-Notify; FRAMING-Modify Bulkhead; GRANITE-delete partial countertop due to Built-in; PAINTING-
1648 395,461 01Nov24 **	1.0	- CLASSIC COLLECTION SCHEDULE A - Choice of 20 LED (3000K) pot lights in finished areas (Second Floor Potlight(s) Require Smooth Ceiling) DRYWALL-Drywall Ceiling cutouts for potlights FRAMING-Frame to accommodate potlights 4X ON GREAT ROOM - USE SEPARATE SWITCH 3X IN BREAKFAST ROOM- USE SEPARATE SWITCH- RELOCATE STD. LIGHT 3X KITCHEN, USE STD. KITCHEN SWITH - RELOCATE STD. LIGHT 2X SERVERY R USE STD. LIGHT SWITCH - RELOCATE STD. LIGHT 2X MAIN HALL (DINING ROOM LANDING) USE STD. 3 WAY HALL SWITCH - RELOCATE STD. LIGHT 2X HALL WAY (POWDER ROOM LANDING) USE STD. HALLWAY 3 WAY SWITCH KEEP STD. LIGHT 4X DINING ROOM - USE SEPAARATE SWITCH - KEEP STD. R/I CAP LIGHT SEE SKETCH # 2
1784 08Nov24 ** NoCat	1.0	- This House requires a Rear Elevation Upgrade Due to Architect Control. Model 30-2794 A The Willowglen.
1784 08Nov24 ** NoCat	1.0	- This is a Walk Out Basement Grading Condition which includes a Balcony off the main floor. Model 30-2794 A The Willowglen.

GRANITE

Invoice	Qty.	Description
1648 389,866 01Nov24 **	1.0	KITCHEN - PLUMBING - KITCHEN SINK UPGRADE - BLANCO QUATRUS U 1 SUPER SINGLE 401248 (MIN CABINET 36 IN) SEE SPEC CABINETRY-upgraded kitchen sink; GRANITE-upgraded kitchen sink
1648 387,676 01Nov24	1.0	Kitchen/Servery - Granite - Countertop - 3/4" GROUP 2 with double edge - Kitchen/Servery - UPG
1648 389,736 01Nov24	1.0	KITCHEN - GRANITE - GRANITE CUTOUT w/ STRAIGHT EDGE POLISH TO ACCOMMODATE COOK TOP
1648 387,620 01Nov24 **	1.0	KITCHEN - Cabinetry - VIKING II/III - Opt. Built-Ins - UPG SKETCH # 3 DRYWAL-Notify; FRAMING-Modify Bulkhead; GRANITE-delete partial countertop due to Built-in; PAINTING-



CONSTRUCTION SUMMARY

Lot: 767
Model: 30-2794 A The Willowglen
Project/Phase: Country Lane / 7

HARDWOOD

Invoice	Qty.	Description
1648 387,616 01Nov24	1.0	Kitchen/Breakfast - Hardwood - 5 in Vintage Sculpted NSS Red Oak UVF-Oil or Pearl - Kitchen/Breakfast - UPG CABINETRY-Raise Cabinet; CERAMICS-Delete Std Ceramics
1648 395,416 01Nov24	1.0	- Hardwood - 5 in Vintage Sculpted NSS Red Oak UVF-Oil or Pearl - Servery - UPG CABINETRY-Raise Cabinet; CERAMICS-Delete Std Ceramics

HEATING / AIR CONDITIONING

Invoice	Qty.	Description
1648 389,800 01Nov24	1.0	KITCHEN - HEATING/AIR - ROUGH-IN GAS LINE FOR GAS STOVE AT MAIN FLOOR (SEE SPECS) (HOOK-UP NOT INCLUDED) LEAVE STANDARD 120 VOLT ELECTRICAL OUTLET ON A SEPARATE CIRCUIT. * SPECIFY IF STANDARD 220V WILL STAY OR BE RELOCATED STANDARD 240v 40AMP PLUG TO BE RELOCATED TO BUILT-IN MICRO/OVEN SKETCH # 3 ELECTRICAL-Notify
1648 390,078 01Nov24 **	1.0	KITCHEN - AVN-368CS-AVG 36 inch STAINLESS STEEL CHIMNEY WALL MOUNTED HOODFAN ***UPG*** IN LIEU OF STD. 30" HOD FAN SEE SPECS CABINETRY-delete stove uppers; ELECTRICAL-Notify; HEATING/AIR CONDITIONING-Duct Size remains 6

INTERIOR STAIRS

Invoice	Qty.	Description
1648 387,616 01Nov24 **	1.0	Kitchen/Breakfast - Hardwood - 5 in Vintage Sculpted NSS Red Oak UVF-Oil or Pearl - Kitchen/Breakfast - UPG CABINETRY-Raise Cabinet; CERAMICS-Delete Std Ceramics
1648 395,416 01Nov24 **	1.0	- Hardwood - 5 in Vintage Sculpted NSS Red Oak UVF-Oil or Pearl - Servery - UPG CABINETRY-Raise Cabinet; CERAMICS-Delete Std Ceramics

INTERIOR TRIM AND DOORS

Invoice	Qty.	Description
1784 08Nov24 ** NoCat	1.0	- This is a Walk Out Basement Grading Condition which includes a Balcony off the main floor. Model 30-2794 A The Willowglen.

LUMBER

Invoice	Qty.	Description
1784 08Nov24 ** NoCat	1.0	- This House requires a Rear Elevation Upgrade Due to Architect Control. Model 30-2794 A The Willowglen.
1784 08Nov24 ** NoCat	1.0	- This is a Walk Out Basement Grading Condition which includes a Balcony off the main floor. Model 30-2794 A The Willowglen.



CONSTRUCTION SUMMARY

Lot: 767
Model: 30-2794 A The Willowglen
Project/Phase: Country Lane / 7

PAINTING

Invoice	Qty.	Description
1648 387,619 01Nov24 **	1.0	Laundry Room - Cabinetry - VIKING II/III - Opt. Laundry Uppers - UPG SKETCH # 4 AND 5
1648 387,618 01Nov24 **	1.0	Servery - Cabinetry - VIKING II/III - Opt. Servery Uppers - UPG SKETCH # 3 no stacked no valance in servery DRYWAL-Notify; FRAMING-Modify Bulkhead; PAINTING-Notify
1648 387,884 01Nov24 **	1.0	KITCHEN - CABINETRY-3A-Stacked upper for 30cm standard depth (includes stack moulding between cabinets)-Built in Plan (66cm at deep fridge uppers and built in) VIKING SKETCH # 3 DRYWAL-Notify; FRAMING-Modify Bulkhead; PAINTING-Notify
1648 387,620 01Nov24 **	1.0	KITCHEN - Cabinetry - VIKING II/III - Opt. Built-Ins - UPG SKETCH # 3 DRYWAL-Notify; FRAMING-Modify Bulkhead; GRANITE-delete partial countertop due to Built-in; PAINTING-

PLUMBING

Invoice	Qty.	Description
1648 389,561 01Nov24	1.0	FINISHED BASEMENT FAMILY (REC) ROOM - PLUMBING - OPTIONAL EXTRA - ROUGH- IN FOR FUTURE WET BAR - SEE SKETCH # 1 CONCRETE AND DRAIN-Additional Stack
1648 389,866 01Nov24	1.0	KITCHEN - PLUMBING - KITCHEN SINK UPGRADE - BLANCO QUATRUS U 1 SUPER SINGLE 401248 (MIN CABINET 36 IN) SEE SPEC CABINETRY-upgraded kitchen sink; GRANITE-upgraded kitchen sink
1648 390,178 01Nov24	1.0	MASTER ENSUITE - PLUMBING - MOEN -CHATEAU - POSI-TEMP TUB/SHOWER WITH 3 FUNCTION DIVERTER VALVE, SLIDE BAR WITH HANDH ELD AND SHOWERHEAD CHROME (MODEL: 62320/U361CI/UT2721/TL183EP/3669EP/A725) SEE SPEC

ROOFING

Invoice	Qty.	Description
1784 08Nov24 ** NoCat	1.0	- This House requires a Rear Elevation Upgrade Due to Architect Control. Model 30-2794 A The Willowglen.

SECURITY

Invoice	Qty.	Description
1648 389,567 01Nov24	1.0	- SECURITY - SECURITY CAMERA ROUGH-IN TO BE INSTALLED ON THE BACK WALL SEE SKETCH # 2

STEEL

Invoice	Qty.	Description
1784 08Nov24 ** NoCat	1.0	- This is a Walk Out Basement Grading Condition which includes a Balcony off the main floor. Model 30-2794 A The Willowglen.



CONSTRUCTION SUMMARY

Lot: 767
Model: 30-2794 A The Willowglen
Project/Phase: Country Lane / 7

STRUCTURED WIRING

Invoice	Qty.	Description
1648 389,571 01Nov24	1.0	GREAT ROOM - STRUCTURED WIRING - CONDUIT PIPE TO ABOVE FIREPLACE ROUGH-IN TO BE INSTALLED 70" +/- FROM FLOOR ABOVE THE FIRE PLACE SEE SKETCH # 2

WINDOWS


Invoice	Qty.	Description
1648 395,422 01Nov24	1.0	- WALK OUT BASEMENT PATIO DOOR LOCK WALK OUT BASEMENT
1784 08Nov24 ** NoCat	1.0	- This House requires a Rear Elevation Upgrade Due to Architect Control. Model 30-2794 A The Willowglen.
1784 08Nov24 ** NoCat	1.0	- This is a Walk Out Basement Grading Condition which includes a Balcony off the main floor. Model 30-2794 A The Willowglen.

30-2794 ELEV. A



Finished Lower Level WOB The Willowglen

Sketch # 1

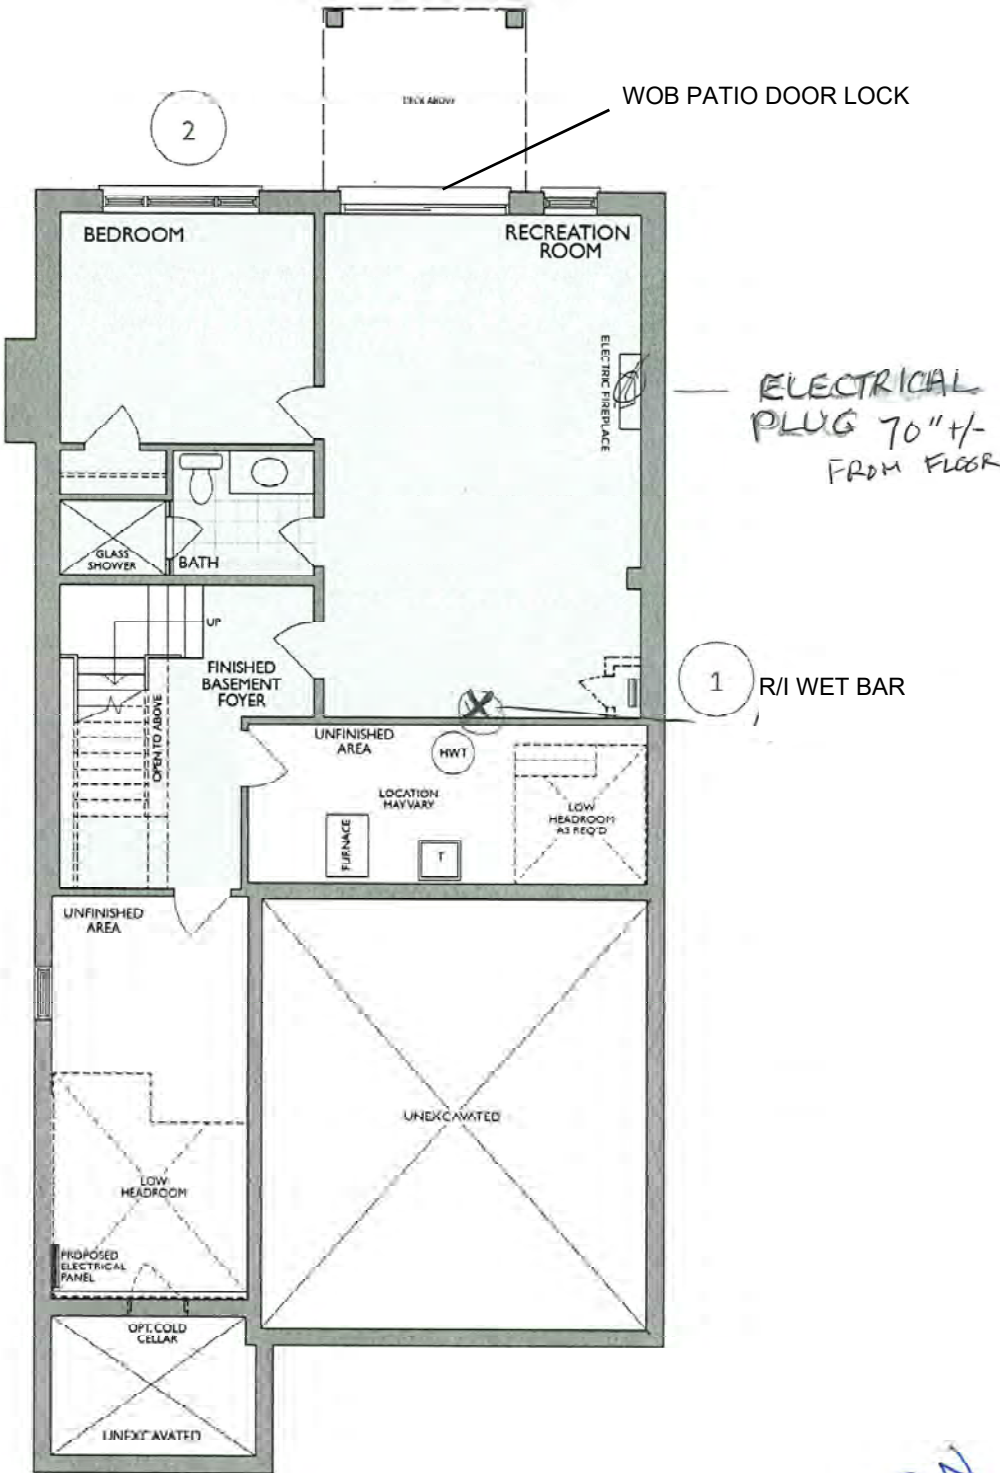

FINISHED LOWER LEVEL
ELEV. A & B WOB

- Changes made to match the Architectural plan:**
- 1. Hydro closet when required
 - 2. Additional bedroom window

* Floor plan may vary due to grading conditions.


30-2794 ELEV. A



Main Level WOB

The Willowglen

Sketch #2

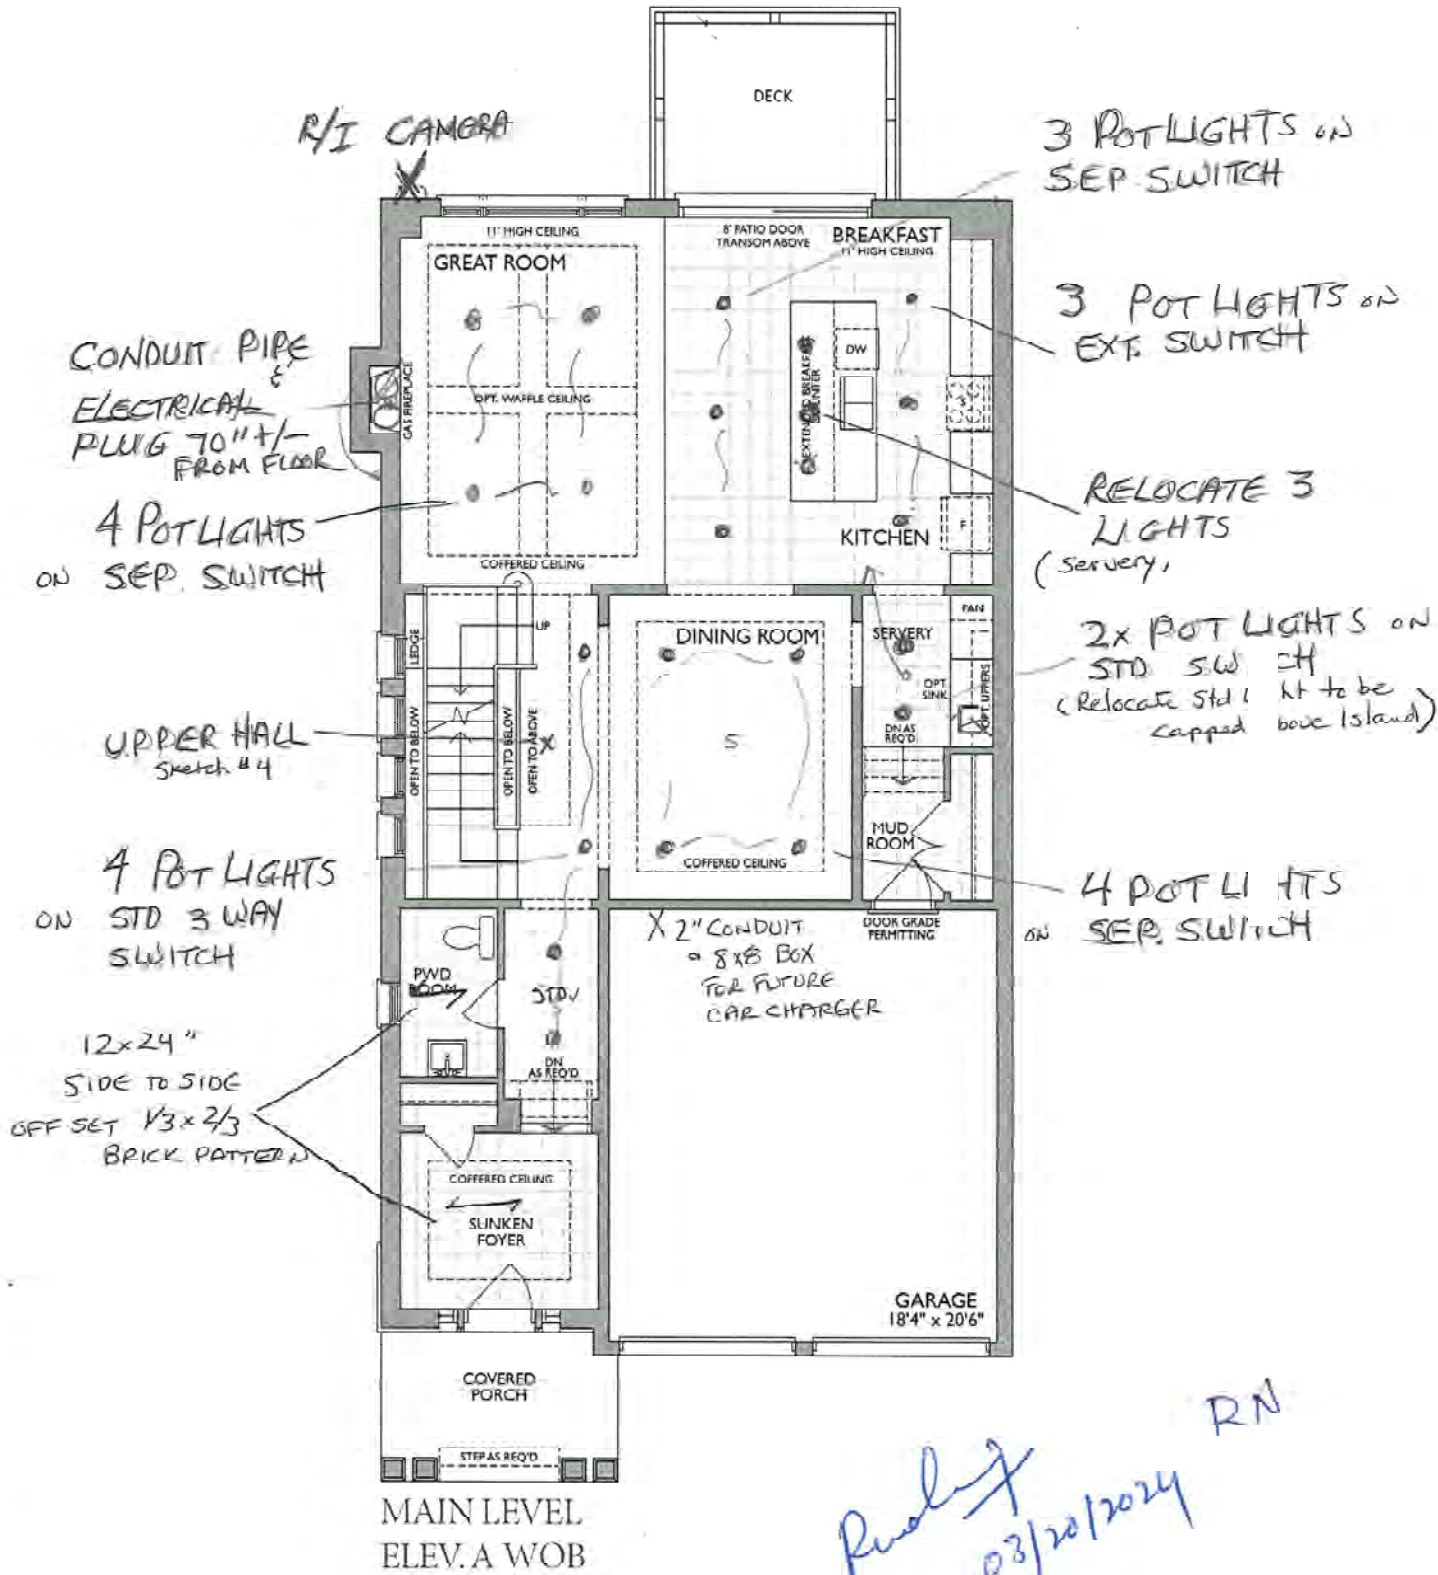


* Floor plan may vary due to grading conditions.

Kitchen-The Classic Series with Built-In Appliances

**VALANCE TRIM AND LIGHT IN KITCHEN

Project: Country Lane
Unit: 767, Phase: 7
Model: 30-2794 A The Willowglen

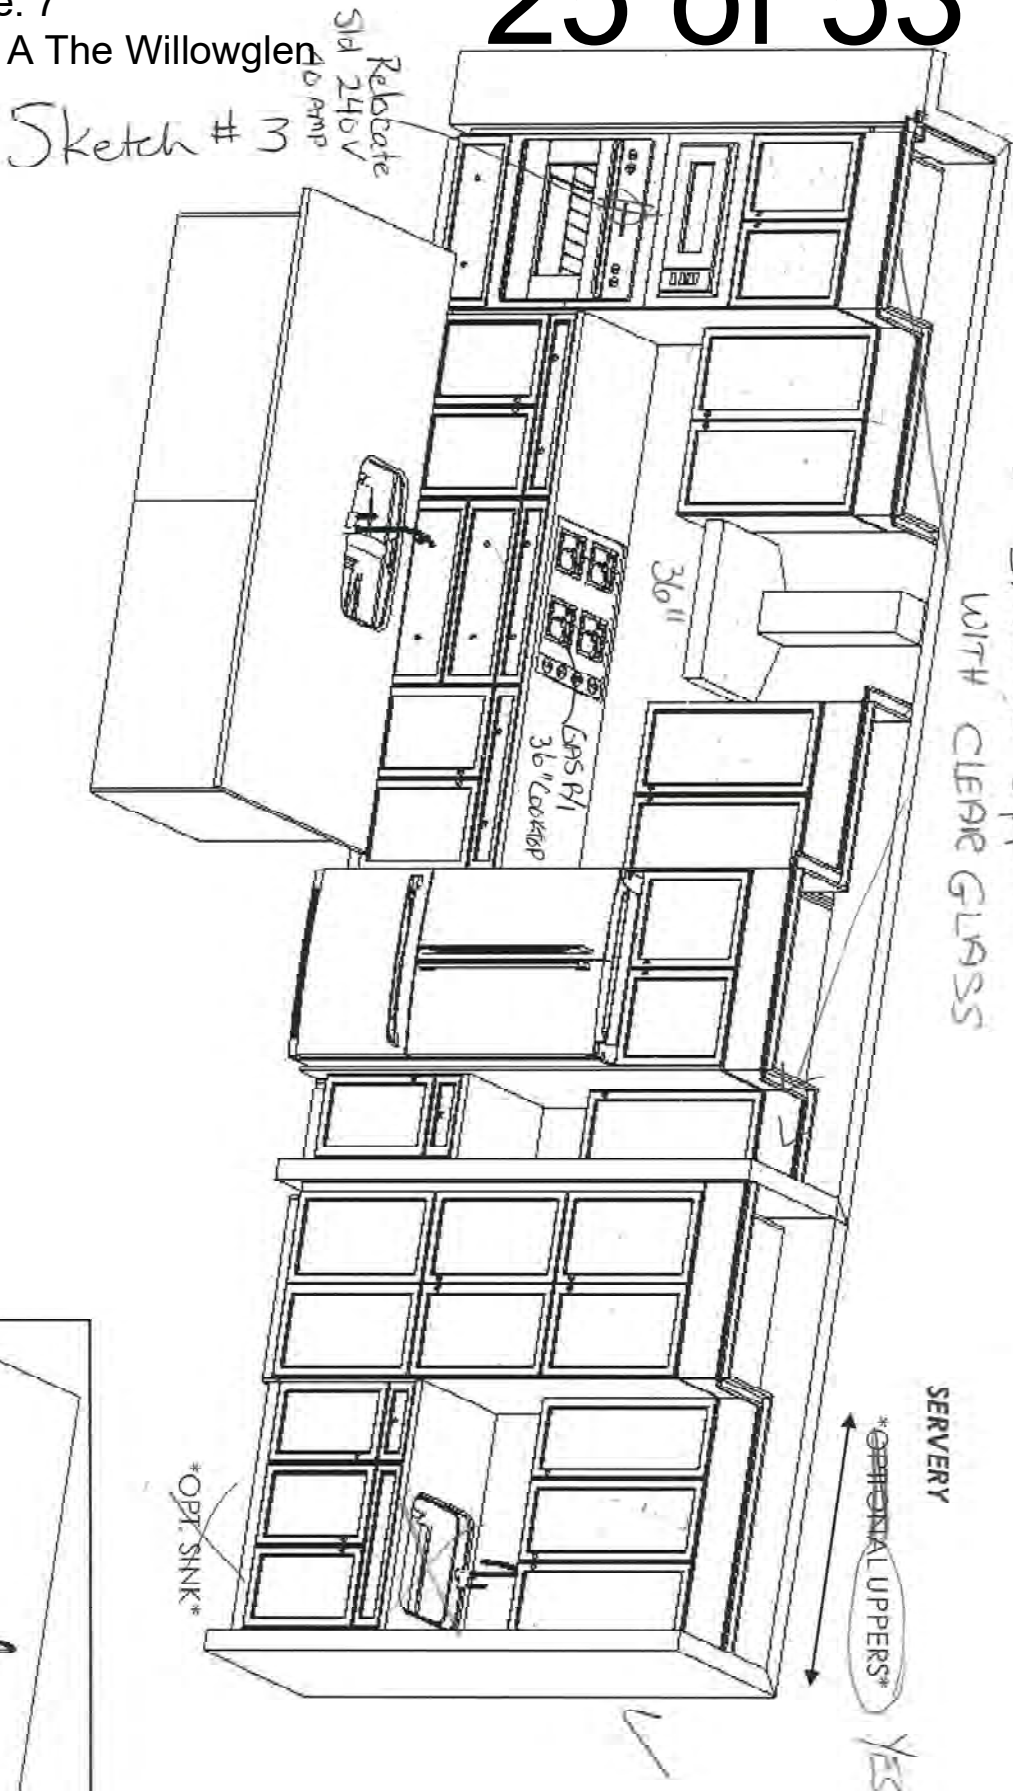


RN

03/20/2024

Ruedy

WASTE/
RECYCLE WITH
TOP DRAWER

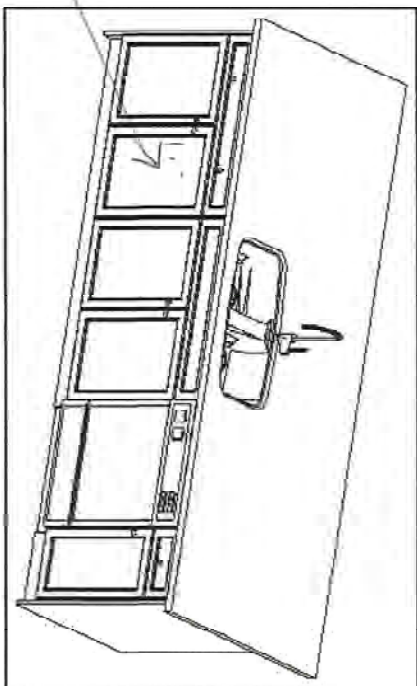

F R E N D E L
K I T C H E N S L I M I T E D
L I T T L E R O C K , O H I O 45125

Heathwood Homes
Country Lane, Whitby

Model:
30-2794 (3604)
The Classic Series

- Standard Features:
- Tandem Box Soft Close Drawers
 - Blumotion Hinges for Doors
 - Crown Moulding & Inlay
 - Top Drawer Construction
 - Deep Fridge Upper w/Deep Panel
 - Tall Upper Cabinets

Drawn By: Sepideh B
Date: July 12, 2023
Revision:
Scale: Not To Scale

Approved By Builder:

Date:




30-2794 ELEV. A

The Willowglen

Second Level

Sketch # 4





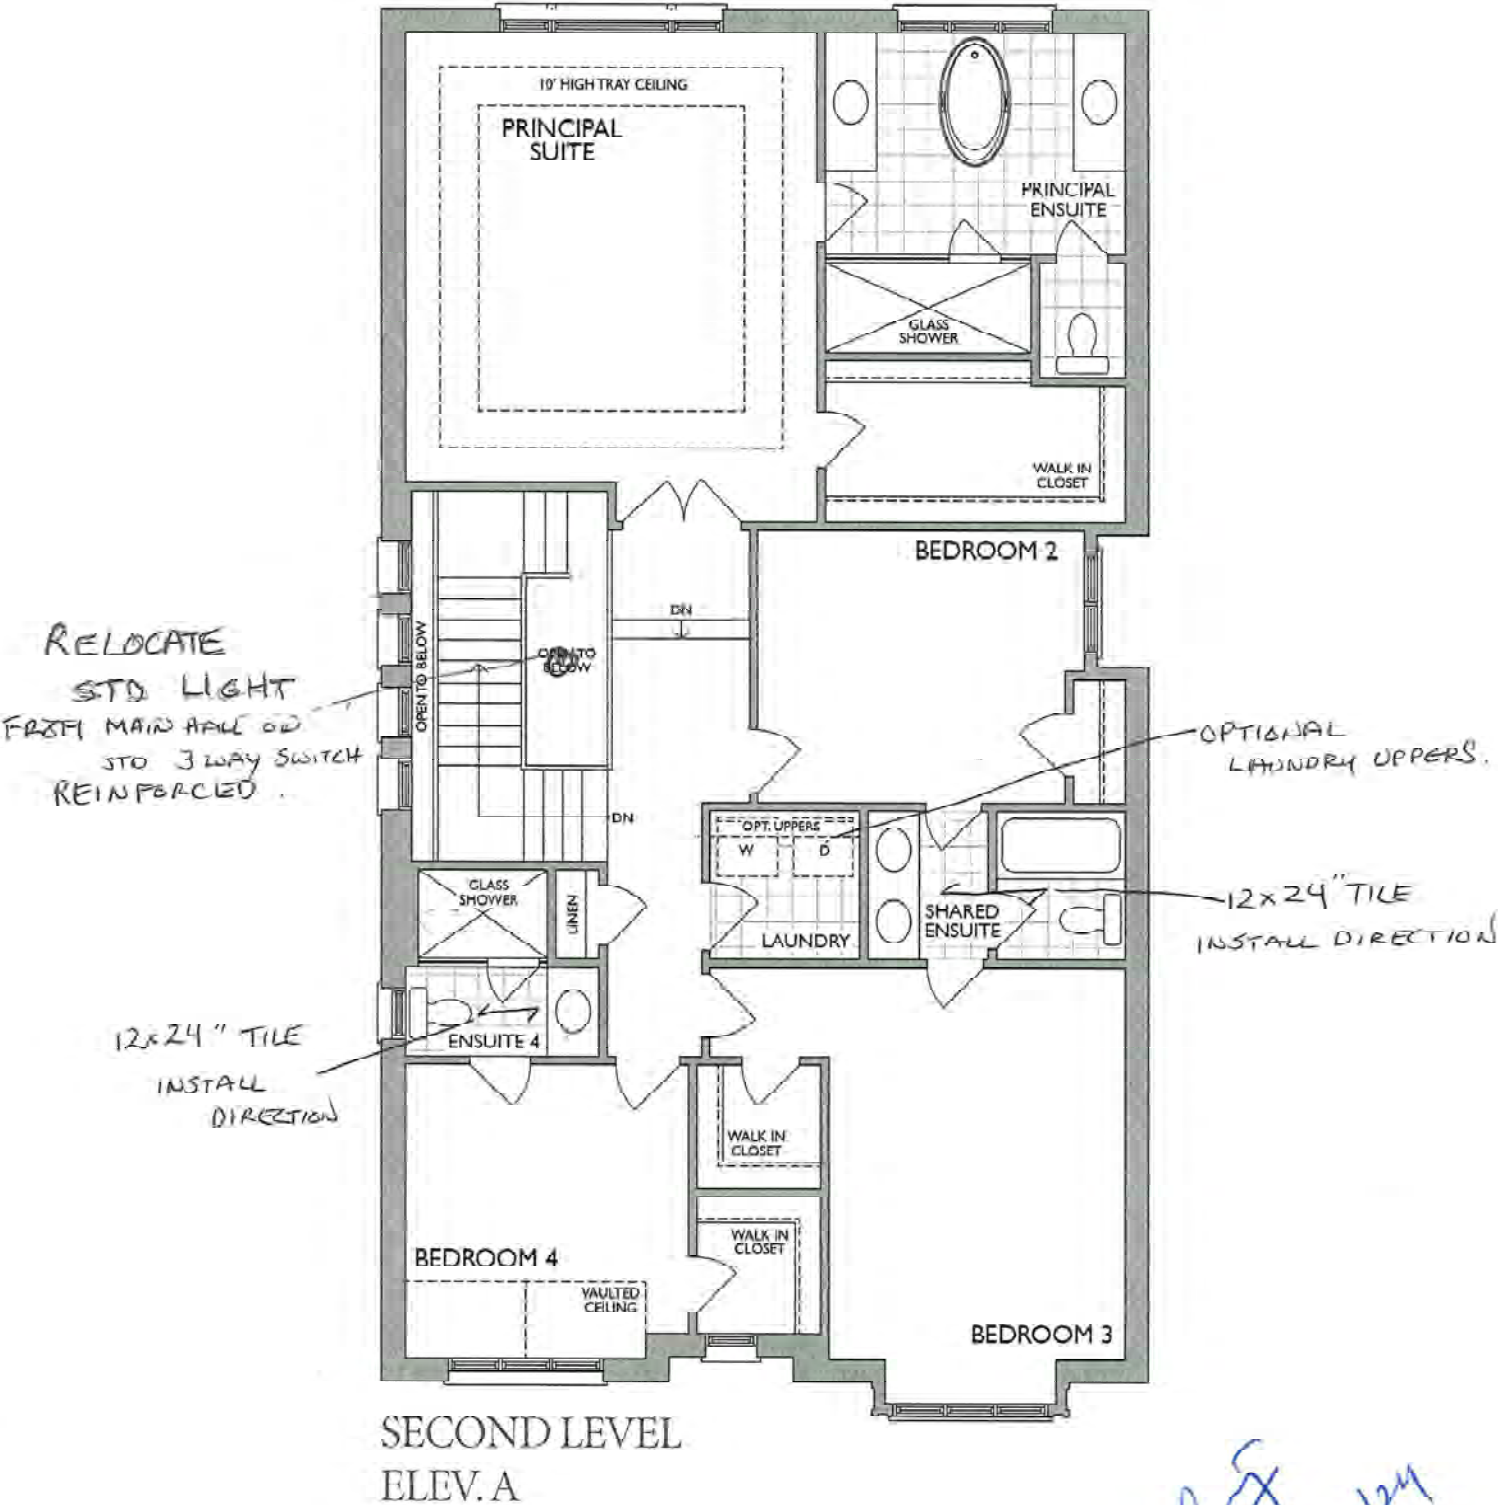


Revised
03/20/24
RN


* Floor plan may vary due to grading conditions.

Project: Country Lane
Unit: 767, Phase: 7
Model: 30-2794 A The Willowglen

Sketch #5

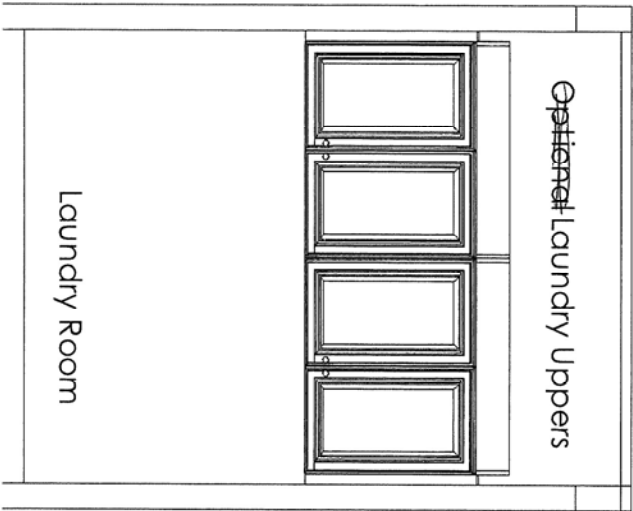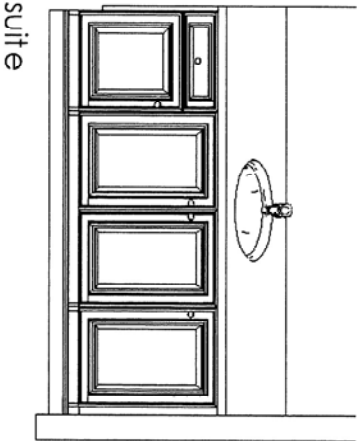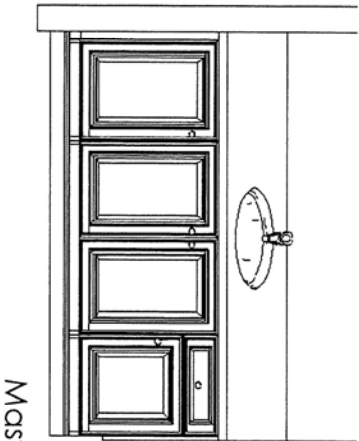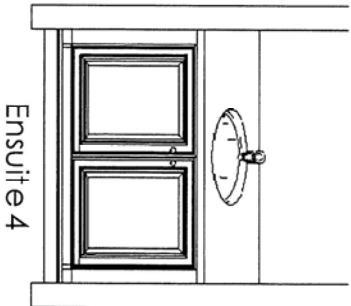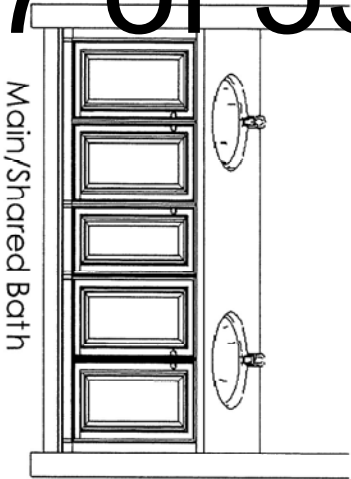

Yes ✓

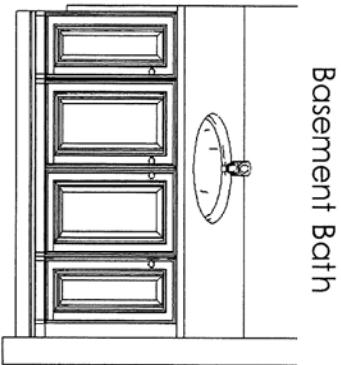

This sketch is for DESIGN PURPOSES ONLY – It is not meant to be an exact rendition.



F R E N D E L
K I T C H E N S L I M I T E D
1350 Shawson Drive, Mississauga, ON L4W 1C5

Heathwood Homes
Country Lane, Whitby

Model:
30-2794 (3604)
The Classic Series

- Standard Features:
- Blum Metabox Drawers
 - Blum Clip On Hinges
 - Top Drawer in Master Ensuite

Drawn By: Sepideh B
Date: July 12, 2023
Revision:
Scale: Not To Scale

Approved By Builder:

Date:

Project: Country Lane
Unit: 767, Phase: 7
Model: 30-2794 A The Willowglen

28 of 53



NEAS NF15 Mantel Flat Wall - Great Room

Cabinet - Finished lower Rec Room

BLANCO

Sink Specifications

Colour	SKU
brushed finish	401248

Design and planning tips

- Min cabinet size: 36 in (915 mm)
- Bowl Depth: 9 in (230.0 mm)

Specifications:
Installation clips, Sink template, Installation instructions, 3 ½" (90 mm) stainless steel strainer


Depending on cabinet construction, a different cabinet size may be required. Consult the cabinet manufacturer.
Codes/Standards: ASME A112.19.3-2017/ CSA B45.4-17

Optional Accessories

Elevated Grid	406346
Workstation	406344
CapFlow Strainer Cover	517666
Ash Cutting Board	406345
Sink Grid	402125

QUATRUS U 1 SUPER SINGLE

Stainless steel brushed finish



Warranty
Limited lifetime warranty on all sinks and faucets. One-year warranty on all accessories and soap dispensers.

Code/Standards Compliance
BLANCO sinks and faucets are third-party tested and certified to CSA, cUPC, ANSI/ASME, IAPMO and NSF standards and listed by applicable certification bodies. For more information on individual product listings, contact our office or listing organization.

 Need support? Learn more by watching our sink & faucet How-to videos:
<https://www.blanco.com/ca-en/support/how-to-videos/how-to-videos-for-sinks/>

	BLANCO Canada Inc 100 Corporation Drive Brampton ON L6S 6B5	Tel & Fax Tel: 905-494-2400 Toll free: 1-877-425-2626 Fax: 905-494-2425 Toll free: 1-877-825-2626
---	---	---

While BLANCO strives to provide accurate information, all images and dimensions in this document are intended for reference only and are subject to change at any time without notice. This document is not intended for use as an installation guide. For technical installation details, refer to installation instructions provided with the product. BLANCO assumes no responsibility for the use of superseded or voided specifications.

MOEN®

There is more than 1 version of this model.
Page down to identify the version you have.

FAUCET DESCRIPTION

- Reflex™ pulldown system offers smooth operation, easy movement and secure docking
- Power Clean™ spray technology
- Metal construction with various finishes identified by suffix
- Duralock™ connect installation
- Pulldown spray with 68" braided hose
- Flexible supply lines with 3/8" compression fittings
- High arc spout provides height and reach to fill or clean large pots while pulldown wand provides the maneuverability for cleaning or rinsing
- 360° rotating spout
- Faucet designed for handle to be mounted on right side only

OPERATION

- Lever style handle
- Temperature controlled by 100° arc of handle travel
- Operates with less than 5 lbs. of force
- Operates in stream or spray mode in the pullout or retracted position

FLOW

- Flow is limited to 1.5 gpm (5.7 L/min) max at 60 psi

CARTRIDGE

- 1255™ Duralast™ cartridge

STANDARDS

- Third party certified to IAPMO Green, ASME A112.18.1/CSA B125.1 and all applicable requirements therein including NSF 61/9G & 3/2
- Meets CalGreen and Georgia SB370 requirements
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- The backflow protection system in the device consists of two independently operating check valves, a primary and a secondary which prevent backflow

- ADA  for lever handle

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
 - 10 year limited warranty when used in a multifamily installation
 - 5 year limited warranty when used in a commercial installation
- Visit www.moen.com/support for complete details and limitations


Specifications



ALIGN™
Single Handle High Arc
Pulldown Kitchen Faucet

Models: 7565 series

NOTE: THIS FAUCET IS DESIGNED TO BE INSTALLED
THROUGH 1 HOLE, 1-1/2" (38mm) MIN. DIA.
(OPTIONAL 3-HOLE ESCUTCHEON 141002 AVAILABLE)

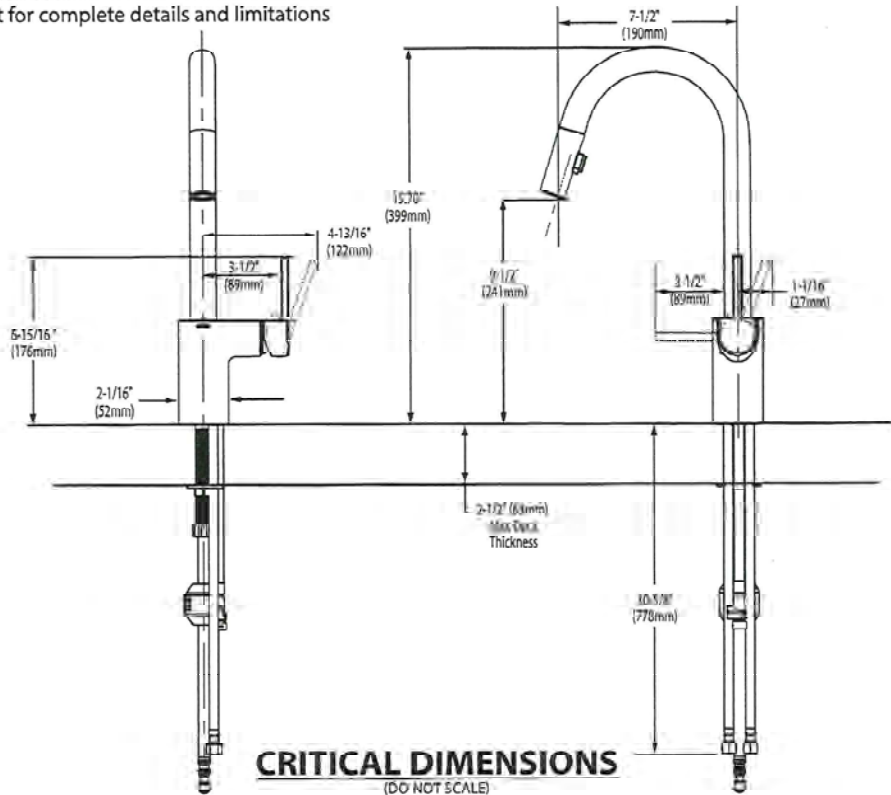

Rowley RN
03/20/2024




BARRIER FREE (ABOVE COUNTER OR DROP-IN ONLY)

**BOULEVARD®
PEDESTAL SINK**
VITREOUS CHINA

BOULEVARD® PEDESTAL SINK

- ☒ ~~0641.800~~ Faucet holes on 8" (203mm) centers (illustrated)
- STD ☒ ~~0641.400~~ Faucet holes on 4" (102mm) centers
- ☒ ~~0641.100~~ Center hole only
- Classic styled rectangular pedestal lavatory
 - Vitreous china
 - Rear overflow
 - Supplied with mounting kit
 - Right Height® for greater comfort during use
 - Faucet ledge with large deck area (faucet not included)
 - **Design coordinates with Boulevard® Toilet**
 - Basin has flat bottom to also allow use as an **above counter** sink or a **drop-in** sink (with u-shaped cut out)

Nominal Dimensions:
24" x 19" x 35-1/2"
(610 x 483 x 902mm)

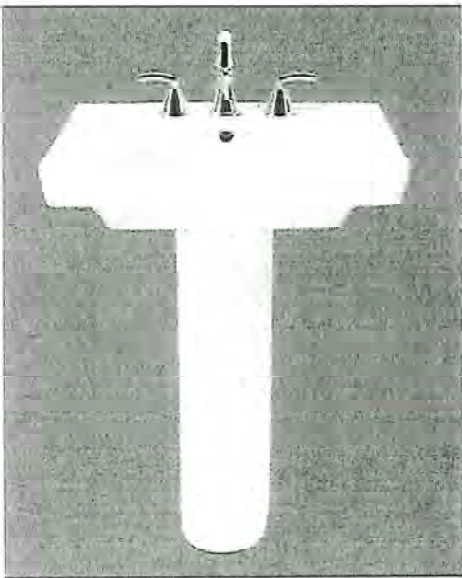

- ☐ **0641.008** Pedestal top-8" (203mm) centers
- ☐ **0641.004** Pedestal top-4" (102mm) centers
- ☐ **0641.001** Pedestal top-center hole only
- ☐ **0010.000** Pedestal only

SEE REVERSE FOR ROUGHING-IN DIMENSIONS

Bowl sizes:
17" (432mm) wide,
12-1/2" (318mm) front to back,
5" (127mm) deep

Compliance Certifications -
Meets or Exceeds the Following Specifications:
• ASME A112.19.2 - 2008/CSA B45.1-08

To Be Specified:

- ☐ Color: ☐ White ☐ Linen
- ☐ Faucet Finish:
- ☐ Supplies:
- ☐ 1-1/4" Trap:
- ☐ Nipple:

* See faucet section for additional models available

Rudolph
03/20/2024 *RN*



03/20/2024

 BARRIER FREE

**COLONY™
COUNTERTOP SINK**

VITREOLIS CHINA

COLONY COUNTERTOP SINK

- Vitreous china
 - Self-rimming
 - Front overflow
 - Supplied with template
 - Faucet deck
- (Faucet shown not included)



0346 803

Faucet holes on 203mm (8") centres

STD ☐ 0346 403 (Illustrated)

Faucet holes on 102mm (4") centres

0346 801



Centre hole only

Nominal Dimensions:

521 x 448mm (20-1/2" x 17-5/8")

Bowl sizes:

422mm (16-5/8") wide, 279mm (11") front to back, 143mm (5-5/8") deep

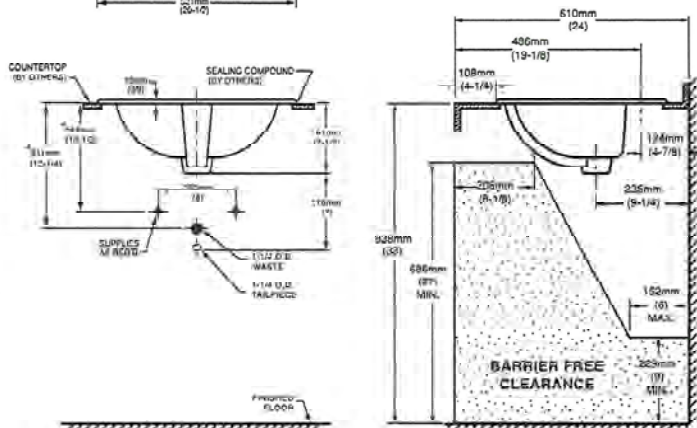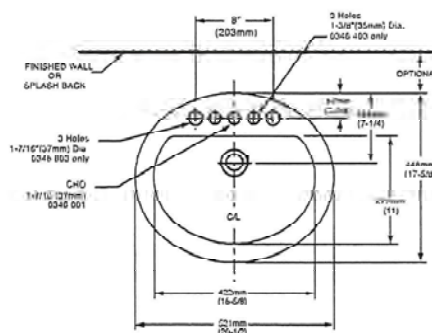

COMPLIANCE CERTIFICATIONS –

Meets or exceeds the following Specifications:

- ASME A112.19.2M for Vitreous China Fixtures.
- CAN/CSA B45 Series.

To Be Specified

- ☐ Colour: ☐ White ☐ Bone ☐ Silver Gray
☐ Linen
- ☐ Faucet:
- ☐ Faucet Finish:
- ☐ Supplies & Stops:
- ☐ Trap 1-1/4" (32 mm):

NOTES:

NOTES: DIMENSIONS SHOWN FOR LOCATION OF SUPPLIES AND "P" TRAP ARE SUGGESTED. FOR COUNTERTOP CUTOUT AND INSTALLATION INSTRUCTIONS USE TEMPLATE SUPPLIED WITH SINK. FAUCETS NOT INCLUDED AND MUST BE ORDERED SEPARATELY. IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard A112.18.2. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

* See faucet section for additional models available

BAS-198

© 2000 American Standard Inc.

01/07

Read ~~by~~ RN
03/20/2024



DEMI™
Product Specification Sheet



Two Piece Freestanding Collection


CF2007	Two Piece Freestanding Soaker
Size:	60" x 32" x 22" 1524 mm x 813 mm x 559 mm

PRODUCT FEATURES & BENEFITS


- Vacuum formed acrylic reinforced with fiberglass
- Scratch, stain and fade resistant high gloss finish
- Installation friendly two piece design
- Accepts deck mounted faucet
- Includes integral pop up drain and rectangular overflow
- Includes levelling feet

TWO PIECE ASSEMBLY


FRONT VIEW

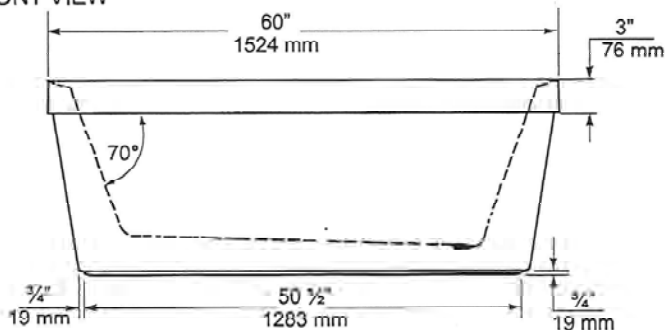

END VIEW

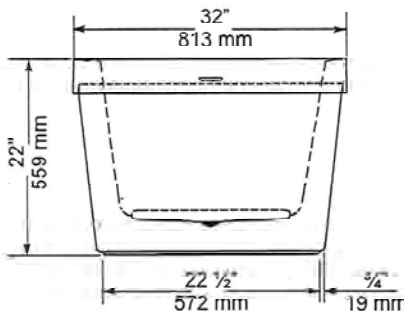

TOP VIEW

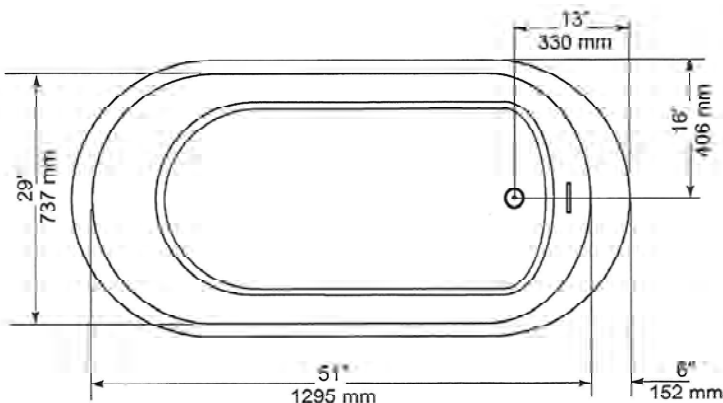

GENERAL SPECIFICATIONS		
Average Weight	90 lb	41 kg
Bathing Well at bottom	43" x 20"	1092 x 508 mm
Capacity Drain to Overflow		195 litres
Water Depth Drain to Overflow	16"	406 mm
Drain Opening (dia.)	2"	51 mm
Overflow Opening	2 1/2" x 1/2"	67 x 13 mm
Drain to Floor Clearance	3 1/4"	69 mm

NOTES: Please confirm measurements on actual product to ensure proper identification. Bathtub to be installed on the floor supported by 5 self levelling feet. Adjust if required to level the bathtub for adequate drainage. Refer to installation instructions for additional information.

IMPORTANT: Dimensions of fixtures are nominal and may vary $\pm 1/8"$ (6 mm). Weight may vary ± 5 lb (2.3 kg). Drawing is not to scale. These measurements are subject to change at manufacturer's discretion.

Compliance Certifications -
Meets or Exceeds the following Specifications:
• CAN/CSA - B45 Series



Review
03/20/2024
RN

American Standard
Style That Works Better

FloWise™ DUAL FLUSH
ELONGATED TOILET
VITREOUS CHINA

FloWise™ DUAL FLUSH ELONGATED TOILET

- 2476 216
 - Vitreous china
 - Low-consumption Dual Flush
 - Full flush 6.0 Lpf/1.3 gpf,
 - Partial flush 3.0 Lpf/0.66 gpf.
 - Elongated wash down bowl
 - Internal trapway fully-glazed,
2-1/4" (57mm) ballpass
 - Concealed trapway bowl
 - Chrome-plated top mounted
push button actuator
 - Easy to clean sanitary dam on bowl
 - Includes Elongated Slow Close Seat
 - 100% factory flush tested
 - 2 bolt caps

Separate Component Parts:


- 3067 316 Elongated Bowl with Slow Close Seat
- 4035 216 Unlined Tank



- 2476 516 Same as above with Lined tank
 - 3067 316 Elongated Bowl
 - 4035 516 Lined Tank

Nominal Dimensions:
794 x 432 x 765mm
(31-1/4" x 17" x 30-1/8")

Compliance Certifications -
Meets or Exceeds the Following Specifications:
- ASME A112.19.2M (and 19.6M)
- CAN/CSA B45 series

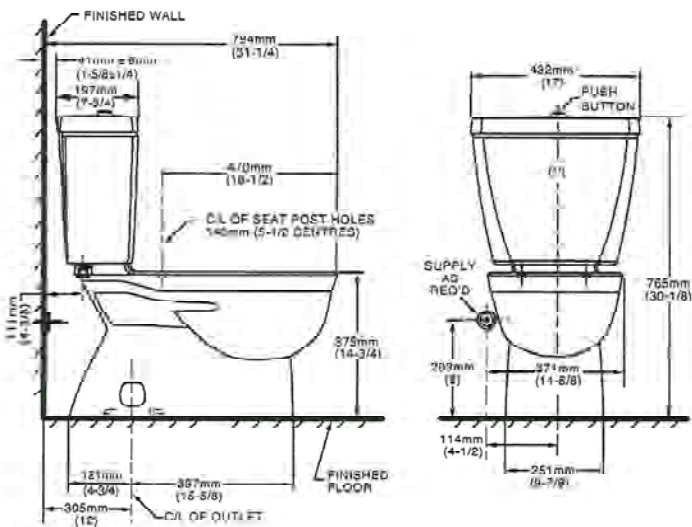

NOTES:
THIS TOILET IS DESIGNED TO ROUGH-IN AT A MINIMUM DIMENSION OF 305MM (12") FROM FINISHED WALL TO C/L OF OUTLET.
SUPPLY NOT INCLUDED WITH FIXTURE AND MUST BE ORDERED SEPARATELY.
* DIMENSION SHOWN FOR LOCATION OF SUPPLY IS SUGGESTED.
FOR ADDITIONAL INFORMATION REFER TO INSTALLATION INSTRUCTIONS SUPPLIED.
IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerance established by ANSI Standard A112.19.2
These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

- To Be Specified
- Colour: 020 White
 - Supply with stop:

UPGRADED VALUE ADDED FEATURES AT NO EXTRA CHARGE

Revised
03/20/2024
RN



Specifications

DESCRIPTION

- Metal construction with various finishes identified by suffix
- 16" long 3/8" tubing connections
- Includes metal or 50/50 pop-up type waste assembly where noted

OPERATION

- Pivot action lever style handle
- Temperature controlled through 180° degree arc of handle travel

FLOW

- Flow is limited to 1.5 gpm max (5.7L/min) at 60 psi

CARTRIDGE

- 1225 cartridge design
- Nonmetallic/nonferrous and stainless steel material
- Can accommodate reversed piping and back to back installations

STANDARDS

- Third party certified to WaterSense®, CSA B-125.1, ASME A112.18.1 and all applicable requirements referenced therein including NSF61/9
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act

- **ADA**  for lever handle

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations



CHATEAU®
Single-Handle Lavatory Faucet

with Metal Waste Assembly

Model: L4625 series

L4631BC

Bulk Packed (12 per carton):

L64624 series

with 50/50 Waste Assembly

Bulk Packed (12 per carton):


L64625 series

Less Waste

Bulk Packed (12 per carton):

L64600 series

NOTE: THIS FAUCET IS DESIGNED TO BE
INSTALLED THRU 3-1" DIA. HOLES, 2" ON CENTER

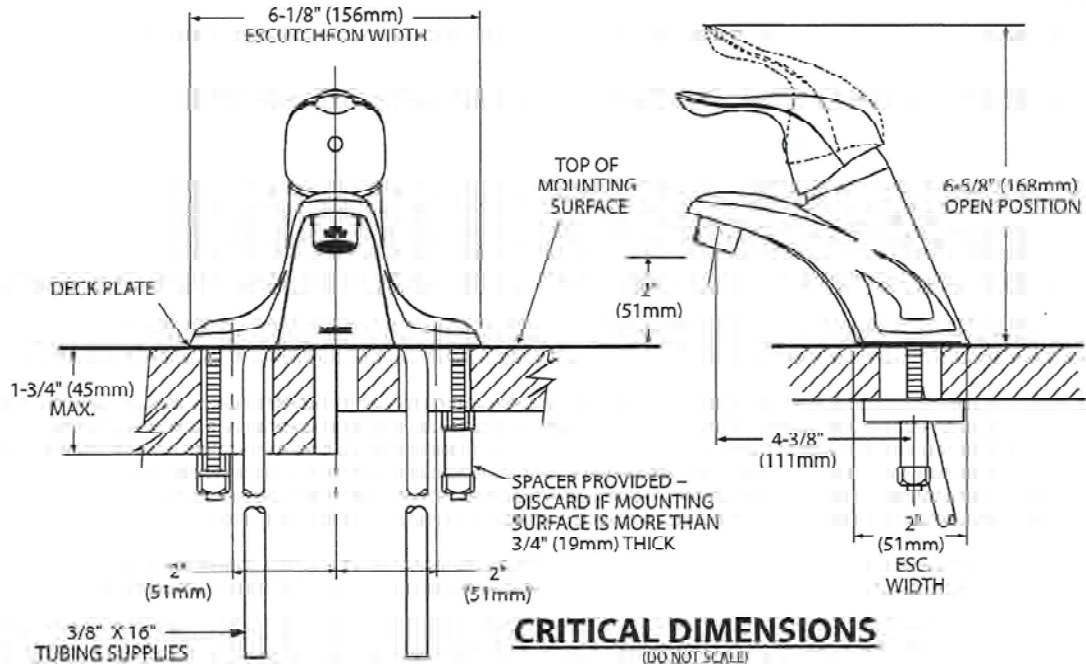

Ready RN
03/20/2024


PRINCIPAL ENSUITE SHOWER

Chateau®

POSI-TEMP®




Posi-Temp® Tub/Shower Faucet with 3 Function Transfer Valve/Trim and Slide Bar with Hand Shower*
TL183EP / U361CI / UT2721 / 3669EP / A725 / 62320

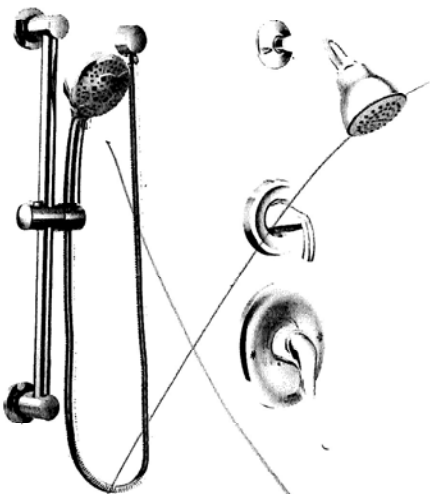


Posi-Temp® Shower Only with 3 Function Transfer Valve/Trim and Slide Bar with Hand Shower*
TL182EP / U361CI / UT2721 / 3669EP / A725 / 62320



Posi-Temp® Tub/Shower Faucet with 4 Function Hand Shower*
TL2359EP / 62320

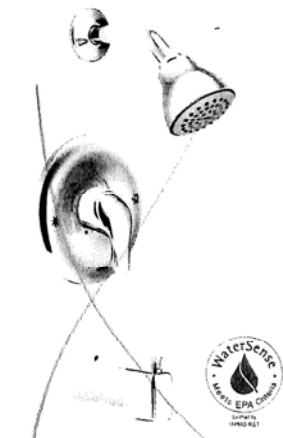

Eco-Performance Posi-Temp® Tub/Shower Faucet*
TL183EP / 62320

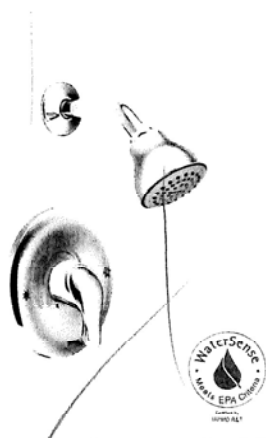

Eco-Performance Posi-Temp® Shower Only*
TL182EP / 62320

CHATEAU
FINISH OPTION



Chrome

To order Chrome (C) model, use model number only.
* Refer to the Shower Design Guide for Installation Instructions



Buy it for looks. Buy it for life.®

There is more than 1 version of this model.
Page down to identify the version you have.

DESCRIPTION

- Metal construction with various finishes identified by suffix
- Includes non-metallic showerhead, arm, flange and non-metallic diverter tub spout

OPERATION

- Handle operates counterclockwise through a 270° arc with off at 6 o'clock and maximum hot at the 9 o'clock position. Shut off in clockwise direction
- Adjustable temperature limit stop to control maximum hot water temperature
- Pressure balancing mechanism maintains selected discharge temperature to $\pm 3^\circ$

FLOW

- Showerhead is limited to 2.5 gpm (9.5 L/min) at 80 psi
- EP suffix models are limited to 1.75 gpm (6.6 L/min) at 80 psi
- NH suffix models contain no showerhead

CARTRIDGE

- 1222 cartridge design
- Accommodates back to back installations
- Nonmetallic/nonferrous and stainless steel material

STANDARDS

- Third party certified to meet ASME A112.18.1/CSA B125.1 and all applicable requirements referenced therein
- EP suffix models are third party certified to WaterSense®

- ADA for lever handle

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations


Specifications



CHATEAU® POSI-TEMP® Single-Handle Tub/Shower Trim Kit

Models: TL181 series - valve trim only
(Bulk Packed 12 per carton)
TL182 series - shower trim only
(Bulk Packed 12 per carton)
TL183 series - tub/shower trim
(Bulk Packed 12 per carton)

Valves: 62300 series
2500 series

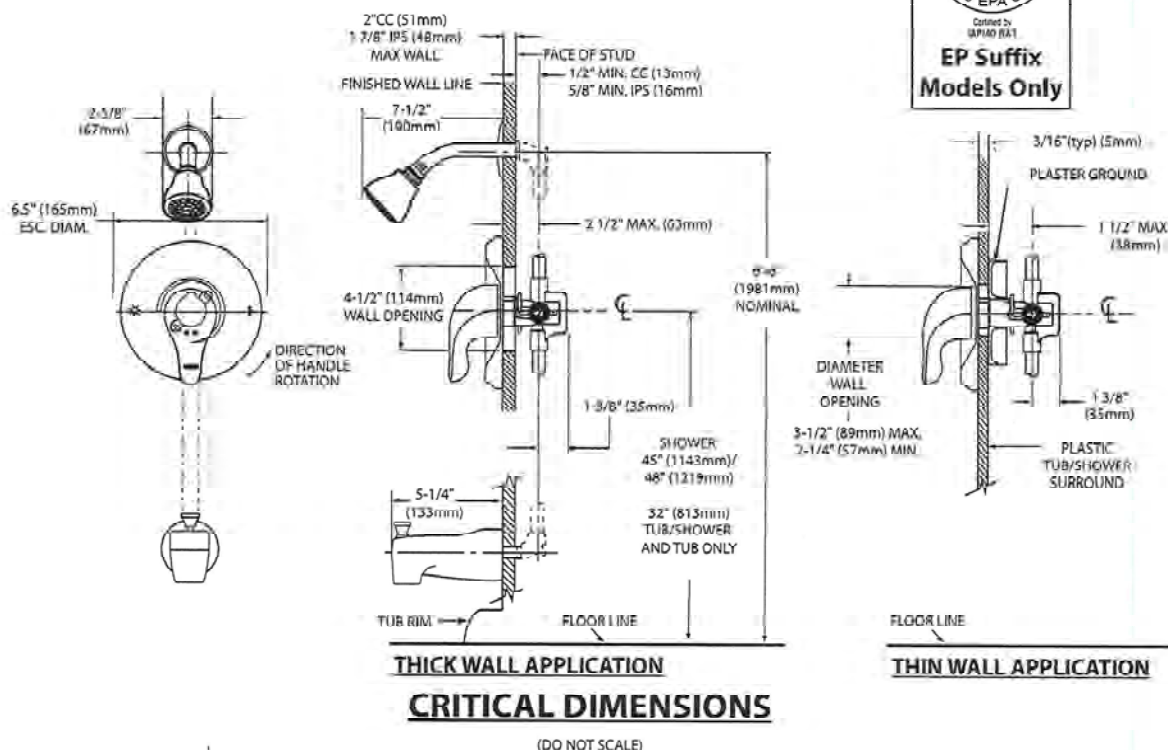

Reedley RN
03/20/2024



Specifications

DESCRIPTION

- Metal construction with various finishes identified by suffix

OPERATION


- Lever style handles with hot and cold color indicator
- Rotate hot side handle counterclockwise to open (clockwise to close) and the cold side handle (clockwise to open) and (counterclockwise to close)

STANDARDS

- Third party certified to: ASME A112.18.1/CSA B-125.1, and all applicable requirements referenced therein
- ADA  for lever handles

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
 - 10 year limited warranty when used in a multi-family installation
 - 5 year limited warranty when used in a commercial installation
- Visit www.moen.com/support for complete details and limitations


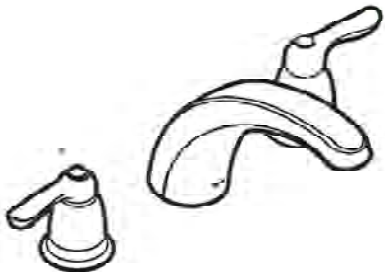


CHATEAU®

Two-Handle Garden Tub Trim

Models: T994 series

Valves: 4792, 4793, 4794, 4796, 4797, 4798

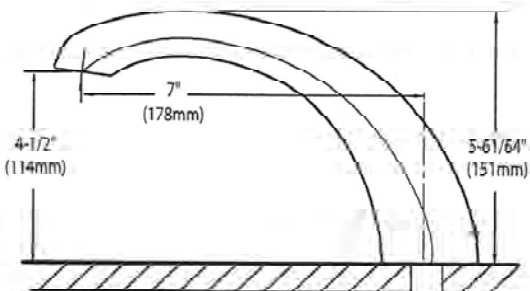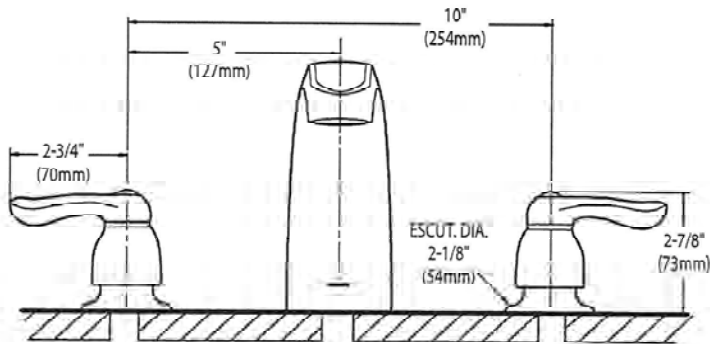

CRITICAL DIMENSIONS

(DO NOT SCALE)

Handwritten signature
03/20/2024
RN

AVG



AVN-368CS



36" Wall mount hood - professional design

Selected Model	
Model number	AVN-368CS
Dimensions	
Dimensions	36 1/2" (W) x 19 3/4" (D) x 7 1/2" (H)
Exterior Appearance	
Stainless steel grade	201
Features	
Control	Soft touch with LED display
Lighting	2 bulbs, 3W LED (bulbs included)
Blower type	860 CFM, 6-Speed
Blower performance	Speed 1, 0.7 sones Speed 6, 6.5 sones
Filter type	2 Stainless steel baffle filters (included)
Duct transition	6" Round (Top)
Ducting	Ducted
Electrical Requirements	
Electrical requirements	120V / 60Hz / 2.7 Amps
Accessories (optional)	
Optional duct covers	AD-884S (884mm, AVN-AVH compatible)
Warranty	
1-year Warranty	Parts and labour, in-home service


Reviewed 03/20/2024
RN

AVN-308/368CS

Dimensions

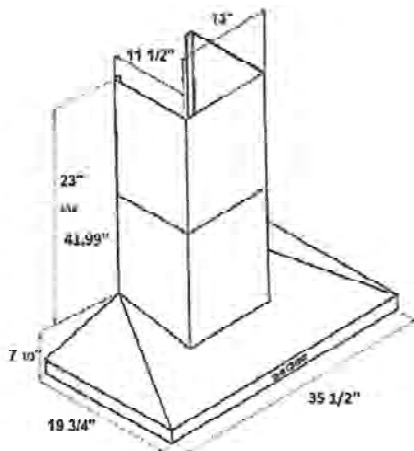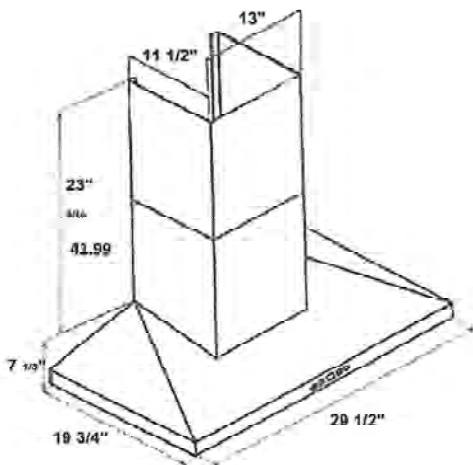

Installation

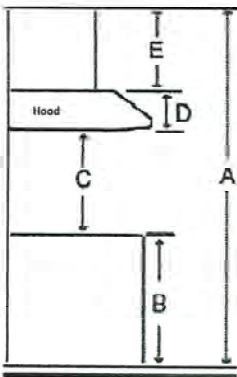

A	Floor to ceiling height	variable
B	Floor to counter top height (standard)	36"
C	Recommended height between cooking surface and bottom of the hood	28" to 30"
D	Hood height	7 1/3"
E	Chimney height	19" to 41.99"

Duct transition

Top 6" round




The information contained herein is based on sources that we believe to be reliable, but is not guaranteed by us, may be incomplete and/or may change without notice.

Need technical support? 1(888) 651-2534

Handwritten signature
03/20/2024
RN

36" Counter-Depth 4-Door Refrigerator

800 Series – Stainless Steel B36CL80SNS

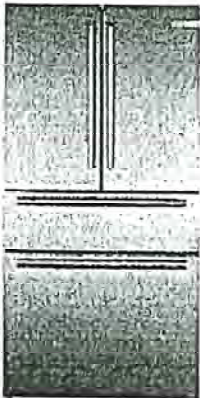

B36CL80SNS
Stainless Steel

Introducing the revolutionary, new FarmFresh System™, with four freshness technologies designed to work together to keep your food fresher, longer. Enjoy less food waste, new innovative features and more thoughtful design.

Features & Benefits

VitaFreshPro™ provides pre-programmed freshness settings to optimize temperature and humidity to keep meat, fish, and produce fresher, longer.

Interior Water Dispenser is thoughtfully placed inside for refreshing water at the touch of a button or a push of a nozzle.

FlexBar™ utilizes typically unused space in the upper refrigerator cavity.

General Properties	
Full 72" height and true counter depth for built-in appearance	Yes
Easy Clean Stainless Steel	Yes
Lighting	Recessed LED light bars
Number of compressors/evaporators	2 / 2
Defrost process refrigerator section	Frost-free
Number of shelves – refrigerator	5
Adjustable shelves – refrigerator	4 half-width
Shelf material – refrigerator	Tempered glass
Type of shelves – refrigerator	Frameless split shelves with metal trim
Flexible storage bar	FlexBar™
Gallon storage bins	2
Humidity control compartments	2
Full width temp. & humidity controlled drawer	VitaFreshPro™
Ice maker	Yes
Water filter	UltraClarityPro™
Internal water dispenser	Yes
Touch control panel	Yes
AirFresh® filter	Yes
FreshProtect™ ethylene filter	Yes
MultiAirFlow™	Yes
Stainless steel back wall	Yes
Defrost process freezer section	Automatic
Number of drawers – freezer	3
Wi-Fi enabled	Yes, Home Connect™ app

Capacity	
Total capacity (cu. ft.)	20.5
Refrigerator capacity (cu. ft.)	14.5
Freezer capacity (cu. ft.)	6
Technical Details	
Current (A)	15 A
Volts (V)	115 V
Frequency (Hz)	60 Hz
Power cord length (in.)	91
Plug type	120V-3 prong
Dimensions & Weight	
Appliance dimensions with hinges, handles and doors (H x W x D) (in.)	72" x 35 5/8" x 31 1/8"
Appliance dimensions without hinges and doors (H x W x D) (in.)	71 1/2" x 35 5/8" x 24"***
Appliance dimensions with hinges and doors, no handles (H x W x D) (in.)	72" x 35 5/8" x 28 3/4"
Required cutout size (H x W x D) (in.)	72" x 36" x 25"
Net weight (lbs)	350 lbs
Efficiency	
Energy consumption (kWh/yr)	568
ENERGY STAR® qualified	Yes

Accessories	
UltraClarityPro™ Water Filter: BORPLFTR50	
FlexBar™ Bottle Holder: BOFLEXBOTL	
FlexBar™ Deep Shelf: BOFLEXLGSH	
FlexBar™ Shallow Shelf: BOFLEXSMSh	
Ethylene Filter Refill Kit: FPETHRF50	

Home Connect



Handwritten: 03/20/2024
RN



*When leveling legs are fully extended, add 5/8" to overall height, total 72 5/8".
**The cutout depth of 25" includes the required 1" airflow. The electrical covers on the back of unit do not require additional depth.
Accessories: To purchase Bosch accessories, cleaners & parts please visit www.bosch-home.com/us/store or call 1-800-944-2904 (Mon to Fri 9 am to 6 pm PST, Sat 9 am to 3 pm PST).
Notes: All height, width and depth dimensions are shown in inches. BSH reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cutout.
Warranty: Please see Use & Care manual or Bosch website for statement of limited warranty.
For more information on our entire line of products, go to www.bosch-home.com/us or call 1-800-944-2904.
© BSH Home Appliances Corporation. All rights reserved. Bosch is a registered trademark of Robert Bosch GmbH.

36" Counter-Depth 4-Door Refrigerator

800 Series – Stainless Steel B36CL80SNS



Installation Details

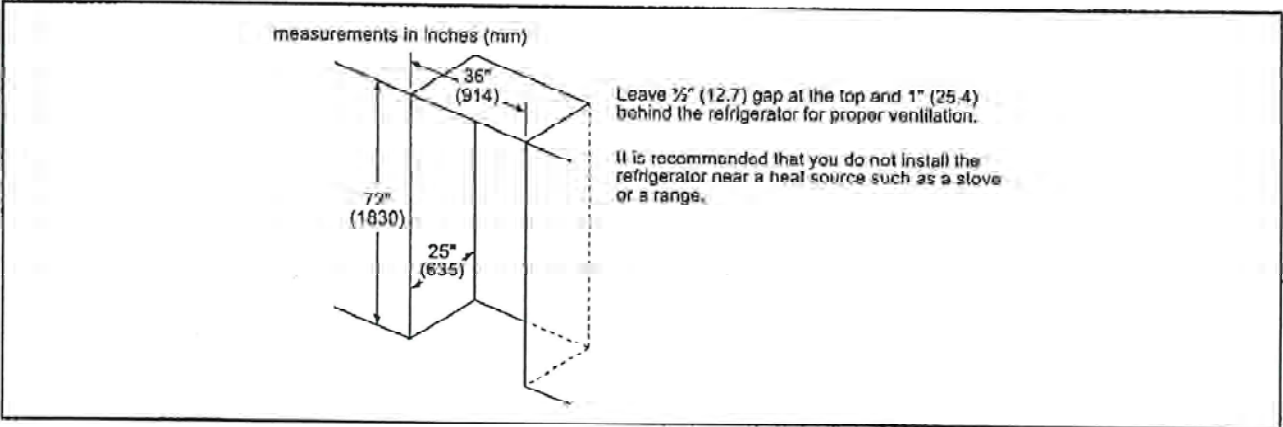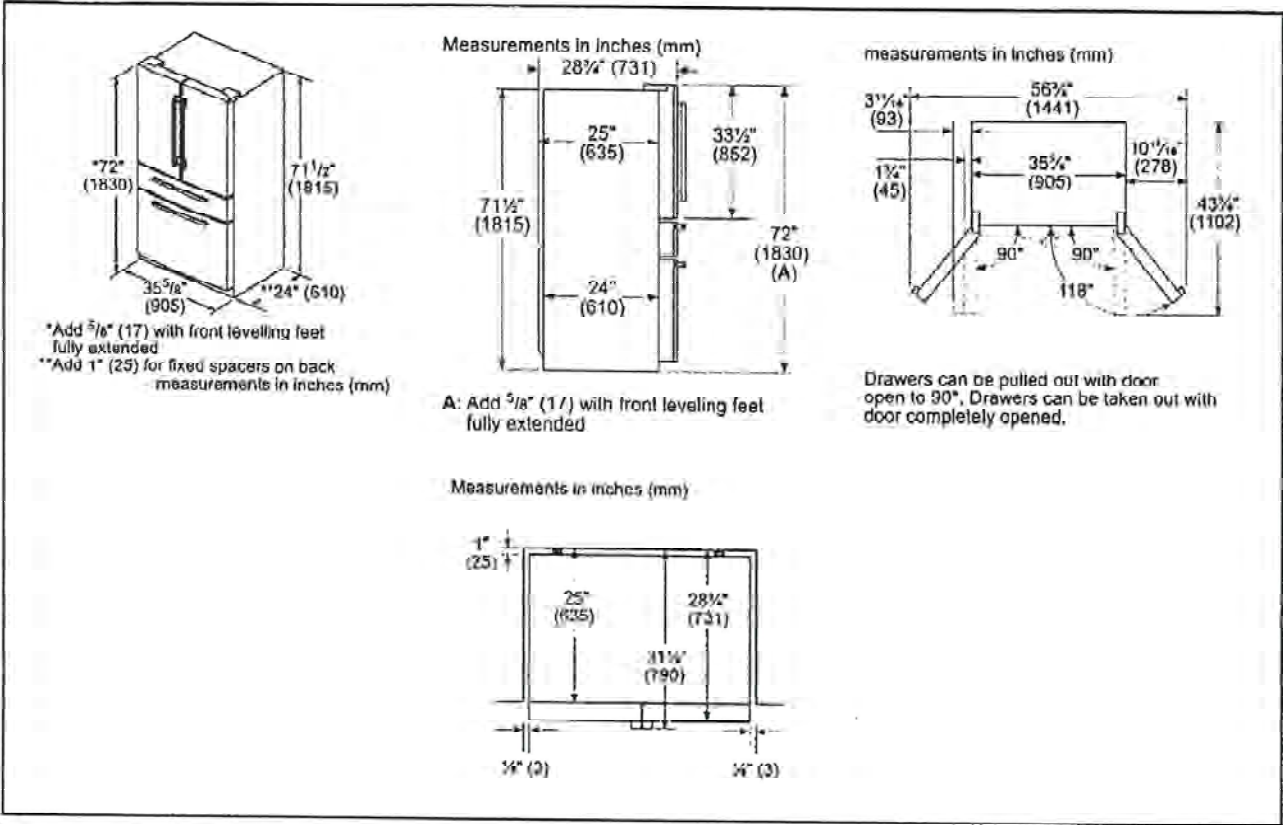

Accessories: To purchase Bosch accessories, cleaners & parts please visit www.bosch-home.com/us/store or call 1-800-944-2904 (Mon to Fri 9 am to 6 pm PST, Sat 9 am to 3 pm PST).
Notes: All height, width and depth dimensions are shown in inches. BSH reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cutout.
Warranties: Please see Use & Care manual or Bosch website for statement of limited warranty.
For more information on our entire line of products, go to www.bosch-home.com/us or call 1-800-944-2904
© BSH Home Appliances Corporation. All rights reserved. Bosch is a registered trademark of Robert Bosch GmbH.

Rudolf
03/20/2024
RN

36" Gas Cooktop

800 Series – Stainless Steel NGM8658UC



NGM8658UC
Stainless Steel

Also available in:
Black w/Black Stainless
Knobs
NGM8648UC

The 800 Series gas cooktop with FlameSelect® is a better way to cook with gas and delivers precision flame levels for consistent results.

- Features & Benefits**
- FlameSelect® offers 9 distinct power levels and delivers precision flame height every time for consistent, repeatable results.
- Dual-ring power burner has 2 rings for low and high flame settings so you can go from simmer to sear with ease.
- Dishwasher safe heavy-duty enameled cast iron grates makes cleanup simple and convenient.
- OptiSim® burner offers more flame control at the lowest settings for precise simmering and melting.
- Control knob with red LED light line indicates if burner is on and the burner's residual heat.

General Properties	
No. of burners	5
Knob color	Stainless Steel Appearance
Control location	Front Center
Sealed burners	Yes
Valves	Five 9-Level Gas Valves
Ignition system	Electronic; Thermocouple Flame Monitor Control
Cooktop surface material	Stainless Steel
Grate material	Cast Iron
Grate features	Continuous Grates, Dishwasher Safe

Element Performance	
Total BTU load (NG / LP)	42,700 / 41,400
Power of front left burner (NG / LP)	3,400 / 3,400
Power of back left burner (NG / LP)	6,000 / 6,000
Power of center burner (NG / LP)	17,000 / 15,700
Power of back right burner (NG / LP)	10,300 / 10,300
Power of front right burner (NG / LP)	6,000 / 6,000



Technical Details	
Circuit breaker	15 A
Volts	120 V
Frequency	60 Hz
Plug type	3-Prong
Power cord length	40"
Fuel type	Natural Gas (Factory Set)
Convertible to LP (kit required)	Yes

Dimensions & Weight	
Overall appliance dimensions (HxWxD)	3 3/4" x 37" x 21 1/4"
Required cutout size (HxWxD)	2" x 34 15/16" x 19 1/8"
Minimum distance from counter front	1 7/8"
Minimum distance from rear wall	3"
Net weight	44 lbs

Accessories – Included	
Included	LP Conversion Kit, OptiSim® Cap

Accessories – Optional	
------------------------	--



HEZ9GR58UC Griddle
HEZ258102 Wok Ring

Rudolf
03/20/2024
RN

*To be fully ADA compliant, these units must be installed according to ADA guidelines. Please check current ADA requirements for guidance on installation.

Accessories: To purchase Bosch accessories, cleaners & parts please visit www.bosch-home.com/us/store or call 1-800-944-2904 (Mon to Fri 9 am to 6 pm PST, Sat 9 am to 3 pm PST).

Notes: All height, width and depth dimensions are shown in inches. BSH reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cutout.

Warranties: Please see Use & Care manual or Bosch website for statement of limited warranty.

For more information on our entire line of products, go to www.bosch-home.com/us or call 1-800-944-2904

© BSH Home Appliances Corporation. All rights reserved. Bosch is a registered trademark of Robert Bosch GmbH.

36" Gas Cooktop

800 Series – Stainless Steel NGM8658UC



Installation Details


Measurements in inches (mm)

A: Dimension from countertop to top of grates
B: When installed in combination with a hood, refer to hood manufacturer's requirements for installation
C: Gas connection


Installation with horizontal panel
If there is no oven beneath the cooktop, install a horizontal panel. To allow access to the power supply connection and regulator, maintain a minimum clearance of 3/8" (10 mm) from the edges of the panel.

IMPORTANT: Complete the installation of the cooktop before installing the horizontal panel.

Measurements in inches (mm)
Cooktop over drawer

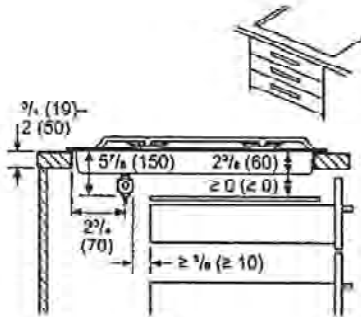

Measurements in inches (mm)
Cooktop over door

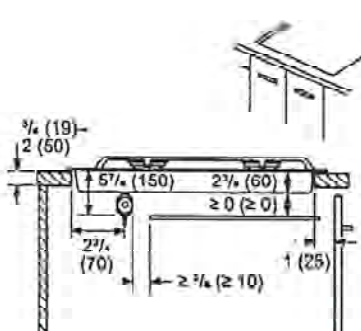

Accessories: To purchase Bosch accessories, cleaners & parts please visit www.bosch-home.com/us/store or call 1-800-944-2904 (Mon to Fri 5 am to 6 pm PST, Sat 6 am to 3 pm PST).
Notes: All height, width and depth dimensions are shown in inches. BSH reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cutout.
Warranties: Please see Use & Care manual or Bosch website for statement of limited warranty.
For more information on our entire line of products, go to www.bosch-home.com/us or call 1-800-944-2904.
© BSH Home Appliances Corporation. All rights reserved. Bosch is a registered trademark of Robert Bosch GmbH.

Reed
03/20/2024

RN

KitchenAid®


PRODUCT MODEL NUMBERS

KMBP100E

KMBP107E

ELECTRICAL CONNECTION

- Microwave oven must be connected to the proper electrical voltage and frequency as specified on the model/serial number rating plate. The model/serial number rating plate is located underneath the control panel, along the oven vent.

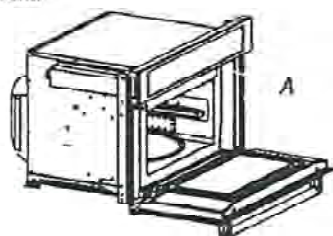


A. Model/serial number rating plate

- The microwave oven rated 120/240 volt, 20-amp, has 4 wires (L1, L2, N and G) in the flex conduit and should be connected to a 20-amp maximum rated circuit, overcurrent protected on both the L1 and L2 circuits.
- A time-delay fuse or circuit breaker is recommended.

PRODUCT DIMENSIONS

27" (68.6 cm) and 30" (76.2 cm) Microwave Ovens

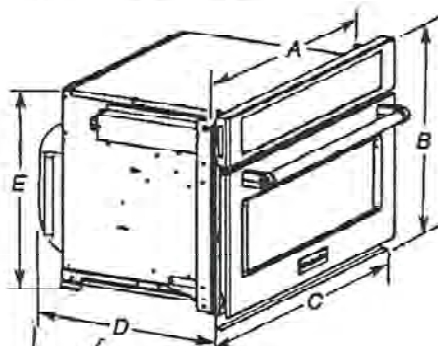


27" (68.6 cm) models

- A. 25 1/4" (64.5 cm)
- B. 18 1/2" (47.3 cm) overall height
- C. 26 1/4" (67.9 cm) overall width
- D. 21 1/2" (54.6 cm)
- E. 17 1/4" (44.1 cm)

30" (76.2 cm) models

- A. 28 1/4" (72.1 cm)
- B. 18 1/2" (47.3 cm) overall height
- C. 29 1/4" (75.6 cm) overall width
- D. 21 1/2" (54.6 cm)
- E. 17 1/4" (44.1 cm)

27" (68.6 cm) and 30" (76.2 cm) Microwave Oven Spacer Kit

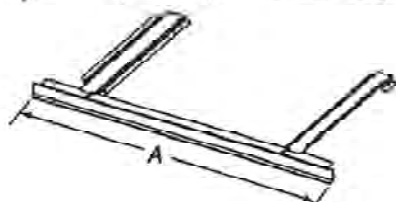

27" (68.6 cm) models

- A. 26 1/4" (67.9 cm) overall width

30" (76.2 cm) models

- A. 29 1/4" (75.6 cm) overall width

NOTE: The microwave oven spacer kit will allow the microwave oven to be installed in a 17 1/2"-17 3/4" (44.1-45.1 cm) maximum cutout height.

A microwave oven spacer kit is available from your dealer that will allow the microwave oven to be installed in a 19"-19 1/8" (48.3-50.2 cm) maximum cutout height. Match the oven size to the following kits:

- 27" (68.6 cm) Stainless Steel - Model W10469901
- 30" (76.2 cm) Stainless Steel - Model W10469903

To order, see the "Assistance or Service" section of the Use and Care Guide.

Because Whirlpool Corporation includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.


Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

Ref. W10725730B
2/10/15

27" (68.6 cm) and 30" (76.2 cm) Electric Built-In Convection Microwave Oven

CABINET DIMENSIONS

27" (68.6 cm) and 30" (76.2 cm) Microwave Ovens

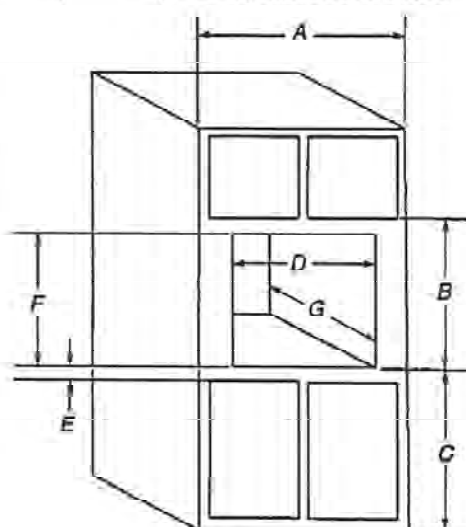

27" (68.6 cm) models

- A. 27" (68.6 cm) min. cabinet width
- B. 18 1/2" (47.3 cm) from bottom of cutout to bottom of upper cabinet door
- C. 40" (101.6 cm) bottom of cutout to floor (recommended)
- D. 25 1/4" (64.5 cm) cutout width
- E. 1 1/2" (3.8 cm) min. bottom of cutout to top of cabinet door
- F. 17 1/4" (44.1 cm) recommended cutout height (will fit cutout height from 17 1/4" (44.1 cm) to 17 3/4" (45.1 cm))
- G. 21 1/4" (55.5 cm) min. cutout depth


30" (76.2 cm) models

- A. 30" (76.2 cm) min. cabinet width
- B. 18 1/2" (47.3 cm) from bottom of cutout to bottom of upper cabinet door
- C. 40" (101.6 cm) bottom of cutout to floor (recommended)
- D. 28 1/4" (72.4 cm) cutout width
- E. 1 1/2" (3.8 cm) min. bottom of cutout to top of cabinet door
- F. 17 1/4" (44.7 cm) recommended cutout height (will fit cutout height from 17 1/4" (44.1 cm) to 17 3/4" (45.1 cm))
- G. 21 1/4" (55.5 cm) min. cutout depth

MINIMUM INSTALLATION CLEARANCES

For proper installation, the following minimum clearances must exist above and below the cabinet opening.

Installation Above Single Built-In Oven

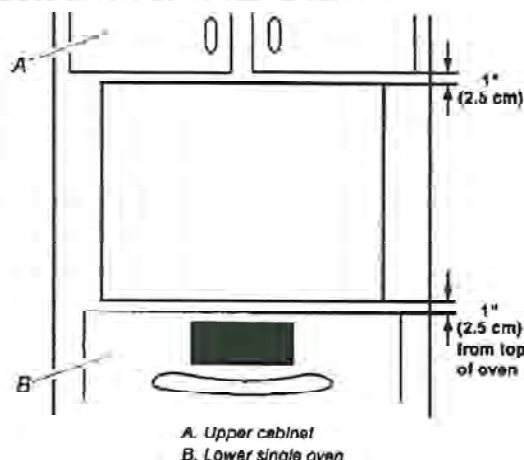

A. Upper cabinet
B. Lower single oven

Approved models: KMBP100E and KMBP107E.

Rudolf
03/20/2024 RN

KMDP100FS

- A time-delay fuse or circuit breaker is recommended.
- Flexible cable from the microwave oven should be connected directly to the junction box.
- Do not cut the conduit. The length of conduit provided is for serviceability of the microwave oven.
- A UL listed or CSA approved conduit connector must be provided.
- If the house has aluminum wiring, follow the procedure below:

Connect the aluminum wiring using special connectors and/or tools designed and UL listed for joining copper to aluminum.

Follow the electrical connector manufacturer's recommended procedure. Aluminum/copper connection must conform with local codes and industry accepted wiring practices.

For power requirements, refer to the following table:

Voltage	Microwave With Convection Oven
240 VAC	19.9 A/3250 W
208 VAC	19.9 A/3250 W

INSTALLATIONS


Spacer Kit Installation (For Microwave Ovens)

NOTE: The microwave oven spacer kit allows the microwave oven to be installed in an 17³/₈" - 17³/₄" (44.1 cm to 45.1 cm) maximum cutout height.

Assemble Spacer Kit


1. Attach the bottom vent to spacer bars using four 3/8" (9.5 mm) hex-head washer screws.

NOTE: Spacer bar flanges should be facing out.

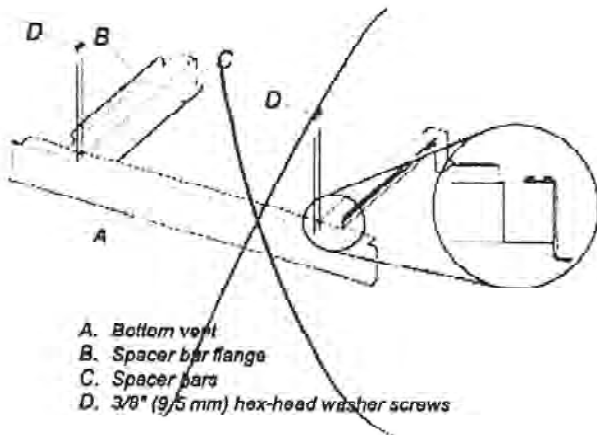

Install Spacer Kit

1. Center assembled microwave oven spacer kit against lower front edge of the cabinet cutout.
2. Using an 1/8" (3.2 mm) drill bit, drill through the mounting holes in the spacer bars to create pilot holes.
3. Attach the assembled spacer kit to the cabinet using four 3/4" (1.9 cm) (pan-head screws). Do not overtighten screws.

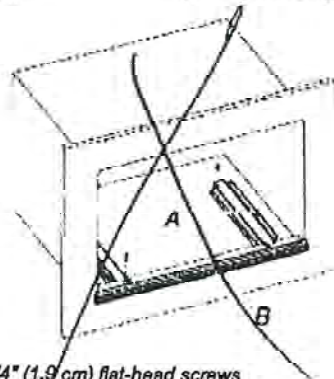

Prepare Built-In Oven

1. Decide on the final location for the oven. Locate existing wiring to avoid drilling into or severing wiring during installation.

⚠ WARNING

Excessive Weight Hazard

Use two or more people to move and install or uninstall appliance.

Failure to do so can result in back or other injury.

2. To avoid floor damage, set the Microwave Oven or Oven onto cardboard prior to installation. Do not use handle or any portion of the front frame for lifting.
3. Remember to remove bottom vent from the foam packing on top of the Oven.
4. Remove the shipping materials and tape from the Microwave Oven or Oven.
5. Remove the hardware package from inside the bag containing literature.
6. Remove and set aside racks and other parts from inside the Microwave Oven or Oven.
7. Move Microwave Oven or Oven and cardboard close to the oven's final location.

Ready
03/20/2024

RN

DIMENSION GUIDE

2 of 18

Location Requirements

IMPORTANT: Observe all governing codes and ordinances.


- To eliminate the risk of burns or fire by reaching over heated surface units, cabinet storage space located above the surface units should be avoided. If cabinet storage is to be provided, the risk can be reduced by installing a range hood that projects horizontally a minimum of 5" (12.7 cm) beyond the bottom of the cabinets.
- Cabinet opening dimensions that are shown must be used. Given dimensions provide minimum clearance with oven.
- Recessed installation area must provide complete enclosure around the recessed portion of the oven.
- Grounded electrical supply is required. See "Electrical Requirements" section.
- Electrical supply junction box should be located 3" (7.6 cm) maximum below the support surface when the oven is installed in a wall cabinet. A 1" (2.5 cm) minimum diameter hole should have been drilled in the right rear or left rear corner of the support surface to pass the appliance cable through to the junction box.

NOTE: For undercounter installation, it is recommended that the junction box be located in the adjacent right or left cabinet. If you are installing the junction box on rear wall behind oven, it is recommended that the junction box be recessed and located in the upper center of the cabinet.

- Oven support surface must be solid, level and flush with bottom of cabinet cutout.
- Floor must be able to support a single oven weight of 200 lbs (91 kg) for 30" (76.2 cm) models.

IMPORTANT: To avoid damage to your cabinets, check with your builder or cabinet supplier to make sure that the materials used will not discolor, delaminate or sustain other damage. This oven has been designed in accordance with the requirements of UL and CSA International and complies with the maximum allowable wood cabinet temperatures of 194°F (90°C).

Product Dimensions - Single Ovens, Standard Installation

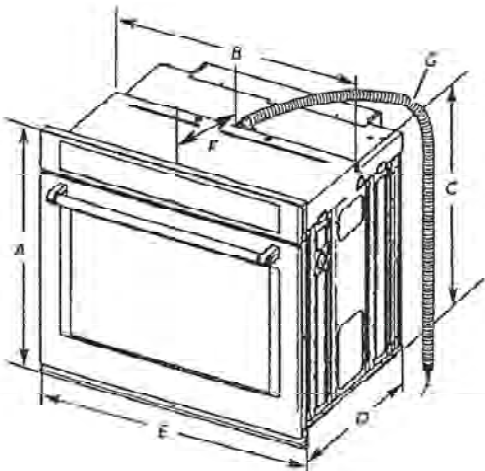

30" (76.2 cm) models


- A. 29" (73.6 cm) maximum overall height
- B. 28 7/8" (72.2 cm) maximum recessed width
- C. 26" (65.9 cm) recessed height
- D. 23 1/4" (59.1 cm) maximum recessed depth
- E. 29 1/4" (75.6 cm) overall width
- F. 12" (30.5 cm) from back of control panel to start of strain relief
- G. 48" (121.3 cm) flexible conduit length

RN
Rudolf 03/20/2024

DIMENSION GUIDE

3 of 18

Single Ovens Installed in Cabinet

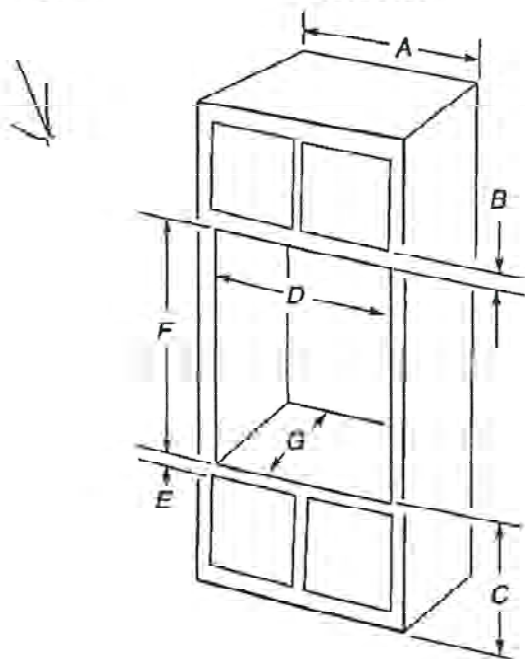

- 30" (76.2 cm) models
- A. 30" (76.2 cm) minimum cabinet width
 - B. 1" (2.5 cm) top of cutout to bottom of upper cabinet door
 - C. 32" (81.3 cm) bottom of cutout to floor
 - D. 28 1/4" (72.4 cm) minimum cutout width
 - E. 1 1/4" (3.8 cm) minimum bottom of cutout to top of cabinet door
 - F. 28" (71.2 cm)* recommended cutout height
 - G. 24" (60.7 cm) cutout depth

*NOTES: The cutout height can be between 27 1/4" and 29 1/8" (69.2 cm and 74.8 cm) for single ovens.


*NOTES: Tall shield for installations greater than 28 11/16" (72.9 cm).

Cabinet Dimensions - Single Ovens, Flush Installations

NOTES: This is an alternate option to install your product in the cabinet and obtain a flush look. For standard installation, refer section "Product Dimensions - Single Ovens, Standard Installation."

A 25" (63.5 cm) minimum cutout depth is required. Top and bottom gaps will be 1/8" (0.3 cm) gap above and below the product. Top and bottom gaps not required for installation. Exposed areas of the cabinet should be finished to match.

Single Ovens Installed in Cabinet

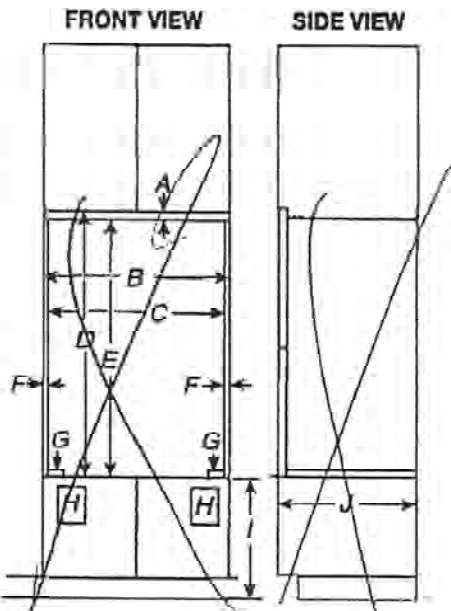

- 30" (76.2 cm) models
- A. 3/4" (1.9 cm) top cleat
 - B. 30 1/4" (76.8 cm) minimum width of flush inset cutout
 - C. 28 5/8" (73.3 cm) minimum width of opening
 - D. 29 1/4" (74.3 cm) minimum height of flush inset cutout
 - E. 28 1/2" (72.6 cm) recommended cutout height
 - F. 1 1/16" (1.7 cm) side cleat
 - G. 1/4" (0.6 cm) recommended with foot, 15/16" to 1 1/4" (2.2 cm to 2.9 cm) allowable without foot
 - H. Recommended junction box location
 - I. 4 1/4"-32" (11.7 cm-81.3 cm) bottom of cutout to floor
 - J. 25" (63.5 cm) minimum depth of cutout

*Cleats and spacers must be recessed 1 1/2" (3.5 cm) from the front of the cabinet.

Ready
03/20/2024 RAN

24" Recessed Handle Dishwasher

300 Series – Stainless Steel SHE53C85N



SHE53C85N
Stainless Steel

Also available in:

- White SHE53C82N
- Black SHE53C86N

The 3rd rack provides the perfect space for silverware and large utensils while its V shape leaves room below for taller items.

Features & Benefits

46 dBA: dishwasher runs quietly so your kitchen conversations aren't interrupted.

With PrecisionWash*, intelligent sensors and precision spray arms target every item of every load, so dishes come out sparkling clean every time.

Enhance your cleaning experience with Wi-Fi enabled Home Connect*. Access additional wash cycles and options or choose the right one for your needs using Smart Cycle.

General Properties

Number of wash cycles	5 + 3 additional in Home Connect*
Number of options	3 + 2 additional in Home Connect*
dBA	46
Wash system	PrecisionWash*
Drying system	PureDry*
Third rack	Standard 3rd Rack
Rack adjustability	Rackmatic*
Tub material	Stainless Steel
Control type	Touch Controls
Concealed water heating element	Yes
Leak protection system	24/7 AquaStop*
Home Connect* (WiFi enabled)	Yes
NSF*-certified* sanitize option	Yes
Water softener	No
Five-level wash	Yes
Child Lock button suspension	Yes
Anti-Fingerprint Finish	Yes
Special features	Extra Dry Option

Efficiency

Water usage per cycle	3.5
ENERGY STAR* qualified	No
Total annual energy consumption	269 kWh

Capacity

Number of place settings	16
--------------------------	----

Technical Details

Watts	1440 W
Current	12 Amps
Volts	120 V
Frequency	60 Hz
Power cord full length	67"
Power cord install length from edge of unit when facing the door	Left – 45" Right – 56"
Minimum water pressure	14 lb/sin
Length outlet hose	78 3/4"

Dimensions & Weight

Overall appliance dimensions (HxWxD)	33 7/8" x 23 9/16" x 23 3/4"
Required cutout size (HxWxD)	33 7/8" x 24" x 24"
Adjustable feet	Yes
Net weight	81 lbs

Accessories-Optional

Junction Box	SMZPCJ81UC
Junction Box + Supply Hose Kit	SMZ3IN1UC
Bosch Dishwasher Water Supply Hose	SMZSH1ABUC
Drain Hose Extension Kit	SGZ1010UC
Silverware Basket	SMZ4000UC
Dishwasher Accessory Kit	SMZ5000
Anti-Tarnish Silverware Cassette	SMZ5002UC
Edge Protector + Power Cord Clip Install Kit	SMZEPCC1UC



* Certification to NSF/ANSI Standard 184 for residential dishwashers

Accessories: To purchase Bosch accessories, cleaners & parts please visit www.bosch-home.com/us/store or call 1-800-944-2904 (Mon to Fri 8 am to 6 pm PST, Sat 8 am to 3 pm PST).
Notes: All height, width and depth dimensions are shown in inches. BSH reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cutout.
Warranty: Please see Use & Care manual or Bosch website for statement of limited warranty.
For more information on our entire line of products, go to www.bosch-home.com/us or call 1-800-944-2904
© BSH Home Appliances Corporation. All rights reserved. Bosch is a registered trademark of Robert Bosch GmbH.






Rudolf RN
03/20/2024

24" Recessed Handle Dishwasher

300 Series – Stainless Steel SHE53C85N



Installation Details

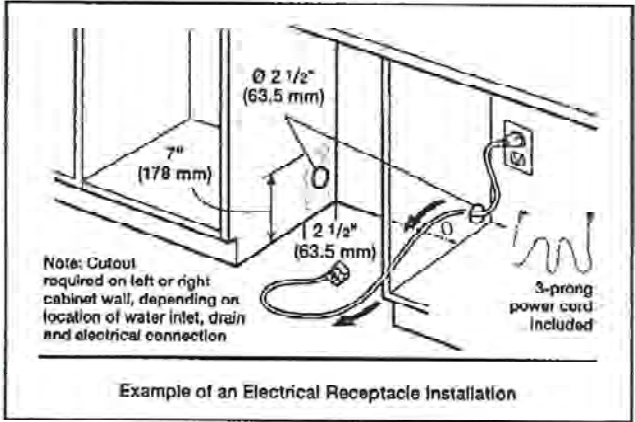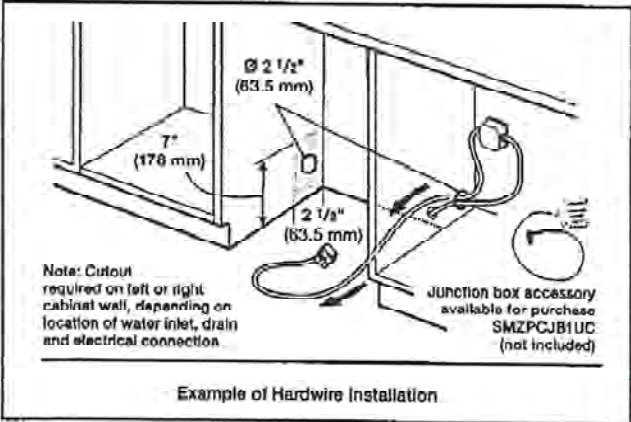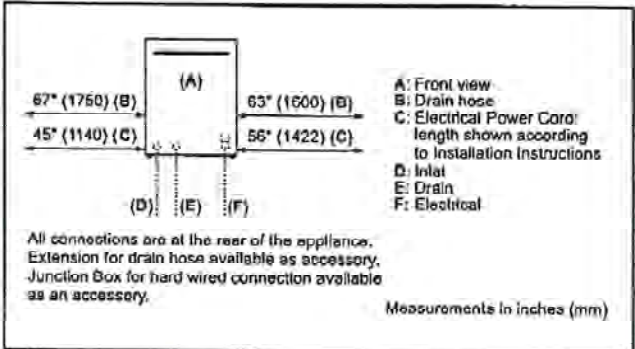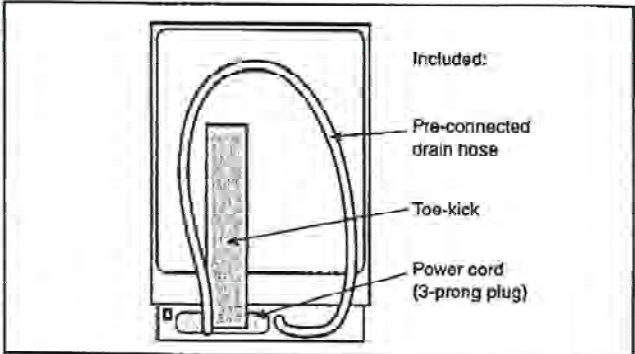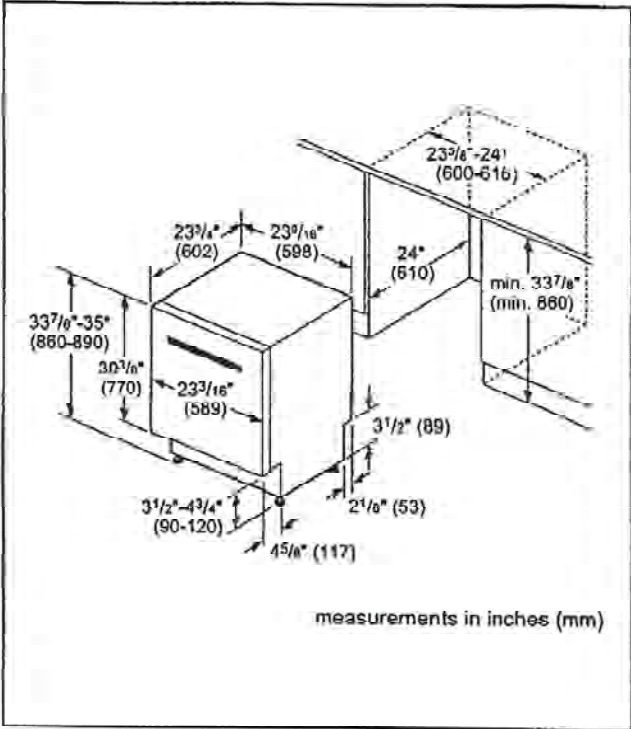

Accessories: To purchase Bosch accessories, cleaners & parts please visit www.bosch-home.com/us/store or call 1-800-944-2904 (Mon to Fri 5 am to 6 pm PST, Sat 6 am to 3 pm PST).
Notes: All height, width and depth dimensions are shown in inches. BSH reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cutout.
Warranties: Please see Use & Care manual or Bosch website for statement of limited warranty.
For more information on our entire line of products, go to www.bosch-home.com/us or call 1-800-944-2904
© BSH Home Appliances Corporation. All rights reserved. Bosch is a registered trademark of Robert Bosch GmbH.

Revised
03/20/2024

767

HOME APPLIANCES

LG LAUNDRY

WM4100HBA

5.2 cu. ft. Capacity Front Load Washer



- TurboWash™ 360 Technology
- AI DD™
- Steam Technology
- ENERGY STAR® Qualified
- SmartDiagnosis™
- Touch Control Panel
- ThinQ™ Technology (Wi-Fi Enabled)

Enjoy new ways to control your home with LG smart appliances

LG ThinQ™

- Start the laundry while you're out shopping
- Get alerts when the cycle is finished
- Works with the LG ThinQ® app

CAPACITY	
Capacity (cu. ft.)	5.2
APPEARANCE	
Design Look	Front Control
Intelligent Electronic Controls with LED Display	
Touch Buttons	
Dial-A-Cycle™	
ENERGY	
ENERGY STAR® Qualified	
CEE Tier	2
DRYING PROGRAMS	
No. of Programs - 14	Normal, Extra, Press, Heavy Duty, Delicates, Towels, Speed Wash, Drain+Spin, Bedding, Tub Clean, Bright Whites™, Sanitary, Allergene™, Sport Guard, Down Guard
No. of Options - 14	TurboWash™, Steam, Fresh Care, Pre-wash, Remote Start, Delay Wash, Add A Load, Cold Wash Extra Rinse, Rinse+Spin, Control Lock, Spin Only Signal
Temperature Settings	Extra Hot, Hot, Warm, Cold, Tap/Cold
Spin Speeds	5
Water Levels	Extra High, High, Medium, Low, No Spin
Soil Levels	Load Sensing
FABRIC CARE FEATURES	
AI DD™	
TurboWash™ 360 Technology	
Steam Technology	
Allergene™ Cycle	
Sanitary Cycle	
Cold Wash™ Option	
CONVENIENCE FEATURES	
4 Tray Dispenser	Pre-wash, Main Wash (with liquid detergent cup), Bleach, Fabric Softener
TrueBalance™ Anti-Vibration System	
Load Sense	
Control Lock	
Auto Suds Removal	
Leveling Legs	4 Adjustable Legs
ThinQ™ TECHNOLOGY	
SmartDiagnosis™ (v1.0)	
Wi-Fi	
Remote Start and Cycle Monitor	
Energy Monitoring	

Tub Clean Cycle	
MOTOR	
Motor Type	Inverter Direct Drive Motor
Motor Speed	Variable
Max RPM	1,300
Axis	Horizontal
MATERIALS AND FINISHES	
NextBest™ Steam System	
Exterior	PCM
Control Panel	Plastic
Top Plate	Painted
Door Glass	Tempered Glass Door
Door Film	Gloss-Chrome
All Available Colors	Black Steel (B)
POWER SOURCE	
Rating	UL Listed
Electrical Requirements	120V, 10 Amps
Type	Electric
OPTIONS	
Pedestal	WDP40
SideKick™ Pedestal Washer	27" x 14 1/8" x 30 3/4"
Stacking Kit	WD100CB
DIMENSIONS	27" x 14 1/8" x 30 3/4"
Product (With D)	27" x 39" x 30 1/4"
Product (With D)	55" (With door open)
Carton (With D)	29 7/32" x 42 25/32" x 31 12/32"
Weight (Product Only)	198.4 lbs / 212.1 lbs
LIMITED WARRANTY	
1 Year Parts and Labour, 5 Year Compressor, 10 Years on Direct Drive Motor	
UPC CODES	
WM4100HBA	772454073250
DLE44760D	772454073267
DLE44760E	772454073366
WD100CB	772454071805
WDP40	648231025451
NS101	772454055896

HOME APPLIANCES

LG LAUNDRY

DLEX4200_ / DLGX4201_
7.4 cu.ft. Front Load Dryer with TurboSteam™ and
Built-In Intelligence

- 7.4 cu. ft. Ultra Large Capacity
- TurboSteam™ Technology
- AI Fabric Sensor/ Smart Pairing™
- LG ThinQ® Technology / Proactive Customer Care
- Tempered Glass Door
- FlowSense™ Duct Clogging and Lint Filter Indicators
- ENERGY STAR® Certified
- Closet Depth
- LoDecibel™ Quiet Operation
- Reversible Door
- Wrinkle Care Option


AVAILABLE COLORS



Enjoy new ways to control your home with LG smart appliances

- Use the ThinQ® app to start the laundry while you're out
- Get alerts when the cycle is finished
- With Smart Pairing™, the washer can tell the dryer to select a compatible drying cycle

LG ThinQ®

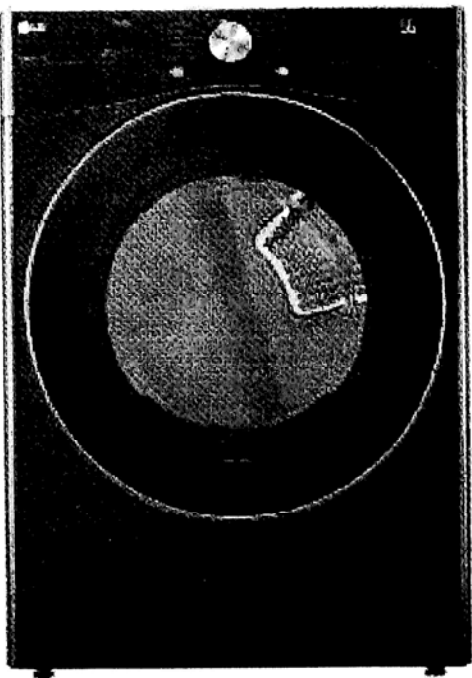

SUMMARY		FABRIC CARE FEATURES	
Type	Front Load Dryer	A.I Dry	Yes
Capacity	7.4 cu. ft.	Sensor Dry	Yes
Matching Washer	WM4200HWA, WM4200HBA	Precise Temperature Control with Variable Heater	Yes
Sensor Dry	Yes	Steam	TurboSteam™
Steam	Yes	CONVENIENCE FEATURES	
Color	White (W), Black Steel (B)	3 Minute Installation Check	Yes
APPEARANCE		LoDecibel™ Quiet Operation	Yes
Intelligent Electronic Controls with LED Display	Yes	End of Cycle Signal	Yes
Dial-A-Cycle™	Yes	Drum Light	Yes
Touch Buttons	Yes	Reversible Door	Yes
DRYER PROGRAMS		FlowSense™ Duct Clogging Indicator	Yes
No. of Programs	14	Wrinkle Care Option	Yes
Programs (Sensor Dry)	Normal, Heavy Duty, Bedding, Small Load, Anti Bacterial, Steam-Sanitary™, SteamFresh™, Perm Press, Delicates, Sportswear, Towels, Speed Dry (Manual Dry), Air Dry (Manual Dry), Downloaded	Child Lock	Yes
		Venting Option	Electric: 4 Way Venting / Gas: 3 Way Venting
		4 Adjustable Legs	Yes
No. of Options	12	Remaining Time Display/Status Indicator(s)	Yes
Options	More Time, Less Time, Damp Dry Signal, Wrinkle Care, Control Lock, Wi-Fi, Energy Saver, TurboSteam™, Reduce Static, Remote Start, Drum Light, Signal	ThinQ® TECHNOLOGY	
	High, Med-High, Medium, Low, Ultra Low	SmartDiagnosis™ (Ex. 9)	Yes
Temperature Settings	Very Dry, More Dry, Normal Dry, Less Dry, Damp Dry	Wi-Fi	Yes
Drying Levels	60 min., 50 min., 40 min., 30 min., 20 min., More Time/Less Time	Remote Start and Cycle Monitor	Yes
Manual Dry Times		Energy Monitoring	Yes (Wi-Fi)
		ENERGY	
		ENERGY STAR® Certified	Yes
		CEF	Electric: 3.94 / Gas: 3.49
		MATERIALS AND FINISHES	
		Aluminized Alloy Steel Drum	Yes
		Tub Rear	Painted
		Cabinet	Painted Steel
		Door	Tempered Glass Door
		All Available Colors	White (W), Black Steel (B)

POWER SOURCE	
Ratings	CSA Listed
Electrical Requirements	120V, 15 Amps (Gas) / 240V 30 Amps (Electric)
Type	Electric, Gas
BTU Rating	20,000 Feet
OPTIONS	
LP Conversion Kit	383EEL3002D
Side Venting Kit	3911E29131X
Pedestal	WDP4W, WDP4B
Pedestal (WxHxD)	27" x 14 1/8" x 20 3/4" (59 1/2" D with door open)
DIMENSIONS (ELECTRIC)	
Product (WxHxD)	27" x 39" x 30 1/8"
Depth with Door Open	51 3/8"
Carton (WxHxD)	29 1/2" x 42 1/4" x 31 1/4"
Weight (Product)	125.3 lbs.
Weight (Carton)	142.6 lbs.
DIMENSIONS (GAS)	
Product (WxHxD)	27" x 39" x 30 1/8"
Depth with Door Open	51 3/8"
Carton (WxHxD)	29 1/2" x 42 1/4" x 31 1/4"
Weight (Product)	139.34 lbs.
Weight (Carton)	155.0 lbs.
LIMITED WARRANTY	
Parts & Labor	1 Year
Drum	3 Years
UPC CODES	
DLEX4200W (White)	048231026417
DLGX4201W (White)	048231028424
WM4200HWA (White)	048231028301
DLEX4200B (Black Steel)	048231028394
DLGX4201B (Black Steel)	048231028400
WM4200HBA (Black Steel)	048231028295