

Sales Selection Sheet
Checklist

1 of 76

LOT 31 Model: 28-2550 C THE FOREST
PURCHASERS: INVENTORY HOME_31/
VENDOR: Heathwood Homes (Williamsburg) Limited

ALT KITCHEN PLAN IN MAIN KITCHEN
OPTIONAL EXTERIOR SIDE ENTRY DOOR TO FINISHED LOWER LEVEL
V2 "SPACES" FINISHED LOWER LEVEL PLAN
OPT. COFFERED CEILING IN GREAT AND DINING ROOMS / OPT DOUBLE SINKS IN SHARED BATH

- ☐ WOB
- ☐ DECK
- ☒ FINISHED LOWER LEVEL (STD)

UPGRADED / MODIFIED ELEVATION

- ☐ CORNER UPGRADE
- ☒ REAR UPGRADE
- ☐ SIDE UPGRADE

CEILING UPGRADE - SMOOTH

- ☒ MAIN FLOOR (SITE STD)
- ☐ SECOND FLOOR
- ☐ SECOND FLOOR UPPER HALLWAY ONLY
- ☒ FINISHED LOWER LEVEL

ADDITIONAL ROUGH-INS

- ☒ 200 AMP SERVICE (SITE STD)
- ☐ WET BAR ROUGH-IN
- ☐ HUMIDIFIER
- ☒ HEAT PUMP / AIR CONDITIONING (SITE STD)

GAS ROUGH-IN

- ☒ STOVE
- ☐ DRYER
- ☒ BBQ
- ☐ ADDITIONAL GAS FIREPLACE

KITCHEN HOODFAN VENTING SIZE

- ☒ 6 IN ROUND DUCT
- ☐ 7 IN ROUND DUCT

FULL LOWER LEVEL STAIRS	All Oak (UPG FOR BSMT STAIRS)
UPPER LOWER LEVEL STAIRS	N/A
LOWER LOWER LEVEL STAIRS	N/A
MAIN STAIRS	All Oak

Aug 13/24

Date

UN SOLD INVENTORY MODEL

Purchaser:

Aug 13/24

Date

MARILYN ROSEN

Decor Consultant:

Date

-08- 13 2024

Approved

Heathwood Homes (Williamsburg) Limited

Purchaser:

Date


Locked Date:

DARREN COOPER/
Project: Williamsburg Green
Unit: 31, Phase: 1
Model: 28-2550 C THE FOREST

Created: 7/22/2024 13:42:01
Locked:
Closed:


Kitchen

Cabinet Colour/Style	6467	Classic II-MANCHESTER-MACADAMIA-PAINT MDF ***UPG***
Island Cabinet Colour/Style	6467	Classic II-MANCHESTER-MACADAMIA-PAINT MDF ***UPG***
Cabinet Hardware	2086	9677-HARDWARE ***STD***
Countertop	9815	Group 2-Quartz-Caesarstone-GOLDEN SKY # 7524-3/4 inch B/U MITERED EDGE ***2***
Island Countertop	9815	Group 2-Quartz-Caesarstone-GOLDEN SKY # 7524-3/4 inch B/U MITERED EDGE ***2***
Countertop Edge	4007	GROUP 2 TO 7 - DOUBLE MITRE 1 1/2 INCH ***3***



- Please note some islands may require a seam as per manufacturer and fabricator discretions.

Sink	9493	BLANCO QUATRUS U 1 SUPER SINGLE 401248 (min cabinet 36 in)	PG 36
HoodFan	9864	AVW-368CS-AVG 36 inch STAINLESS STEEL CHIMNEY WALL MOUNTED HOODFAN-Stainless Steel-36 inch-UPG	PG 46-47
Backsplash	9466	UN.CT.WHT.0312.MT-City-White Matte-3 x 12 UPG 3 ***UPG***	
Backsplash Grout	9836	Grout-Eggshell #5220 ***STD***	
Backsplash Tile Pattern	3070	HORIZONTAL STACKED ***STD***	



Comment

- Purchasers have been advised: standard fridge opening is a minimum 37 3/8 x 73 3/8 inches. Ice Waterline Rough-In is included.
- Standard stove opening is 30 inches and standard dishwasher opening is 24 inches. Any gas stove will require backsplash or stainless steel backing to avoid fire hazards.
- Purchasers acknowledge: Heathwood Homes and its contractors will not be responsible for any kitchen cabinet changes due to appliances dimension changes after sign-off.

Kitchen/Breakfast

Flooring	9364	Red Oak UVF-Vintage Northern Solid Sawn BARISTA-3/4 inch x 5 inch ***STD in Single***
Floor Tile Grout	1111	N/A *****
Floor Tile Pattern	1111	N/A *****

Comment

Great/Dining

Customer Colours

DARREN COOPER/
Project: Williamsburg Green
Unit: 31, Phase: 1
Model: 28-2550 C THE FOREST

Created: 7/22/2024 13:42:01
Locked:
Closed:

Flooring	9364	Red Oak UVF-Vintage Northern Solid Sawn-BARISTA-3/4 inch x 5 inch ***STD in Single***
Comment		

Great Room Fireplace

Type	8869	Majestic MERC32 ***STD***
Mantle	9114	NF 15-Paint Grade Mantle- Cabinet (Per Plan)-WHITE ***STD***
Surround (Opt.)	1111	N/A *****

PG 34

- Purchasers have been advised: heat from the FP can damage TV above a FP and items placed on mantle.
- Heathwood and its contractors will not be liable for any damage on items placed and / or installed above a FP after closing.

Comment		
---------	--	--

Main Hall

Flooring	9364	Red Oak UVF-Vintage Northern Solid Sawn-BARISTA-3/4 inch x 5 inch ***STD in Single***
Floor Tile Grout	1111	N/A *****
Floor Tile Pattern	1111	N/A *****

Comment		
---------	--	--

Foyer

Flooring	8916	OV.CH.WHT.1224-Chambray-White-12 x 24 See Tile Direction on Sketch Page ***2***
Floor Tile Grout	9837	Grout-Warm Grey #5093 ***STD***
Floor Tile Pattern	3050	SIDE TO SIDE ***STD***

Comment		
---------	--	--

Powder Room

Flooring	8916	OV.CH.WHT.1224-Chambray-White-12 x 24 See Tile Direction on Sketch Page ***2***
Floor Tile Grout	9837	Grout-Warm Grey #5093 ***STD***
Floor Tile Pattern	3050	SIDE TO SIDE ***STD***

--	--

Customer Colours

DARREN COOPER/
Project: Williamsburg Green
Unit: 31, Phase: 1
Model: 28-2550 C THE FOREST

Created: 7/22/2024 13:42:01
Locked:
Closed:

Plumbing Fixture (Colour)1737Plumbing Fixtures-WHITE ***STD***

Comment

Laundry/Mud Room

Floor Tile8916OV.CH.WHT.1224-Chambray-White-12 x 24 See Tile Direction on Sketch Page ***2***

Floor Tile Grout9837Grout-Warm Grey #5093 ***STD***

Floor Tile Pattern3050SIDE TO SIDE ***STD***

Cabinet Colour/Style - Uppers9111VIKING III SIMCOE ORCHID 3DL ***UPG***

Cabinet Hardware - Uppers20869677-HARDWARE ***STD***

Cabinet Colour/Style - Base9111VIKING III SIMCOE ORCHID 3DL ***UPG***

Cabinet Hardware - Base20869677-HARDWARE ***STD***

Countertop88171881K-52-Countertop-CIPOLLINO BIANCO-Wilsonart ***STD***

Opt. Countertop Edge1111N/A *****

Comment

Upper Hall

Flooring9364Red Oak UVF-Vintage Northern Solid Sawn-BARISTA-3/4 inch x 5 inch ***STD in Single***

Comment

Principal Suite and Walk-in Closet

Flooring950584558-MINOTAUR-BEACH SHELL-40 oz Poly ***STD***

Comment

Bedroom 2 and Walk-in Closet

Flooring950584558-MINOTAUR-BEACH SHELL-40 oz Poly ***STD***

Comment

DARREN COOPER/
Project: Williamsburg Green
Unit: 31, Phase: 1
Model: 28-2550 C THE FOREST

Created: 7/22/2024 13:42:01
Locked:
Closed:





Bedroom 3

Flooring	9505	84558-MINOTAUR-BEACH SHELL-40 oz Poly ***STD***
Comment		

Bedroom 4

Flooring	9505	84558-MINOTAUR-BEACH SHELL-40 oz Poly ***STD***
Comment		

Principal Ensuite

Cabinet Colour/Style	6469	Classic II-MANCHESTER-WINTER WHITE-PAINT MDF ***UPG***
Cabinet Hardware	2075	151-HARDWARE ***STD***
Countertop	9814	Group 2-Quartz-Caesarstone-ASHEN MARBLE # 7512-3/4 inch B/U MITERED EDGE ***2***
Countertop Edge	4007	GROUP 2 TO 7 - DOUBLE MITRE 1 1/2 INCH ***3*** 
Floor Tile	5691	NY.RG.SLW.1224.PL.N.-Regal Polished-Shell White-12 x 24 See Tile Direction on Sketch Page ***4***
Floor Tile Grout	9837	Grout-Warm Grey #5093 ***STD***
Floor Tile Pattern	3040	FRONT TO BACK ***STD*** 
Shower Wall Tile	5721	QT.CD.ARW.0306.BR-Colour and Dimension Bright-Arctic White-3 x 6 ***1***
Shower Wall Tile Grout	9836	Grout-Eggshell #5220 ***STD***
Shower Wall Tile Pattern	3060	HORIZONTAL BRICK ***STD*** 
Shower Floor Tile	8661	OD.ON.SWT.0202.MT.N-Ontario Series Mosaic-Snow White Matte-2 x 2 ***STD***
Shower Floor Tile Grout	9836	Grout-Eggshell #5220 ***STD***
Shower Floor Tile Pattern	3000	STANDARD SQUARE ***STD*** 
Shower Jamb(s) and Sill(s)	8923	Shower Jamb / Sill-Thassos White ***STD***
Shower Fixture(s)	4707	Shower Fixture-WHITE ***STD***


Customer Colours

DARREN COOPER/
Project: Williamsburg Green
Unit: 31, Phase: 1
Model: 28-2550 C THE FOREST

Created: 7/22/2024 13:42:01
Locked:
Closed:

Plumbing Fixture (colour)	1737	Plumbing Fixtures-WHITE ***STD***
Comment		

Main Bath


Cabinet Colour/Style	1737	Viking III-TRINITY VIVA-FASHIONISTA L582K ***STD***									
Cabinet Hardware	7672	135-HARDWARE ***STD***									
Countertop	9806	Group 1-Quartz-Caesarstone-WHITE SAND # 7041-3/4 inch ***STD IN PRINCIPLAL ENSUITE ONLY***									
Countertop Edge	4010	GROUP 1 - SINGLE POLISHED STRAIGHT EDGE 3/4 INCH ***1***									
Floor Tile	8916	 OV.CH.WHT.1224-Chambray-White-12 x 24 See Tile Direction on Sketch Page ***2***									
Floor Tile Grout	9837	Grout-Warm Grey #5093 ***STD***									
Floor Tile Pattern	3050	SIDE TO SIDE ***STD*** <table border="1"><tr><td></td><td></td></tr><tr><td></td><td></td></tr><tr><td></td><td></td></tr><tr><td></td><td></td></tr></table>									
Shower Wall Tile	5723	QT.CD.GRY.0306.BR-Colour and Dimension Bright-Grey-3 x 6 UPG 1 ***UPG***									
Shower Wall Tile Grout	9837	Grout-Warm Grey #5093 ***UPG***									
Shower Wall Tile Pattern	3070	HORIZONTAL STACKED ***STD*** <table border="1"><tr><td></td><td></td></tr><tr><td></td><td></td></tr><tr><td></td><td></td></tr><tr><td></td><td></td></tr></table>									
Shower Floor Tile	8661	OD.ON.SWT.0202.MT.N-Ontario Series Mosaic-Snow White Matte-2 x 2 ***STD***									
Shower Floor Tile Grout	9836	Grout-Eggshell #5220 ***STD***									
Shower Floor Tile Pattern	3000	STANDARD SQUARE ***STD*** <table border="1"><tr><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td></tr><tr><td></td><td></td><td></td></tr></table>									
Shower Jamb(s) and Sill(s)	8923	Shower Jamb / Sill-Thassos White ***STD***									
Plumbing Fixture (colour)	1737	Plumbing Fixtures-WHITE ***STD***									
Comment											

Shared Bath

Cabinet Colour/Style	9111	Viking III-SIMCOE ORCHID 3DL ***STD***
Cabinet Hardware	2084	171-HARDWARE ***STD***
Countertop	9806	Group 1-Quartz-Caesarstone-WHITE SAND # 7041-3/4 inch ***STD IN PRINCIPLAL ENSUITE ONLY***
Countertop Edge	4010	GROUP 1 - SINGLE POLISHED STRAIGHT EDGE 3/4 INCH ***1***

DARREN COOPER/
Project: Williamsburg Green
Unit: 31, Phase: 1
Model: 28-2550 C THE FOREST

Created: 7/22/2024 13:42:01
Locked:
Closed:

										
Floor Tile	8916	OV.CH.WHT.1224-Chambray-White-12 x 24 See Tile Direction on Sketch Page ***2***								
Floor Tile Grout	9837	Grout-Warm Grey #5093 ***STD***								
Floor Tile Pattern	3050	SIDE TO SIDE ***STD*** <table><tr><td></td><td></td></tr><tr><td></td><td></td></tr><tr><td></td><td></td></tr><tr><td></td><td></td></tr></table>								
Wall Tile	5723	QT.CD.GRY.0306.BR-Colour and Dimension Bright-Grey-3 x 6 UPG 1 ***UPG***								
Wall Tile Grout	9837	Grout-Warm Grey #5093 ***UPG***								
Wall Tile Pattern	3070	HORIZONTAL STACKED ***STD*** <table><tr><td></td><td></td></tr><tr><td></td><td></td></tr><tr><td></td><td></td></tr><tr><td></td><td></td></tr></table>								
Opt. Shower Floor Tile	1111	N/A *****								
Opt. Shower Floor Tile Grout	1111	N/A *****								
Opt. Shower Floor Tile Pattern	1111	N/A *****								
Opt. Shower Jamb(s) and Sill(s)	1111	N/A *****								
Plumbing Fixture (colour)	1737	Plumbing Fixtures-WHITE ***STD***								
Comment										

Lower Level Recreation Room (Opt. Finis

Flooring	9505	84558-MINOTAUR-BEACH SHELL-40 oz Poly ***STD***
Comment	TO INCLUDE BEDROOM "SPACES" KITCHENETTE CABINETRY VIK III MANCHESTER OYSTER WITH 3/4" GROUP 1 WHITE SAND QUARTZ COUNTERS AND 9677 HANDLES SEE SKETCH # SEE APPLIANCE SPECS NF-17 WHITE PAINT CABINET MANTLE "SPACE" LAUNDRY CLOSET OV.CH.WHT.1224 CHAMBRAY WHITE SIDE TO SIDE WITH STD GROUT WARM GREY	

PG 35
SINK PG 63

Lower Level Bathroom (Opt. Finished Bas

Cabinet Colour/Style	6261	Viking III-MANCHESTER-OYSTER CL-MAPLE ***STD***
Cabinet Hardware	2086	9677-HARDWARE ***STD***
Countertop	9806	Group 1-Quartz-Caesarstone-WHITE SAND # 7041-3/4 inch ***STD IN PRINCIPLAL ENSUITE ONLY***
Countertop Edge	4010	GROUP 1 - SINGLE POLISHED STRAIGHT EDGE 3/4 INCH ***1*** 
Floor Tile	8916	OV.CH.WHT.1224-Chambray-White-12 x 24 See Tile Direction on Sketch Page ***2***
Floor Tile Grout	9837	Grout-Warm Grey #5093 ***STD***
Floor Tile Pattern	3050	SIDE TO SIDE ***STD***

Customer Colours

DARREN COOPER/
Project: Williamsburg Green
Unit: 31, Phase: 1
Model: 28-2550 C THE FOREST

Created: 7/22/2024 13:42:01
Locked:
Closed:

Shower Wall Tile		
8833	QT.UW.WHT.0810-Uniwall-White-8 x 10 ***STD***	
Shower Wall Tile Grout		
9837	Grout-Warm Grey #5093 ***UPG***	
Shower Wall Tile Pattern		
3070	HORIZONTAL STACKED ***STD***	
Shower Floor Tile		
8661	OD.ON.SWT.0202.MT.N-Ontario Series Mosaic-Snow White Matte-2 x 2 ***STD***	
Shower Floor Tile Grout		
9836	Grout-Eggshell #5220 ***STD***	
Shower Floor Tile Pattern		
3000	STANDARD SQUARE ***STD***	
Shower Jamb(s) and Sill(s)		
8923	Shower Jamb / Sill-Thassos White ***STD***	
Plumbing Fixture (colour)		
1737	Plumbing Fixtures-WHITE ***STD***	
Comment		

Main Stairs

Type	1714	Oak Stairs ***STD MAIN STAIRS***
Colour	9787	Barista STAIN TO COMPLIMENT HARDWOOD AND WILL VARY FROM FLOORING ***99***
Handrail/Pickets/Posts Type	7652	1 5/16 inch Square pickets with 3 1/2 Square/Cap Post(s)-ALL OAK ***STD***
Handrail/Pickets/Posts Colour	1728	Oak Grade-Stain handrail,oak pickets,stringers,treads,risers
Custom Stain/Paint	1111	N/A *****
Landing(s)	9364	Red Oak UVF-Vintage Northern Solid Sawn-BARISTA-3/4 inch x 5 inch ***STD in Single***
Opt. Carpet Runner	1111	N/A *****
Comment		

Lower Level Stairs

Type	1712	Oak Stairs ***1 BASEMENT STAIRS***
Colour	9787	Barista STAIN TO COMPLIMENT HARDWOOD AND WILL VARY FROM FLOORING ***99***
Handrail/Pickets/Posts Type	9119	Handrail only on closed walls (one or two sides per building code) ***STD***
Handrail/Pickets/Posts Colour	1728	Oak Grade-Stain handrail,oak pickets,stringers,treads,risers

Customer Colours

DARREN COOPER/
Project: Williamsburg Green
Unit: 31, Phase: 1
Model: 28-2550 C THE FOREST

Created: 7/22/2024 13:42:01
Locked:
Closed:

Custom Stain/Paint	1111	N/A *****
Landing(s)	1111	BASEMENT LANDING STD 13 X 13 ALPES GREY WITH STD GROUT WARM GREY WHITE
Opt. Carpet Runner	1111	N/A *****
Comment		

Throughout

Switches and Plug	5796	Decora White Switches and Plugs ***STD***
Thresholds	2232	Metal Thresholds ***STD***
Underpad	1079	500 Series-Underpad ***STD***
Trim Size	8705	4 1/4 Baseboard and 2 3/4 Casings ***STD***
Trim - Paint Colour	1716	Trim-WHITE ***STD***
Walls - Paint Colour	1717	22-Wall-WARM GREY ***STD***
Comment		

Purchaser: Signature on file
DARREN COOPER
by email

Date

MARILYN ROSEN
Decor Consultant

Date
Nov 11/24

Purchaser: _____

Date

ML Rosen
Williamsburg Green

Date Approved
-11- 12 2024



CONSTRUCTION SUMMARY

Lot: 31
Model: 28-2550 C THE FOREST
Project/Phase: Williamsburg Green / 1

Offer Worksheet	This Lot requires an Upgraded Rear Elevation Note:
Offer Worksheet	Back to front drainage, typically 203 risers in the backyard, 4-6 in the front yard. Garage man doors will require sunken laundries or access from stair landings Note:



CONSTRUCTION SUMMARY

Lot: 31
Model: 28-2550 C THE FOREST
Project/Phase: Williamsburg Green / 1

ALUMINUM

Invoice	Qty.	Description
1734 363,258 16Oct24 **	4.0	THROUGHOUT - ELECTRICAL-4 IN EXTERIOR POTLIGHT IN SOFFIT (120 VOLT NON-INSULATED) MODEL #2550WH (WITH LED BULB) USE SEPARATE SWITCH IN FOYER SKETCH # 1 DRYWAL-Notify; FRAMING-Modify Bulkhead; GRANITE-delete partial countertop due to Built-in; PAINTING-

APPLIANCES

Invoice	Qty.	Description
1734 16Oct24 ** NoCat	1.0	FINISHED BASEMENT FAMILY (REC) ROOM - "SPACES" PLAN WITH KITCHENETTE IN FINISHED LOWER LEVEL REC ROOM SKETCH # 2
1778 14Nov24 NoCat	1.0	KITCHEN - UPGRADE STANDARD CYCLONE 30" HOODFAN TO AVG 36" CHIMNEY HOODFAN AVW 368CS INCLUDED AS PER SCHEDULE E OF AGREEMENT OF PURCHASE AND SALE SEE SPECS
1778 14Nov24 NoCat	1.0	- DELETE ORIGINAL APPLIANCE SPECS SEE NEW APPLIANCE SPECS LG -LRFXC2606S FRIDGE, SMEG 36" INDUCTION SLIDE IN RANGE SPR36UIMX, 24" BOSCH MICROWAVE DRAWER HMD8451UC , BOSCH 24" SHX5AEM5N DISHWASHER, LG STEAM WASHER WM5500HVA , LG STEAM DRYER DLEX5500V INCLUDING WASHER / DRYER STACKING KITS- SEE SPECS

CABINETRY

Invoice	Qty.	Description
1734 16Oct24 NoCat	1.0	KITCHEN - ALTERNATE KITCHEN SKETCH # 3 DRYWAL-Notify; FRAMING-Modify Bulkhead; GRANITE-extend countertops; PAINTING-Notify
1734 16Oct24 ** NoCat	1.0	FINISHED BASEMENT FAMILY (REC) ROOM - "SPACES" PLAN WITH KITCHENETTE IN FINISHED LOWER LEVEL REC ROOM SKETCH # 2
1734 363,091 16Oct24 **	1.0	SHARED BATHROOM - PLUMBING-OPTION FROM ONE SINK TO DOUBLE SINKS INCLUDING ONE ADDITIONAL STD CHATEAU FAUCET OVERMOUNT COLONY SINK ONE EXTRA VANITY LIGHT AND CABINET CONVERSION 2D VIKING SKETCH # 4 CABINETRY-2D Convert Cabinetry Viking; ELECTRICAL-Additional Vanity Light
1734 375,408 16Oct24	1.0	- CABINETRY-OPT.LIGHT VALANCE (INCLUDE LIGHTING) -UPG ELECTRICAL-Complete Kitchen valaance light including switch (Luminiz LED slimline strip light)
1734 362,480 16Oct24	1.0	KITCHEN - CABINETRY-10A-UPPER ANGLE CORNER PER UNIT VIKING SKETCH # 3 DRYWAL-Notify; FRAMING-Modify Bulkhead; PAINTING-Notify
1750 374,179 14Nov24	1.0	KITCHEN - CABINETRY-KITCHEN-VIKING IV-UPG
1750 374,180 14Nov24	1.0	MASTER ENSUITE - CABINETRY-PRINCIPAL ENSUITE-VIKING IV-UPG



CONSTRUCTION SUMMARY

Lot: 31
Model: 28-2550 C THE FOREST
Project/Phase: Williamsburg Green / 1

CABINETRY

Invoice	Qty.	Description
1750 362,514 14Nov24	1.0	KITCHEN - CABINETRY-10B-KITCHEN POTS AND PANS (3) DRAWERS (WIDTH MIN. 60CM/MAX. 90CM) (SIZE SUBJECT TO FLOOR PLAN) VIKING SKETCH # 5
1750 362,520 14Nov24	1.0	KITCHEN - CABINETRY-15B-PER UNIT 45CM WIDE PULL-OUT DOOR BASE CABINET WASTE/RECYCLE CENTRE WITH SOFT-CLOSE ([2] 35L BINS) (AVAILABLE ONLY WITH 45CM WIDE CABINET) VIKING SKETCH # 5
1750 362,576 14Nov24	1.0	SHARED BATHROOM - CABINETRY-15D-VANITY BANK OF DRAWERS (3) (MAX. WIDTH 55CM) VIKING VANITY WITH OPTIONAL DOUBLE SINKS SKETCH # 6
1750 364,157 14Nov24 **	1.0	Opt. Main Bath - GRANITE-GROUP 1-OPT. MAIN BATH-UPG CABINETRY-delete std countertop; GRANITE-see upgraded single hole faucet and undermount sink
1750 364,149 14Nov24 **	1.0	Opt. Shared Bath - GRANITE-GROUP 1-OPT. SHARED BATH-UPG CABINETRY-delete std countertop; GRANITE-see upgraded single hole faucet and undermount sink
1750 364,141 14Nov24 **	1.0	Opt. Lower Bath - GRANITE-GROUP 1-OPT. LOWER BATH-UPG CABINETRY-delete std countertop; GRANITE-see upgraded single hole faucet and undermount sink
1750 362,901 14Nov24 **	4.0	- PLUMBING-AMERICAN STANDARD-SINK OPTIONS-UNDERMOUNT SINK-OVALYN MODEL 0496 221 020 (19 INCH X 16 INCH) - 2 X SHARED BATHROOM / 1X MAIN BATHROOM / 1X FINISHED LOWER LEVEL BATHROOM CABINETRY-upgraded vanity sink; GRANITE-See Specs cutout to accommodate undermount sinks
1778 362,811 14Nov24 **	1.0	KITCHEN - GRANITE-WATERFALL END 3 FT ISLAND TWO SIDES 1 1/2 INCH MITERED EDGE-GROUP 2 INCLDUED AS PER SCHEDULE E OF AGREEMENT OF PURCHASE AND SALE SEE SKETCH # 11
1778 373,128 14Nov24 **	1.0	Opt. Kitchen/Breakfast - HARDWOOD-3/4 X 5 IN RED OAK PEARL OR UVF SCULPTED NSS CHARACTER-OPT. KITCHEN/BREAKFAST INCLUDED AS PER SCHEDULE E OF AGREEMENT OF PURCHASE AND SALE CABINETRY-Raise Cabinet; CERAMICS-Delete Std Ceramics
1778 362,958 14Nov24 **	1.0	KITCHEN - PLUMBING-KITCHEN SINK UPGRADE-BLANCO QUATRUS U 1 SUPER SINGLE 401248 (MIN CABINET 36 IN) CABINETRY-upgraded kitchen sink; GRANITE-upgraded kitchen sink REVISED FROM STANDARD KINDRED NS1930U/9 INCLUDED AS PER SCHEDULE E OF AGREEMENT OF PURCHASE AND SALE SEE SPEC
1778 362,659 14Nov24	1.0	KITCHEN - CABINETRY-34H-BASE CABINET FOR BUILT-IN MICROWAVE/SMALL APPLIANCE WITH TRIM KIT WITH DRAWER BELOW (NOT AVAILABLE FOR PANASONIC TRIMKIT NN-TK714SS) (SUPPLY SPECS) VIKING AS PER SCHEDULE E OF AGREEMENT OF PURCHASE AND SALE SKETCH # 11 SEE SPECS FOR BOSCH 24" MICROWAVE DRAWER



CONSTRUCTION SUMMARY

Lot: 31
Model: 28-2550 C THE FOREST
Project/Phase: Williamsburg Green / 1

CARPET

Invoice	Qty.	Description
1734 16Oct24 ** NoCat	1.0	FINISHED BASEMENT FAMILY (REC) ROOM - "SPACES" PLAN WITH KITCHENETTE IN FINISHED LOWER LEVEL REC ROOM SKETCH # 2
1734 16Oct24 ** NoCat	1.0	- OPTIONAL SIDE DOOR TO FINISHED BASEMENT SKETCH # 3
1734 375,588 16Oct24 **	1.0	- INTERIOR STAIRS-UPGRADE BASEMNT STAIR TO OAK-UPG CARPET-Delete Std Carpet Stairs; HARDWOOD-Supply and install Hardwood at Landing(s); PAINTING-Paint of stairs
1778 373,145 14Nov24 **	1.0	Opt. Upper Hall - HARDWOOD-3/4 X 5 IN RED OAK PEARL OR UVF SCULPTED NSS CHARACTER-OPT. UPPER HALL INCLUDED AS PER SCHEDULE E OF AGREEMENT OF PURCHASE AND SALE CARPET-delete std carpet; INTERIOR TRIM-supply and install quarter rounds; PAINTING-paint quarter round



CONSTRUCTION SUMMARY

Lot: 31
Model: 28-2550 C THE FOREST
Project/Phase: Williamsburg Green / 1

CERAMIC

Invoice	Qty.	Description
1750 370,243 14Nov24	1.0	FOYER - CERAMICS-FLOOR -UG 2-FOYER
1750 370,303 14Nov24	1.0	LAUNDRY/MUDROOM - CERAMICS-FLOOR -UG 2-LAUNDRY/MUDROOM
1750 370,253 14Nov24	1.0	POWDER ROOM - CERAMICS-FLOOR -UG 2-POWDER ROOM
1750 370,295 14Nov24	1.0	PRINCIPAL ENSUITE - CERAMICS-FLOOR -UG 4-PRINCIPAL ENSUITE
1750 370,224 14Nov24	1.0	KITCHEN - CERAMICS-OPT. BACKSPLASH-UG 3-KITCHEN
1750 370,410 14Nov24	1.0	PRINCIPAL ENSUITE SHOWER INCLUDING CEILING - CERAMICS-WALL-UG 1-PRINCIPAL ENSUITE SHOWER INCLUDING CEILING
1750 370,417 14Nov24	1.0	PRINCIPAL ENSUITE SHOWER INCLUDING CEILING - CERAMICS-WALL-DIAG OR CHECKER -PRINCIPAL ENSUITE SHOWER INCLUDING CEILING
1750 370,283 14Nov24	1.0	SHARED BATH - CERAMICS-FLOOR -UG 2-SHARED BATH
1750 370,231 14Nov24	1.0	KITCHEN - CERAMICS-OPT. BACKSPLASH-GROUT-KITCHEN
1778 370,273 14Nov24	1.0	MAIN BATH - CERAMICS-FLOOR -UG 2-MAIN BATH INCLUDED AS PER SCHEDULE E OF AGREEMENT OF PURCHASE AND SALE
1778 370,399 14Nov24	1.0	MAIN SHOWER INCLUDING CEILING - CERAMICS-WALL-GROUT-MAIN SHOWER INCLUDING CEILING INCLUDED AS PER AGREEMENT OF PURCHASE AND SALE
1778 370,409 14Nov24	1.0	SHARED BATH TUB - CERAMICS-WALL-GROUT-SHARED BATH TUB INCLUDED AS PER SCHEDULE E OF AGREEMENT OF PURCHASE AND SALE
1778 370,390 14Nov24	1.0	MAIN SHOWER INCLUDING CEILING - CERAMICS-WALL-UG 1-MAIN SHOWER INCLUDING CEILING INCLUDED AS PER SCHEDULE E OF AGREEMENT OF PURCHASE AND SALE



CONSTRUCTION SUMMARY

Lot: 31
Model: 28-2550 C THE FOREST
Project/Phase: Williamsburg Green / 1

CERAMIC

Invoice	Qty.	Description
1778 370,400 14Nov24	1.0	SHARED BATH TUB - CERAMICS-WALL-UG 1-SHARED BATH TUB INCLUDED AS PER SCHEDULE E OF AGREEMENT OF PURCHASE AND SALE
1778 370,233 14Nov24	1.0	LOWER BATH - CERAMICS-FLOOR -UG 2-LOWER BATH INCLUDED AS PER SCHEDULE E OF AGREEMENT OF PURCHASE AND SALE

CERAMICS

Invoice	Qty.	Description
1734 16Oct24 ** NoCat	1.0	FINISHED BASEMENT FAMILY (REC) ROOM - "SPACES" PLAN WITH KITCHENETTE IN FINISHED LOWER LEVEL REC ROOM SKETCH # 2
1750 375,658 14Nov24	1.0	KITCHEN - CERAMICS - ADDITIONAL BACKSPLASH DUE TO UPGRADE CHIMNEY HOODFAN IN KITCHEN - KITCHEN - UPGRADE 3
1778 373,128 14Nov24 **	1.0	Opt. Kitchen/Breakfast - HARDWOOD-3/4 X 5 IN RED OAK PEARL OR UVF SCULPTED NSS CHARACTER-OPT. KITCHEN/BREAKFAST INCLUDED AS PER SCHEDULE E OF AGREEMENT OF PURCHASE AND SALE CABINETRY-Raise Cabinet; CERAMICS-Delete Std Ceramics

COFFERED CEILING

Invoice	Qty.	Description
1734 363,393 16Oct24	1.0	- COFFERED CEILING - OPT. COFFERED CEILING - DINING ROOM - UPG DRYWALL-Notify; FRAMING-Notify; PAINTING-Notify
1734 363,390 16Oct24	1.0	- COFFERED CEILING - OPT. COFFERED CEILING - GREAT ROOM - UPG DRYWALL-Notify; FRAMING-Notify; PAINTING-Notify

CONCRETE AND DRAIN

Invoice	Qty.	Description
1734 16Oct24 ** NoCat	1.0	FINISHED BASEMENT FAMILY (REC) ROOM - "SPACES" PLAN WITH KITCHENETTE IN FINISHED LOWER LEVEL REC ROOM SKETCH # 2



CONSTRUCTION SUMMARY

Lot: 31
Model: 28-2550 C THE FOREST
Project/Phase: Williamsburg Green / 1

DRYWALL

Invoice	Qty.	Description
1734 16Oct24 ** NoCat	1.0	KITCHEN - ALTERNATE KITCHEN SKETCH # 3 DRYWAL-Notify; FRAMING-Modify Bulkhead; GRANITE-extend countertops; PAINTING-Notify
1734 16Oct24 ** NoCat	1.0	FINISHED BASEMENT FAMILY (REC) ROOM - "SPACES" PLAN WITH KITCHENETTE IN FINISHED LOWER LEVEL REC ROOM SKETCH # 2
1734 363,393 16Oct24 **	1.0	- COFFERED CEILING - OPT. COFFERED CEILING - DINING ROOM - UPG DRYWALL-Notify; FRAMING-Notify; PAINTING-Notify
1734 363,410 16Oct24 **	1.0	THROUGHOUT - CLASSIC COLLECTION SCHEDULE A - Choice of 20 LED (3000K) pot lights in finished areas (Second Floor Potlight(s) Require Smooth Ceiling) DRYWALL-Drywall Ceiling cutouts for potlights FRAMING-Frame to accommodate potlights 6X GREAT ROOM- USE EXISTING SWITCHED PLUG SWITCH 4X DINING ROOM - USE SEPARATE SWITCH, FROM STANDARD. CAPPED CEILING LIGHT 6 X KITCHEN-ON SEPARATE SWITCH, RELOCATE STD. LIGHT TO BE CAPPED ABOVE ISLAND 4 X BREAKFAST ROOM - USE SEPARATE SWITCH KEEP STD. LIGHT (ON 3 WAY SWITCH WITH 3 X ISLAND) SKETCH # 3
1734 363,262 16Oct24 **	1.0	FINISHED BASEMENT FAMILY (REC) ROOM/HALL - ELECTRICAL-POTLIGHT BUNDLE - 8 X 4 IN SLIM RECESSED LED DOWNLIGHT WHITE TRIM (3000K) MODEL DWS4303 INCLUDES 2 SWITCHES SKETCH # 2 DRYWALL-Additional Drywall/Ceiling cutouts for potlights; FRAMING-Frame to accommodate additional potlig
1734 363,390 16Oct24 **	1.0	- COFFERED CEILING - OPT. COFFERED CEILING - GREAT ROOM - UPG DRYWALL-Notify; FRAMING-Notify; PAINTING-Notify
1734 16Oct24 ** NoCat	1.0	- OPTIONAL SIDE DOOR TO FINISHED BASEMENT SKETCH # 3
1734 362,480 16Oct24 **	1.0	KITCHEN - CABINETRY-10A-UPPER ANGLE CORNER PER UNIT VIKING SKETCH # 3 DRYWAL-Notify; FRAMING-Modify Bulkhead; PAINTING-Notify
1734 363,301 16Oct24	1.0	- DRYWALL - SMOOTH CEILING - FINISHED LOWER LEVEL - UPG PAINTING-Paint smooth ceiling



CONSTRUCTION SUMMARY

Lot: 31
Model: 28-2550 C THE FOREST
Project/Phase: Williamsburg Green / 1

ELECTRICAL

Invoice	Qty.	Description
1734 362,858 16Oct24 **	1.0	KITCHEN - HEATING / AIR CONDITIONING-ROUGH-IN GAS LINE FOR GAS STOVE AT MAIN FLOOR (SEE SPECS) (HOOK-UP NOT INCLUDED) LEAVE STANDARD 120 VOLT ELECTRICAL OUTLET ON A SEPARATE CIRCUIT. * SPECIFY IF STANDARD 220V WILL STAY OR BE RELOCATED SKETCH # 3 ELECTRICAL-Notify
1734 16Oct24 ** NoCat	1.0	FINISHED BASEMENT FAMILY (REC) ROOM - "SPACES" PLAN WITH KITCHENETTE IN FINISHED LOWER LEVEL REC ROOM SKETCH # 2
1734 363,226 16Oct24	2.0	KITCHEN - ELECTRICAL-INTERIOR CAPPED-CEILING OUTLET (ROUGH-IN ONLY) (SWITCH WITH OTHERS) 2 X R/I CAP CEILING TO BE INSTALLED TOGETHER WITH OTHER 1 X RELOCATED KITCHEN LIGHT USE EXISTING 3 WAY SWITCH SKETCH #
1734 363,258 16Oct24	4.0	THROUGHOUT - ELECTRICAL-4 IN EXTERIOR POTLIGHT IN SOFFIT (120 VOLT NON-INSULATED) MODEL #2550WH (WITH LED BULB) USE SEPARATE SWITCH IN FOYER SKETCH # 1 DRYWAL-Notify; FRAMING-Modify Bulkhead; GRANITE-delete partial countertop due to Built-in; PAINTING-
1734 363,410 16Oct24	1.0	THROUGHOUT - CLASSIC COLLECTION SCHEDULE A - Choice of 20 LED (3000K) pot lights in finished areas (Second Floor Potlight(s) Require Smooth Ceiling) DRYWALL-Drywall Ceiling cutouts for potlights FRAMING-Frame to accommodate potlights 6X GREAT ROOM- USE EXISTING SWITCHED PLUG SWITCH 4X DINING ROOM - USE SEPARATE SWITCH, FROM STANDARD. CAPPED CEILING LIGHT 6 X KITCHEN-ON SEPARATE SWITCH, RELOCATE STD. LIGHT TO BE CAPPED ABOVE ISLAND 4 X BREAKFAST ROOM - USE SEPARATE SWITCH KEEP STD. LIGHT (ON 3 WAY SWITCH WITH 3 X ISLAND) SKETCH # 3
1734 363,262 16Oct24	1.0	FINISHED BASEMENT FAMILY (REC) ROOM/HALL - ELECTRICAL-POTLIGHT BUNDLE - 8 X 4 IN SLIM RECESSED LED DOWNLIGHT WHITE TRIM (3000K) MODEL DWS4303 INCLUDES 2 SWITCHES SKETCH # 2 DRYWALL-Additional Drywall/Ceiling cutouts for potlights; FRAMING-Frame to accommodate additional potlig
1734 363,221 16Oct24	1.0	FOYER - ELECTRICAL-INTERIOR SWITCH TO BE USED FOR THE EXTERIOR POT LIGHTS INSTALL IN FOYER WITH STANDARD EXTERIOR LIGHT SWITCHES SKETCH # 3
1734 363,261 16Oct24	1.0	KITCHEN - ELECTRICAL-RELOCATION OF SWITCHES/LIGHTS RELOCATE STANDARD KITCHEN LIGHT TO BE CAPPED ABOVE BREAKFAST BAR (TOGETHER WITH 2 X R/I CAP LIGHT FOR A TOTAL OF 3) USE EXISITNG 3 WAY SWITCH SKETCH # 3
1734 363,091 16Oct24 **	1.0	SHARED BATHROOM - PLUMBING-OPTION FROM ONE SINK TO DOUBLE SINKS INCLUDING ONE ADDITIONAL STD CHATEAU FAUCET OVERMOUNT COLONY SINK ONE EXTRA VANITY LIGHT AND CABINET CONVERSION 2D VIKING SKETCH # 4 CABINETRY-2D Convert Cabinetry Viking; ELECTRICAL-Additional Vanity Light
1734 375,408 16Oct24 **	1.0	- CABINETRY-OPT.LIGHT VALANCE (INCLUDE LIGHTING) -UPG ELECTRICAL-Complete Kitchen valaance light including switch (Luminiz LED slimline strip light)
1734 395,465 16Oct24	2.0	THROUGHOUT - ELECTRICAL-SUPPLY AND INSTALL RECESSED PLUG ON EXISTING CIRCUIT 1X GREAT ROOM - TO BE INSTALLED ABOVE THE FIRE PLACE - 70" +-FROM FLOOR 1X REC ROOM - TO BE INSTALLED ABOVE THE ELECTRIC FIRE PLACE - 70" +-FROM FLOOR SKETCH 2 AND 3
1778 363,191 22Nov24	1.0	- ELECTRICAL-CONDUIT PIPE (BASEMENT TO ATTIC, CAPPED AND PULL STRING ROUGH-IN). FROM ELECTRICAL PANEL TO ATTIC FOR FUTURE SOLAR PANELS INCLUDED AS PER SCHEDULE E OF AGREEMENT OF PURCHASE AND SALE



CONSTRUCTION SUMMARY

Lot: 31
Model: 28-2550 C THE FOREST
Project/Phase: Williamsburg Green / 1

ELECTRICAL

Invoice	Qty.	Description
1734 16Oct24 ** NoCat	1.0	- OPTIONAL SIDE DOOR TO FINISHED BASEMENT SKETCH # 3
1750 363,235 14Nov24	1.0	KITCHEN - ELECTRICAL-ADDITIONAL 120V 15AMP DIRECT LINE (ARC FAULT) FOR MICROWAVE SHELF SKETCH # 5
1778 363,235 14Nov24	1.0	KITCHEN - ELECTRICAL-ADDITIONAL 120V 15AMP DIRECT LINE (ARC FAULT) TO BE A RECESSED PLUG FOR NEW BOSCH MICROWAVE DRAWER AS PER ORIGINAL SSS- SEE NEW LOCATION FOR BASE CABINET B/I MICROWAVE INCLUDED AS PER SCHEDULE E OF AGREEMENT OF PURCHASE AND SALE SKETCH # 11 SEE SPECS
1778 363,219 14Nov24	5.0	- ELECTRICAL-INTERIOR DUPLEX OUTLET WITH G.F.I. ON AN EXISTING CIRCUIT INSTALL ON WALL BEHIND (TO RIGHT OF TOILETS) FOR ALL 5 BATHROOMS INCLUDED AS PER SCHEDULE E OF AGREEMENT OF PURCHASE AND SALE
1778 363,246 14Nov24	1.0	UPPER HALL - ELECTRICAL-REINFORCE CEILING BOX TO HOLD A LIGHT FIXTURE UP TO 75LBS FOR SECOND FLOOR LIGHT IN STAIRCASE OPEN TO BELOW AREA INCLUDED AS PER SCHEDULE E OF AGREEMENT OF PURCHASE AND SALE SKETCH # 10

EXTERIOR BRICK

Invoice	Qty.	Description
1734 16Oct24 ** NoCat	1.0	FINISHED BASEMENT FAMILY (REC) ROOM - "SPACES" PLAN WITH KITCHENETTE IN FINISHED LOWER LEVEL REC ROOM SKETCH # 2
1734 16Oct24 ** NoCat	1.0	- OPTIONAL SIDE DOOR TO FINISHED BASEMENT SKETCH # 3

EXTERIOR CAULKING

Invoice	Qty.	Description
1734 16Oct24 ** NoCat	1.0	FINISHED BASEMENT FAMILY (REC) ROOM - "SPACES" PLAN WITH KITCHENETTE IN FINISHED LOWER LEVEL REC ROOM SKETCH # 2
1734 16Oct24 ** NoCat	1.0	- OPTIONAL SIDE DOOR TO FINISHED BASEMENT SKETCH # 3

FIREPLACE AND MANTLE

Invoice	Qty.	Description
1734 16Oct24 ** NoCat	1.0	FINISHED BASEMENT FAMILY (REC) ROOM - "SPACES" PLAN WITH KITCHENETTE IN FINISHED LOWER LEVEL REC ROOM SKETCH # 2



CONSTRUCTION SUMMARY

Lot: 31
Model: 28-2550 C THE FOREST
Project/Phase: Williamsburg Green / 1

FORMING

Invoice	Qty.	Description
1734	1.0	FINISHED BASEMENT FAMILY (REC) ROOM - "SPACES" PLAN WITH KITCHENETTE IN FINISHED LOWER LEVEL REC ROOM
16Oct24 ** NoCat		SKETCH # 2
1734	1.0	- OPTIONAL SIDE DOOR TO FINISHED BASEMENT
16Oct24 ** NoCat		SKETCH # 3

FRAMING

Invoice	Qty.	Description
1734	1.0	KITCHEN - ALTERNATE KITCHEN
16Oct24 ** NoCat		SKETCH # 3 DRYWAL-Notify; FRAMING-Modify Bulkhead; GRANITE-extend countertops; PAINTING-Notify
1734	1.0	FINISHED BASEMENT FAMILY (REC) ROOM - "SPACES" PLAN WITH KITCHENETTE IN FINISHED LOWER LEVEL REC ROOM
16Oct24 ** NoCat		SKETCH # 2
1734 363,393 16Oct24 **	1.0	- COFFERED CEILING - OPT. COFFERED CEILING - DINING ROOM - UPG
		DRYWALL-Notify; FRAMING-Notify; PAINTING-Notify
1734 363,410 16Oct24 **	1.0	THROUGHOUT - CLASSIC COLLECTION SCHEDULE A - Choice of 20 LED (3000K) pot lights in finished areas (Second Floor Potlight(s) Require Smooth Ceiling) DRYWALL-Drywall Ceiling cutouts for potlights FRAMING-Frame to accommodate potlights 6X GREAT ROOM- USE EXISTING SWITCHED PLUG SWITCH 4X DINING ROOM - USE SEPARATE SWITCH, FROM STANDARD. CAPPED CEILING LIGHT 6 X KITCHEN-ON SEPARATE SWITCH, RELOCATE STD. LIGHT TO BE CAPPED ABOVE ISLAND 4 X BREAKFAST ROOM - USE SEPARATE SWITCH KEEP STD. LIGHT (ON 3 WAY SWITCH WITH 3 X ISLAND) SKETCH # 3
1734 363,262 16Oct24 **	1.0	FINISHED BASEMENT FAMILY (REC) ROOM/HALL - ELECTRICAL-POTLIGHT BUNDLE - 8 X 4 IN SLIM RECESSED LED DOWNLIGHT WHITE TRIM (3000K) MODEL DWS4303 INCLUDES 2 SWITCHES
		SKETCH # 2 DRYWALL-Additional Drywall/Ceiling cutouts for potlights; FRAMING-Frame to accommodate additional potlig
1734 363,390 16Oct24 **	1.0	- COFFERED CEILING - OPT. COFFERED CEILING - GREAT ROOM - UPG
		DRYWALL-Notify; FRAMING-Notify; PAINTING-Notify
1734	1.0	- OPTIONAL SIDE DOOR TO FINISHED BASEMENT
16Oct24 ** NoCat		SKETCH # 3
1734 362,480 16Oct24 **	1.0	KITCHEN - CABINETRY-10A-UPPER ANGLE CORNER PER UNIT VIKING
		SKETCH # 3 DRYWAL-Notify; FRAMING-Modify Bulkhead; PAINTING-Notify



CONSTRUCTION SUMMARY

Lot: 31
Model: 28-2550 C THE FOREST
Project/Phase: Williamsburg Green / 1

GRANITE

Invoice	Qty.	Description
1734 16Oct24 ** NoCat	1.0	KITCHEN - ALTERNATE KITCHEN SKETCH # 3 DRYWAL-Notify; FRAMING-Modify Bulkhead; GRANITE-extend countertops; PAINTING-Notify
1734 16Oct24 ** NoCat	1.0	FINISHED BASEMENT FAMILY (REC) ROOM - "SPACES" PLAN WITH KITCHENETTE IN FINISHED LOWER LEVEL REC ROOM SKETCH # 2
1750 362,794 14Nov24	4.0	- GRANITE-GRANITE CUTOUT WITH STRAIGHT EDGE POLISH TO ACCOMMODATE UNDER MOUNT VANITY SINK 2 X SHARED BATHROOM / 1 X MAIN BATHROOM / 1 X FINISHED LOWER LEVEL BATHROOM
1750 364,128 14Nov24	1.0	Kitchen - GRANITE-GROUP 2 WITH 1 1/2 IN MITER EDGE-KITCHEN-UPG
1750 364,135 14Nov24	1.0	Principle Ensuite - GRANITE-GROUP 2 WITH 1 1/2 IN MITER EDGE-PRINCIPLE ENSUITE-UPG
1750 364,157 14Nov24	1.0	Opt. Main Bath - GRANITE-GROUP 1-OPT. MAIN BATH-UPG CABINETRY-delete std countertop; GRANITE-see upgraded single hole faucet and undermount sink
1750 364,149 14Nov24	1.0	Opt. Shared Bath - GRANITE-GROUP 1-OPT. SHARED BATH-UPG CABINETRY-delete std countertop; GRANITE-see upgraded single hole faucet and undermount sink
1750 364,141 14Nov24	1.0	Opt. Lower Bath - GRANITE-GROUP 1-OPT. LOWER BATH-UPG CABINETRY-delete std countertop; GRANITE-see upgraded single hole faucet and undermount sink
1750 362,901 14Nov24 **	4.0	- PLUMBING-AMERICAN STANDARD-SINK OPTIONS-UNDERMOUNT SINK-OVALYN MODEL 0496 221 020 (19 INCH X 16 INCH) - 2 X SHARED BATHROOM / 1X MAIN BATHROOM / 1X FINISHED LOWER LEVEL BATHROOM CABINETRY-upgraded vanity sink; GRANITE-See Specs cutout to accommodate undermount sinks
1750 363,166 14Nov24 **	7.0	THROUGHOUT - PLUMBING-MOEN-VICHY SINGLE HANDLE LAV FAUCET WITH LIFT ROD DRAIN MODEL 6710 CHROME GRANITE-see specs on upgraded single hole faucet and undermount sink LESS 20% DISCOUNT -1 X POWDER ROOM / 2 X PRINCIPAL ENSUITE / 2 X SHARED BATHROOM / 1 X MAIN BATHROOM AND 1 X FINISHED LOWER LEVEL BATHROOM SEE SPEC
1778 362,811 14Nov24	1.0	KITCHEN - GRANITE-WATERFALL END 3 FT ISLAND TWO SIDES 1 1/2 INCH MITERED EDGE-GROUP 2 INCLDUE D AS PER SCHEDULE E OF AGREEMENT OF PURCHASE AND SALE SEE SKETCH # 11
1778 362,958 14Nov24 **	1.0	KITCHEN - PLUMBING-KITCHEN SINK UPGRADE-BLANCO QUATRUS U 1 SUPER SINGLE 401248 (MIN CABINET 36 IN) CABINETRY-upgraded kitchen sink; GRANITE-upgraded kitchen sink REVISED FROM STANDARD KINDRED NS1930U/9 INCLUDED AS PER SCHEDULE E OF AGREEMENT OF PURCHASE AND SALE SEE SPEC



CONSTRUCTION SUMMARY

Lot: 31
Model: 28-2550 C THE FOREST
Project/Phase: Williamsburg Green / 1

HARDWOOD

Invoice	Qty.	Description
1734 375,588 16Oct24 **	1.0	- INTERIOR STAIRS-UPGRADE BASEMNT STAIR TO OAK-UPG CARPET-Delete Std Carpet Stairs; HARDWOOD-Supply and install Hardwood at Landing(s); PAINTING-Paint o stairs
1778 373,128 14Nov24	1.0	Opt. Kitchen/Breakfast - HARDWOOD-3/4 X 5 IN RED OAK PEARL OR UVF SCULPTED NSS CHARACTER-OPT. KITCHEN/BREAKFAST INCLUDED AS PER SCHEDULE E OF AGREEMENT OF PURCHASE AND SALE CABINETRY-Raise Cabinet; CERAMICS-Delete Std Ceramics
1778 373,145 14Nov24	1.0	Opt. Upper Hall - HARDWOOD-3/4 X 5 IN RED OAK PEARL OR UVF SCULPTED NSS CHARACTER-OPT. UPPER HALL INCLUDED AS PER SCHEDULE E OF AGREEMENT OF PURCHASE AND SALE CARPET-delete std carpet; INTERIOR TRIM-supply and install quarter rounds; PAINTING-paint quarter round
1778 373,123 14Nov24	1.0	Dining Room - HARDWOOD-3/4 X 5 IN RED OAK PEARL OR UVF SCULPTED NSS CHARACTER-DINING ROOM UPGRADE FROM STANDARD 3 1/4" HARDWOOD INCLUDED AS PER AGREEMENT OF PURCHASE AND SALE
1778 373,121 14Nov24	1.0	Great Room - HARDWOOD-3/4 X 5 IN RED OAK PEARL OR UVF SCULPTED NSS CHARACTER-GREAT ROOM UPGRADED FROM STANDARD 3 1/4" HARDWOOD AS PER SCHEDULE E OF AGREEMENT OF PURCHASE AND SALE
1778 373,130 14Nov24	1.0	Landing > second - HARDWOOD-3/4 X 5 IN RED OAK PEARL OR UVF SCULPTED NSS CHARACTER-LANDING > SECOND INCLUDED AS PER SCHEDULE E OF AGREEMENT OF PURCHASE AND SALE
1778 373,125 14Nov24	1.0	Main Hall - HARDWOOD-3/4 X 5 IN RED OAK PEARL OR UVF SCULPTED NSS CHARACTER-MAIN HALL

HEATING / AIR CONDITIONING

Invoice	Qty.	Description
1734 362,858 16Oct24	1.0	KITCHEN - HEATING / AIR CONDITIONING-ROUGH-IN GAS LINE FOR GAS STOVE AT MAIN FLOOR (SEE SPECS) (HOOK-UP NOT INCLUDED) LEAVE STANDARD 120 VOLT ELECTRICAL OUTLET ON A SEPARATE CIRCUIT. * SPECIFY IF STANDARD 220V WILL STAY OR BE RELOCATED SKETCH # 3 ELECTRICAL-Notify
1734 16Oct24 ** NoCat	1.0	FINISHED BASEMENT FAMILY (REC) ROOM - "SPACES" PLAN WITH KITCHENETTE IN FINISHED LOWER LEVEL REC ROOM SKETCH # 2
1734 362,855 16Oct24	1.0	- HEATING / AIR CONDITIONING-ROUGH-IN GAS LINE FOR BBQ AT MAIN FLOOR UP TO 40 FT (QUICK CONNECT NOT INCLUDED); ELECTR ICAL OUTLET PRICED SEPARATELY IF REQUIRED SKETCH # 3



CONSTRUCTION SUMMARY

Lot: 31
Model: 28-2550 C THE FOREST
Project/Phase: Williamsburg Green / 1

INTERIOR RAILINGS

Invoice	Qty.	Description
1734 16Oct24 ** NoCat	1.0	FINISHED BASEMENT FAMILY (REC) ROOM - "SPACES" PLAN WITH KITCHENETTE IN FINISHED LOWER LEVEL REC ROOM SKETCH # 2
1734 16Oct24 ** NoCat	1.0	- OPTIONAL SIDE DOOR TO FINISHED BASEMENT SKETCH # 3

INTERIOR STAIRS

Invoice	Qty.	Description
1734 16Oct24 ** NoCat	1.0	FINISHED BASEMENT FAMILY (REC) ROOM - "SPACES" PLAN WITH KITCHENETTE IN FINISHED LOWER LEVEL REC ROOM SKETCH # 2
1734 16Oct24 ** NoCat	1.0	- OPTIONAL SIDE DOOR TO FINISHED BASEMENT SKETCH # 3
1734 375,588 16Oct24	1.0	- INTERIOR STAIRS-UPGRADE BASEMNT STAIR TO OAK-UPG CARPET-Delete Std Carpet Stairs; HARDWOOD-Supply and install Hardwood at Landing(s); PAINTING-Paint o stairs

INTERIOR TRIM AND DOORS

Invoice	Qty.	Description
1734 16Oct24 ** NoCat	1.0	FINISHED BASEMENT FAMILY (REC) ROOM - "SPACES" PLAN WITH KITCHENETTE IN FINISHED LOWER LEVEL REC ROOM SKETCH # 2
1734 16Oct24 ** NoCat	1.0	- OPTIONAL SIDE DOOR TO FINISHED BASEMENT SKETCH # 3
1778 373,145 14Nov24 **	1.0	Opt. Upper Hall - HARDWOOD-3/4 X 5 IN RED OAK PEARL OR UVF SCULPTED NSS CHARACTER-OPT. UPPER HALL INCLUDED AS PER SCHEDULE E OF AGREEMENT OF PURCHASE AND SALE CARPET-delete std carpet; INTERIOR TRIM-supply and install quarter rounds; PAINTING-paint quarter round

LUMBER

Invoice	Qty.	Description
1734 16Oct24 ** NoCat	1.0	FINISHED BASEMENT FAMILY (REC) ROOM - "SPACES" PLAN WITH KITCHENETTE IN FINISHED LOWER LEVEL REC ROOM SKETCH # 2
1734 16Oct24 ** NoCat	1.0	- OPTIONAL SIDE DOOR TO FINISHED BASEMENT SKETCH # 3



CONSTRUCTION SUMMARY

Lot: 31
Model: 28-2550 C THE FOREST
Project/Phase: Williamsburg Green / 1

PAINTING

Invoice	Qty.	Description
1734 16Oct24 ** NoCat	1.0	KITCHEN - ALTERNATE KITCHEN SKETCH # 3 DRYWAL-Notify; FRAMING-Modify Bulkhead; GRANITE-extend countertops; PAINTING-Notify
1734 16Oct24 ** NoCat	1.0	FINISHED BASEMENT FAMILY (REC) ROOM - "SPACES" PLAN WITH KITCHENETTE IN FINISHED LOWER LEVEL REC ROOM SKETCH # 2
1734 363,393 16Oct24 **	1.0	- COFFERED CEILING - OPT. COFFERED CEILING - DINING ROOM - UPG DRYWALL-Notify; FRAMING-Notify; PAINTING-Notify
1734 363,390 16Oct24 **	1.0	- COFFERED CEILING - OPT. COFFERED CEILING - GREAT ROOM - UPG DRYWALL-Notify; FRAMING-Notify; PAINTING-Notify
1734 16Oct24 ** NoCat	1.0	- OPTIONAL SIDE DOOR TO FINISHED BASEMENT SKETCH # 3
1734 362,480 16Oct24 **	1.0	KITCHEN - CABINETRY-10A-UPPER ANGLE CORNER PER UNIT VIKING SKETCH # 3 DRYWAL-Notify; FRAMING-Modify Bulkhead; PAINTING-Notify
1734 375,588 16Oct24 **	1.0	- INTERIOR STAIRS-UPGRADE BASEMNT STAIR TO OAK-UPG CARPET-Delete Std Carpet Stairs; HARDWOOD-Supply and install Hardwood at Landing(s); PAINTING-Paint carpet stairs
1734 363,301 16Oct24 **	1.0	- DRYWALL - SMOOTH CEILING - FINISHED LOWER LEVEL - UPG PAINTING-Paint smooth ceiling
1778 373,145 14Nov24 **	1.0	Opt. Upper Hall - HARDWOOD-3/4 X 5 IN RED OAK PEARL OR UVF SCULPTED NSS CHARACTER-OPT. UPPER HALL INCLUDED AS PER SCHEDULE E OF AGREEMENT OF PURCHASE AND SALE CARPET-delete std carpet; INTERIOR TRIM-supply and install quarter rounds; PAINTING-paint quarter rounds



CONSTRUCTION SUMMARY

Lot: 31
Model: 28-2550 C THE FOREST
Project/Phase: Williamsburg Green / 1

PLUMBING

Invoice	Qty.	Description
1734 16Oct24 ** NoCat	1.0	FINISHED BASEMENT FAMILY (REC) ROOM - "SPACES" PLAN WITH KITCHENETTE IN FINISHED LOWER LEVEL REC ROOM SKETCH # 2
1734 363,091 16Oct24	1.0	SHARED BATHROOM - PLUMBING-OPTION FROM ONE SINK TO DOUBLE SINKS INCLUDING ONE ADDITIONAL STD CHATEAU FAUCET OVERMOUNT COLONY SINK ONE EXTRA VANITY LIGHT AND CABINET CONVERSION 2D VIKING SKETCH # 4 CABINETRY-2D Convert Cabinetry Viking; ELECTRICAL-Additional Vanity Light
1750 362,901 14Nov24	4.0	- PLUMBING-AMERICAN STANDARD-SINK OPTIONS-UNDERMOUNT SINK-OVALYN MODEL 0496 221 020 (19 INCH X 16 INCH) - 2 X SHARED BATHROOM / 1X MAIN BATHROOM / 1X FINISHED LOWER LEVEL BATHROOM CABINETRY-upgraded vanity sink; GRANITE-See Specs cutout to accommodate undermount sinks
1750 363,166 14Nov24	7.0	THROUGHOUT - PLUMBING-MOEN-VICHY SINGLE HANDLE LAV FAUCET WITH LIFT ROD DRAIN MODEL 6710 CHROME GRANITE-see specs on upgraded single hole faucet and undermount sink LESS 20% DISCOUNT -1 X POWDER ROOM / 2 X PRINCIPAL ENSUITE / 2 X SHARED BATHROOM / 1 X MAIN BATHROOM AND 1 X FINISHED LOWER LEVEL BATHROOM SEE SPEC
1750 375,666 14Nov24	1.0	POWDER ROOM - PLUMBING-AMERICAN STANDARD-PEDESTAL SINK-OPT POWDER ROOM BOULEVARD- WHITE MODEL 0641 100 020 CENTRE HOLE IN LIEU OF STD 4 IN CENTRE - SEE SPEC
1778 362,958 14Nov24	1.0	KITCHEN - PLUMBING-KITCHEN SINK UPGRADE-BLANCO QUATRUS U 1 SUPER SINGLE 401248 (MIN CABINET 36 IN) CABINETRY-upgraded kitchen sink; GRANITE-upgraded kitchen sink REVISED FROM STANDARD KINDRED NS1930U/9 INCLUDED AS PER SCHEDULE E OF AGREEMENT OF PURCHASE AND SALE SEE SPEC

SECURITY

Invoice	Qty.	Description
1734 363,189 16Oct24	1.0	- SECURITY-SECURITY CAMERA ROUGH-IN TO BE INSTALLED ON THE EXTERIOR BACK WALL SEE SKETCH # 3

STEEL

Invoice	Qty.	Description
1734 16Oct24 ** NoCat	1.0	- OPTIONAL SIDE DOOR TO FINISHED BASEMENT SKETCH # 3



CONSTRUCTION SUMMARY

Lot: 31
Model: 28-2550 C THE FOREST
Project/Phase: Williamsburg Green / 1

STRUCTURED WIRING

Invoice	Qty.	Description
1734 16Oct24 ** NoCat	1.0	FINISHED BASEMENT FAMILY (REC) ROOM - "SPACES" PLAN WITH KITCHENETTE IN FINISHED LOWER LEVEL REC ROOM SKETCH # 2
1778 363,196 14Nov24	18.0	THROUGHOUT - STRUCTURED WIRING-DATA LINE ROUGH-IN CAT6 2 X REC ROOM,/ 1 X LOWER LEVEL BEDROOM / 3 X GREAT ROOM / 3 X KITCHEN /BREAKFAST ROOM / 1 X DINING ROOM/ 3 X PRINCIPAL BEDROOM / 2 X BEDROOM 2 / 2 X BEDROOM 3 AND 1 X BEDROOM 4 INCLDUED AS PER SCHEDULE E OF AGREEMENT OF PURCHASE AND SALE SEE SKETCH # 8, 9 AND 10 FOR LOCATIONS

WINDOWS

Invoice	Qty.	Description
1734 16Oct24 ** NoCat	1.0	FINISHED BASEMENT FAMILY (REC) ROOM - "SPACES" PLAN WITH KITCHENETTE IN FINISHED LOWER LEVEL REC ROOM SKETCH # 2
1734 16Oct24 ** NoCat	1.0	- OPTIONAL SIDE DOOR TO FINISHED BASEMENT SKETCH # 3

Sketch #1

4 x EXTERIOR POT LIGHTS




ELEVATION 'C'


SKETCH #2-5 REPLACED WITH SKETCH #8-11

2ND FLOOR CABINETRY


PRINCIPAL ENSUITE

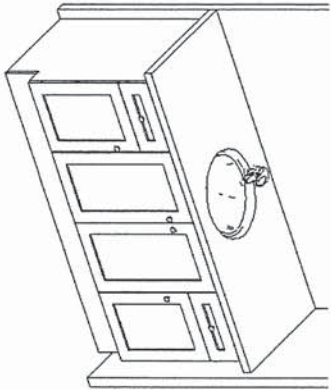


MAIN BATH



SHARED BATH
STANDARD SINGLE SINK

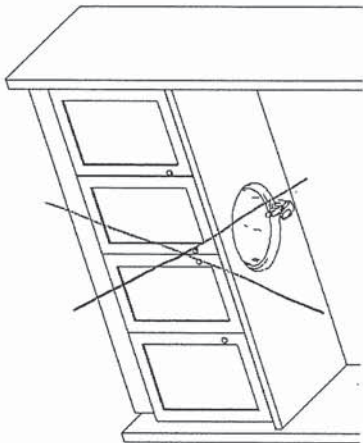


OPTIONAL DOUBLE SINK
(V70-V35-V70)

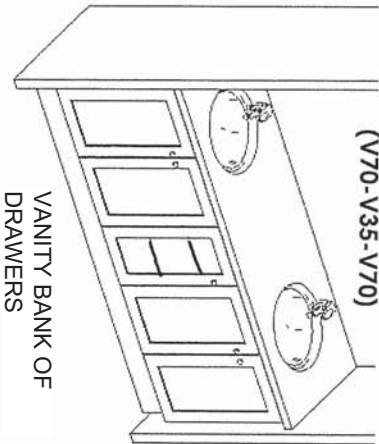

VANITY BANK OF
DRAWERS


LAUNDRY

STD. LAUNDRY BASE
STD. LAUNDRY UPPERS

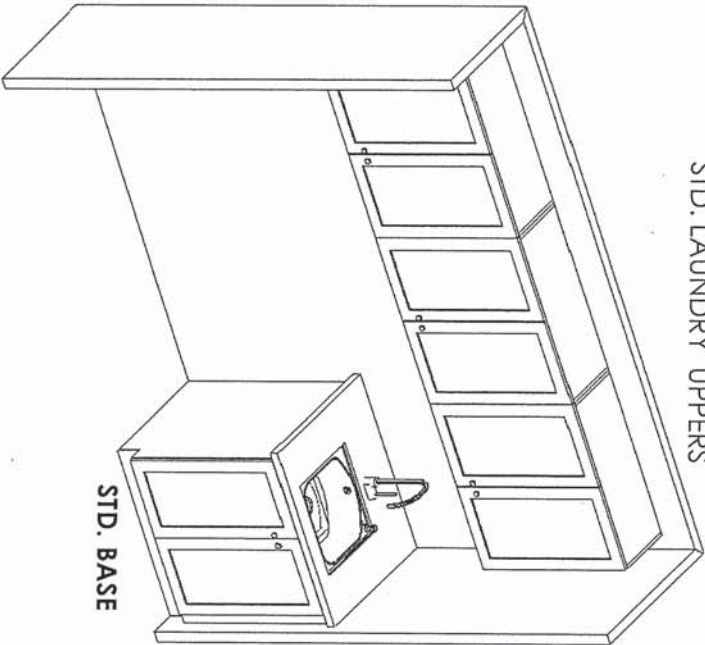

BASEMENT

OPT. FINISHED BASEMENT

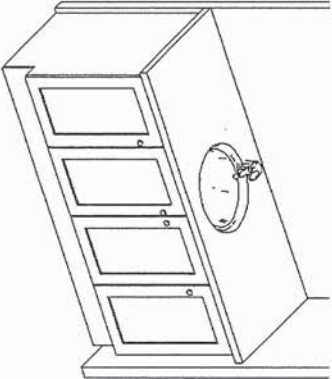

27 of 76

Sketch # 0

Project: Williamsburg Green
Unit: 31, Phase: 1
Model: 28-2550 C THE FOREST



F R E N D E L
KITCHENS LIMITED
1350 Shawson Drive, Mississauga, ON L4W 1C5

HEATHWOOD HOMES
WILLIAMSBURG

MODEL: FOERST - ALL BRICK
28-2550 (3402)

STANDARD CONTRACT INCLUDES:

Appliance Openings

- Hood: 30"W Builder Hood
- Fridge Opening: 37 3/8 "W X 73 3/8"
- Fridge cabinet & gables: 66cm Deep
- Stove Opening: 30" Freestanding
- Dishwasher Opening: 24"

Standard Scope Kitchen, Vanity, Laundry:

- 100cm H wall Cabinets
- Base Pie Cut Corner Cabinets
- Std. Blumotion Hinges-**Soft Close Doors**
- Std. Metabox Drawers-**Not Soft Close**
- Top Drawer In Principal Ensuite (Qty x1)
- Std. Laundry Uppers - 61cm H
- Std. Laundry Base
- Std. Basement Baths
- Backing on All - Except Sink Cabinets
- Countertop by Others for Kitchen & Principal Ensuite


Drawn By: Sepideh B
Date: August 22, 2024
Scale: Not To Scale

This sketch is for DESIGN PURPOSES ONLY – It is not meant to be an exact rendition.


THIS DRAWING IS FOR DESIGN PURPOSES ONLY.
IT IS NOT AN EXACT RENDITION.

Sketch #

BATH
BASEMENT

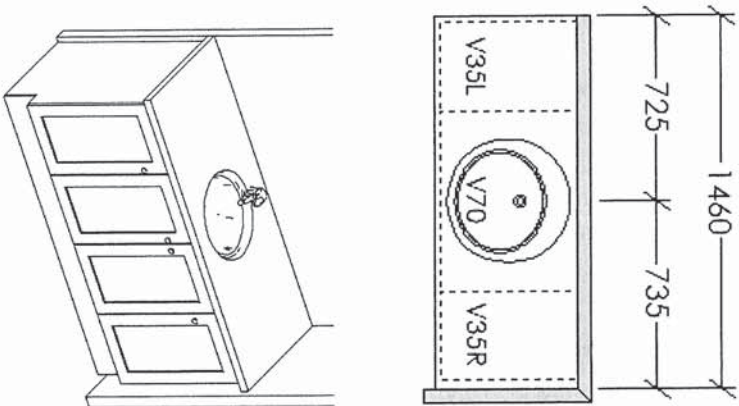

KITCHENETTE
BASEMENT

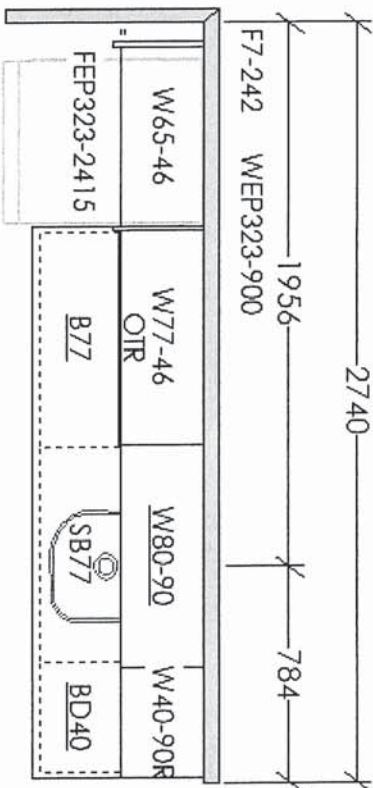

MOUNT AT 242



F R E N D E L
K I T C H E N S L I M I T E D
1350 Showson Drive, Mississauga, ON L4W 1C5

HEATHWOOD HOMES
WILLIAMSBURG

MODEL: FOERST- ALL BRICK
28-2550 (3402)

STANDARD CONTRACT INCLUDES:

Appliance Openings

- Hood: 30"W Bullder Hood
- Fridge Opening: 37 3/8 "W X 73 3/8"
- Fridge cabinet & gables: 66cm Deep
- Stove Opening: 30" Freestanding
- Dishwasher Opening: 24"

Standard Scope Kitchen, Vanity, Laundry:

- 100cm H wall Cabinets
- Base Pie Cut Corner Cabinets
- Std. Blumotion Hinges-**Soft Close Doors**
- Std. Metabox Drawers-**Not Soft Close**
- Top Drawer In Principal Ensuite (Qty x1)
- Std. Laundry Uppers - 61 cm H
- Std. Laundry Base
- Std. Basement Baths
- Backing on All - Except Sink Cabinets
- Countertop by Others for Kitchen & Principal Ensuite

Drawn By: Sepideh B
Date: August 22, 2024
Scale: Not To Scale

This sketch is for DESIGN PURPOSES ONLY – It is not meant to be an exact rendition.

THIS DRAWING IS FOR DESIGN PURPOSES ONLY.
IT IS NOT AN EXACT RENDITION.

Sketch #8

THE FOREST

ELEVATION C ! 3,352 SQ. FT.


Including 802 sq. ft. of Finished Lower Level

28-2550 S ELEV. C

Finished Lower Level

WILLIAMSBURG
GREEN

Lot 31

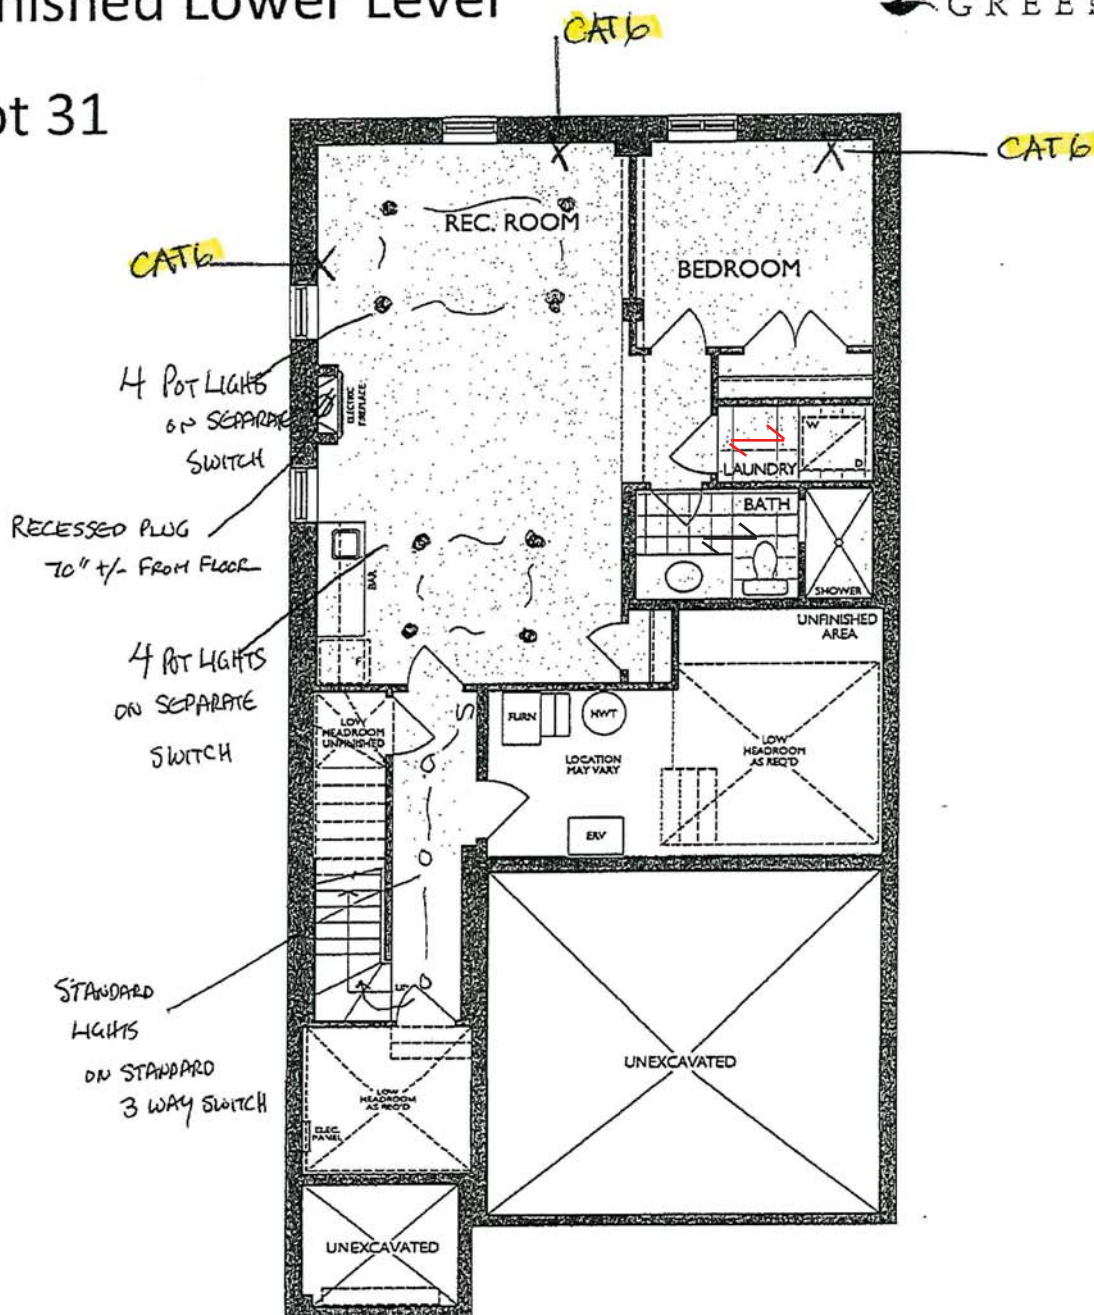

FINISHED LOWER LEVEL
ELEVATION A
(ELEV. B & C SIMILAR)

* Floor plan may vary due to grading conditions.



Legal Plan April 2023

THE FOREST

Lot 31



Initial
DC

Legal Plan April 2023

Sketch # 10

THE FOREST

ELEVATION C | 3,352 SQ. FT.


Including 802 sq. ft. of Finished Lower Level

28-2550 S ELEV. C

Second Level

WILLIAMSBURG
GREEN


Lot 31

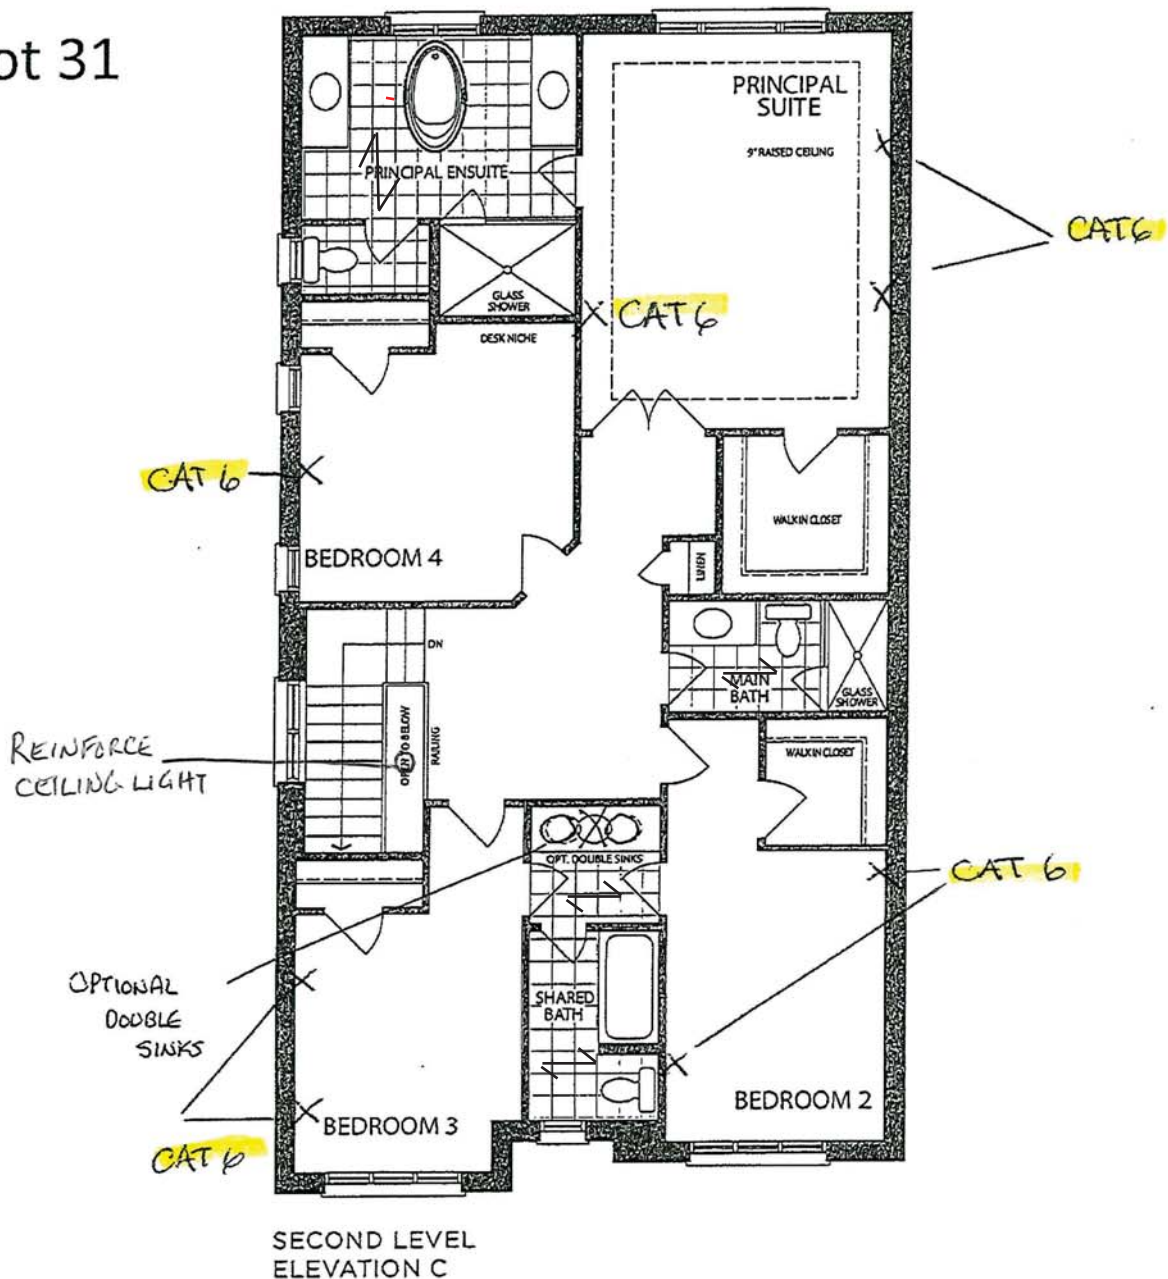

* Floor plan may vary due to grading conditions.



Legal Plan April 2023

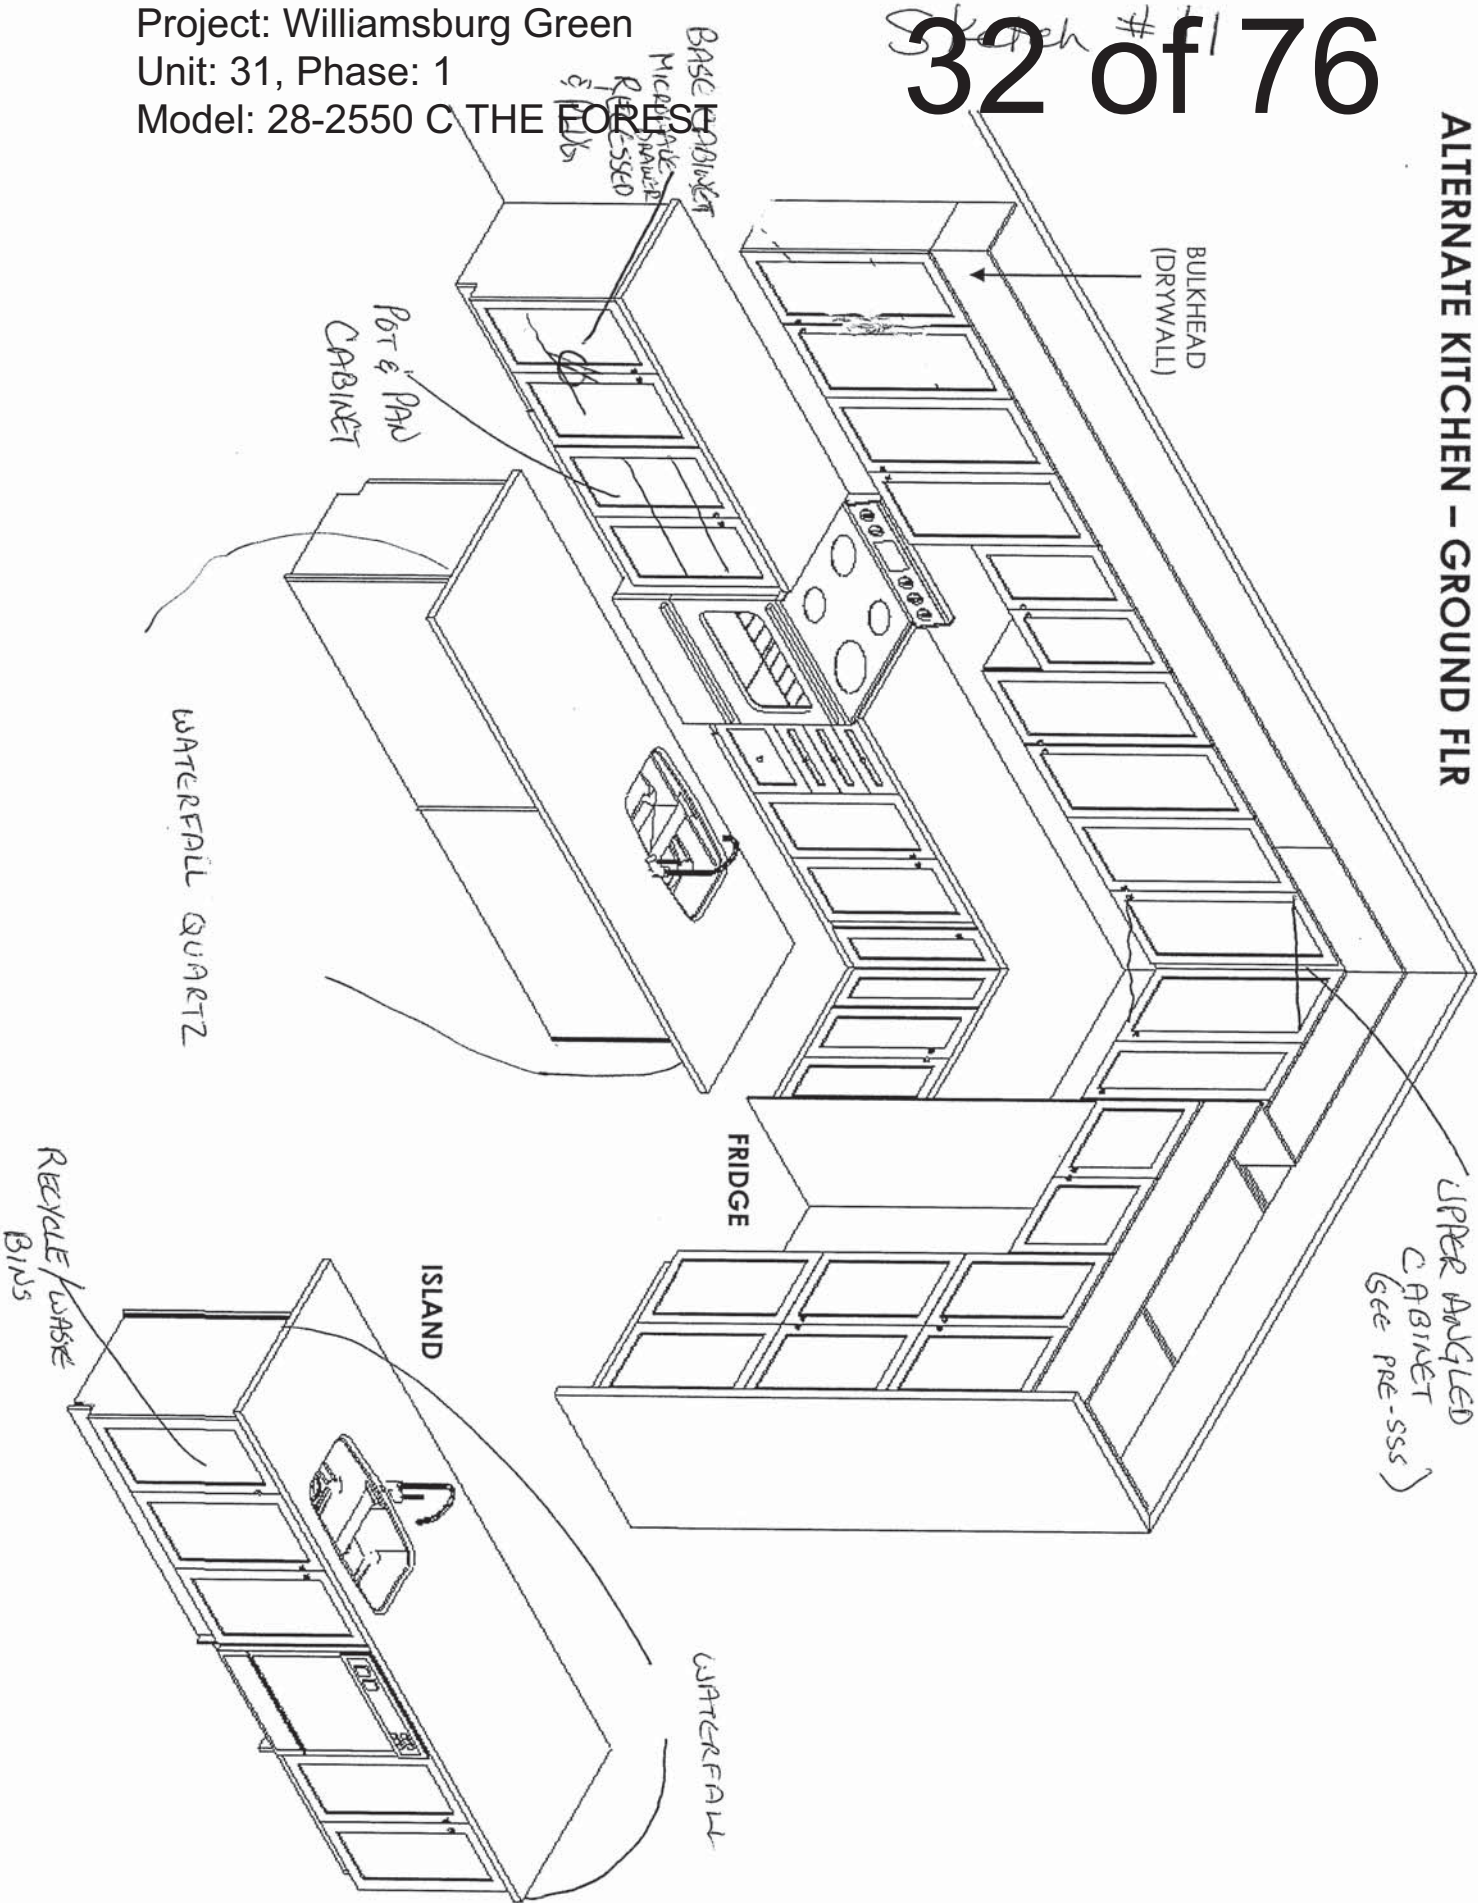

F R E N D E I
K I T C H E N S L I M I T E D
1350 Shawson Drive, Mississauga, ON L4W 1C5

HEATHWOOD HOMES
WILLIAMSBURG

MODEL: FOREST- ALL BRICK
28-2550 (3402) – ALT.

STANDARD CONTRACT INCLUDES:

Appliance Openings

- Hood: 30"W Builder Hood
- Fridge Opening: 37 3/8 "W X 73 3/8"
- Fridge cabinet & gables: 66cm Deep
- Stove Opening: 30" Freestanding
- Dishwasher Opening: 24"

Standard Scope Kitchen, Vanity, Laundry:

- 100cm H wall Cabinets
- Base Pie Cut Corner Cabinets
- Std. Blumotion Hinges-Soft Close Doors
- Std. Metabox Drawers-Not Soft Close
- Top Drawer In Principal Ensuite (Qty x1)
- Std. Laundry Uppers - 61cm H
- Std. Laundry Base
- Std. Basement Baths
- Backing on All - Except Sink Cabinets
- Countertop by Others for Kitchen & Principal Ensuite


Drawn By: Sepideh B

Date: June 17, 2024

Scale: Not To Scale

THIS DRAWING IS FOR DESIGN PURPOSES ONLY.
IT IS NOT AN EXACT RENDITION.

1 ½ MITERED Edge FULL POLISHED without side gables

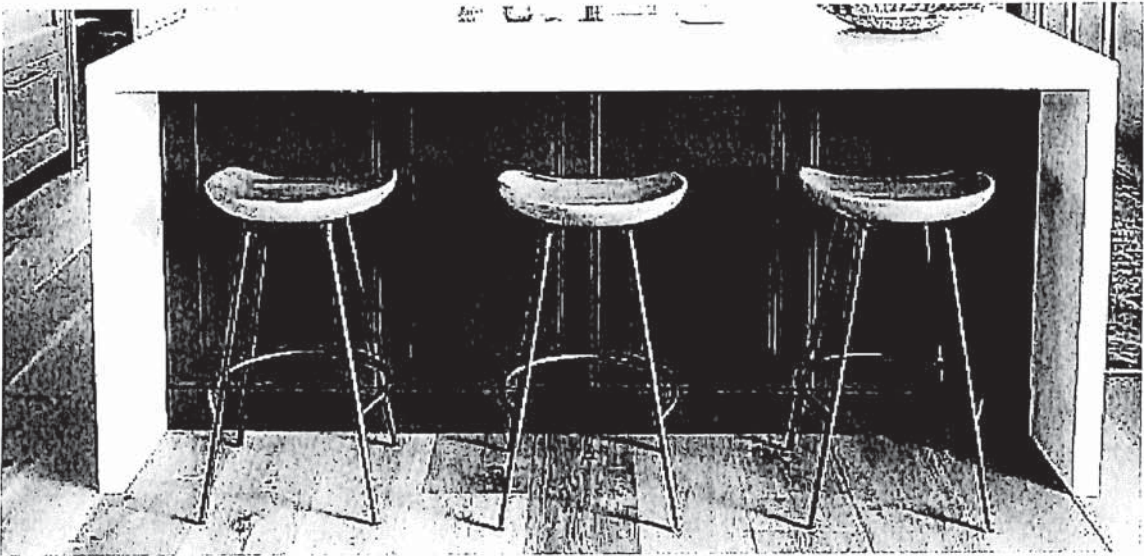

¾ SINGLE Edge PARTIAL POLISHED with 5/8" side gables on both side.





NEAS NF15 Mantel - CABINET

GREAT ROOM



NEAS NF17 Mantel CABINET

FINISHED LOWER LEVEL
REC ROOM
ELECTRIC FIREPLACE

BLANCO

Sink Specifications

Colour	SKU
brushed finish	401248

Design and planning tips


- Min cabinet size: 36 in (915 mm)
- Bowl Depth: 9 in (230.0 mm)

Specifications:
Installation clips, Sink template, Installation instructions, 3 ½" (90 mm) stainless steel strainer

Depending on cabinet construction, a different cabinet size may be required. Consult the cabinet manufacturer.

Codes/Standards: ASME A112.19.3-2017/ CSA B45.4-17

QUATRUS U 1 SUPER SINGLE
Stainless steel brushed finish



Optional Accessories

Elevated Grid	406346
Workstation	406344
CapFlow Strainer Cover	517666
Ash Cutting Board	406345
Sink Grid	402125

Warranty

Limited lifetime warranty on all sinks and faucets. One-year warranty on all accessories and soap dispensers.

Code/Standards Compliance

BLANCO sinks and faucets are third-party tested and certified to CSA, cUPC, ANSI/ASME, IAPMO and NSF standards and listed by applicable certification bodies. For more information on individual product listings, contact our office or listing organization.



Need support? Learn more by watching our sink & faucet How-to videos:
<https://www.blanco.com/ca-en/support/how-to-videos/how-to-videos-for-sinks/>



BLANCO Canada Inc
100 Corporation Drive
Brampton ON L6S 6B5

Tel & Fax
Tel: 905-494-2400 Toll free: 1-877-425-2626
Fax: 905-494-2425 Toll free: 1-877-825-2626


While BLANCO strives to provide accurate information, all images and dimensions in this document are intended for reference only and are subject to change at any time without notice. This document is not intended for use as an installation guide. For technical installation details, refer to installation instructions provided with the product. BLANCO assumes no responsibility for the use of superseded or voided specifications.

MOEN®

Specifications


- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
- 10 year limited warranty when used in a multifamily installation
- 5 year limited warranty when used in a commercial installation

Visit www.moen.com/support for complete details and limitations

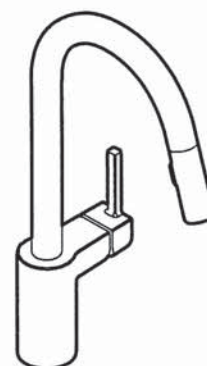

Single Handle High Arc Pulldown Kitchen Faucet

NOTE: THIS FAUCET IS DESIGNED TO BE INSTALLED
THROUGH 1 HOLE, 1-1/2" (38mm) MIN. DIA.
(OPTIONAL 3-HOLE ESCUTCHEON 141002 AVAILABLE)

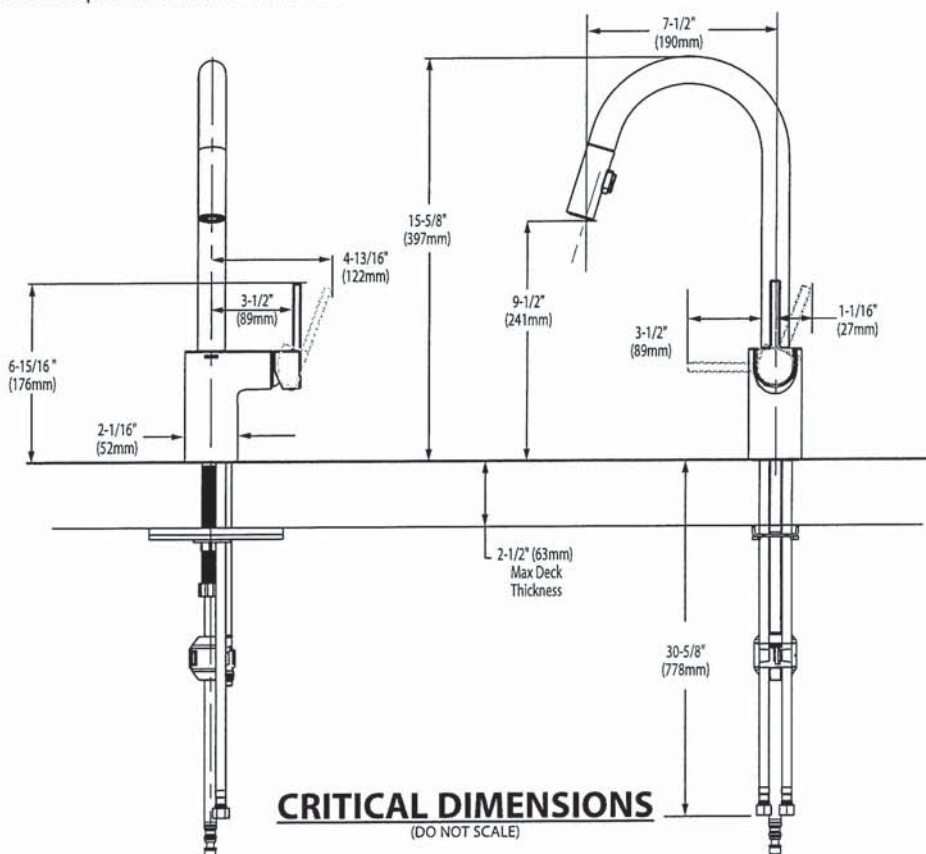

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN
www.moen.com

POWDER ROOM



BARRIER FREE (ABOVE COUNTER OR DROP-IN ONLY)

BOULEVARD®
PEDESTAL SINK
VITREOUS CHINA

BOULEVARD® PEDESTAL SINK

- ☐ **0641.800** Faucet holes on 8" (203mm) centers (Illustrated)
- ☒ **0641.400** Faucet holes on 4" (102mm) centers
- ☐ **0641.100** Center hole only
- Classic styled rectangular pedestal lavatory
- Vitreous china
- Rear overflow
- Supplied with mounting kit
- Right Height® for greater comfort during use
- Faucet ledge with large deck area (faucet not included)
- **Design coordinates with Boulevard® Toilet**
- Basin has flat bottom to also allow use as an **above counter** sink or a **drop-in** sink (with u-shaped cut out)

Nominal Dimensions:

24" x 19" x 35-1/2"
(610 x 483 x 902mm)

- ☐ **0641.008** Pedestal top-8" (203mm) centers
- ☐ **0641.004** Pedestal top-4" (102mm) centers
- ☐ **0641.001** Pedestal top-center hole only
- ☐ **0010.000** Pedestal only

Bowl sizes:

17" (432mm) wide,
12-1/2" (318mm) front to back,
5" (127mm) deep

Compliance Certifications -

Meets or Exceeds the Following Specifications:

- ASME A112.19.2 - 2008/CSA B45.1-08



SEE REVERSE FOR ROUGHING-IN DIMENSIONS

To Be Specified:

- ☐ Color: ☐ White ☐ Linen
- ☐ Faucet Finish:
- ☐ Supplies:
- ☐ 1-1/4" Trap:
- ☐ Nipple:

* See faucet section for additional models available

BATHROOM SINKS

American Standard
Style That Works Better

 BARRIER FREE

OVALYN™ UNDERCOUNTER SINK

- Classic oval undermount sink
- Made from vitreous china
- Front overflow
- Supplied with mounting kit (047194-0070A) and template

☐ **0495.221 Unglazed rim**
435 x 359mm
(17-1/8" x 14-1/8")

☐ **0495.300 Glazed underside**

Bowl size:
382mm (15-1/16") wide
306mm (12-1/16") front to back
140mm (5-1/2") deep

☐ **0496.221 Unglazed rim**
489 x 413mm
(19-1/4" x 16-1/4")

☐ **0496.300 Glazed underside**

Bowl size:
432mm (17") wide
356mm (14") front to back
140mm (5-1/2") deep

☐ **0497.221 Unglazed rim**
546 x 441mm
(21-1/2" x 17-3/8")

☐ **0497.300 Glazed underside**


Bowl size:
483mm (19") wide
391mm (15-3/8") front to back
140mm (5-1/2") deep

- Compliance Certifications -
Meets or Exceeds the Following Specifications:**
- ASME A112.19.2M for Vitreous China Fixtures
 - CAN/CSA B45 series

To Be Specified: ☐ Color: ☐ White ☐ Bone ☐ Linen ☐ Silver ☐ Fawn Beige ☐ Black ☐ Faucet*: ☐ Faucet Finish: ☐ Supplies: ☐ 1-1/4" Trap:

* See faucet section for additional models available

OVALYN™
UNDERCOUNTER SINK
VITREOUS CHINA

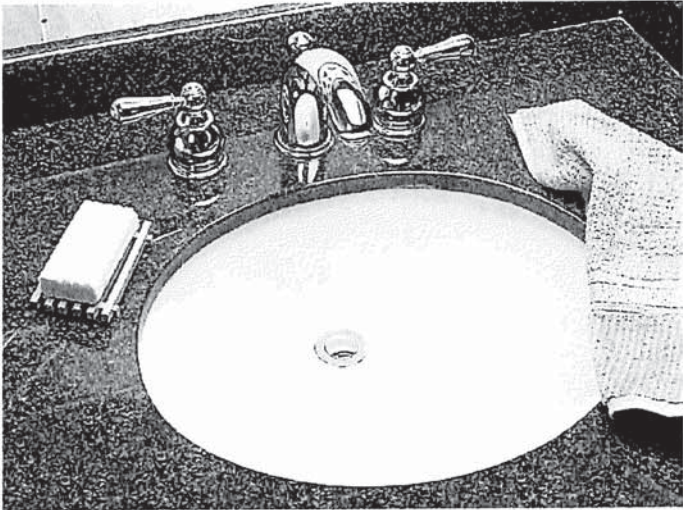


SEE REVERSE FOR ROUGHING-IN DIMENSIONS

American Standard
Style That Works Better

BARRIER FREE

OVALYN™
UNDERCOUNTER SINK
VITREOUS CHINA

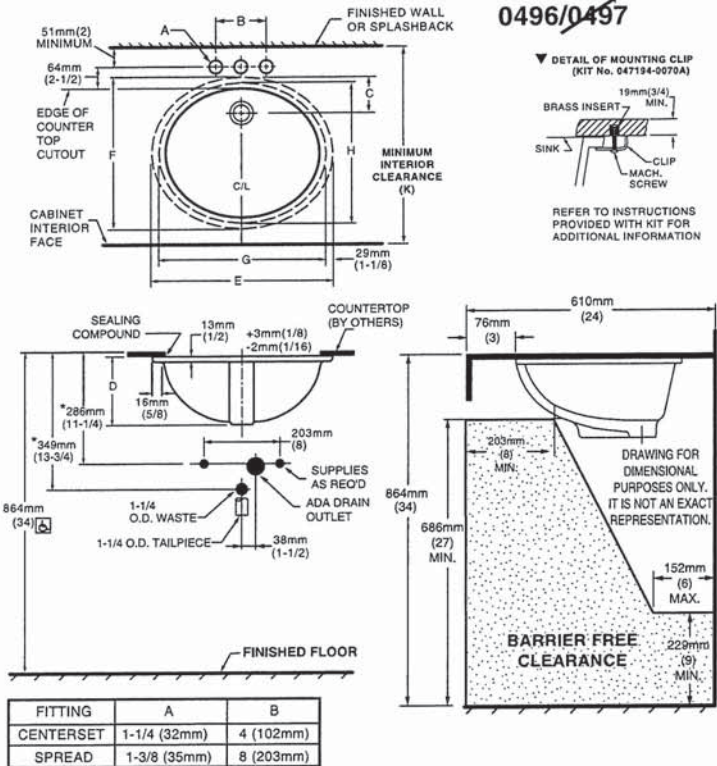


NOTES:
* DIMENSIONS SHOWN FOR LOCATION OF SUPPLIED AND "P" TRAP ARE SUGGESTED.
▼ UNDERCOUNTER MOUNTING KIT SUPPLIED WITH SINK.
PLEASE NOTE MINIMUM INTERIOR CLEARANCE DIMENSION (K). FITTINGS NOT INCLUDED AND MUST BE ORDERED SEPARATELY. USE ENCLOSED TEMPLATE FOR COUNTERTOP CUTOUT SEALING COMPOUND SUPPLIED BY OTHERS.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard A112.19.2. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

MEETS THE AMERICANS WITH DISABILITIES ACT GUIDELINES AND ANSI A117.1 ACCESSIBLE AND USEABLE BUILDINGS AND FACILITIES - CHECK LOCAL CODES.

Countertop 864mm (34") from finished floor. Lavatory installed 76mm (3") from front edge of countertop. Countertop thickness to be 25mm (1") maximum.

CAT. NO.	E	F	G	H	C	D	J	K
0496.221	489mm (19-1/4)	413mm (16-1/4)	432mm (17)	356mm (14)	103mm (4-1/16)	182mm (7-3/16)	16mm (5/8)	500mm (19-11/16)
0497.221	546mm (21-1/2)	441mm (17-3/8)	483mm (19)	391mm (15-3/8)	95mm (3-3/4)	191mm (7-1/2)	19mm (3/4)	534mm (21-1/16)

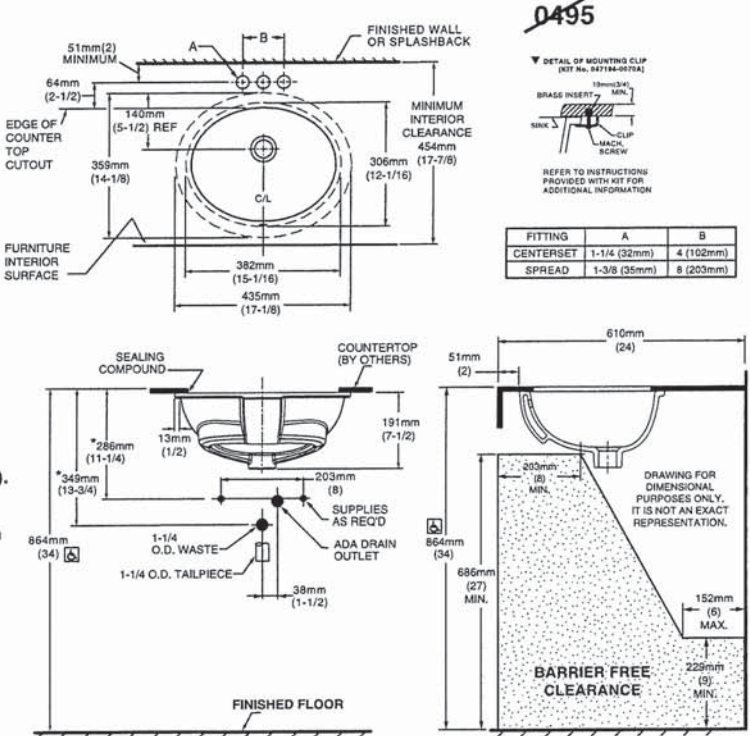

NOTES:
USE ENCLOSED TEMPLATE FOR COUNTER TOP CUTOUT. FITTINGS NOT INCLUDED WITH FIXTURE AND MUST BE ORDERED SEPARATELY.
* DIMENSIONS SHOWN FOR LOCATION OF SUPPLIED AND "P" TRAP ARE SUGGESTED.
▼ UNDERCOUNTER MOUNTING KIT SUPPLIED WITH SINK.
PLEASE NOTE MINIMUM INTERIOR CLEARANCE DIMENSION (K). SEALING COMPOUND SUPPLIED BY OTHERS.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard A112.19.2. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages

MEETS THE AMERICANS WITH DISABILITIES ACT GUIDELINES AND ANSI A117.1 ACCESSIBLE AND USABLE BUILDINGS AND FACILITIES - CHECK LOCAL CODES.

Countertop 864mm (34") from finished floor. Lavatory installed 51mm (2") from front edge of countertop. Countertop thickness to be 25mm (1") maximum.



DEMI™
Product Specification Sheet



Two Piece Freestanding Collection


CF2007	Two Piece Freestanding Soaker
Size:	60" x 32" x 22" 1524 mm x 813 mm x 559 mm

PRODUCT FEATURES & BENEFITS


- Vacuum formed acrylic reinforced with fiberglass
- Scratch, stain and fade resistant high gloss finish
- Installation friendly two piece design
- Accepts deck mounted faucet
- Includes integral pop up drain and rectangular overflow
- Includes levelling feet

TWO PIECE ASSEMBLY


FRONT VIEW

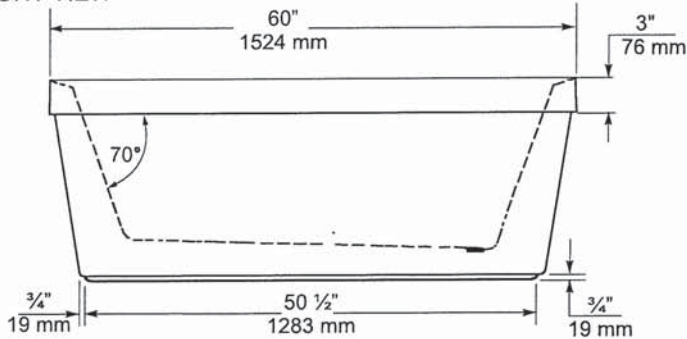

END VIEW

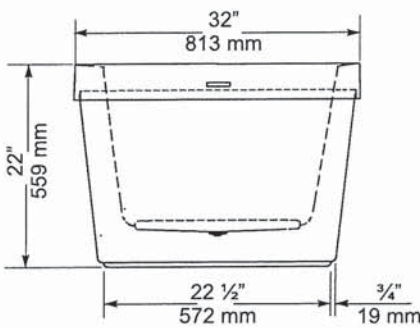

TOP VIEW

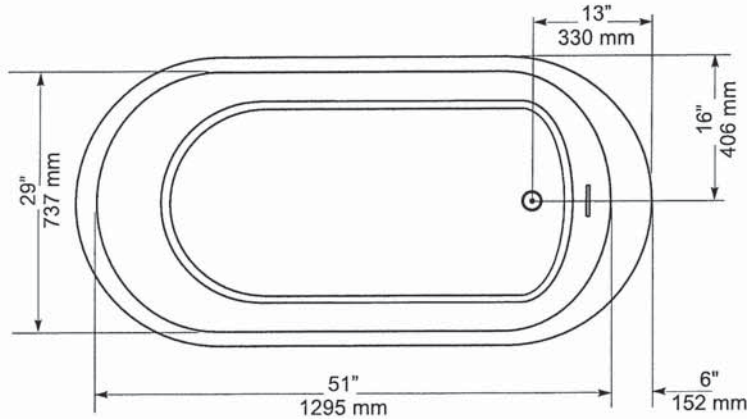

GENERAL SPECIFICATIONS		
Average Weight	90 lb	41 kg
Bathing Well at bottom	43"x 20"	1092 x 508 mm
Capacity Drain to Overflow		195 litres
Water Depth Drain to Overflow	16"	406 mm
Drain Opening (dia.)	2"	51 mm
Overflow Opening	2 1/4"x 1/2"	57 x 13 mm
Drain to Floor Clearance	3 1/4"	83 mm

NOTES: Please confirm measurements on actual product to ensure proper identification. Bathtub to be installed on the floor supported by 5 self levelling feet. Adjust if required to level the bathtub for adequate drainage. Refer to installation instructions for additional information.

IMPORTANT: Dimensions of fixtures are nominal and may vary ± 1/4" (6 mm). Weight may vary ± 5 lb (2.3 kg). Drawing is not to scale. These measurements are subject to change at manufacturer's discretion.

Compliance Certifications -
Meets or Exceeds the following Specifications:
• CAN/CSA - B45 Series





VORMAX® UHET
RIGHT HEIGHT® ELONGATED TOILET
VITREOUS CHINA



VORMAX® UHET
RIGHT HEIGHT® ELONGATED TOILET

- ❑ **238AA.114**
 - VorMax flushing technology cleans two times better than conventional toilets**
 - Combination bowl and tank, less seat
 - 12" (305 mm) rough-in
 - Right Height elongated siphon action bowl
 - Ultra-high efficiency toilet (UHET) 1.0 gpf/3.8 Lpf
 - Meets EPA WaterSense® and MaP Premium criteria
 - EverClean® Antimicrobial Surface
 - Transitional styling
 - Includes EZ-Install Tools
 - CleanCurve™ rim eliminates rim area where dirt and build-up hide
 - 16-1/2" (419 mm) rim height for accessible applications
 - 2-1/16" (52 mm) trapway
 - Dual injection flush valves
 - Chrome trip lever
 - Two color-matched bolt caps
 - 10 year warranty

- ❑ **238AA.115** Same as above except trip lever on right hand side
- ❑ **3385A.101** Right Height® Elongated Bowl
- ❑ **4385A.114** UHET Tank

Nominal Dimensions:
30-3/16" x 17-7/8" x 32-1/4"
(767 x 453 x 820mm)

Fixture only, seat and supply sold separately

Alternative Tank Configuration Available:
❑ **4385A.115** Tank complete with trip lever located on right side

Compliance Certifications -
Meets or Exceeds the Following Specifications:

- ASME A112.19.2/CSA B45.1 for Vitreous China Fixtures
- US EPA WaterSense® Specification for UHETs


To Be Specified:

- ❑ Color: ❑ White
- ❑ Seat: #5055A.65C Elongated Slow Close solid plastic seat and cover
- ❑ Supply with stop:

** Source: IAPMO R&T Labs Test Report No. 109-141486-002, comparing VorMax against conventional under-the-rim-water-dispersal toilets from major retailers.

MEETS THE AMERICANS WITH DISABILITIES ACT GUIDELINES AND ICC ANSI A117.1 REQUIREMENTS FOR ACCESSIBLE AND USABLE BUILDING FACILITIES-CHECK LOCAL CODES.

EVERCLEAN®
Surface

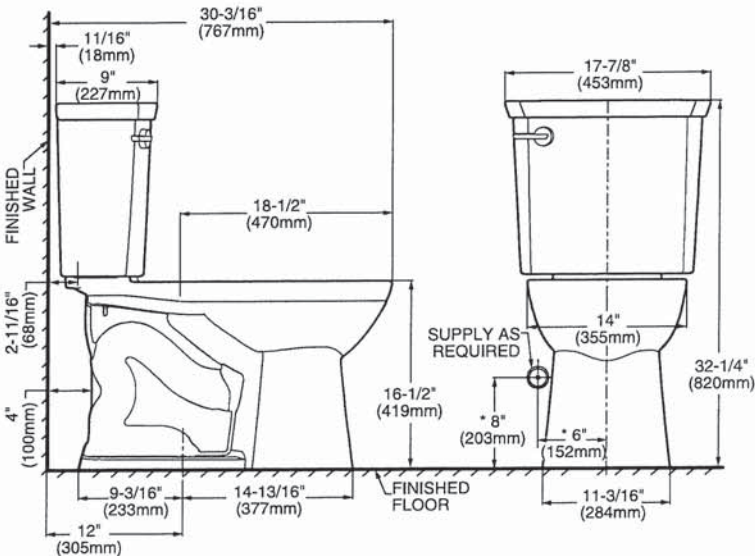

NOTES:
THIS TOILET IS DESIGNED TO ROUGH-IN AT A MINIMUM DIMENSION OF 305MM (12") FROM FINISHED WALL TO C/L OF OUTLET. SUPPLY NOT INCLUDED WITH FIXTURE AND MUST BE ORDERED SEPARATELY.
* DIMENSION SHOWN FOR LOCATION OF SUPPLY IS SUGGESTED.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard A112.19.2. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

BATHROOM FAUCETS
THROUGHOUT



Buy it for looks. Buy it for life.®

FAUCET DESCRIPTION

- Metal construction with chrome finish
- Flexible supply lines with 3/8" compression fittings
- Includes metal pop-up waste assembly
- Optional 3 hole deck plate (escutcheon) available

OPERATION

- Lever style handle
- Temperature controlled by 100° arc of handle travel
- Includes hot & cold temperature indicators

FLOW

- Flow is limited to 1.2 gpm max (4.5 L/min) at 60 psi

CARTRIDGE

- 1255™ Duralast™ cartridge
- Nonmetallic/nonferrous and ceramic material


STANDARDS

- Third party certified to WaterSense,® ASME A112.18.1/CSA B125.1, and all applicable requirements referenced therein
- Certified to NSF 61/9 & 372
- Compliant with California water efficiency regulations
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- ADA ♿ for lever handle

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations


Specifications

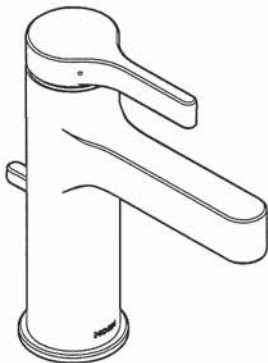

Vichy™
Single-Handle Lavatory Faucet

Model: 6710

NOTE: THIS FAUCET IS DESIGNED TO BE
INSTALLED THRU 1 HOLE, 1-1/4" MIN. DIA.

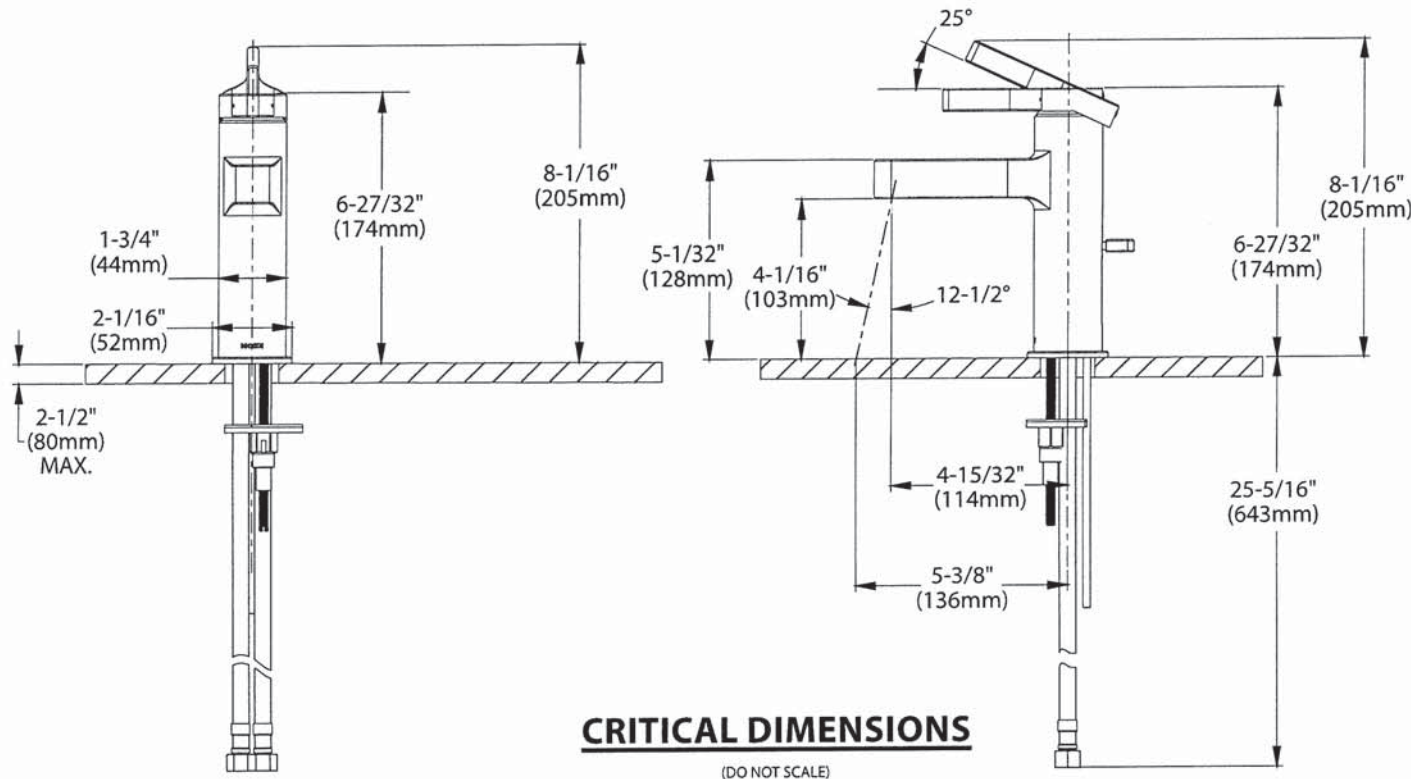



Buy it for looks. Buy it for life.®

There is more than 1 version of this model.
Page down to identify the version you have.

DESCRIPTION

- Metal construction with various finishes identified by suffix
- Includes non-metallic showerhead, arm, flange and non-metallic diverter tub spout

OPERATION

- Handle operates counterclockwise through a 270° arc with off at 6 o'clock and maximum hot at the 9 o'clock position. Shut off in clockwise direction
- Adjustable temperature limit stop to control maximum hot water temperature
- Pressure balancing mechanism maintains selected discharge temperature to ± 3°

FLOW

- Showerhead is limited to 2.5 gpm (9.5 L/min) at 80 psi
- EP suffix models are limited to 1.75 gpm (6.6 L/min) at 80 psi
- NH suffix models contain no showerhead

CARTRIDGE

- 1222 cartridge design
- Accommodates back to back installations
- Nonmetallic/nonferrous and stainless steel material

STANDARDS

- Third party certified to meet ASME A112.18.1/CSA B125.1 and all applicable requirements referenced therein
- EP suffix models are third party certified to WaterSense®

- ADA  for lever handle

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations


Specifications



CHATEAU® POSI-TEMP®
Single-Handle Tub/Shower Trim Kit

Models: TL181 series - valve trim only
(Bulk Packed 12 per carton)
TL182 series - shower trim only
(Bulk Packed 12 per carton)
TL183 series - tub/shower trim
(Bulk Packed 12 per carton)

Valves: 62300 series
2500 series

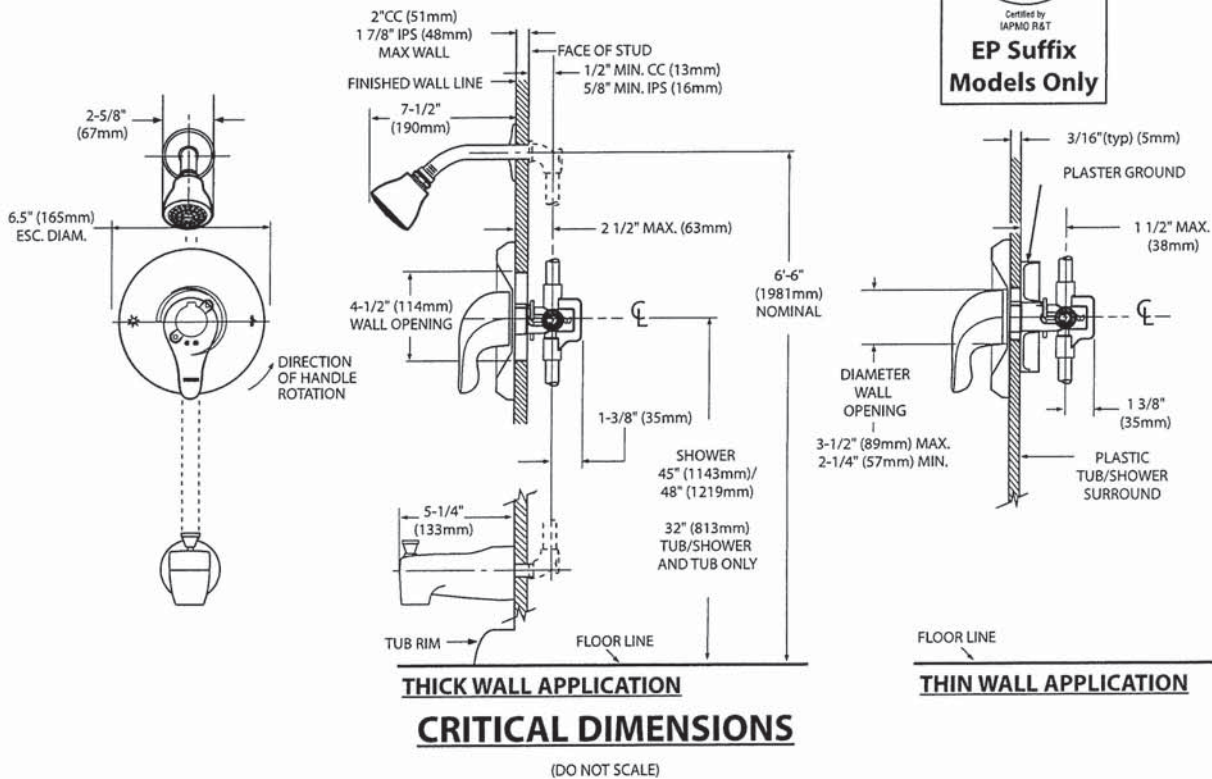



Specifications

DESCRIPTION

- Metal construction with various finishes identified by suffix

OPERATION

- Lever style handles with hot and cold color indicator
- Rotate hot side handle counterclockwise to open (clockwise to close) and the cold side handle (clockwise to open) and (counterclockwise to close)

STANDARDS

- Third party certified to: ASME A112.18.1/CSA B-125.1, and all applicable requirements referenced therein

- ADA  for lever handles

WARRANTY



- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
 - 10 year limited warranty when used in a multi-family installation
 - 5 year limited warranty when used in a commercial installation
- Visit www.moen.com/support for complete details and limitations



CHATEAU®
Two-Handle Garden Tub Trim

Models: T994 series


Valves: 4792, 4793, 4794, 4796, 4797, 4798

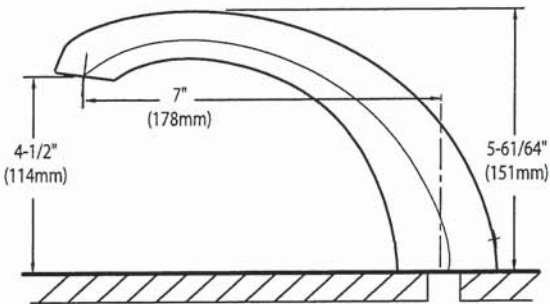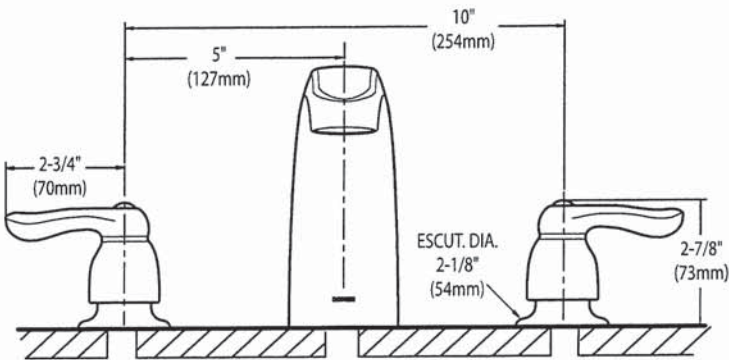

CRITICAL DIMENSIONS
(DO NOT SCALE)




AVW-368CS
36" Wall Mounted hood - MSRP: \$839.00

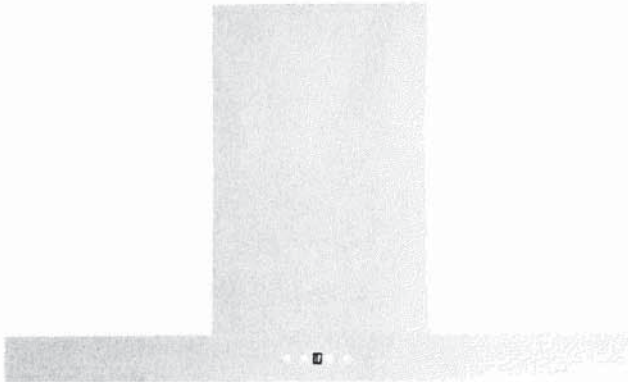


Model	
AVW-368CS	
Features	
Control	Soft touch with LED display
Lighting	2 bulbs, 3W LED (bulbs included)
Blower type	860 CFM, 6-Speed
Blower performance	Speed 1, 2.4 sones
	Speed 6, 6.2 sones
Filter type	3 aluminium micro hole filters (included)
	3 filters chicane (inox)
Duct transition	6" Round (Top)
Ducting	Ducted
Chimney (ducted out)	For ceiling heights up to 9'0"
Exterior Appearance	
Stainless steel grade	201
Electrical Requirements	
Electrical requirements	120V / 60Hz / 2.7 Amps
Dimensions	
Dimensions	35 1/2"(W) x 19 3/4"(D) x 2 3/4"(H)
Warranty	
1-year Warranty	Parts and labour, in-home service

Dimensions

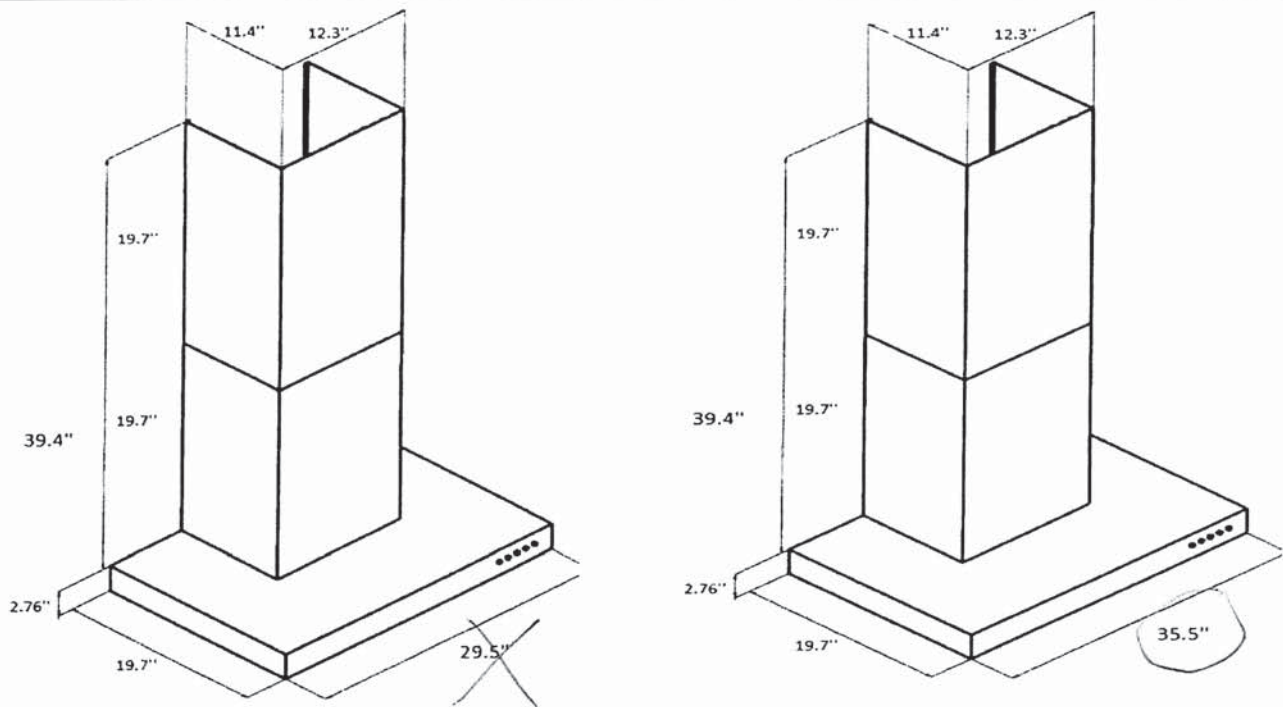

Installation

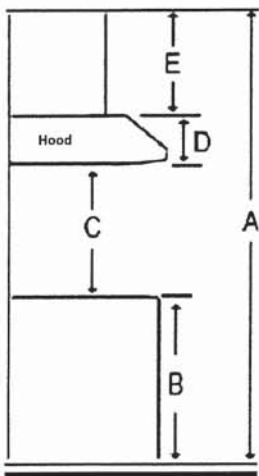

A	Floor to ceiling height	Variable
B	Floor to counter top height (standard)	36"
C	Recommended height between cooking surface and bottom of the hood	28" to 30"
D	Hood height	2.76"
E	Chimney height	19.7" to 39.4"

Duct transition

6" round top



The information contained herein is based on sources that we believe to be reliable, but is not guaranteed by us, may be incomplete and/or may change without notice.

HOME APPLIANCES



LG REFRIGERATION

LRFXC2606S


26 cu. ft. Counter Depth MAX Refrigerator

- Industry's Largest 26 cu. ft. Counter Depth Capacity
Dual Ice maker – Cubed and Crush
Cool Guard™
Door Cooling+
Flat Door Design with Handle
Smart Inverter

AVAILABLE COLORS



PRINTPROOF™ STAINLESS STEEL

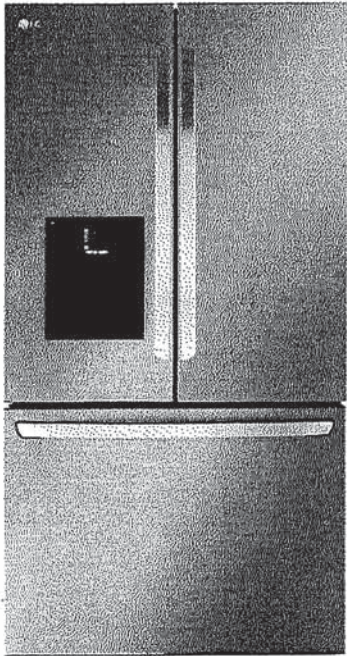

Proactive Smart Alerts to Keep
Your Appliances Running Smoothly

ThinQ care

- Preventative Alerts help you stay a step ahead of potential issues to find proactive solutions before problems arise.
- Avoid preventable repairs and service calls with real-time diagnostics for a hassle-free experience.
- Integrated within LG's ThinQ app—a smart home hub for managing your smart devices and appliances.

CAPACITY

Refrigerator (cu. ft.)	16.9 cu. ft.
Freezer (cu. ft.)	8.6 cu. ft.
Total Capacity (cu. ft.)	25.5 cu. ft.

ENERGY

ENERGY STAR® Qualified	Yes
Energy Consumption (kWh/Year)	699

WATER & ICE SYSTEM

Ice & Water Dispenser	Yes
In-door Ice maker	Yes (1)
In-door Ice maker Ice Type	Cubed / Crushed
In-door Ice maker Daily Production	3.0 / 3.3 (IcePlus) lbs.
In-door Ice maker Storage Capacity	3.0 lbs.
No. Freezer Ice maker	Yes (1)
Freezer Ice maker Ice Type	Cubed
Freezer Ice maker Daily Production	2.5 / 2.7 (IcePlus) lbs.
Freezer Ice maker Storage Capacity	4.0 lbs.
Ice Plus	Yes
Filteration System	1 stage
Filter	LT1000P

COOLING

Compressor Type	Smart Inverter
Evaporator	Yes (1)
Multi Air Flow Cooling	Yes
Temperature Sensors	2

Refrigerant

CONVENIENCE

Display Type	Smooth Touch Control / White LED
Temperature Controls	Electronic/Digital
Door Alarm	Yes
Child Lock	Yes
Auto Closing Door Hinge	Yes
Decibel™ Quiet Operation	Yes
Sabbath Mode	Yes
ADA Compliant	Yes

REFRIGERATOR

No. of Shelves	4 split (4 Fixed)
Shelf Construction	Spill Protector/Tempered Glass
Shelf Trim	White Décor
No. of Crisper Bins	2
Pantry (Glide N Serve)	Yes (Normal)
CoolGuard™	Yes
Fresh Air Filter	Yes
Light	Yes

REFRIGERATOR DOOR

No. of Bins	4 (Left Door), 4 (Right Door)
Door Shape	Flat
Handle Type	Bar
FREEZER	
Door Type	Pull Drawer
Handle Type	Smart Pull™ Handle
Drawers / Shelves	2-Tier Organization
Freezer Light	Upper LED Lighting Lower No

SMART TECHNOLOGY

Smart Diagnosis	Yes
Wi-Fi	Yes
ThinQ®	Yes
ThinQ® Care	Yes

MATERIALS AND FINISHES

Hidden Hinges	Yes
Surface	Smooth
Handles	Matching Commercial Handles
All Available Colors	PrintProof™ Stainless Steel
Insulation	Low GWP and Zero ODP Blowing Agent

DIMENSIONS/CLEARANCES/WEIGHTS

Product (W x H x D)	35 3/4" x 70 1/4" x 31 5/8"
Width	35 3/4"
Height (to Top of Hinge)	70 1/4"
Depth (with Handles)	31 5/8"
Width (Door Open 90° without Handle)	40"
Width (Door Open 90° with Handle)	44 7/8"
Width (Door Fully Open without Handle)	56 3/4"
Height (to Top of Case)	68 7/8"
Depth without Door	24 3/4"
Depth without Handles	29 1/8"
Depth (to Hinge Cover)	18 1/4"
Depth (Total with Door Open)	43 5/8"
Depth (Draw Open Fully without Handle)	48 7/8"
Installation Clearance	Sides 1/8", Top 1", Back 2"
Carton Dimensions (WxHxD)	38" x 72" x 31"
Weight (Unit/Carton)	291 lbs. / 313 lbs.

LIMITED WARRANTY


Parts & Labor	1 Year
Sealed System (Parts & Labor)	5 Years
Compressor (Parts & Labor)	5 Years
Linear Compressor (Parts & Labor)	6 - 10 Years

UPC CODES

LRFXC2606S (PrintProof™ Stainless Steel)	195174057339
--	--------------

SPR36UIMX

Range, 36", Professional, Stainless steel, Cooktop type: Induction, Main oven: Thermo-ventilated

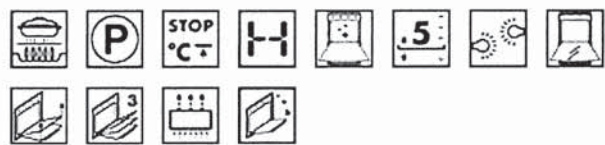

TYPE

Product family: Range • Range size: 36" • Cooktop type: Induction • Main oven: Thermo-ventilated • EAN code: 8017709308971

AESTHETIC

Color: Stainless steel • Design: Flush mounted • Series: Professional • Material: Stainless steel • Control panel finish: Stainless steel • Cooktop color: Black enamel • Handle: Robust knurled handle • Controls color: Stainless steel • Display: Touch • Handle color: Brushed stainless steel • Control knobs: Pro-style control knobs • No. of controls: 7

PROGRAMS / FUNCTIONS

Traditional cooking functions: Static, Fan-assisted, True European convection, Small grill, Large grill, Large grill + Fan, Convection bottom, Pizza • Cleaning functions: VaporClean • Other functions: Defrost by time

COOKTOP OPTIONS

Multizone Option: Yes

MAIN OVEN OPTIONS

Minimum Temperature: 150 °F • Maximum temperature: 500 °F

COOKTOP TECHNICAL FEATURES

Cooking zones: 5 • Cooking zones with Booster: 5 • Zone 1 - Position: Front-left • Zone 2 - Position: Rear-left • Zone 3 - Position: Center • Zone 4 - Position: Rear-right • Zone 5 - Position: Front-right • Zone 1 - Type: Induction - Multizone • Zone 2 - Type: Induction - Multi-zone • Zone 3 - Type: Induction - single • Zone 4 - Type: Induction - Multizone • Zone 5 - Type: Induction - Multizone • Zone 1 - Power: 3 kW • Zone 2 - Power: 3 kW • Zone 3 - Power: 3.7 kW • Zone 4 - Power: 3 kW • Zone 5 - Power: 3 kW • Automatic switch-off in case of over-heating: Yes • Automatic pan detection: Yes • Selected zone indicator: Yes • Residual heat indicator: Yes

MAIN OVEN TECHNICAL FEATURES

Cavity material: EverClean enamel • No. of shelves: 5 • Shelves type: Metal racks • No. of lights: 2 • Light type: Halogen • Light Power: 40 W • Fan number: 2 • Time setting: Minute minder • Full-glass inner door: Yes • Removable inner door: Yes • Total no. of door glasses: 3 • Cooling system: Tangential • Grill type: Electric • Grill power: 1700 W • Large grill - Power: 2900 W • Bottom heating element - Power: 1700 W • Upper heating element - Power: 1200 W • Circular heating element - Power: 1550 W • Soft Close system: Yes

ELECTRICAL CONNECTION

Electrical connection rating: 240 W • Voltage: 208/240 V • Frequency: 60 Hz • Power cord length: 47 1/4 "

LOGISTIC INFORMATION


Width: 35 3/4 " • Height: 35 7/16 " • Depth: 25 3/16 " • Net weight: 210 lbs


ACCESSORIES INCLUDED FOR MAIN OVEN AND COOKTOP

Meat Probe: 1Oven grid with back-stop, tray support: 2

OPTIONAL


PPR9: Pizza stone, Ovens, RangesPRTX: Pizza stone, Ovens, RangesPALPZ: Pizza shovel, Ovens, Ranges

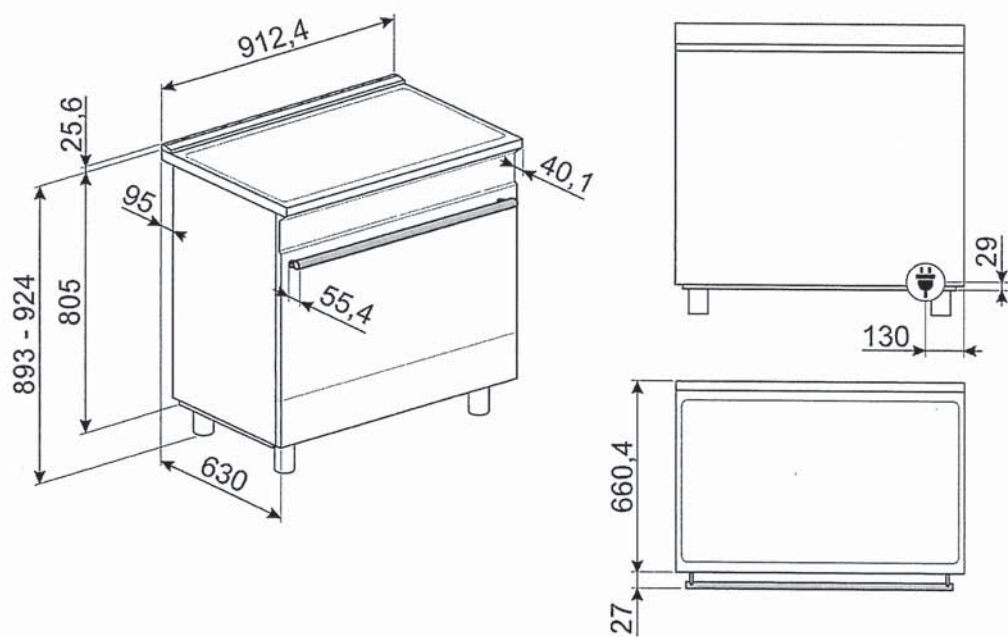

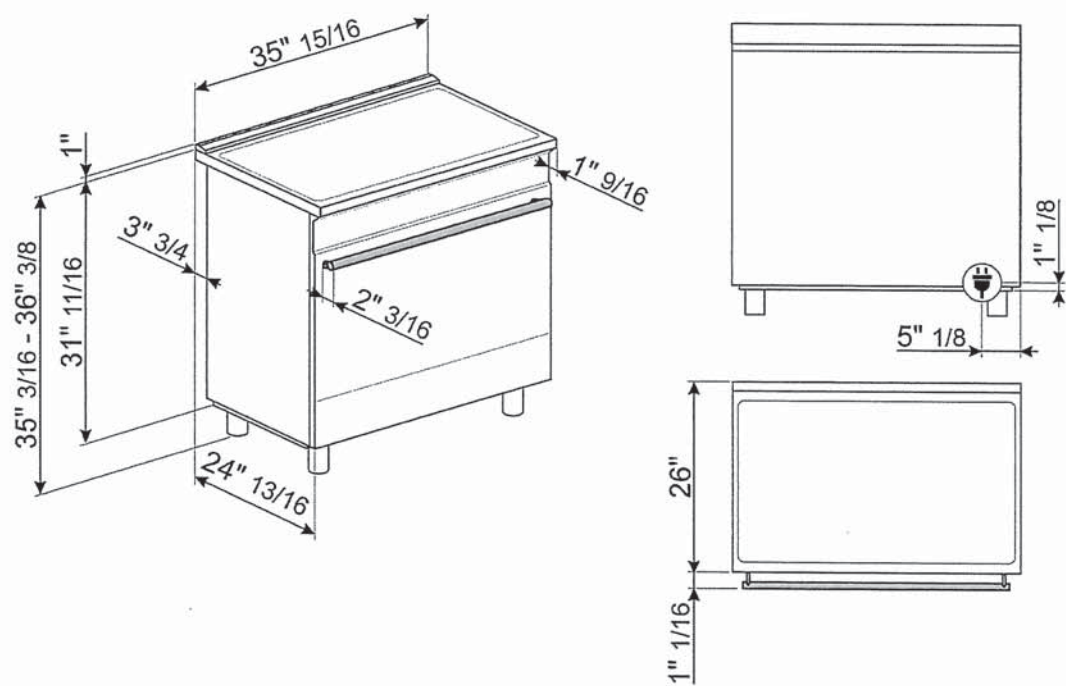

24" Drawer Microwave

800 Series – Stainless Steel HMD8451UC




HMD8451UC
Stainless Steel

The 24" drawer microwave opens and closes automatically with the push of a button, and can be installed flush to cabinet.

Features & Benefits

- Convenient automatic sensor programs simplify cooking for perfect results.
- White touch control LCD matches Bosch wall ovens.
- Able to fit a 20 oz. cup or a 13" x 9" baking oven pan.
- Low profile design with touch "open" and "close".

General Properties	
Cavity material	White
Max. microwave power (W)	950 W
Capacity	
Cavity capacity (cu. ft.)	1.2 cu. ft.
Technical Details	
Watts (W)	1,500 W
Circuit breaker (A)	15 A
Volts (V)	120 V
Frequency (Hz)	60 Hz
Power cord length (in)	48"
Plug type	120V-3 prong
Dimensions & Weight	
Overall appliance dimensions (HxWxD) (in)	16 5/16" X 23 7/8" X 23 3/8"
Required cutout size (HxWxD) (in)	14 13/16" x 22 1/8" x 23 1/2"
Net weight (lbs)	81 lbs



Accessories: To purchase Bosch accessories, cleaners & parts please visit www.bosch-home.com/us/store or call 1-800-944-2904 (Mon to Fri 5 am to 6 pm PST, Sat 6 am to 3 pm PST).
Notes: All height, width and depth dimensions are shown in inches. BSH reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cutout.
Warranties: Please see Use & Care manual or Bosch website for statement of limited warranty.
For more information on our entire line of products, go to www.bosch-home.com/us or call 1-800-944-2904
© BSH Home Appliances Corporation. All rights reserved. Bosch is a registered trademark of Robert Bosch GmbH.

Initial
DC


24" Drawer Microwave

800 Series – Stainless Steel HMD8451UC



**BOSCH**

Invented for life

Installation Details


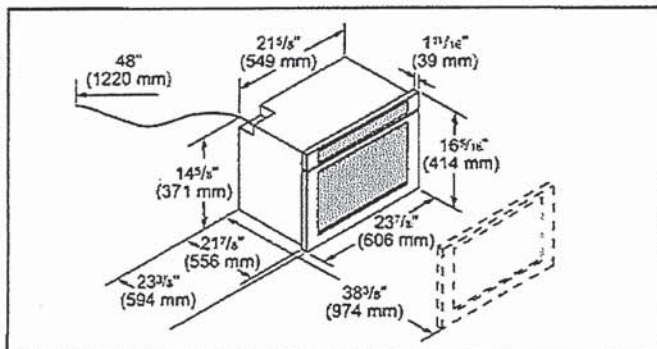


STANDARD INSTALLATION DIMENSIONS & CLEARANCES

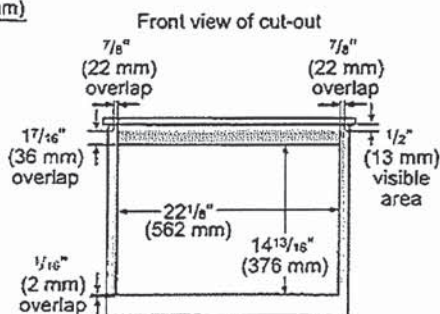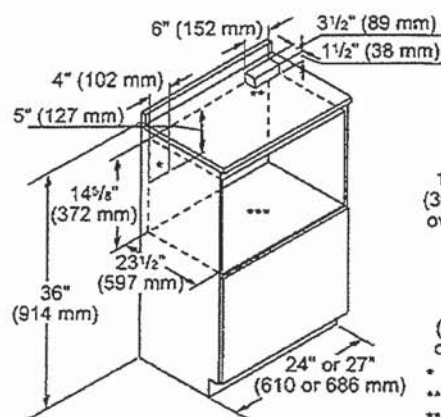

- * Recommended location of electrical outlet
- ** Anti-tip block
- *** Base should support up to 100 lbs

FLUSH INSTALLATION DIMENSIONS & CLEARANCES

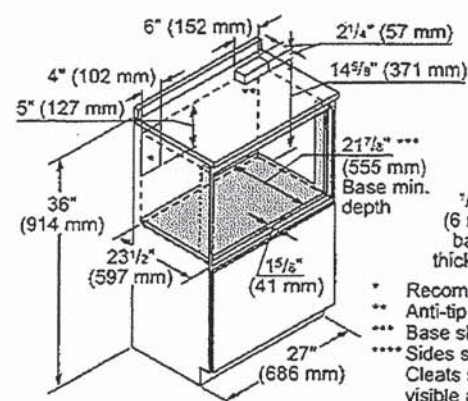

- * Recommended location of electrical outlet
- ** Anti-tip block
- *** Base should support up to 100 lbs
- **** Sides should be finished and extend back to cleat. Cleats should also be finished, as they may be visible after installation.

Accessories: To purchase Bosch accessories, cleaners & parts please visit www.bosch-home.com/us/store or call 1-800-944-2904 (Mon to Fri 5 am to 6 pm PST, Sat 6 am to 3 pm PST).

Notes: All height, width and depth dimensions are shown in inches. BSH reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cutout.

Warranties: Please see Use & Care manual or Bosch website for statement of limited warranty.

For more information on our entire line of products, go to www.bosch-home.com/us or call 1-800-944-2904


© BSH Home Appliances Corporation. All rights reserved. Bosch is a registered trademark of Robert Bosch GmbH.

07/19

Initial
DC

24" Bar Handle Dishwasher

100 Series Premium – Stainless Steel SHX5AEM5N

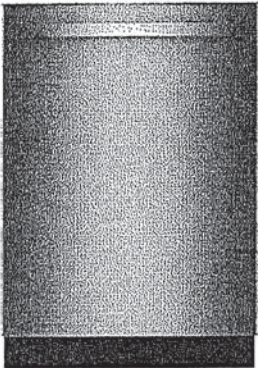

SHX5AEM5N
Stainless Steel

Also available in:

- White SHX5AEM2N
- Black SHX5AEM4N
- Stainless Steel
- Black SHX5AEM6N

A 3rd rack provides 30% more loading space¹ for your utensils, giving the other racks more space for dishes.

Features & Benefits

With Bosch PrecisionWash[®], just scrape and load. No pre-rinsing required for a beautiful clean.

46 dBA: Quietest dishwasher brand in North America.²

RackMatic[®] adjusts the upper rack to 9 different positions, allowing for taller items like stemware or leaving room for pots and pans below.

Home Connect[®] lets you monitor and control your appliance remotely, via the Home Connect[®] app.

24/7 Overflow Protection System[®] helps prevent water leaks, even when your dishwasher is off.

General Properties	
Number of wash cycles	5 + 3 additional in Home Connect [®]
Number of options	3 + 4 additional in Home Connect [®]
dBA	46
Wash system	PrecisionWash [®]
Drying system	PureDry [®]
Third rack	Standard 3rd rack
Rack adjustability	RackMatic [®]
Tub material	Stainless steel/polypropylene
Control type	Touch
Concealed water heating element	Yes
Leak protection system	24/7 Overflow Protection
NSF [®] -certified ³ sanitize option	Yes
Water softener	No
Five-level wash	Yes
Child Lock button suspension	No
Home Connect [®] (Wi-Fi enabled)	Yes
Anti-Fingerprint Finish	Yes
Special features	InfoLight [®]
Efficiency	
Water usage per cycle	3.5 gal
Total annual energy consumption	269 kWh
Capacity	
Number of place settings	15

Home Connect



¹Compared to Bosch dishwasher with two racks.
²Based on an average of sound ratings of 24" Full Size Stainless Steel Tub dishwashers contained in major brands US & Canadian websites. Major brands defined as TraQline Top 5 Market Share (US & Canada) December 2021.
³Certification to NSF/ANSI Standard 184 for residential dishwashers.

Technical Details	
Watts	1440 W
Current	12 Amps
Volts	120 V
Frequency	60 Hz
Power cord full length	67"
Power cord install length from edge of unit when facing the door	Left – 45" Right – 50"
Minimum water pressure	14 lb/sin
Length outlet hose	90 1/2"
Dimensions & Weight	
Overall appliance dimensions (HxWxD)	33 7/8" x 23 9/16" x 22 9/16"
Required cutout size (HxWxD)	33 7/8" x 24" x 24"
Adjustable feet	Yes
Net weight	67 lbs
Accessories—Optional	
Supply Hose Kit with Elbow	SMZSH1ABUC
Junction Box	SMZPCJB1UC
Dishwasher Drain Hose Extension	SGZ1010UC
Dishwasher Accessory Kit	SMZ5000
DoubleFlex Silverware Basket	SMZ4000UC
Edge Protector + Power Cord Clip Install Kit	SMZEPCC1UC

Accessories: To purchase Bosch accessories, cleaners & parts please visit www.bosch-home.com/us/store or call 1-800-944-2904 (Mon to Fri 5 am to 6 pm PST, Sat 6 am to 3 pm PST).
Notes: All height, width and depth dimensions are shown in inches. BSH reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cutout.
Warranties: Please see Use & Care manual or Bosch website for statement of limited warranty.
For more information on our entire line of products, go to www.bosch-home.com/us or call 1-800-944-2904
© BSH Home Appliances Corporation. All rights reserved. Bosch is a registered trademark of Robert Bosch GmbH.



Initial
DC

24" Bar Handle Dishwasher

100 Series Premium – Stainless Steel SHX5AEM5N



Installation Details

Note: Plumbing installations will vary - refer to local codes. Drain hose included is 90 1/2" (230 cm) and can be extended to a maximum of 168 1/2" (428 cm).

Always use the approved drain hose extension kit (SGZ1010UC).

Ensure a portion of the drain hose is raised between min. 33" (84 cm) and max. 43" (110 cm) above the cabinet floor.

Accessories: To purchase Bosch accessories, cleaners & parts please visit www.bosch-home.com/us/store or call 1-800-944-2904 (Mon to Fri 5 am to 6 pm PST, Sat 6 am to 3 pm PST).

Notes: All height, width and depth dimensions are shown in inches. BSH reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cutout.

Warranties: Please see Use & Care manual or Bosch website for statement of limited warranty.

For more information on our entire line of products, go to www.bosch-home.com/us or call 1-800-944-2904

© BSH Home Appliances Corporation. All rights reserved. Bosch is a registered trademark of Robert Bosch GmbH.

Initial
DC

HOME APPLIANCES


LG LAUNDRY



WM5500HVA

5.2 cu. ft. Capacity Smart Front Load Energy Star Washer with TurboWash® 360° and AI DD® Built-In Intelligence

- 5.2 cu. ft. Ultra Large Capacity
- Digital Dial Control with LCD Display & Touch Button Control Panel
- TurboWash® 360° Technology
- AI DD®: AI Fabric and Weight Sensors with Smart Pairing
- LG ThinQ® Technology with ThinQ Care
- Allergiene® Cycle
- Cold Wash Technology
- NeveRust® Stainless Steel Drum
- ENERGY STAR® Certified & ENERGY STAR Most Efficient

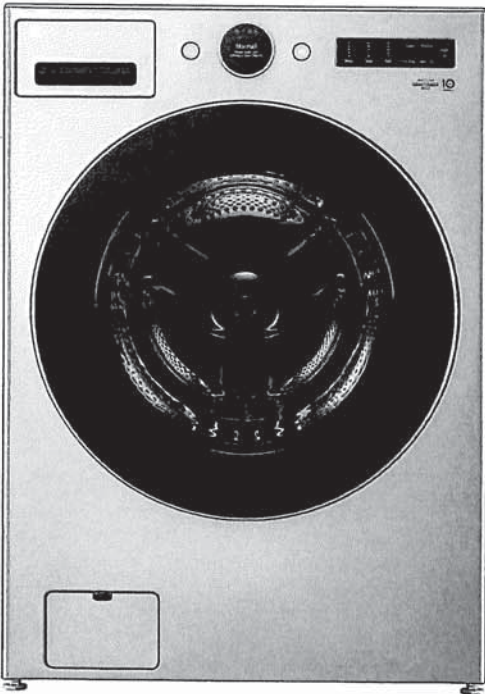

AVAILABLE COLOURS



GRAPHITE STEEL



Proactive Smart Alerts to Keep Your Appliances Running Smoothly

ThinQ Care

- Preventative Alerts help you stay a step ahead of potential issues to find proactive solutions before problems arise.
- Avoid preventable repairs and service calls with real-time diagnostics for a hassle-free experience.
- Integrated within LG's ThinQ app—a smart home hub for managing your smart devices and appliances.

SUMMARY

Type	Front Load Dryer
Capacity (cu. ft.)	5.2 cu. ft.
Matching Electric Dryer	DLEX3500V
Matching Gas Dryer	DLGX5501V
Color	Graphite Steel (V)
APPEARANCE	
LCD Display	Yes
Touch Buttons	Yes
Dial-A-Cycle®	Yes
ENERGY	
ENERGY STAR® Most Efficient	Yes
ENERGY STAR® Certified	Yes
CEE Tier	Tier2
IMEF	2.92
IWF	3.0
DRYER PROGRAMS	
No. of Programs	25
Programs (Sensor Dry)	Normal, AI Wash, Bedding, Delicates, Towels, Quick Wash, Heavy Duty, Allergiene®, Perm. Press, Tub Clean, Bright Whites™, Sanitary, Rinse+Spin, Spin Only, Hand/Wool, Active Wear, Swimwear, Kids Wear, Jeans, Dresses, Color Care, Sweat Stains, Small Load, Large Load, X Large Load
No. of Options	15
Options	TurboWash®, Steam, Fresh Care, Pre-wash, Remote Start, Delay Wash, Wi-Fi, Add Item, Extra Rinse, Control Lock, Drum Light, Cold Wash, Signal, Cycle List Edit, Cycle Optimization
WASH DETAILS	
No. of Wash/Rinse Temps	5
Wash/Rinse Temps	Ex. Hot, Hot, Warm, Cold, Tap Cold

No. of Spin Speeds	5
Spin Speeds	Ex. High, High, Medium, Low, No Spin
Max RPM	1300
Water Levels	Load Sensing
No. of Soil Levels	5
FABRIC CARE FEATURES	
AI DD®	Yes
TurboWash® 360° Technology	Yes
Steam Technology	Yes
Allergiene® Cycle	Yes
Sanitary Cycle	Yes
Cold Wash Option	Yes
CONVENIENCE FEATURES	
Vibration Sensing (Cabinet Vibration Sensor)	Yes
TrueBalance® Anti-Vibration System	Yes
4 Tray Dispenser	Prewash, Main Wash (with liquid detergent cup), Bleach, FabricSoftener
End of Cycle Signal	Yes
LoadSense	Yes
Control Lock	Yes
Auto Suds Removal	Yes
Leveling Legs	4 Adjustable Legs
Drum Light	Yes
ThinQ® TECHNOLOGY	
Smart Diagnosis	Yes
Wi-Fi	Yes
Energy Monitoring	Yes
Tub Clean Coach	Yes
MOTOR AND AGITATOR	
Motor Type	Inverter Direct Drive Motor
Axis	Horizontal


MATERIALS AND FINISHES	
NeveRust® Stainless Steel Drum	Yes
Cabinet	Painted Steel (One unit)
Control Panel	Painted Steel
Top Plate	Painted Steel
Door / Rim	Glass / STS Silver
Door Cover	Tempered Glass Door
All Available Colors	Graphite Steel (V)
CERTIFICATION	
Asthma Canada	Yes
POWER SOURCE	
Ratings	UL Listed
Electrical Requirements	120V, 10 Amps
Type	Electric
OPTIONS/ACCESSORIES	
Pedestal	WDP6V
Pedestal (WxHxD)	27" x 13 5/8" x 25 3/8" (43 7/8" D with door open)
LG Sidekick™ Pedestal Washer	WD300CV
LG Sidekick™ Pedestal Washer (WxHxD)	27" x 14 1/8" x 30 3/4" (50 1/2 with drawer open)
Stacking Kit	KSTK4
DIMENSIONS	
Product (WxHxD)	27" x 39" x 30 1/4"
Depth with Door Open	55"
Carton (WxHxD)	29 1/2" x 42 1/8" x 31 1/2"
Weight (Product/Carton)	200.8 / 214.4 lbs.
LIMITED WARRANTY	
Parts & Labor	1 Year
Drum	3 Years
Direct Drive Motor	10 Years
UPC CODES	
WM5500HVA (Graphite Steel)	195174052976

WBLOT 31
WASHER DRYER SPECS
WM 5500 HVA

8 PRODUCT OVERVIEW


Accessories

Included Accessories

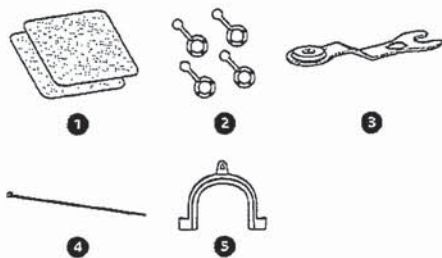

- 1 Non-skid Pads
- 2 Hole Caps
- 3 Wrench
- 4 Tie Strap
- 5 Elbow Bracket (for securing drain hose)

Optional Accessories (sold separately)

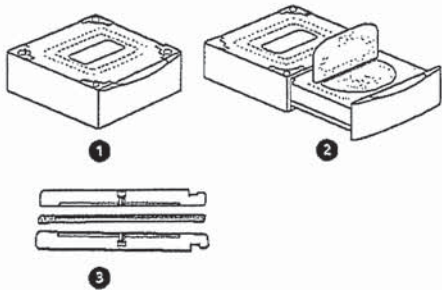

- 1 Pedestal†
 - 2 Pedestal Washer†
 - 3 Stacking Kit
- † Check the width of the pedestal before purchasing to make sure that it matches the width of your appliance (27" (70 cm) or 29" (74 cm)).

Required Accessories (sold separately)



- 1 Hot and Cold Water Hoses

Product Specifications

Model	WM5500H*A	WM6500H*A
Electrical Requirements	120 V~, 60 Hz	
Min. / Max. Water Pressure	20 psi - 120 psi (138 kPa - 827 kPa)	
Dimensions (Width X Height X Depth)	27" X 39" X 30 1/4" (70 cm X 99 cm X 77 cm)	27" X 39" X 33 1/8" (70 cm X 99 cm X 84 cm)
Maximum Depth with Door Open	55" (139.6 cm)	57 3/4" (146.6 cm)
Net Weight	200.8 lb (91.1 kg)	202.6 lb (91.9 kg)
Max. Spin Speed	1300 RPM	

60 of 76
WASHER DRYER SPECS
WED


8 PRODUCT OVERVIEW

PRODUCT OVERVIEW

Product Features


The images in this guide may be different from the actual components and accessories, which are subject to change by the manufacturer without prior notice for product improvement purposes.

Front View

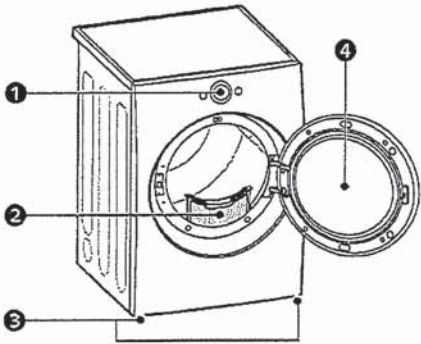

- 1 Control Panel
- 2 Lint filters
- 3 Leveling feet
- 4 Reversible door

Rear View

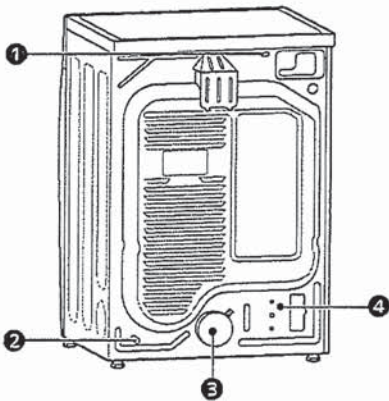

- 1 Power Cord
- 2 Gas Connection (for Gas Models)
- 3 Exhaust Duct Outlet
- 4 Water Inlet Hose Connection (for Steam Models)

HOME APPLIANCES



LG LAUNDRY

DLEX5500_ / DLGX5501_

7.4 cu. ft. Capacity Energy Star Smart Front Load Dryer with
AI Sensor Dry & TurboSteam®

- 7.4 cu. ft. Ultra Large Capacity
- Digital Dial Control with LCD Display & Touch Button Control Panel
- AI Sensor Dry with Smart Pairing
- TurboSteam®, SteamFresh®, and SteamSanitary® Technology
- Wrinkle Care Option
- LG ThinQ® Technology with ThinQ Care
- FlowSense® Duct Clogging Indicator
- Tempered Glass Door (Reversible)
- NeveRust® Stainless Steel Drum
- ENERGY STAR® Certified

AVAILABLE COLORS

- GRAPHITE STEEL
- WHITE



Proactive Smart Alerts to Keep
Your Appliances Running Smoothly

- Preventative Alerts help you stay a step ahead of potential issues to find proactive solutions before problems arise.
- Avoid preventable repairs and service calls with real-time diagnostics for a hassle-free experience.
- Integrated within LG's ThinQ app—a smart home hub for managing your smart devices and appliances.

ThinQ Care

SUMMARY

Type	Front Load Dryer
Vent Type	Vented
Dryer Type	Elec: DLEX5500V / DLEX5500W Gas: DLGX5501V/ DLGX5501W
Capacity	7.4 cu. ft.
Matching Washer	WM5500HVA / WM5500HWA
Sensor Dry	Yes
Steam	Yes
Color	Graphite Steel (V), White (W)
APPEARANCE	
LCD Display	Yes
Touch Buttons	Yes
Dial-A-Cycle®	Yes
DRYER PROGRAMS	
No. of Programs	23
Programs (Sensor Dry)	Normal, AI Dry, Bedding, Delicates, Towels, Quick Dry, Timed Dry, Power Dry, Perm. Press, SteamFresh™, Heavy Duty, Air Dry, Steam Sanitary™, Super Dry, Active Wear, Jeans, Blanket Refresh, Low Temp Dry, Overnight Dry, Easy Ironing, Small Load, Large Load Dry, X Large Load Dry
No. of Options	11
Options	Cycle Optimization, Damp Dry Signal, Wrinkle Care, Control Lock, Wi-Fi, Energy Saver, TurboSteam®, Reduce Static, Remote Start, Drum Light, Signal, Cycle Edit List
Temperature Settings	High, Med. High, Medium, Low, Ultra Low
Drying Levels	Very Dry, More Dry, Normal Dry, Less Dry, Damp Dry
Manual Dry Times	10 min – 100 min (10 min increments)

FABRIC CARE FEATURES

AI Sensor Dry	Yes
Sensor Dry	Yes
Precise Temperature Control with Variable Heater	Yes
Steam	TurboSteam®
CONVENIENCE FEATURES	
3 Minute Installation Check	Yes
End of Cycle Signal	Yes
Drum Light (Door Open)	Yes
Reversible Door	Yes
FlowSense® Duct Clogging Indicator	Yes
Wrinkle Care Option	Yes
Control Lock	Yes
Venting Option	Electric: 4 Way Venting / Gas: 3 Way Venting
4 Adjustable Legs	Yes
Remaining Time Display / Status Indicator(s)	Yes
ThinQ® TECHNOLOGY	
Smart Diagnosis	Yes
Wi-Fi	Yes
ThinQ Care	Yes
Remote Start and Cycle Monitor	Yes
Energy Monitoring	Yes
ENERGY	
ENERGY STAR® Certified	Yes
CEF	Electric: 3.94 / Gas: 3.49
MATERIALS AND FINISHES	
NeveRust® Stainless Steel Drum	Yes
Cabinet	Painted Steel
Door	Tempered Glass Door
All Available Colors	Graphite Steel (V), White (W)

POWER SOURCE

Ratings	CSA Listed
Electrical Requirements	Elec: 120/240V, 60Hz, 26A Gas: 120V, 60Hz, 11.5A
Type	Electric, Gas
BTU Rating	Gas: 20,000
OPTIONS	
LP Conversion Kit	383EEL3002D
Side Venting Kit	3911EZ9131X
Drying Rack	3750EL1001A
Pedestal	WDP6V, WDP6W
Pedestal (WxHxD)	27" x 13 5/8" x 28" (43 7/8" D with door open)
DIMENSIONS	
Product (WxHxD)	27" x 39" x 29 3/4"
Depth with Door Open	51 3/8"
Carton (WxHxD)	28 7/8" x 46 1/2" x 31 3/8"
Product Weight (lbs.)	Electric: 124.3 lbs. / Gas: 136.0 lbs.
Carton Weight (lbs.)	Electric: 136.5 lbs. / Gas: 146.6 lbs.
LIMITED WARRANTY	
Parts & Labor	1 Year
Drum	3 Years
UPC CODES	
DLEX5500V (Graphite Steel)	195174048580
DLGX5501V (Graphite Steel)	195174048894
DLEX5500W (White)	195174048603
DLGX5501W (White)	195174048900

WB LOT 31
WASHER DRYER SPECS
DLEX 5500 V

Product Specifications

Model		DL*X670** / DL*X650** / DL*X550**
Electrical Requirements		Please refer to the rating label for detailed information.
Min. / Max. Water Pressure		20 - 120 psi (138 - 827 kPa)
Dimensions (Width X Depth X Height)		27" X 29 3/4" X 39" (68.6 cm X 75.6 cm X 98.9 cm)
Maximum Depth with Door Open		51 3/8" (130.5 cm)
Net Weight		Gas : 136.03 lb (61.7 kg) - 139.34 lb (63.2 kg) Electric : 121.9 lb (55.3 kg) - 125.3 lb (56.8 kg)
Capacity	Steam Cycle	7.4 cu.ft. (8 lb / 3.6 kg)
	Normal Cycle	7.4 cu.ft. (22.5 lb / 10.2 kg)
Gas Requirements		NG: 4 - 10.5-inch (10.2 - 26.7 cm) WC LP: 8 - 13-inch (20.4 - 33.1 cm) WC

ENGLISH




Accessories

Included Accessories



1 Y Connector

Optional Accessories (sold separately)



- 1 Water Inlet Hose (for steam)
- 2 Drying Rack
- 3 Pedestal
- 4 Stacking kit

' SPACES '
FINISHED LOWER LEVEL



Phone: 416-742-1888 | Fax: 416-742-6888
www.boscocanada.com | info@boscocanada.com
5171 Steeles Avenue West | Toronto, Ontario M9L 1R5

Builder Series - Model:207023
Undermount

Specifications:

- 304 Stainless Steel
- 18 Gauge
- Template
- Strainer
- Undermount Clips
- 6 1/2" Deep

Outside:
13" x 13" x 6 1/2"
Inside:
11 3/8" x 11 3/8" x 6 1/2"

Minimum cabinet size 15"


Certification/Warranty

- ASME A 112.19.3
- CSA B45.4
- Limited Lifetime Warranty

Optional Accessories



Model: G207023
Grid

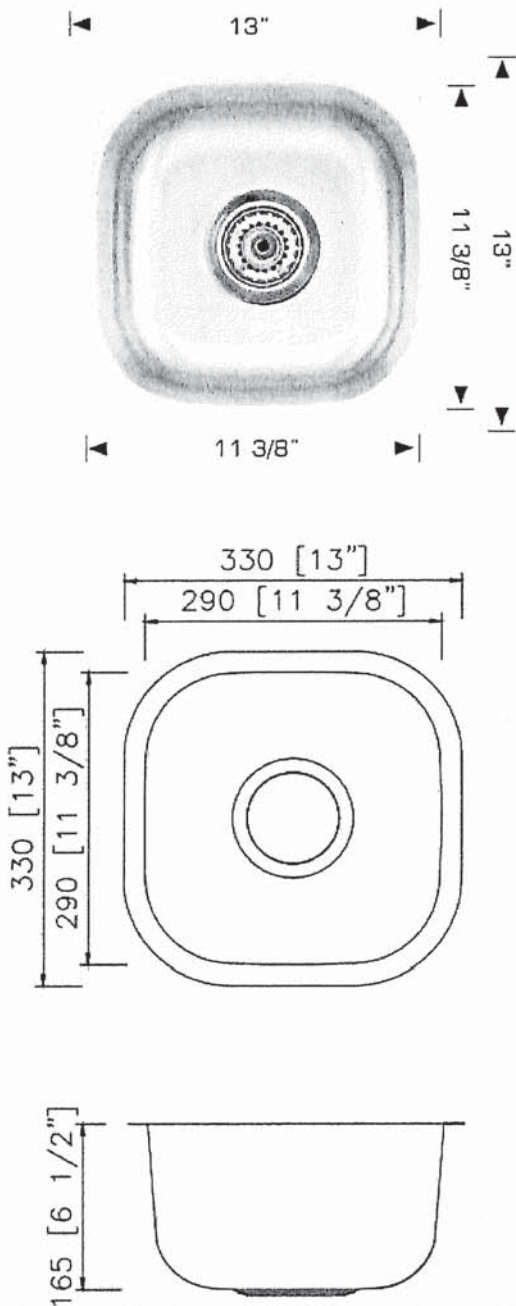

Bosco Canada Inc. is known around the world for producing high quality kitchen sinks that incorporate modern design and functional superiority in every piece they manufacture.

LOWER LEVEL WET BAR FAUCET

MOEN®

Specifications

FAUCET DESCRIPTION

- Reflex™ pulldown system offers smooth operation, easy movement and secure docking
- Power Clean™ spray technology
- Metal construction with various finishes identified by suffix
- Quick connect installation
- Pulldown spray with 68" braided hose
- Flexible supply lines with 3/8" compression fittings
- High arc spout provides the perfect height and reach for prep sinks while the pulldown feature provides maneuverability for food preparation tasks
- 360° rotating spout provides ability to install handle on either side
- Faucet designed for handle to be mounted on right side

OPERATION

- Lever style handle
- Temperature controlled by 100° arc of handle travel
- Operates with less than 5 lbs. of force
- Operates in stream or spray mode in the pullout or retracted position

FLOW

- Flow is limited to 1.5 gpm (5.7 L/min) max at 60 psi

CARTRIDGE

- 1255™ Duralast™ cartridge for Single-Handle Faucets


STANDARDS

- Third party certified to IAPMO Green, ASME A112.18.1/CSA B125.1 and all applicable requirements referenced therein including NSF 61/9G & 372
- Meets CalGreen and Georgia SB370 requirements
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- The backflow protection system in the device consists of two independently operating check valves, a primary and a secondary which prevent backflow

- ADA  for lever handle

WARRANTY


- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
 - 10 year limited warranty when used in a multifamily installation
 - 5 year limited warranty when used in a commercial installation
- Visit www.moen.com/support for complete details and limitations

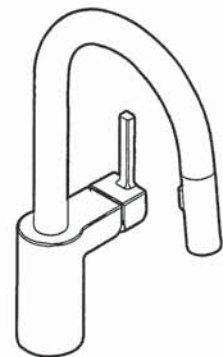

ALIGN™
Single Handle High Arc
Pulldown Prep/Bar Faucet

Models: 5965 series


NOTE: THIS FAUCET IS DESIGNED TO BE INSTALLED
THROUGH 1 HOLE, 1-1/2" (38mm) MIN. DIA.
(OPTIONAL 3-HOLE ESCUTCHEON 141002 AVAILABLE)

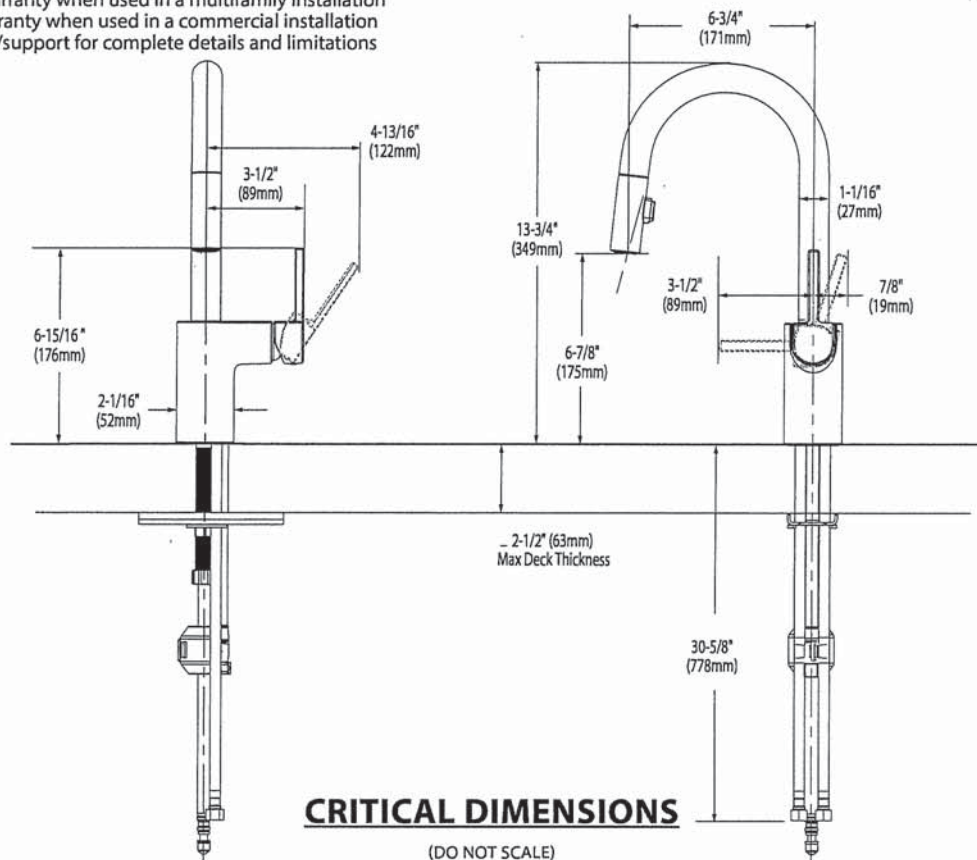

LOWER LEVEL WET BAR FRIDGE

CHANGED TO WHIRLPOOL

Frigidaire



Bottom Freezer Refrigerator

11.5 Cu. Ft. Bottom Freezer Refrigerator

FRBG1224AV

Available Colors : Brushed Steel

Version : 08/21

Refrigerator	
Crisper Color	Clear
Door Bin Color	Clear
Interior Lighting	LED
Shelf Material	Glass
Number of Fixed 2 Liter Door Bins	1
Number of Other Door Bins	2
Total Number of Door Bins	3
Number of Adjustable Shelves	2
Number of Fixed Shelves	1
Number of Crispers	1

Electrical Specifications	
Amps @ 120 Volts	1.1 Amps
General Specifications	
Annual Energy	397 kWh
Condenser Type	Air-cooled
Leveling Legs	Yes
Prop 65 Label	Yes
Refrigerant Type	R-600A
Warranty - Labor	1 Year
Warranty - Parts	1 Year

Freezer	
Automatic Defrost	Yes
Baskets / Bins Color	Clear
Drawer Color	Clear
Number of Baskets / Bins	3
Number of Drawers	3

Performance Certifications and Approvals	
ENERGY STAR Certified	Yes

Controls	
Control Location	Top Center of Fresh Food

Safety Certifications and Approvals	
CSA Listed	Yes

Exterior	
Door Finish	Smooth
Door Stops	Yes

REFRIGERATOR DOOR SWING
LEFT HAND DOOR OPENING
- HINGES ON LEFT
- HANDLE ON RIGHT

Dimensions and Volume	
Height With Hinge	72 8/10"
Width	23 6/10"
Width of Cabinet	23 42/100"
Depth of Cabinet	23 23/100"
Depth With Door	27 2/10"
Freezer Capacity	3.72 Cu. Ft.
Fresh Food Capacity	7.79 Cu. Ft.
Total Capacity	11.51 Cu. Ft.

REFRIGERATOR DOOR SWING
RIGHT HAND DOOR OPENING
- HINGES ON RIGHT
- HANDLE ON LEFT

GARAGE LEFT


CHANGED TO WHIRLPOOL

Frigidaire


11.5 Cu. Ft. Bottom Freezer Refrigerator

FRBG1224AV

Version : 08/21

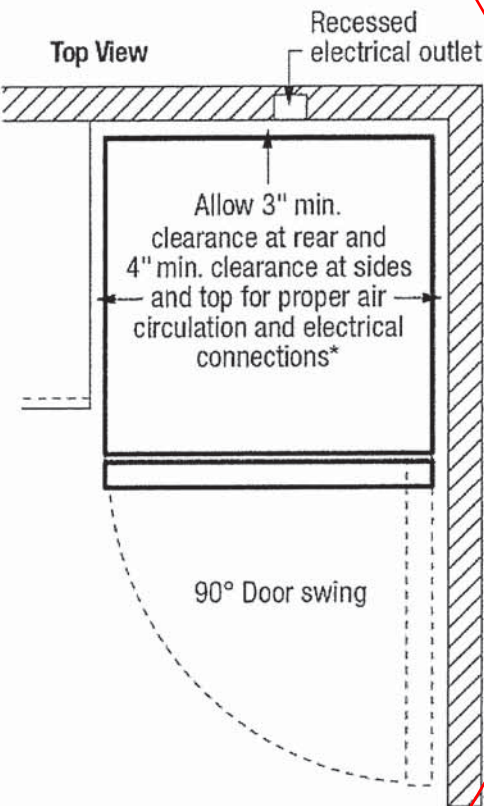

* When installing refrigerator adjacent to wall, cabinet or other appliance that extends beyond front edge of unit, 20" minimum clearance recommended to allow for optimum 140° door swing.

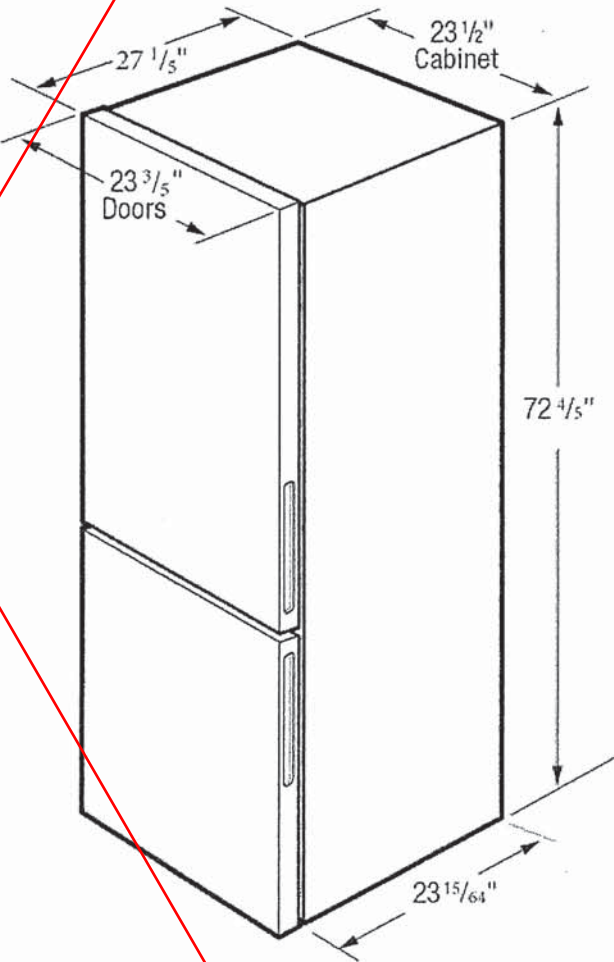

Note: For planning purposes only. Always consult local and national electric, gas and plumbing codes.
Refer to product installation manual for detailed installation instructions and clearances. frigidaire.com frigidaire.ca
Specifications subject to change. Always refer to technical information available on file. frigidaire.com frigidaire.ca

USA: 10800 David Taylor Drive, Charlotte, NC 28262 • 1-800-FRIGIDAIRE frigidaire.com
CANADA: 5855 Teri Fox Way, Mississauga, ON L5V 9E4 • 1-800-263-8357 frigidaire.ca



WRB533CZJZ

Available Finishes/Colours

- WRB533CZJB
Black
- WRB533CZJW
White
- WRB533CZJZ
Fingerprint-Resistant
Stainless Finish



Top Features

Flexi-Slide™ bins
Flexi-Slide™ bins

TotalCoverage cooling
TotalCoverage cooling

Auto hibernate mode
Auto hibernate mode

Gallon door bin
Gallon door bin

Dimensions	
Depth	28 3/8
Height	71
Width	24 3/8

Configuration and Overview	
Advance Foam Insulation	99.9% lower Global Warming Potential and Better Energy Performance
Counter Depth	Yes
Number of Doors	2


Details	
Advance Foam Insulation	99.9% lower Global Warming Potential and Better Energy Performance

Details	
Cooling Type	Single Evaporator
Counter Depth	Yes

Controls	
Control Type	Electronic
Control Location	Exterior
Air Filter Indicator/Reset	No
Automatic Defrost	Yes
Verrouillage des commandes	Yes
Door Ajar/Open Alarm	No
LCD Touch Screen	No

REFRIGERATOR DOOR SWING
RIGHT HAND DOOR OPENING
- HINGES ON RIGHT
- HANDLE ON LEFT


Models	WRB533CZJB, WRB533CZJW, WRB533CZJZ, WRB543CMJV, WRB543CMJZ
--------	--

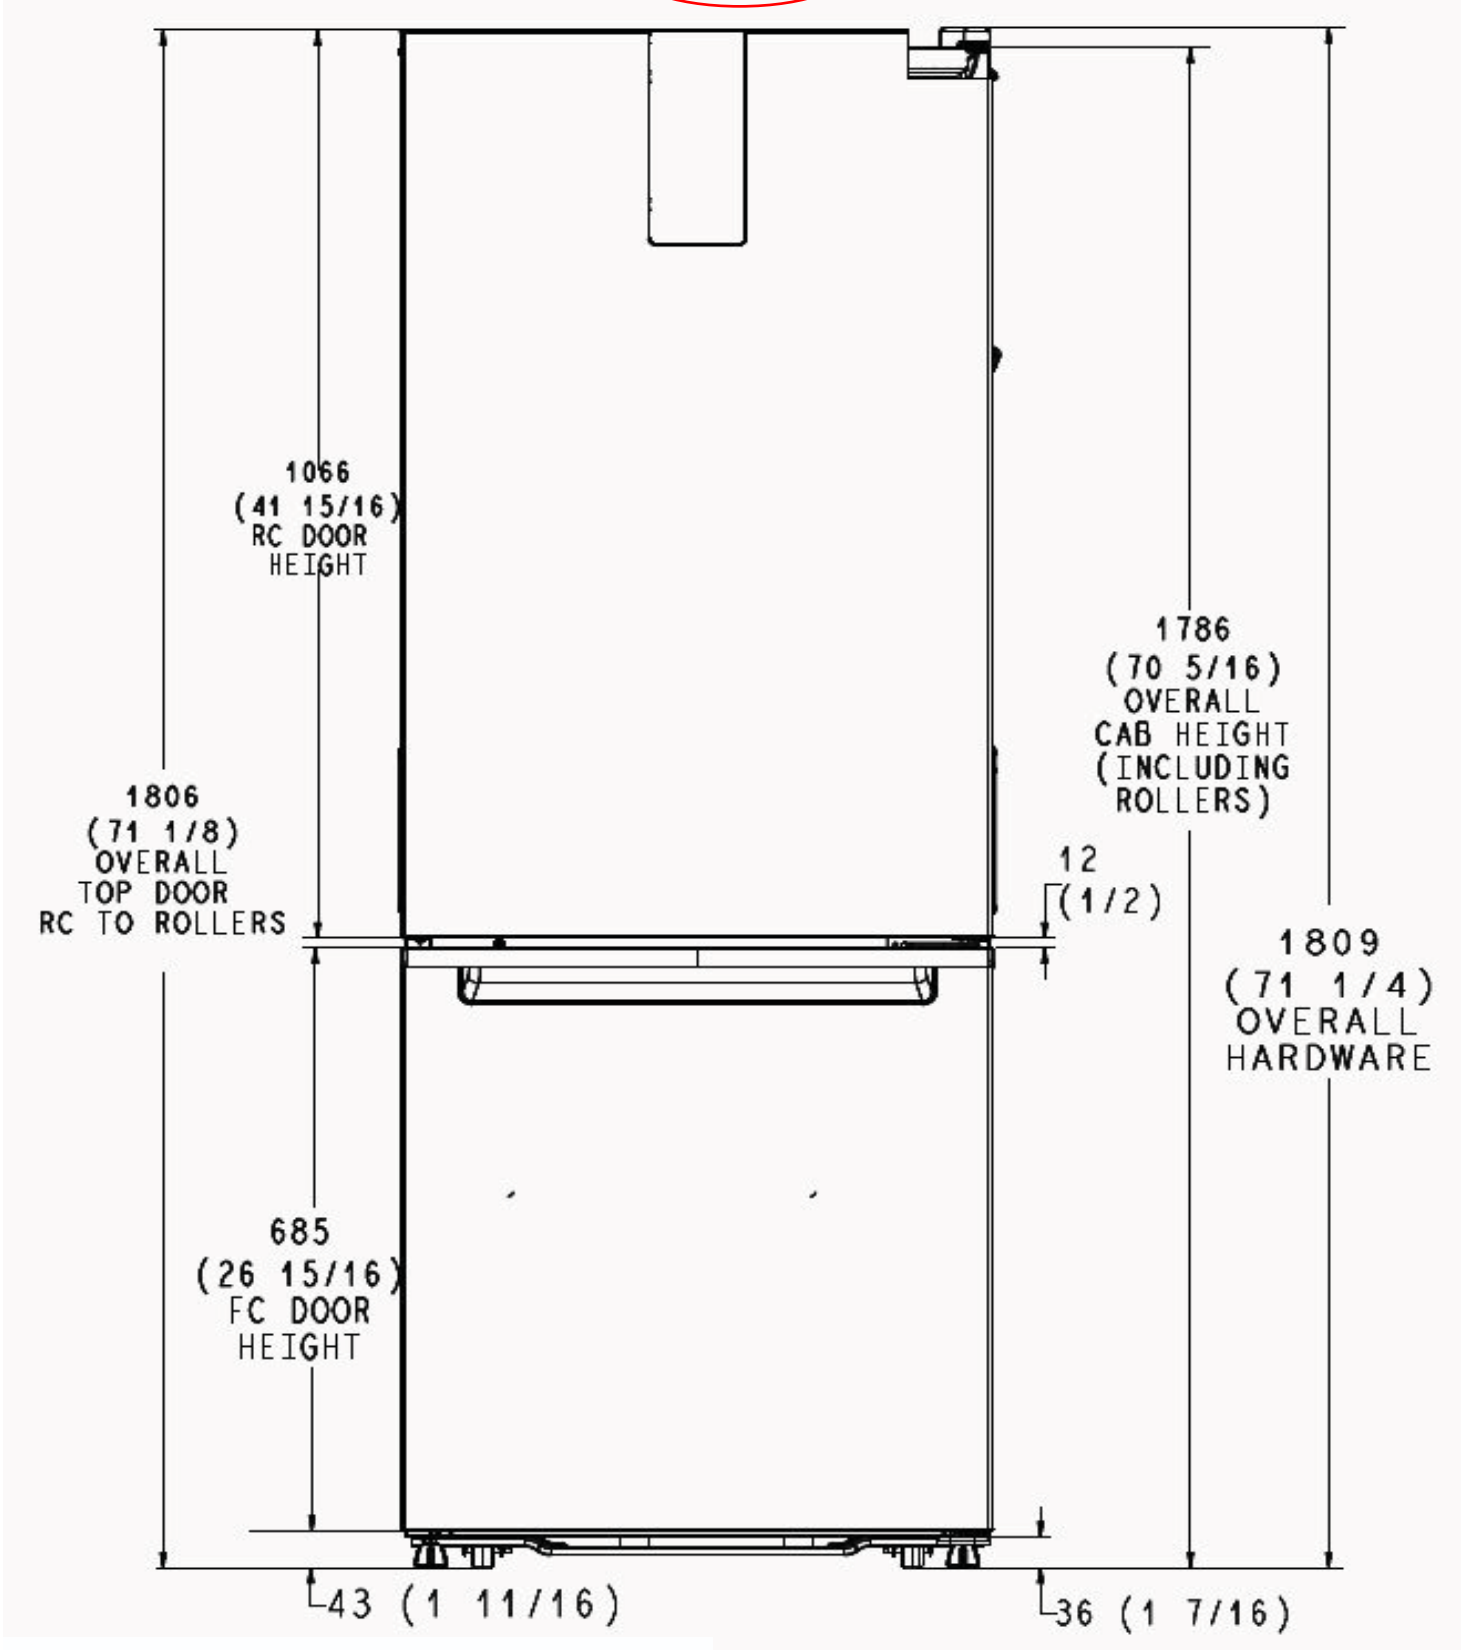

NOTE: MILLIMETER DIMENSIONS ARE ACTUAL.
FRACTIONAL INCH DIMENSIONS ARE DERIVED FROM
ACTUAL BY ROUNDING TO THE NEAREST 1/16 INCH.

Note: All the dimension are millimeters
(inches in) i.e. 610 mm (24 in)

PN W11440352

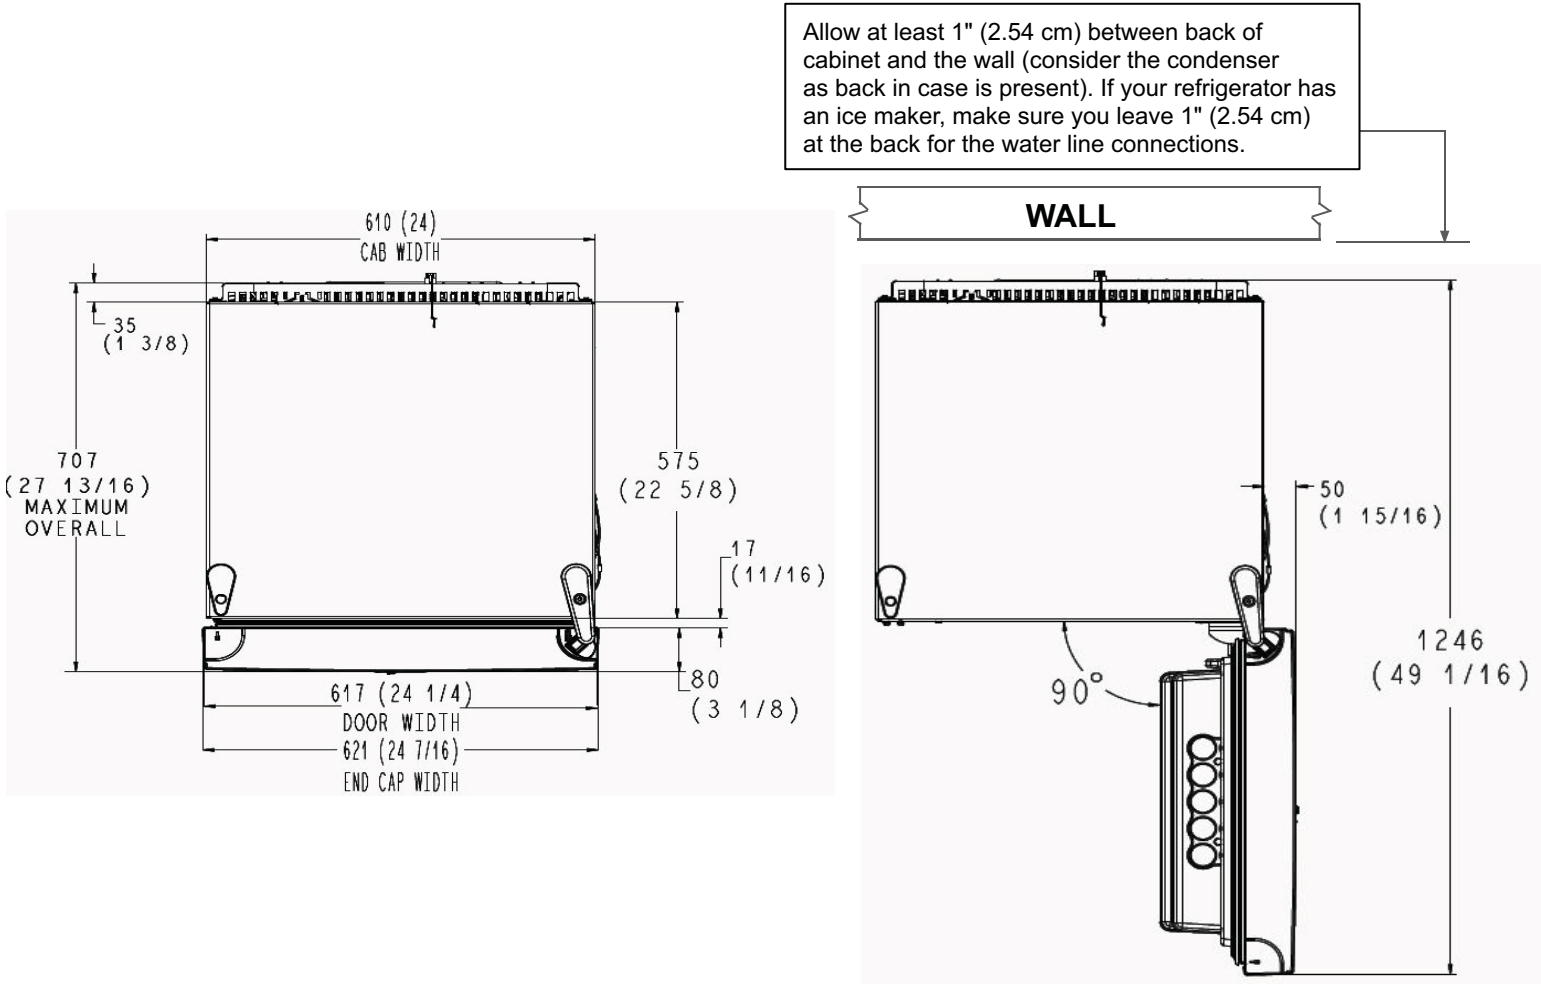

Note: All the dimension are millimeters (inches in) i.e. 610 mm (24 in)

LOCATION REQUIREMENTS




To ensure proper ventilation for your refrigerator, it is recommended to allow a 1/2" (1.27 cm) space on each side. Allow 1½" (3.81 cm) of space between overhead cabinets and refrigerator top. Allow at least 1" (2.54 cm) between back of cabinet and the wall (consider the condenser as back in case is present). If your refrigerator has an ice maker, make sure you leave extra space at the back for the water line connections. If you are installing your refrigerator next to a fixed wall, leave 2 1/4 (5.7 cm) on the hinge side to allow the door to swing open. This space on the hinge side also allows for crisper removal when the door is fully swung open.


NOTE: This refrigerator is intended for use in a location where the temperature ranges from a minimum of 55°F (13°C) to a maximum of 110°F (43°C). The preferred room temperature range for optimum performance, which reduces electricity usage and provides superior cooling, is between 60°F (15°C) and 90°F (32°C). It is recommended that you do not install the refrigerator near a heat source, such as an oven or radiator.

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

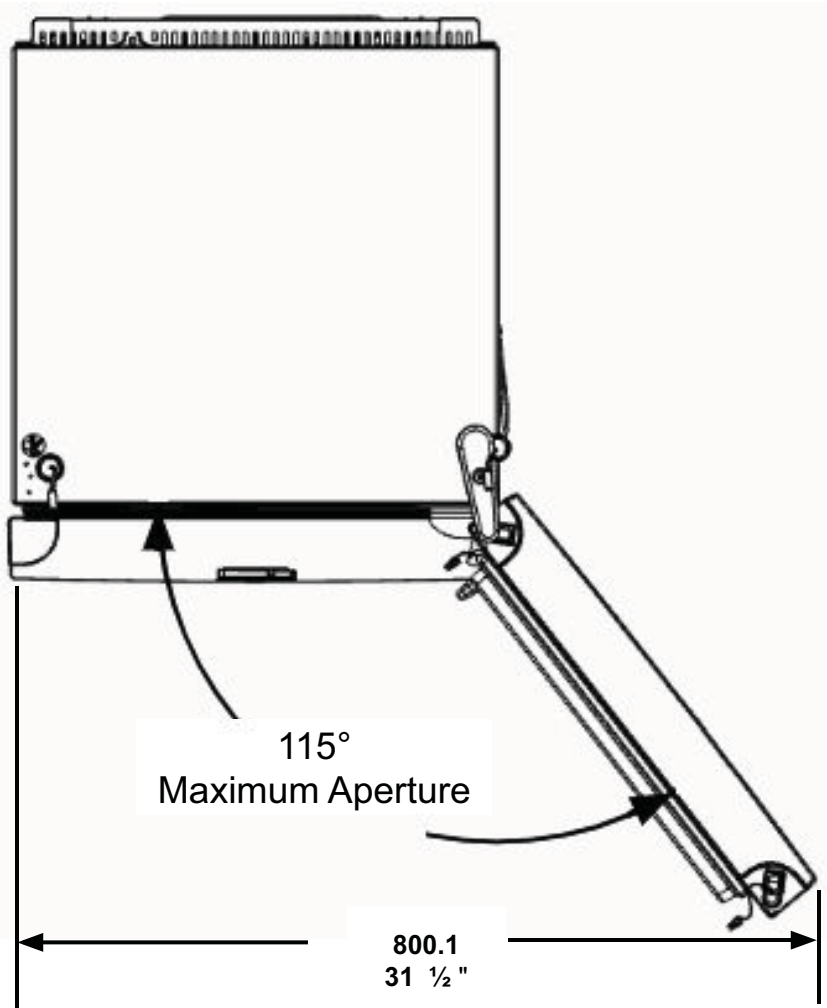

Water valve

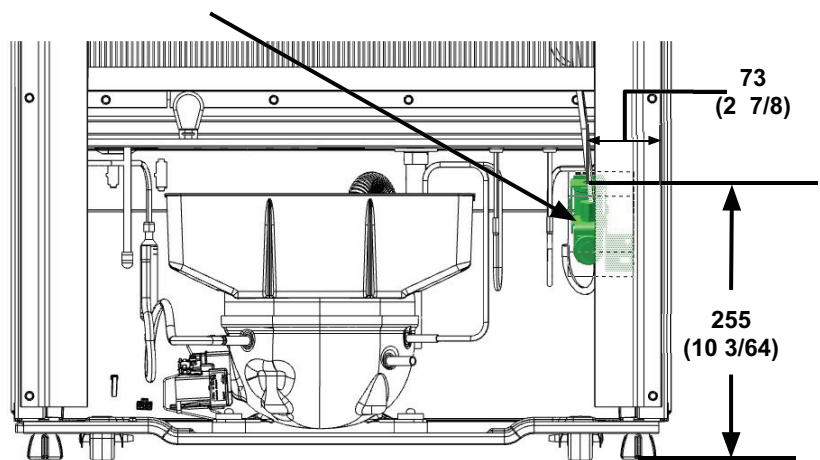

Electrical: A 115-volt, 60-Hz, AC-only, 15- or 20-amp fused, grounded electrical supply is required. It is recommended that a separate circuit serving only your refrigerator be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.

NOTE: Before performing any type of installation, cleaning, or removing a light bulb, turn the control (Thermostat, Refrigerator or Freezer Control depending on the model) to OFF and then disconnect the refrigerator from the electrical source. When you are finished, reconnect the refrigerator to the electrical source and reset the control (Thermostat, Refrigerator or Freezer Control depending on the model) to the desired setting. See "Using the Controls."

Water: A cold water supply with water pressure between 30 and 120 psi (207 and 827 kPa) is required to operate ice maker and water dispenser. If you have questions about your water pressure, call a licensed, qualified plumber.

IMPORTANT: The pressure of the water coming out of a reverse osmosis system going to the water inlet valve of the refrigerator needs to be between 30 and 120 psi (207 and 827 kPa). Reverse Osmosis Water Supply: If a reverse osmosis water filtration system is connected to your cold water supply, the water pressure to the reverse osmosis system needs to be a minimum of 40 to 60 psi (276 to 414 kPa)

LOWER LEVEL WET BAR

Whirlpool®

1.7 cu. ft. Over-the-Range Microwave Hood Combination
WMH31017H



Fingerprint Resistant Stainless Steel
WMH31017HZ

Capacity	
Total	1.7 cu. ft.
General Features & Properties	
2-Speed, 300 CFM Motor Class	
Add 30 Seconds Option	
Adjustable Cooktop Lighting	
Electrical Details	
Amps	16
Volts	120
Technical Details	
Microwave Type	Over-the-Range
CFMs	300
Lighting Type	Incandescent
Number of Speeds	2
Venting Type	Updraft
Dimensions	
Product Dimensions (H x W x D)	17-1/8" x 29-15/16" x 15-9/16"
Depth with Door Open 90°	39-3/8"
Cutout Dimensions (W x D)	30" x 12" minimum
Reference Material	

Also available in:

- WhiteWMH31017HW
- BlackWMH31017HB
- Stainless SteelWMH31017HS


Key Features & Benefits

- Microwave Presets**

Get just the right amount of heat and time, whether you're cooking or defrosting, with specific preset options.
- Electronic Touch Controls**

Navigate through cooking modes and options with controls that are as easy to use as they are to clean.
- Dishwasher-Safe Turntable Plate**

Clean up spills on the turntable by simply putting it in the dishwasher.

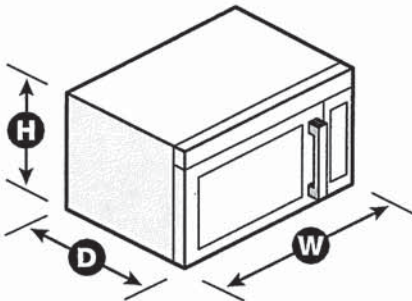

NOTE: Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

®/™ © 2020. All rights reserved. Printed in the U.S.A. D200104XXE. WMH31017HSpecSheetV01.

Whirlpool® MICROWAVE HOOD INSTALLATION INSTRUCTIONS


PRODUCT MODEL NUMBERS

WMH31017H

LOCATION REQUIREMENTS

Installation Dimensions


NOTE: The grounded 3 prong outlet must be inside the upper cabinet.
See the "Electrical Requirements" section.

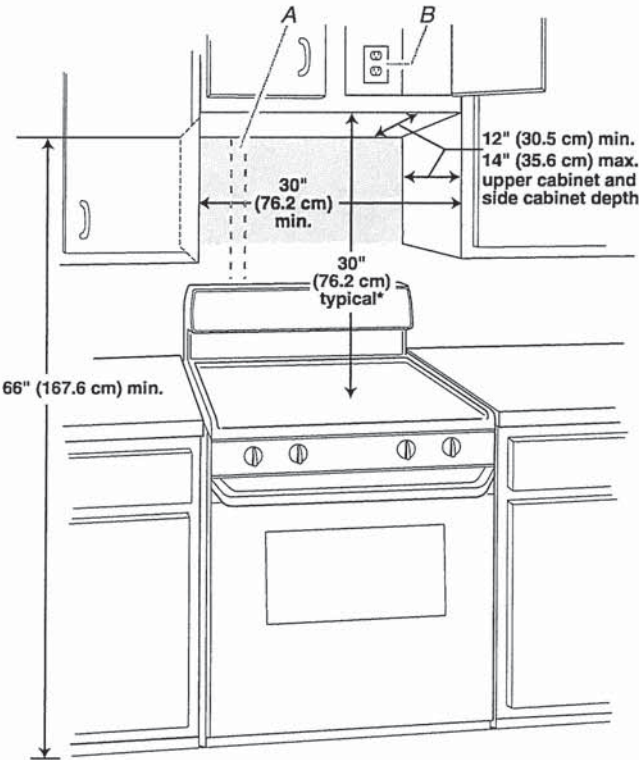

A. 2" x 4" wall stud
B. Grounded 3 prong outlet

*30" (76.2 cm) is typical for 66" (167.6 cm) installation height. Exact dimensions may vary depending on type of range/cooktop below.

PRODUCT DIMENSIONS

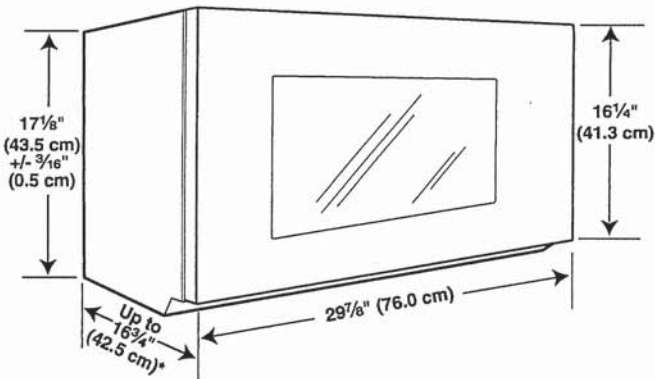

*Overall depth of product will vary slightly depending on door design.

PRODUCT DIMENSIONS

ELECTRICAL REQUIREMENTS

⚠ WARNING



Electrical Shock Hazard

- Plug into a grounded 3 prong outlet.
- Do not remove ground prong.
- Do not use an adapter.
- Do not use an extension cord.
- Failure to follow these instructions can result in death, fire, or electrical shock.

Observe all governing codes and ordinances.

Required:

- A 120-volt, 60 Hz, AC-only, 15- or 20-amp electrical supply with a fuse or circuit breaker

Recommended:

- A time-delay fuse or time-delay circuit breaker
- A separate circuit serving only this microwave oven

VENTING DESIGN SPECIFICATIONS

This section is intended for architectural designer and builder/ contractor reference only.

NOTES:

- Vent materials needed for installation are not provided with microwave hood combination.
- We do not recommend using a flexible metal vent.
- To avoid possible product damage, be sure to vent air outside, unless using recirculation installation. Do not vent exhaust air into concealed spaces, such as spaces within walls or ceilings, attics, crawl spaces, or garages.

For optimal venting installation, we recommend:


- Using roof or wall caps that have back draft dampers
- Using a rigid metal vent
- Using the most direct route by minimizing the length of the vent and number of elbows to provide efficient performance
- Using uniformly sized vents
- Using duct tape to seal all joints in the vent system
- Using caulking compound to seal exterior wall or roof opening around cap
- Not installing 2 elbows together for optimal hood performance

If venting through the wall, be sure that there is proper clearance within the wall for the damper to open fully.

If venting through the roof, and rectangular-to-round transition is used, be sure there are at least 3" (7.6 cm) of clearance between the top of the microwave oven and the transition piece. See "Rectangular-to-Round Transition" illustration.

Rectangular-to-Round Transition


NOTE: The minimum 3" (7.6 cm) clearance must exist between the top of the microwave oven and the rectangular to round transition piece so that the damper can open freely and fully.

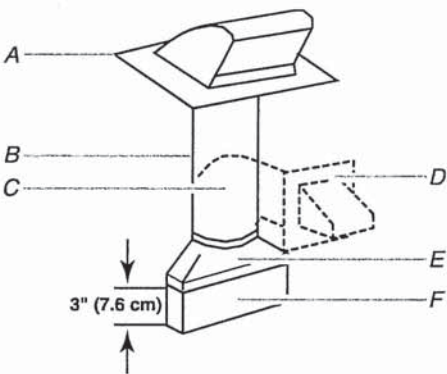


- A. Roof cap
- B. 6" (15.2 cm) min. diameter round vent
- C. Elbow (for wall venting only)
- D. Wall cap
- E. 3¼" x 10" to 6" (8.3 x 25.4 cm to 15.2 cm) rectangular to round transition piece
- F. Vent extension piece, at least 3" (7.6 cm) high

Recommended Standard Fittings

The following length equivalents are for use when figuring vent length. See the examples in "Recommended Vent Length."

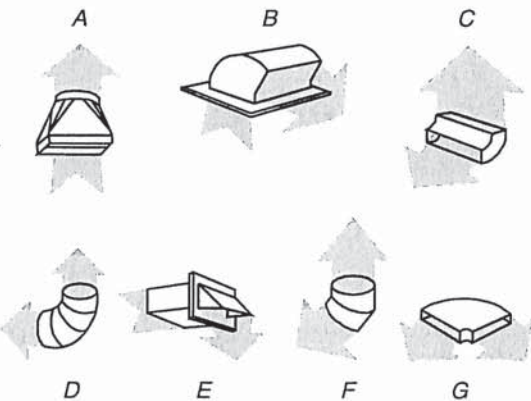

- A. Rectangular-to-round transition piece: 3¼" x 10" to 6" = 5 ft (8.3 x 25.4 cm to 15.2 cm = 1.5 m)
- B. Roof cap: 3¼" x 10" = 24 ft (8.3 x 25.4 cm = 7.3 m)
- C. 90° elbow: 3¼" x 10" = 25 ft (8.3 x 25.4 cm = 7.6 m)
- D. 90° elbow: 6" = 10 ft (15.2 cm = 3 m)
- E. Wall cap: 3¼" x 10" = 40 ft (8.3 x 25.4 cm = 12.2 m)
- F. 45° elbow: 6" = 5 ft (15.2 cm = 1.5 m)
- G. 90° flat elbow: 3¼" x 10" = 10 ft (8.3 x 25.4 cm = 3 m)

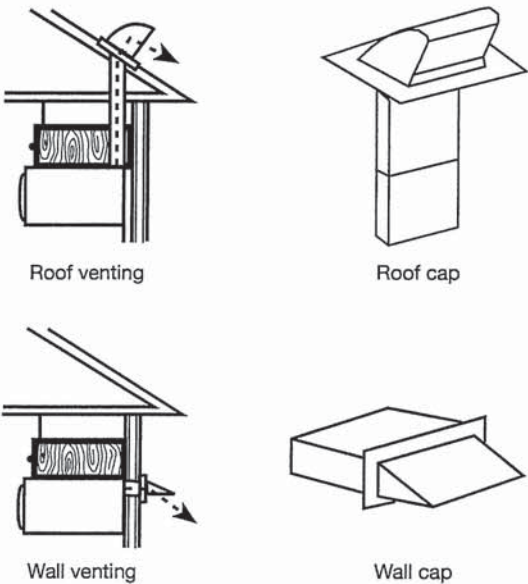

Recommended Vent Length


A 3¼" x 10" (8.3 x 25.4 cm) rectangular or 6" (15.2 cm) round vent should be used.

The total length of the vent system including straight vent, elbow(s), transitions, and wall or roof caps must not exceed the equivalent of 140 ft (42.7 m) for either type of vent. See the "Recommended Standard Fittings" section for equivalent lengths.

For best performance, use no more than three 90° elbows.


To calculate the length of the system you need, add the equivalent lengths of each vent piece used in the system. See the following examples:

3¼" x 10" (8.3 x 25.4 cm) vent system = 73 ft (22.2 m) total

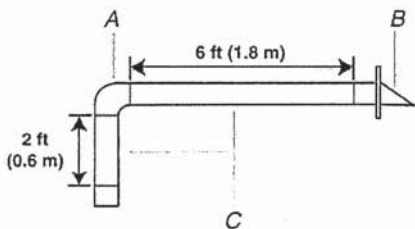

- A. One 3¼" x 10" (8.3 x 25.4 cm) 90° elbow = 25 ft (7.6 m)
- B. 1 wall cap = 40 ft (12.2 m)
- C. 2 ft (0.6 m) + 6 ft (1.8 m) straight = 8 ft (2.4 m)

6" (15.2 cm) vent system = 73 ft (22.2 m) total

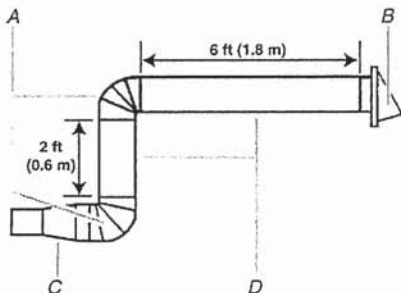

- A. Two 90° elbows = 20 ft (6.1 m)
- B. 1 wall cap = 40 ft (12.2 m)
- C. 1 rectangular-to-round transition piece = 5 ft (1.5 m)
- D. 2 ft (0.6 m) + 6 ft (1.8 m) straight = 8 ft (2.4 m)

If the existing vent is round, a rectangular-to-round transition piece must be used. In addition, a rectangular 3" (7.6 cm) extension vent between the damper assembly and rectangular-to-round transition piece must be installed to keep the damper from sticking.

LOWER LEVEL LAUNDRY CLOSET STACKING LAUNDRY PAIR

5.0 cu.ft I.E.C. Closet-Depth Front Load Washer with Intuitive Controls

Model: WFW560CHW

[Overview](#)
[Specifications](#)
[Reviews](#)
[You May Also Like](#)
[Help And Resources](#)
[Find In Store](#)








Key Features

- #1 in Customer Satisfaction in the J.D. Power 2020 Laundry Appliances Satisfaction Study
- 5.0 cu. ft. I.E.C. Capacity
- ENERGY STAR® Certified
- Intuitive Controls
- Sanitize Cycle with Oxi

Color

White



Specifications

Width:
6858.00, 27.0"
Centimeters, Inches

Depth:
8016.88, 31-9/16"
Centimeters, Inches

Dimensions

Capacity	4-3/10
Depth	8016.88 cm, 31-9/16 in
Gross Weight	97068688.00 kg, 214 lbs
Net Weight	92532768.00 kg, 204 lbs
Width	6858.00 cm, 27.0 in

Appearance

LCD Touch Screen	No
Window	Yes

Details

Advanced Vibration Control™	No
Dispense System	Detergent, Fabric Softener & Bleach
Eco Monitor/Efficiency Monitor	No
Hoses Included	4ft 4in Drain Hose Included
Internal Heater	No
Maximum Spin Speed	1160
Out Of Balance Sensing	Yes
Water Factor	3-1/5

Cycles and Options

Number Of Wash Cycles 35

Electrical

Power Cord Included	Yes
---------------------	-----

Controls

Automatic Temperature Controls	Yes
Control Location	Front
LCD Touch Screen	No

Compatibility

Works With	No
------------	----

Options

Number Of Washer Options	7
--------------------------	---

Features

Stackable	Yes
Water Faucet	No

Cycles

Number Of Wash Cycles	35
-----------------------	----





Exterior

Lid/Door Lock	Yes
Lid/Door Swing	Left

Modifiers

Delay Start	No
Number Of Rinse Options	2
Number Of Soil Levels	3
Number Of Spin Speeds	4
Number Of Wash/Rinse Temperatures	4
Pre Soak	Yes
Temperature Selections	Hot, Cold, Cool, Warm

LOWER LEVEL LAUNDRY CLOSET STACKING LAUNDRY PAIR

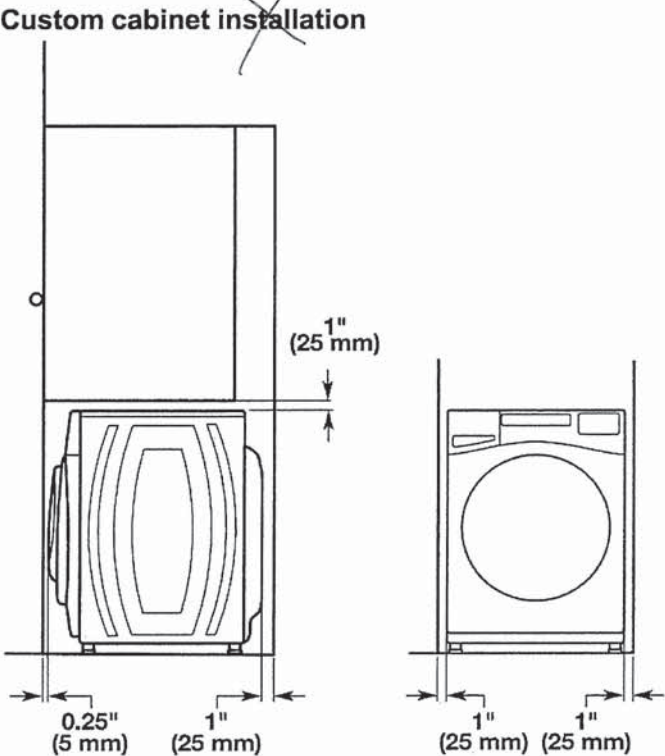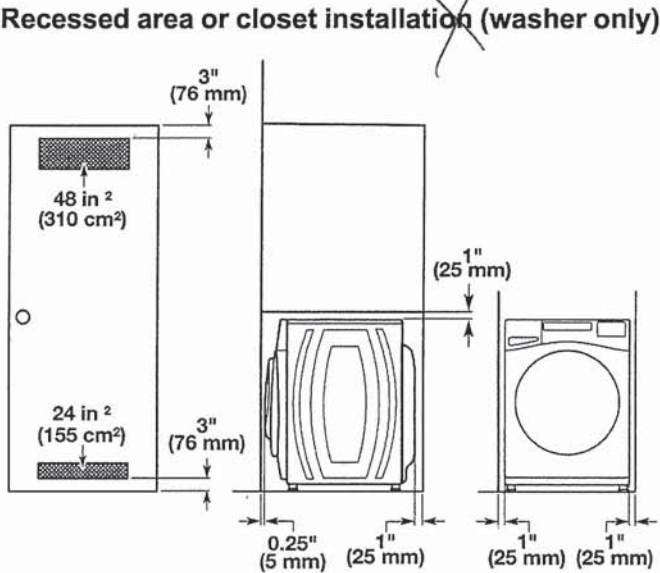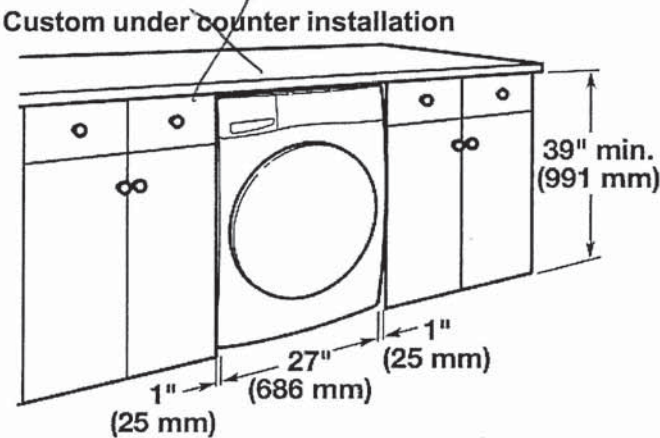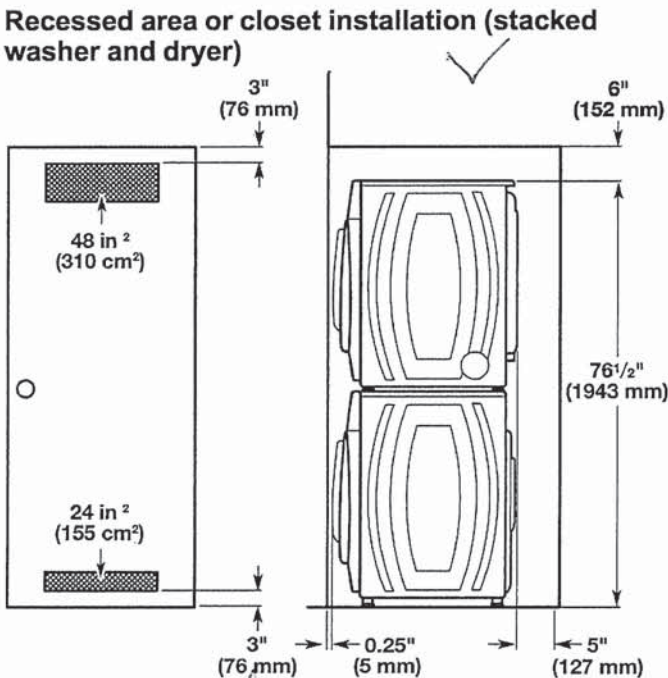


Drain System

It is the responsibility of the installer to install and secure the drain hose in to the provided plumbing/drain in a manner that will avoid the drain hose coming out of or leaking from the plumbing/drain.

Drain system can be installed using a floor drain, wall standpipe, floor standpipe, or laundry tub. Select the method you need.

IMPORTANT: To avoid siphoning, only 4.5" (114 mm) of drain hose should be inside standpipe. Always secure drain hose with cable tie.


Floor standpipe drain system

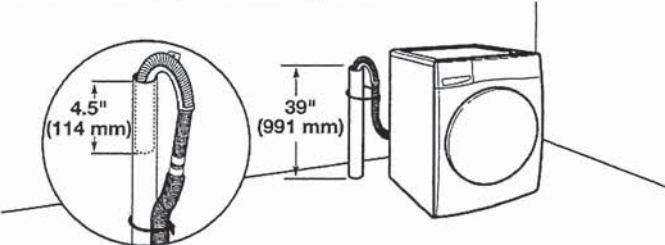

Minimum diameter for a standpipe drain: 2" (51 mm). Minimum carry-away capacity: 17 gallons (64 L) per minute. A 1/4" (6 mm) diameter to 1" (25 mm) diameter Standpipe Adapter Kit is available; refer to the Quick Start Guide for online ordering information. Top of standpipe must be at least 39" (762 mm) high; install no higher than 96" (2.4 m) from bottom of washer. If you have an overhead sewer and need to pump higher than 96" (2.4 m), a sump pump and associated hardware are needed. See "Alternate Parts."


LOWER LEVEL LAUNDRY CLOSET STACKING LAUNDRY PAIR

Wall standpipe drain system

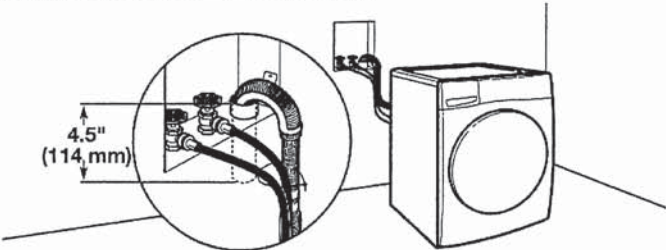


See requirements in "Floor standpipe drain system."


Laundry tub drain system

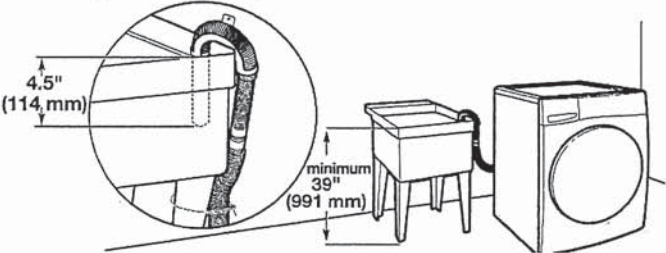

Minimum capacity: 20 gallons (76 L). Top of laundry tub must be at least 39" (991 mm) from the floor; install no higher than 96" (2.4 m) from bottom of washer.

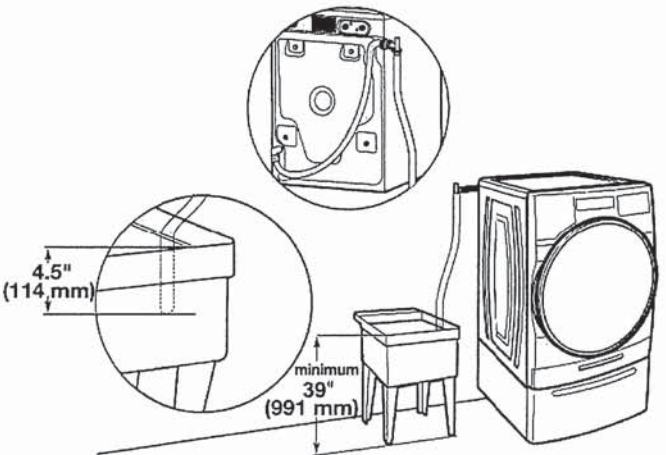

Floor drain system

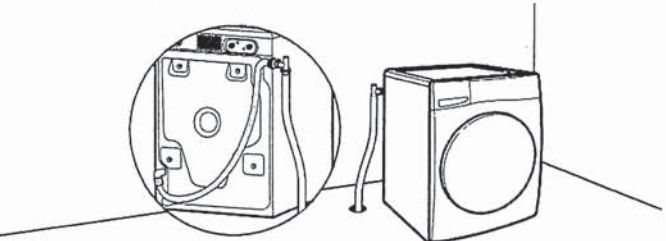

Floor drain system requires a Siphon Break Kit, 2 Connector Kits, and an Extension Drain Hose that may be purchased separately; refer to the Quick Start Guide for online ordering information. Minimum siphon break height: 28" (710 mm) from bottom of washer. (Additional hoses may be needed.)

Electrical Requirements

⚠ WARNING



Electrical Shock Hazard

- Plug into a grounded 3 prong outlet.
- Do not remove ground prong.
- Do not use an adapter.
- Do not use an extension cord.
- Failure to follow these instructions can result in death, fire, or electrical shock.

- A 120 V, 60 Hz, AC only, 15 or 20 A, fused electrical supply is required. A time-delay fuse or circuit breaker is recommended. It is recommended that a separate circuit breaker serving only this appliance be provided.
- This washer is equipped with a power supply cord having a 3-prong grounding plug.
- To minimize possible shock hazard, the cord must be plugged into a mating, 3-prong, grounding-type outlet, grounded in accordance with local codes and ordinances. If a mating outlet is not available, it is the personal responsibility and obligation of the customer to have the properly grounded outlet installed by a qualified electrician.
- If codes permit and a separate ground wire is used, it is recommended that a qualified electrician determine that the ground path is adequate.
- Do not ground to a gas pipe.
- Check with a qualified electrician if you are not sure the washer is properly grounded.
- Do not have a fuse in the neutral or ground circuit.

GROUNDING INSTRUCTIONS

For a grounded, cord-connected appliance:
This appliance must be grounded. In the event of a malfunction or breakdown, grounding will reduce the risk of electric shock by providing a path of least resistance for electric current. This appliance is equipped with a cord having an equipment-grounding conductor and a grounding plug. The plug must be plugged into an appropriate outlet that is properly installed and grounded in accordance with all local codes and ordinances.

WARNING: Improper connection of the equipment-grounding conductor can result in a risk of electric shock. Check with a qualified electrician or serviceman if you are in doubt as to whether the appliance is properly grounded. Do not modify the plug provided with the appliance: If it will not fit the outlet, have a proper outlet installed by a qualified electrician.


For a permanently connected appliance:
This appliance must be connected to a grounded metal, permanent wiring system, or an equipment-grounding conductor must be run with the circuit conductors and connected to the equipment-grounding terminal or lead on the appliance.

SAVE THESE INSTRUCTIONS

LOWER LEVEL LAUNDRY CLOSET STACKING LAUNDRY PAIR

WHIRLPOOL DRYER Model #: YWED5620HW

Whirlpool Brand Canada English | Washer and Dryers | Dryers | Electric Dryers | YWED5620HW

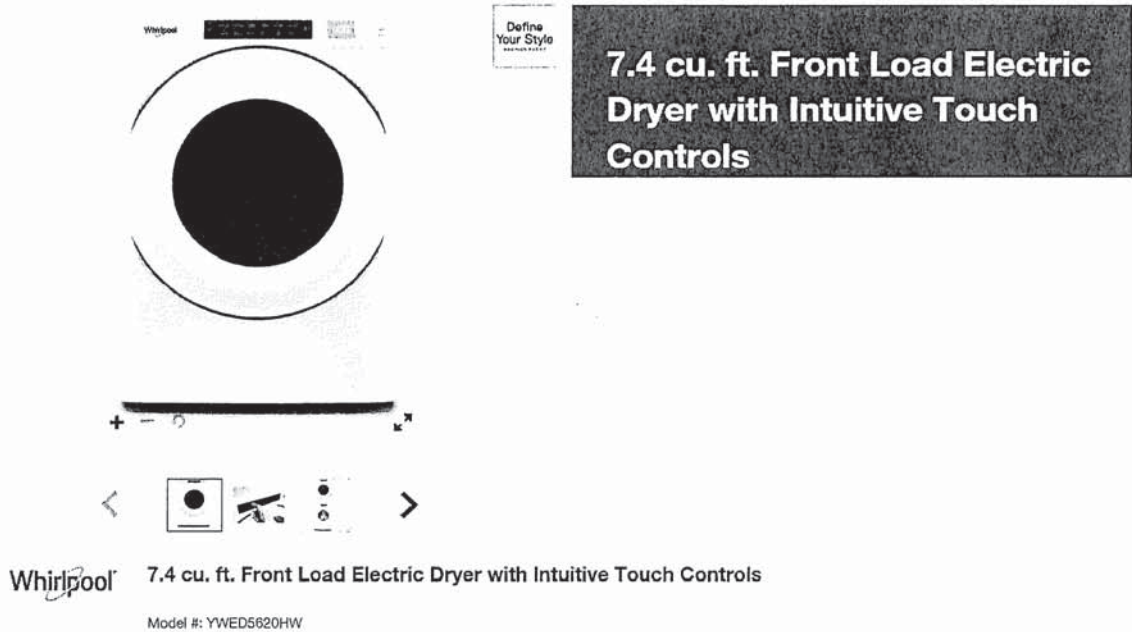

Dimensions

Depth	78.74 cm, 31.0 in
Depth With Door Open 90 Degree	138.43 cm, 54-1/2 in
Height	98.42 cm, 38-3/4 in
Width	68.58 cm, 27.0 in

Configuration and Overview

Fuel Type	Electric
-----------	----------

Cycles and Options

Cycle Time Remaining	Yes
Lint Filter Indicator	No
Number of Dryer Cycles	36
Number of Dryness Levels	3

Ventilation System

Long Vent	No
Maximum Vent Length	64
Venting Direction	Left, Right, Bottom, Rear

Electrical

Hz	60
Power Cord Included	Yes

LOWER LEVEL LAUNDRY CLOSET STACKING LAUNDRY PAIR




Installation Instructions Instrucciones de instalación Instructions d'installation

Stack Kit

Juego para lavadora y secadora

Ensemble superposé

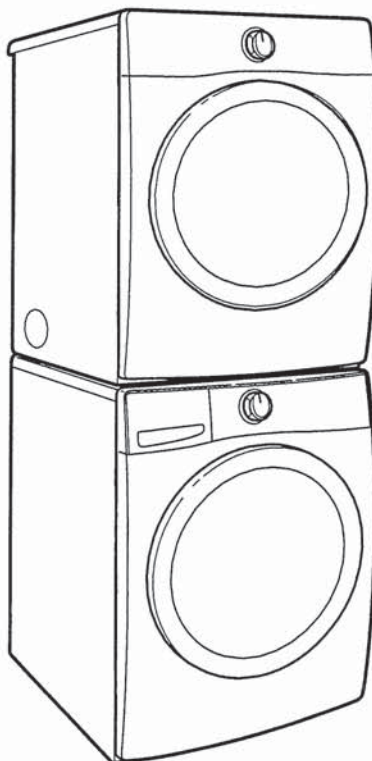

Kit Number W10869845
Número de juego W10869845
Ensemble numéro W10869845

For use only with front-load washers and dryers


Para uso sólo con lavadoras y secadoras de carga frontal

Pour utilisation avec laveuses et sècheuses à chargement
par l'avant seulement


If you have any problems or questions, visit us at www.whirlpool.com
Si tiene cualquier problema o duda, visítenos en www.whirlpool.com
Pour tout problème ou toute question, consulter www.whirlpool.ca

LOWER LEVEL LAUNDRY CLOSET STACKING LAUNDRY PAIR


Parts supplied:




Hooked brackets (2)



Plastic clips (2)



Feet (4)




Pan-head screws (4)

LOCATION REQUIREMENTS

Recessed Area and Closet Installation Instructions

IMPORTANT: The stacked washer/dryer can be installed in an enclosure. Check the locations of the water supply faucets, grounded electrical outlets, and gas supply line connection (gas dryer only). Depending on your application, longer washer fill hoses, longer electric power supply cords, and a longer flexible stainless steel gas connector line than that supplied with the washer/dryer may be needed.

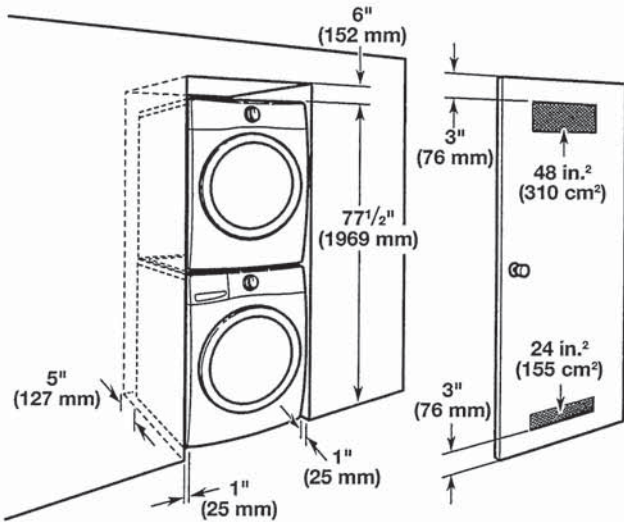

If the water supply faucets, electrical outlets, gas supply line, or power cord need modification, have a qualified plumber, electrician, or gas technician make the changes.

Mobile home – Additional installation requirements

This dryer is suitable for mobile home installations. The installation must conform to the Manufactured Home Construction and Safety Standard, Title 24 CFR, Part 3280 (formerly the Federal Standard for Mobile Home Construction and Safety, Title 24, HUD Part 280) or the Canadian Manufactured Home Standard CAN/CSA-Z240 MH. Mobile home installations require special parts (listed following), which are available for purchase from your local dealer or service center. Stacked pair must be securely fastened to the floor.

Parts Needed:

- Mobile Home Installation Kit, Part Number 346764, needs to be purchased to accomplish this. Order 2 kits to enable you to secure both the front and the back of the unit to the floor.
- Metal exhaust system hardware.



Special provisions must be made in mobile homes to introduce outside air into the dryer. The opening (such as a nearby window) should be at least twice as large as the dryer exhaust opening. The exhaust vent must be securely fastened to a noncombustible portion of the mobile home structure and must not terminate beneath the mobile home. Terminate the exhaust vent outside.

