Sales Selection Sheet Checklist

Model: 30-2576 A The Oakwood

LOT 7125

1 of 52

PURCHASERS: KARIN TROFIMOVA/FILIPE MIGUEL OLIVEIRA COSTA Heathwood Homes (Whitby) Limited VENDOR: FINISHED BASEMENT BATHROOM TUB TO SHOWER CONVERSATION OPT SERVERY BAR SINK RELOCATED ELECTRIC FIREPLACE IN LOWER LEVEL REC ROOM COLD CELLAR DECK **UPGRADED / MODIFIED ELEVATION CORNER UPGRADE** REAR UPGRADE **CEILING UPGRADE - SMOOTH** MAIN FLOOR (STD) SECOND FLOOR WITH RESILIENCE CHANEL LOWER LEVEL ADDITIONAL ROUGH-INS 200 AMP SERVICE (STD) WET BAR ROUGH-IN **HUMIDIFIER (STD)** AIR CONDITIONING (STD) GAS ROUGH-IN STOVE DRYER **BBQ** ADDITIONAL GAS FIREPLACE KITCHEN HOODFAN VENTING SIZE 6 IN ROUND DUCT (STD WITH APPLIANCE PACKAGE) 7 IN ROUND DUCT All Oak **FULL LOWER LEVEL STAIRS UPPER LOWER LEVEL STAIRS** N/A LOWER LOWER LEVEL STAIRS N/A All Oak MAIN STAIRS **Decor Consultant:** Date Purchaser: -11- 2 8 2024 Purchaser: Heathwood Homes (Whitby) Limited Date **Approved Locked Date:**

KARIN TROFIMOVA/FILIPE MIGUEL OLIVEIRA COSTA Project: Country Lane Unit: 7125, Phase: 7

Model: 30-2576 A The Oakwood



Locked: Closed:

			W-10-2-3
tchen			
Cabinet Colour/Style	9111	Viking III-SIMCOE ORCHID 3DL ***STD***	
Island Cabinet Colour/Style	9158	Viking III-SIMCOE-NAVY BLUE-3DL ***STD***	\exists
Cabinet Hardware	9146	12877 MB BLACK-HARDWARE ***2***	
Countertop	7874	Group 5-Quartz-Caesarstone-PURE WHITE # 1141-3/4 inch with built-up edge ***5***	\exists
Island Countertop	7874	Group 5-Quartz-Caesarstone-PURE WHITE # 1141-3/4 inch with built-up edge ***5***	-
Countertop Edge	4005	DOUBLE MITRE 1 1/2 INCH ***UPG***	
			_
Crumb Vac Colour	9483	Vacuum-Crumb Vac (Dust Pan)-Black	
Sink	9488	Plumbing-KINDRED Kitchen Sink Collection - Reginox NS1930 U/9-Single Bowl Undermount Sink (or equivalent)-Stainless Steel	PG 29
HoodFan	8894	SCB51430-CYCLONE 30 inch CANOPY CHIMNEY HOODFAN-STAINLESS STEEL ******	_ PG 41-42
Opt. Backsplash	5730	QT.CD.ARW.0306MT-Colour and Dimension Matte-Arctic White-3 x 6 ***1***	
Opt. Backsplash Grout	9836	Grout-Eggshell #5220 ***STD***	
Opt. Backsplash Tile Pattern	3060	HORIZONTAL BRICK ***STD***	
Flooring	9556	Red Oak UVF-Vintage Solid Sawn Sculpted Character-TITANIUM-3/4 in x 5 in ***UPG***	
Floor Tile Grout	1111	N/A *****]
Floor Tile Pattern	1111	N/A *****]

- Purchasers have been advised: standard fridge opening is a minimum 37 3/8 x 73 3/8 inches. Ice Waterline Rough-In is included.
- Standard stove opening is 30 inches and standard dishwasher opening is 24 inches. Any gas stove will require backsplash or stainless steel backing to avoid fire hazards.
- Purchasers acknowledge: Heathwood Homes and its contractors will not be responsible for any kitchen cabinet changes due to appliances dimension changes after sign-off.

Commant	<u> </u>	
Comment		

ervery	9	
Cabinet Colour/Style	9111	Viking III-SIMCOE ORCHID 3DL ***STD***
Cabinet Hardware	9146	12877 MB BLACK-HARDWARE ***2***
Opt. Cabinet Colour/Style - Uppers	9111	VIKING III SIMCOE ORCHID 3DL ***UPG***
Oat Cabinat Hardware Union	0146	42077 MD DLACK HADDWADE ****



KARIN TROFIMOVA/FILIPE MIGUEL OLIVEIRA COSTA

Project: Country Lane
Unit: 7125, Phase: 7
Model: 30-2576 A The Oakwood

Locked:

Closed:

Opt. Cabinet naroware - Oppers	Ø140	IIIZOZZIWE EL EL E
Countertop	7874	Group 5-Quartz-Caesarstone-PURE WHITE # 1141-3/4
•		inch with built-up edge ***5***
Countertop Edge	4005	DOUBLE MITRE 1 1/2 INCH ***UPG***
Opt. Sink		
		BOSCO Model T207029 Undermount Servery Sink
Opt. Backsplash	5730	QT.CD.ARW.0306MT-Colour and Dimension Matte-Arcti
		White-3 x 6 ***1***
Opt. Backsplash Grout	9836	Grout-Eggshell #5220 ***STD***
Opt. Backsplash Tile Pattern	3060	HORIZONTAL BRICK ***STD***
Flooring	9556	Red Oak UVF-Vintage Solid Sawn Sculpted
		Character-TITANIUM-3/4 in x 5 in ***UPG***
Floor Tile Grout	1111	N/A *****
Floor Tile Pattern	1111	N/A *****
oyer		
Flooring	9106	GE.MD.WHT.1818.MT Madison Series White Matte 18 X
		18 Matte ***1***
Floor Tile Grout		
Floor Tile Pattern	9837	Grout-Warm Grev #5093 ***CTD***
	9837 3000	Grout-Warm Grey #5093 ***STD*** STANDARD SQUARE ***STD***
Comment		
Comment		
Comment		
	3000	STANDARD SQUARE ***STD***
wder Room		STANDARD SQUARE ***STD***
wder Room Flooring	9437	STANDARD SQUARE ***STD*** TH.CT.WHT.1212.MT-Construct-White Matte-12 x 12 STD ***STD***
wder Room Flooring Floor Tile Grout	9437 9837	TH.CT.WHT.1212.MT-Construct-White Matte-12 x 12 STD ***STD*** Grout-Warm Grey #5093 ***STD***
wder Room Flooring	9437	STANDARD SQUARE ***STD*** TH.CT.WHT.1212.MT-Construct-White Matte-12 x 12 STD ***STD***
wder Room Flooring Floor Tile Grout	9437 9837	TH.CT.WHT.1212.MT-Construct-White Matte-12 x 12 STD ***STD*** Grout-Warm Grey #5093 ***STD***
Floor Tile Grout	9437 9837	TH.CT.WHT.1212.MT-Construct-White Matte-12 x 12 STD ***STD*** Grout-Warm Grey #5093 ***STD***

Customer Colours KARIN TROFIMOVA/FILIPE MIGUEL OLIVEIRA COSTA Project: Country Lane Unit: 7125, Phase: 7 Locked: Model: 30-2576 A The Oakwood Closed: Plumbing Fixture (Colour) 1737 Plumbing Fixtures-WHITE ***STD*** Comment Garage Entry Floor Tile GE.MD.WHT.1818.MT Madison Series White Matte 18 X 9106 18 Matte ***1* Floor Tile Grout 9837 Grout-Warm Grey #5093 ***STD*** Floor Tile Pattern STANDARD SQUARE ***STD*** 3000 Comment **Dining Room** Flooring Red Oak UVF-Vintage Solid Sawn Sculpted 9556 Character-TITANIUM-3/4 in x 5 in ***STD for Single UPG Comment **Great Room** Flooring Red Oak UVF-Vintage Solid Sawn Sculpted 9556 Character-TITANIUM-3/4 in x 5 in ***STD for Single UPG Comment Great Room Fireplace

Type

Mantle

Mantle

Mantle

Mantle

Mantle

Mantle

Mantle

MF 17-Paint Grade Mantle-Flat Wall-WHITE ***STD***

Surround (Opt.)

8873

3 pc- 4 inch Marble Surround-Nero Marquina ***STD***

- Purchasers have been advised: heat from the FP can damage TV above a FP and items placed on mantle.

- Heathwood and its contractors will not be liable for any damage on items placed and / or installed above a FP after closing.

Comment

RECROOM FP - NF17 CABINET

in Hall		
Flooring	9556	Red Oak UVF-Vintage Solid Sawn Sculpted Character-TITANIUM-3/4 in x 5 in ***STD for Single UPO
Comment		



Upper Hall

KARIN TROFIMOVA/FILIPE MIGUEL OLIVEIRA COSTA

Project: Country Lane
Unit: 7125, Phase: 7
Model: 30-2576 A The Oakwood



Locked: Closed:

Flooring		9556	Red Oak UVF-Vintage Solid Sawn Sculpted
Comment			Character-TITANIUM-3/4 in x 5 in ***STD for Single UPG
Comment			
Laundry Room	Western		
Floor Tile			
1 loor file		9439	TH.CT.LGR.1212.MT-Construct-Light Grey Matte-12 x 12 STD ***STD***
Floor Tile G	rout	9840	Grout-Pearl Gray #5019 ***STD***
Floor Tile Pa	attern	3000	STANDARD SQUARE ***STD***
Opt. Cabine	t Colour/Style - Uppers	9156	Viking III-SIMCOE-RAIN CLOUD-3DL ***STD***
Opt. Cabinet	Hardware - Uppers	7669	169-HARDWARE ***STD***
Comment			
	H1		4
9			
Dringing Colt	114/ 11		
Flooring	nd Walk-in Closets		
Flooring		9245	DY 87354-Dynasty Tex-OVERCAST-40 oz Poly***STD***
Comment			
Podro and O			
Bedroom 2			
Flooring		9245	DY 87354-Dynasty Tex-OVERCAST-40 oz Poly***STD***
Comment			
3.43		11	
		-Ast o - Ast	
Bedroom 3			
Flooring		9245	DY 87354-Dynasty Tex-OVERCAST-40 oz Poly***STD***
0			
Comment			
Dodge and			
Bedroom 4		50.1-	
Flooring		9245	DY 87354-Dynasty Tex-OVERCAST-40 oz Poly***STD***
Comment			

Principal Ensuite

KARIN TROFIMOVA/FILIPE MIGUEL OLIVEIRA COSTA

Project: Country Lane Unit: 7125, Phase: 7

Shared Ensuite

Model: 30-2576 A The Oakwood



Locked:

Closed: Cabinet Colour/Style VIKING III-GEORGIAN-ORCHID 3DL***STD*** 9120 Cabinet Hardware 7669 169-HARDWARE ***STD*** Countertop Group 1-Quartz-Caesarstone-GREY CINDER # 7204-3/4 9813 inch B/U MITERED EDGE ***STD in KITCHEN ONLY*** Countertop Edge 4005 DOUBLE MITRE 1 1/2 INCH ***UPG*** Floor Tile OV.ET.MGR.1224.PL Eterna Series Medium Grey 12x24 9115 54 Polished See Tile Direction UPG 5 Floor Tile Grout 9840 Grout-Pearl Gray #5019 ***STD*** Floor Tile Pattern 3040 FRONT TO BACK ***STD*** Shower Wall Tile 8638 QT.CH.TGR.0412.BR-Chess Bevelled-Tender Grey-4 x 12

Shower Wall Tile

8638

QT.CH.TGR.0412.BR-Chess Bevelled-Tender Grey-4 x 12

3

Shower Wall Tile Grout

9839

Grout-Silver #5027 ***UPG***

Shower Wall Tile Pattern

HORIZONTAL BRICK ***UPG***

Shower Floor Tile

8665

OD.ON.TPE.0202.MT.N-Ontario Series Mosaic-Taupe

Matte-2 x 2 ***1***

Shower Floor Tile

8665

OD.ON.TPE.0202.MT.N-Ontario Series Mosaic-Taupe
Matte-2 x 2 ***1***

Shower Floor Tile Grout

9840

Grout-Pearl Gray #5019 ***STD***

Shower Floor Tile Pattern

STANDARD SQUARE ***STD***

Shower Jamb(s) and Sill(s)

Plumbing Fixture (colour)

1737

Plumbing Fixtures-WHITE ***STD***

Comment

Cabinet Colour/Style

9165

Viking II-GEORGIAN-NAVY BLUE-3DL ***STD***

Cabinet Hardware

7669

169-HARDWARE ***STD***

Countertop

9810

Group 1-Quartz-Caesarstone-WHITE SAND # 7041- 3/4 inch B/U MITERED EDGE ***UPG***

Countertop Edge

4010

GROUP 1 - SINGLE POLISHED STRAIGHT EDGE 3/4 INCH ***1***

Floor Tile GE.BY.AZR.1313 New Byzantine Azzuro 13x13 ***STD***

Floor Tile Grout

9839

Grout-Silver #5027 ***STD***

Floor Tile Pattern

3000

STANDARD SQUARE ***STD***

Al E

Customer Colours KARIN TROFIMOVA/FILIPE MIGUEL OLIVEIRA COSTA Project: Country Lane Unit: 7125, Phase: 7 Locked:



7125, Phase: 7 el: 30-2576 A The Oakwood		Locked:		
		Closed:		
and described to a contract of the second of				
Wall Tile	8833	QT.UW.WHT.0810-Uniwall-White-8 x 10 ***STD***		
Wall Tile Grout	9836	Grout-Eggshell #5220 ***STD***		
Wall Tile Pattern	3090	VERTICAL STACKED ***STD***		
		The state of the s		
Opt. Shower Floor Tile	1111	N/A *****		
·				
Opt. Shower Floor Tile Grout	1111	N/A *****		
Opt. Shower Floor Tile Pattern	1111	N/A *****		
Ont Chause Inch ()				
Opt. Shower Jamb(s) and Sill(s)	1111	N/A *****		
Plumbing Fixture (colour) Comment	1737	Plumbing Fixtures-WHITE ***STD***		
Comment				
iite 4				
Cabinet Colour/Style	9165	Viking II-GEORGIAN-NAVY BLUE-3DL ***STD***		
Cabinet Hardware	7669	169-HARDWARE ***STD***		
Countertop	9810	Group 1-Quartz-Caesarstone-WHITE SAND # 7041- 3/4		
	0010	inch B/U MITERED EDGE ***UPG***		
Countertop Edge	4010	GROUP 1 - SINGLE POLISHED STRAIGHT EDGE 3/4		
		INCH ***1***		
Floor Tile	9071	GE.BY.AZR.1313 New Byzantine Azzuro 13x13 ***STD**		
	9839	Grout-Silver #5027 ***STD***		
	9839 3000	Grout-Silver #5027 ***STD*** STANDARD SQUARE ***STD***		
Floor Tile Pattern	3000	STANDARD SQUARE ***STD***		
Floor Tile Pattern				
Floor Tile Pattern	3000	STANDARD SQUARE ***STD***		
Floor Tile Pattern Shower Wall Tile	3000	STANDARD SQUARE ***STD***		
Floor Tile Pattern Shower Wall Tile Shower Wall Tile Grout	3000 8833	STANDARD SQUARE ***STD*** QT.UW.WHT.0810-Uniwall-White-8 x 10 ***STD***		
Floor Tile Pattern Shower Wall Tile Shower Wall Tile Grout	8833 9836	QT.UW.WHT.0810-Uniwall-White-8 x 10 ***STD*** Grout-Eggshell #5220 ***STD***		
Floor Tile Grout Floor Tile Pattern Shower Wall Tile Shower Wall Tile Grout Shower Wall Tile Pattern	8833 9836	QT.UW.WHT.0810-Uniwall-White-8 x 10 ***STD*** Grout-Eggshell #5220 ***STD***		



KARIN TROFIMOVA/FILIPE MIGUEL OLIVEIRA COSTA Project: Country Lane Unit: 7125, Phase: 7 Model: 30-2576 A The Oakwood



Locked:

Closed:

Shower Floor Tile	e	8661	OD.ON.SWT.0202.MT.N-Ontario Series Mosaic-Snow White Matte-2 x 2 ***STD***	
Shower Floor Tile	e Grout	9839	Grout-Silver #5027 ***STD***	1
Shower Floor Tile	Shower Floor Tile Pattern		STANDARD SQUARE ***STD***	-
Shower Jamb(s)	and Sill(s)	8923	Shower Jamb / Sill-Thassos White ***STD***	
Plumbing Fixture	(colour)	1737	Plumbing Fixtures-WHITE ***STD***	1
Comment Lower Level Recreati	on Poom			
Flooring	Oli Koom	50.15		
riconing		9245	DY 87354-Dynasty Tex-OVERCAST-40 oz Poly***STD***	
Comment	CROOMFP - NF1	7 CABINET F	TREPACE RELOCATED SKETCH #1	PG 28
Lower Level bedroom	- Finished Bas	emer		
Flooring		9245	DY 87354-Dynasty Tex-OVERCAST-40 oz Poly***STD***	
Comment				
Lower Level bedroom	- Finished Base	emer		
Flooring		9245	DY 87354-Dynasty Tex-OVERCAST-40 oz Poly***STD***	
Comment				
Lower Level Bathroom				
Cabinet Colour/Sty		9120	VIKING III-GEORGIAN-ORCHID 3DL***STD***	
Cabinet Hardware		7669	169-HARDWARE ***STD***	
Countertop		9812	Group 1-Quartz-Caesarstone-SILVER SAND # 7360-3/4	
Countertop Edge		4010	inch B/U MITERED EDGE ***UPG*** GROUP 1 - SINGLE POLISHED STRAIGHT EDGE 3/4	
			INCH ***1***	6
Floor Tile		5465	TH.LY.WHT.1212.N Lily White 12 x 12 ***STD***	1'
Floor Tile Grout		9837	Grout-Warm Grey #5093 ***STD***	
Floor Tile Pattern		3000	STANDARD SQUARE ***STD***	
对自己的问题。 特别是一个一个人的方式,但是这种理论的问题。	TO RESIDENCE THE PARTY OF THE PARTY.	Andreas Andreas Andreas		

KARIN TROFIMOVA/FILIPE MIGUEL OLIVEIRA COSTA Project: Country Lane Unit: 7125, Phase: 7 Model: 30-2576 A The Oakwood

Locked:

Closed:

Shower Wall Tile	8833	QT.UW.WHT.0810-Uniwall-White-8 x 10 ***STD***
Shower Wall Tile Grout	9836	Grout-Eggshell #5220 ***STD***
Shower Wall Tile Pattern	3090	VERTICAL STACKED ***STD***
Shower Floor Tile	8661	OD.ON.SWT.0202.MT.N-Ontario Series Mosaic-Snow White Matte-2 x 2 ***STD***
Shower Floor Tile Grout	9837	Grout-Warm Grey #5093 ***STD***
Shower Floor Tile Pattern	3000	STANDARD SQUARE ***STD***
01	· (
Shower Jamb(s) and Sill(s)	8923	Shower Jamb / Sill-Thassos White ***STD***
Plumbing Fixture (colour) Comment	1737	Plumbing Fixtures-WHITE ***STD***
in Stairs		
Туре	1712	Oak Stairs ***STD***
Colour	9805	Titanium STAIN TO COMPLIMENT HARDWOOD AND WILL VARY FROM FLOORING ***99***
Handrail/Pickets/Posts Type	8148	Single Collar Alt. Plain w/ Shoes with 3 1/2 Square/Cap

.,,,,,	1712	Oak Stairs ^^^S I D***			
Colour	9805	Titanium STAIN TO COMPLIMENT HARDWOOD AND WILL VARY FROM FLOORING ***99***			
Handrail/Pickets/Posts Type	8148	Single Collar Alt. Plain w/ Shoes with 3 1/2 Square/Cap Post(s)-BLACK ***STD***			
Handrail/Pickets/Posts Colour					
Custom Stain/Paint	1111	N/A *****			
Landing(s)	9556	Red Oak UVF-Vintage Solid Sawn Sculpted Character-TITANIUM-3/4 in x 5 in ***STD for Single UPG			
Opt. Carpet Runner	1111	N/A *****			
Comment					

ver Level Stairs		
Туре	1712	Oak Stairs ***STD***
Colour	9805	Titanium STAIN TO COMPLIMENT HARDWOOD AND WILL VARY FROM FLOORING ***99***
Handrail/Pickets/Posts Type	8148	Single Collar Alt. Plain w/ Shoes with 3 1/2 Square/Cap Post(s)-BLACK ***STD***
Handrail/Pickets/Posts Colour		





KARIN TROFIMOVA/FILIPE MIGUEL OLIVEIRA COSTA Project: Country Lane Unit: 7125, Phase: 7 Model: 30-2576 A The Oakwood

FILIPE MIGUEL OLIVEIRA CO

Date Approved

Closed:

	,		Ciccou.	
Custom Stain/Paint				
Custom Stain/Paint	1111	N/A *****		
Landing(s)	9556	Red Oak U' Character-1	VF-Vintage Solid Sawn Scr TTANIUM-3/4 in x 5 in ***S	ulpted STD for Single UPG
Carpet Runner	1111	N/A *****		
Comment				
roughout				
Switches and Plug	5796	Decora Whi	te Switches and Plugs ***S	TD***
Thresholds	2232		holds ***STD***	710
Underpad	1079	500 Series-Underpad ***STD***		
Trim Size	8704	5 1/4 inch Baseboard and 3 inch Integrated Backbend Casings ***UPG*** / ***STD in Singles***		
Trim - Paint Colour	1716	Trim-WHITE	***STD***	
Walls - Paint Colour	1717	22-Wall-WA	RM GREY ***STD***	
Comment				
urchaser:		112/24	An	11.12.24
KARIN TROFIMOVA		Date	Decor Consultant	Date
urchaser:	No	12/24	Mon	-11- 2 8 202

Date

Country Lane

11 of 52



Lot: 7125 Model: 30-2576 A The Oakwood

Project/Phase: Country Lane / 7

Offer	Supply and Install Central Air Conditioning
Worksheet	Note:
Offer	Two Men and a Truck Credit of One Thousand Dollars (\$1000.00) for moving services only, Into your Heathwood Home (No
	Cash Value) The Credit is Non-Transferable and cannot be combined with any other offer Singles
Worksheet	Note:
Offer	Classic Collection: Five Appliances: SS Fridge, Stove, Dishwasher: White Front Loader Washer/Dryer (Singles)
	• • • • • • • • • • • • • • • • • • • •
Worksheet	Note:
Offer	The Purchaser(s) acknowledge that they have NOT been referred by an existing Heathwood Homeowner and therefor are not
	entitled to a referral fee under Heathwood Homes Referral program.
Worksheet	1 5
Worksheet	Note.
Offer	This is a Deck Grading Condition that includes a deck with steps to grade.
Worksheet	Note:
OIKSHEET	



Lot: 7125 Model: 30-2576 A The Oakwood

Project/Phase: Country Lane / 7

CABIN	CABINETRY		
Invoice	Qty.	Description	
1744 714,437	2.0	KITCHEN - CABINETRY - 3C-PANTRY 66CM DEEP PER FOOT (COUNTER DEPTH)-VIKING	
27Mar25		DOUBLE THE SIZE OF EXISTING PANTRY SKETCH # 2 AND 3 DRYWAL-Notify; FRAMING-Modify Bulkhead; PAINTING-Notify	
1744 714,443	2.0	KITCHEN - CABINETRY - 10C-INTERIOR PULL-OUT DRAWER FOR DOUBLE-DOOR PANTRY (EACH) (66CM DEEP, MAX. [4] PER PANTRY)-VIKING	
27Mar25		INSTALL DRAWERS AT BOTTOM AND SECOND FROM THE BOTTOM SKETCH # 3	
1744 700,000	1.0	SERVERY ONLY - CABINETRY - OPT SERVERY UPPER-VIKING II/III-UPG	
27Mar25		SKETCH# 3 DRYWAL-Notify; FRAMING-Modify Bulkhead; PAINTING-Notify	
1744 389,832	1.0	SERVERY ONLY - PLUMBING - BAR SINK - COMPLETE BAR SINK FOR SERVERY INCLUDES PLUMBING ROUGH-IN AND MOEN ALIGN BAR PREP FAUCET (MODEL: 5965) AND BOSCO MODEL 207029 UNDERMOUNT SINK	
27Mar25		(INCLUDING GRANITE SINK CUTOUT/POLISH) - SKETCH # 3 SEE NEW BOSCO SPEC (ORIGINAL REGINOX DISCONTINUED) CABINETRY-Accommodate Servery Sink; CONCRETE AND DRAIN-Additional Stack; GRANITE-Additional Cu	
1744 714,472	1.0	KITCHEN - CABINETRY - 32H-WALL CABINET WITH SHELF FOR MICROWAVE (FINISHED INTERIOR) (OPENING 24inW X 13 3/4inH X 17inD) (NOT AVAILABLE IN SOME LAMINATES)-VIKING	
27Mar25		INSTALL BESIDE FRIDGE SKETCH # 3	
1744 714,424	1.0	KITCHEN - CABINETRY - 16B-60CM WIDE PULL-OUT DOOR BASE CABINET WASTE/RECYCLE CENTRE WITH SOFT-CLOSE ([4] BINS TOTAL, INCLUDING [2] 35L) (AVAILABLE ONLY WITH 60CM WIDE CABINET)-VIKING	
27Mar25		INSTALL IN ISLAND SKETCH # 3 SEE SPEC	
1744	1.0	- REMOVE BASE CABINET IN SERVERY FOR FUTURE BEVERAGE FRIDGE	
27Mar25 NoCat			
1744 714,488	1.0	- CABINETRY - 1L-TWO-TONE COLOUR/STYLE SELECTION FOR ISLAND (MUST BE OF EQUAL OR LOWER LEVEL TO MAIN SELECTION)-VIKING	
27Mar25			
1744 712,432	1.0	- HARDWOOD - KITCHEN - 5 IN VINTAGE SCULPTED NSS RED OAK (CHARACTER GRADE) UVF OIL OR PEARL - UPG	
27Mar25		CABINETRY-Raise Cabinet; CERAMICS-Delete Std Ceramics	
1744 711,371	1.0	- GRANITE - PRINCIPAL ENSUITE - GROUP 1 - UPG	
27Mar25		CABINETRY-delete std countertop; GRANITE-see upgraded single hole faucet and undermount sink	
1744 389,822	6.0	MASTER ENSUITE - PLUMBING - AMERICAN STANDARD - SINK - UNDERMOUNT SINK - BOXE - WHITE - MODEL 0315 000 020	
27Mar25		MST ENS X 2; SHARED X 2; ENS 4; BSMT SEE SPECS	
1744 714,446	2.0	MASTER ENSUITE - CABINETRY - 4D-INCREASE VANITY TO KITCHEN HEIGHT GREATER THAN 3ft (90CM HIGH, MAINTAINS VANITY DEPTH)-VIKING	
27Mar25		SKETCH # 4	

DisciplineMS.rpt 13dec21 Page 2 of 10

13 of 52



CONSTRUCTION SUMMARY

Lot: 7125 Model: 30-2576 A The Oakwood Project/Phase: Country Lane / 7

CABINETRY

Invoice	Qty.	Description
1744 700,001	1.0	LAUNDRY ROOM - CABINETRY - OPT LAUNDRY UPPER-VIKING II/III-UPG
27Mar25		SKETCH# 4
1744 711,363	1.0	- GRANITE - MAIN BATH - GROUP 1 - UPG
27Mar25 **		CABINETRY-delete std countertop; GRANITE-see upgraded single hole faucet and undermount sink
1744 711,379	1.0	- GRANITE - ENSUITE BED 4 - GROUP 1 - UPG
27Mar25 **		CABINETRY-delete std countertop; GRANITE-see upgraded single hole faucet and undermount sink
1744 711,387	1.0	- GRANITE - LOWER BATH - GROUP 1 - UPG
27Mar25 **		CABINETRY-delete std countertop; GRANITE-see upgraded single hole faucet and undermount sink
1744 389,746	1.0	- GRANITE - WATERFALL END 3 FT ISLAND ONE SIDE WITH 1 1/2 INCH MITERED EDGE - GORUP 5
27Mar25		SEE SKETCH # 2 AND 3 FOR SIDE FACING GREAT ROOM CABINETRY-Accommodate One side Waterfall
1744 714,462 27Mar25	1.0	- CABINETRY - 2G-UPGRADE HARDWARE FOR KITCHEN IN A SINGLE OR DETACHED MODEL (STACKED UPPER HARDWARE IS AN ADDITIONAL CHARGE SEE LINE G04 IF APPLICABLE)-UPG2 HARDWARE
1744 712,434	1.0	- HARDWOOD - SERVERY - 5 IN VINTAGE SCULPTED NSS RED OAK (CHARACTER GRADE) UVF OIL OR PEARL - UPG
27Mar25 **		CABINETRY-Raise Cabinet; CERAMICS-Delete Std Ceramics; INTERIOR STAIRS-Notify
1744 714,420	1.0	KITCHEN - CABINETRY - 10B+8B-POTS AND PANS (3) DRAWERS SOFT-CLOSE TANDEMBOX (WIDTH MIN. 60CM/MAX. 90CM) (SIZE SUBJECT TO FLOOR PLAN)-VIKING
27Mar25		INSTALL BESIDE STOVE SKETCH# 3
1744 714,419 27Mar25	1.0	KITCHEN - CABINETRY - 9B+8B-KITCHEN HEIGHT BANK OF (4) DRAWERS SOFT-CLOSE TANDEMBOX (MAX. WIDTH 55CM) (SIZE SUBJECT TO FLOOR PLAN)-VIKING SKETCH # 3

DisciplineMS.rpt 13dec21 Page 3 of 10



Lot: 7125 Model: 30-2576 A The Oakwood **Project/Phase: Country Lane / 7**

CERA		
Invoice	Qty.	Description
1744 701,584 27Mar25	1.0	Servery - CERAMIC - SERVERY - BACKSPLASH SINGLES SERVERY - UG 1 - UPG
1744 712,432 27Mar25 **	1.0	- HARDWOOD - KITCHEN - 5 IN VINTAGE SCULPTED NSS RED OAK (CHARACTER GRADE) UVF OIL OR PEARL - UPG CABINETRY-Raise Cabinet; CERAMICS-Delete Std Ceramics
1744 701,476 27Mar25	1.0	Master Bath - CERAMIC - MASTER BATH - FLOOR - UG 5 - UPG
1744 701,401 27Mar25	1.0	Master Shower - CERAMIC - MASTER SHOWER - MOSAIC - UG 1 - UPG
1744 706,485 27Mar25	1.0	Master Shower - CERAMIC - MASTER SHOWER - WALL - GROUT - UPG
1744 712,434 27Mar25 **	1.0	- HARDWOOD - SERVERY - 5 IN VINTAGE SCULPTED NSS RED OAK (CHARACTER GRADE) UVF OIL OR PEARL - UPG CABINETRY-Raise Cabinet; CERAMICS-Delete Std Ceramics; INTERIOR STAIRS-Notify
1744 701,404 27Mar25	1.0	Foyer - CERAMIC - FOYER - FLOOR - UG 1 - UPG
1744 701,406 27Mar25	1.0	Mud Room - CERAMIC - MUD ROOM - FLOOR - UG 1 - UPG
1744 701,466 27Mar25	1.0	Master Shower - CERAMIC - MASTER SHOWER - WALL - UG 5 - UPG
1744 701,517 27Mar25	1.0	Master Shower - CERAMIC - MASTER SHOWER - WALL - DIAG OR CHECKER - UPG INSTALL HORIZONTAL BRICK PATTERN
1744 389,806 27Mar25 **		FINISHED BASEMENT BATHROOM - TUB TO SHOWER CONVERSION - CHANGE STANDARD 5 FT TUB TO FULL SHOWER STALL (W/ 8 INCH HIGH SILL) INCLUDES CHROME-FRAMED 36 INCH WIDE PANEL AND 24 INCH HINGED DOOR SKETCH # 1 CERAMICS-Notify; DRYWALL-Notify; FRAMING-Notify; MIRRORS/GLASS PRODUCTS-ADDITIONAL SHOWER; PLUMBING-Notify

DisciplineMS.rpt 13dec21 Page 4 of 10

construction summary of 52



Lot: 7125

Model: 30-2576 A The Oakwood Project/Phase: Country Lane / 7

CONCRETE AND DRAIN

Invoice	Qty.	Description
1744 389,832		SERVERY ONLY - PLUMBING - BAR SINK - COMPLETE BAR SINK FOR SERVERY INCLUDES PLUMBING ROUGH-IN AND MOEN ALIGN BAR PREP FAUCET (MODEL: 5965) AND BOSCO MODEL 207029 UNDERMOUNT SINK (INCLUDING GRANITE SINK CUTOUT/POLISH) -
27Mar25 **		SKETCH # 3 SEE NEW BOSCO SPEC (ORIGINAL REGINOX DISCONTINUED) CABINETRY-Accommodate Servery Sink; CONCRETE AND DRAIN-Additional Stack; GRANITE-Additional Cu

DRYW	DRYWALL		
Invoice	Qty.	Description	
1744 714,437	2.0	KITCHEN - CABINETRY - 3C-PANTRY 66CM DEEP PER FOOT (COUNTER DEPTH)-VIKING	
27Mar25 **		DOUBLE THE SIZE OF EXISTING PANTRY SKETCH # 2 AND 3 DRYWAL-Notify; FRAMING-Modify Bulkhead; PAINTING-Notify	
1744 700,000	1.0	SERVERY ONLY - CABINETRY - OPT SERVERY UPPER-VIKING II/III-UPG	
27Mar25		SKETCH # 3 DRYWAL-Notify; FRAMING-Modify Bulkhead; PAINTING-Notify	
1744 711,330 27Mar25	1.0	- DRYWALL - SMOOTH CEILINGS-SECOND FLOOR WITH RESILIENT CHANNEL-UPG	
2/Wai23		ELECTRICAL-Drop electrical boxes; PAINTING-Paint smooth ceiling	
1744 389,716	1.0	FINISHED BASEMENT FAMILY (REC) ROOM - FIREPLACE AND MANTLE - RELOCATE ELECTRICAL FIREPLACE	
27Mar25 **		SKETCH # 1 DRYWALL-notify; ELECTRICAL-notify; FRAMING-notify; HEATING/AIR CONDITIONING-notify; INTERIO TRIM-notify; PAINTING-notify	
1744 389,806	1.0	FINISHED BASEMENT BATHROOM - TUB TO SHOWER CONVERSION - CHANGE STANDARD 5 FT TUB TO FULL SHOWER STALL (W/ 8 INCH HIGH SILL) INCLUDES CHROME-FRAMED 36 INCH WIDE PANEL AND 24 INCH HINGED DOOR	
27Mar25 **		SKETCH # 1 CERAMICS-Notify;DRYWALL-Notify;FRAMING-Notify;MIRRORS/GLASS PRODUCTS-ADDITIONAL SHOWER;PLUMBING-Notify	
1744 714,614	1.0	FINISHED BASEMENT FAMILY (REC) ROOM/HALL - ELECTRICAL-POTLIGHT (5000K) BUNDLE-8 X 4 INCH SLIM RECESSED LED DOWNLIGHT WHITE TRIM INCLUDES 2 SWITCHES NOTE: LOCATION MAY VARY FROM REQUEST	
27Mar25		DEPENDS ON JOIST PLACEMENT	
**		DRYWALL-Drywall/Ceiling cutouts for potlights; FRAMING-Frame to accommodate potlights 6 X FINISHED RECROOM - 1 SWITCH - DELETE STD LIGHTS	
		2 X LOWEVEER LEVEL FOYER - 1 SWITCH - DELETE STD SKETCH # 1	

DisciplineMS.rpt 13dec21 Page 5 of 10

16 of 52 construction summary



Lot: 7125

Model: 30-2576 A The Oakwood Project/Phase: Country Lane / 7

ELECTRICAL

Invoice		Description
invoice	Γ.	•
1744 390,516	2.0	KITCHEN/SERVERY - ELECTRICAL-OUTLET-EXTRA WALL INTERIOR OUTLET (120V/15A) ON A SEPARATE CIRCUIT (ON ARCFAULT)
27Mar25		1 X MICRO SHELF
		1 X UNDER COUNTERTOP IN SERVERY FOR FUTURE BEVERAGE FRIDGE SKETCH # 3
1744	1.0	- DRYWALL - SMOOTH CEILINGS-SECOND FLOOR WITH RESILIENT CHANNEL-UPG
711,330		
27Mar25		ELECTRICAL-Drop electrical boxes; PAINTING-Paint smooth ceiling
	<u> </u> 	
1744 389,716	1.0	FINISHED BASEMENT FAMILY (REC) ROOM - FIREPLACE AND MANTLE - RELOCATE ELECTRICAL FIREPLACE
27Mar25		SKETCH # 1
**		DRYWALL-notify; ELECTRICAL-notify; FRAMING-notify; HEATING/AIR CONDITIONING-notify; INTERIO
	<u> </u> 	TRIM-notify; PAINTING-notify
1744 390,494	1.0	- ELECTRICAL-CAR CHARGER-2 INCH CONDUIT WITH 8X8 BOX FOR FUTURE CAR CHARGER
27Mar25		SKETCH# 2
1744	2.0	KITCHEN/BREAKFAST - ELECTRICAL-RELOCATION OF SWITCHES/LIGHTS (MUST SPECIFY LOCATION)-NOTE:
390,528		PLUGS CANNOT BE RELOCATED- MUST PURCHASE ADDITIONAL OUTLET.
27Mar25		RELOCATE STD LIGHTS IN KITCHEN & BREAKFAST AREA TO OVER ISLAND - 1 SWITCH SKETCH # 2
1744 389,806	1.0	FINISHED BASEMENT BATHROOM - TUB TO SHOWER CONVERSION - CHANGE STANDARD 5 FT TUB TO FULL SHOWER STALL (W/8 INCH HIGH SILL) INCLUDES CHROME-FRAMED 36 INCH WIDE PANEL AND 24 INCH HINGED
		DOOR SKETCH # 1 ELECTRICAL-ADDITIONAL SHOWER LIGHT
27Mar25		CERAMICS-Notify;DRYWALL-Notify;FRAMING-Notify;MIRRORS/GLASS PRODUCTS-ADDITIONAL
		SHOWER; PLUMBING-Notify
1744 714,614	1.0	FINISHED BASEMENT FAMILY (REC) ROOM/HALL - ELECTRICAL-POTLIGHT (5000K) BUNDLE-8 X 4 INCH SLIM RECESSED LED DOWNLIGHT WHITE TRIM INCLUDES 2 SWITCHES NOTE: LOCATION MAY VARY FROM REQUEST DEPENDS ON JOIST PLACEMENT
27Mar25		DEPENDS ON JOIST PLACEIVIENT
		DRYWALL-Drywall/Ceiling cutouts for potlights; FRAMING-Frame to accommodate potlights
		6 X FINISHED RECROOM - 1 SWITCH - DELETE STD LIGHTS 2 X LOWEVEER LEVEL FOYER - 1 SWITCH - DELETE STD
		SKETCH # 1
1744	1.0	- CLASSIC COLLECTION SCHEDULE A - Choice of 20 LED (5000K) pot lights in finished areas (Second Floor Potlight(s)
714,608	1.0	Require Smooth Ceiling)
27Mar25		DRYWALL-Drywall Ceiling cutouts for potlights FRAMING-Frame to accommodate potlights 6 X GREAT RM - 1 SWITCH
2,1,14123		5 X BRKFST AREA - 1 SWITCH - RELOCATE STD LIGHT TO OVER ISLAND
		5 X KITCHEN - 1 SWITCH - RELOCATE STD LIGHT TO OVER ISLAND
		2 X SERVERY - 1 SWITCH - DELETE STD 2 X MUDROOM - 1 SWITCH - DELETE STD
		SKETCH # 2

FIREPLACE AND MANTLE

	LIKET	LA	CE AND MANTEE
]	Invoice	Qty.	Description
	1744	1.0	FINISHED BASEMENT FAMILY (REC) ROOM - FIREPLACE AND MANTLE - RELOCATE ELECTRICAL FIREPLACE
	389,716		
	27Mar25		SKETCH # 1
			DRYWALL-notify; ELECTRICAL-notify; FRAMING-notify; HEATING/AIR CONDITIONING-notify; INTERIO
			TRIM-notify; PAINTING-notify

Page 6 of 10

17 of 52 construction summary



Lot: 7125 Model: 30-2576 A The Oakwood **Project/Phase: Country Lane / 7**

FRAMING

Invoice	Qty.	Description
1744 714,437	2.0	KITCHEN - CABINETRY - 3C-PANTRY 66CM DEEP PER FOOT (COUNTER DEPTH)-VIKING
27Mar25 **		DOUBLE THE SIZE OF EXISTING PANTRY SKETCH # 2 AND 3 DRYWAL-Notify; FRAMING-Modify Bulkhead; PAINTING-Notify
1744 700,000	1.0	SERVERY ONLY - CABINETRY - OPT SERVERY UPPER-VIKING II/III-UPG
27Mar25		SKETCH # 3 DRYWAL-Notify; FRAMING-Modify Bulkhead; PAINTING-Notify
1744 389,716	1.0	FINISHED BASEMENT FAMILY (REC) ROOM - FIREPLACE AND MANTLE - RELOCATE ELECTRICAL FIREPLACE
27Mar25 **		SKETCH# 1 DRYWALL-notify; ELECTRICAL-notify; FRAMING-notify; HEATING/AIR CONDITIONING-notify; INTERIO TRIM-notify; PAINTING-notify
1744 389,806	1.0	FINISHED BASEMENT BATHROOM - TUB TO SHOWER CONVERSION - CHANGE STANDARD 5 FT TUB TO FULL SHOWER STALL (W/ 8 INCH HIGH SILL) INCLUDES CHROME-FRAMED 36 INCH WIDE PANEL AND 24 INCH HINGED DOOR
27Mar25 **		SKETCH # 1 CERAMICS-Notify;DRYWALL-Notify;FRAMING-Notify;MIRRORS/GLASS PRODUCTS-ADDITIONAL SHOWER;PLUMBING-Notify
1744 714,614	1.0	FINISHED BASEMENT FAMILY (REC) ROOM/HALL - ELECTRICAL-POTLIGHT (5000K) BUNDLE-8 X 4 INCH SLIM RECESSED LED DOWNLIGHT WHITE TRIM INCLUDES 2 SWITCHES NOTE: LOCATION MAY VARY FROM REQUEST DEPENDS ON JOIST BLACEMENT.
27Mar25 **		DRYWALL-Drywall/Ceiling cutouts for potlights; FRAMING-Frame to accommodate potlights 6 X FINISHED RECROOM - 1 SWITCH - DELETE STD LIGHTS 2 X LOWEVEER LEVEL FOYER - 1 SWITCH - DELETE STD SKETCH # 1

	SKEICH#1			
CLASS	GLASS PRODUCTS / MIRRORS			
GLASS) I N	CODUCTS / WITKORS		
Invoice	ivoice Qty. Description			
1511	1.0	ED HOUSED DAGENGENES A THE COLUMN TO CHANGE CONTINUES ON A SECULAR TO SHARE		
1744	1.0	FINISHED BASEMENT BATHROOM - TUB TO SHOWER CONVERSION - CHANGE STANDARD 5 FT TUB TO FULL		
389,806		SHOWER STALL (W/ 8 INCH HIGH SILL) INCLUDES CHROME-FRAMED 36 INCH WIDE PANEL AND 24 INCH HINGED		
, , , , , , , ,		DOOR		
27Mar25		SKETCH # 1		
**		CERAMICS-Notify;DRYWALL-Notify;FRAMING-Notify;MIRRORS/GLASS PRODUCTS-ADDITIONAL		
		SHOWER; PLUMBING-Notify		

DisciplineMS.rpt 13dec21 Page 7 of 10

18 of 52



CONSTRUCTION SUMMARY

Lot: 7125 Model: 30-2576 A The Oakwood Project/Phase: Country Lane / 7

GRANITE

Invoice	Qty.	Description
1744 389,832 27Mar25 **	1.0	SERVERY ONLY - PLUMBING - BAR SINK - COMPLETE BAR SINK FOR SERVERY INCLUDES PLUMBING ROUGH-IN AND MOEN ALIGN BAR PREP FAUCET (MODEL: 5965) AND BOSCO MODEL 207029 UNDERMOUNT SINK (INCLUDING GRANITE SINK CUTOUT/POLISH) - SKETCH # 3 SEE NEW BOSCO SPEC (ORIGINAL REGINOX DISCONTINUED) CABINETRY-Accommodate Servery Sink; CONCRETE AND DRAIN-Additional Stack; GRANITE-Additional Cu
1744 711,371 27Mar25	1.0	- GRANITE - PRINCIPAL ENSUITE - GROUP 1 - UPG CABINETRY-delete std countertop; GRANITE-see upgraded single hole faucet and undermount sink
1744 389,738 27Mar25	6.0	THROUGHOUT - GRANITE - GRANITE CUTOUT WITH STRAIGHT EDGE POLISH TO ACCOMMODATE UNDER MOUNT VANITY SINK MST ENS X 2 SHARED X 2 ENS 4 X 1 BSMT X 1 SEE BOXE UNDERMOUNT SINK SPECS
1744 389,822 27Mar25 **	6.0	MASTER ENSUITE - PLUMBING - AMERICAN STANDARD - SINK - UNDERMOUNT SINK - BOXE - WHITE - MODEL 0315 000 020 MST ENS X 2; SHARED X 2; ENS 4; BSMT SEE SPECS
1744 711,363 27Mar25	1.0	- GRANITE - MAIN BATH - GROUP 1 - UPG CABINETRY-delete std countertop; GRANITE-see upgraded single hole faucet and undermount sink
1744 711,379 27Mar25	1.0	- GRANITE - ENSUITE BED 4 - GROUP 1 - UPG CABINETRY-delete std countertop; GRANITE-see upgraded single hole faucet and undermount sink
1744 711,387 27Mar25	1.0	- GRANITE - LOWER BATH - GROUP 1 - UPG CABINETRY-delete std countertop; GRANITE-see upgraded single hole faucet and undermount sink
1744 389,746 27Mar25	1.0	- GRANITE - WATERFALL END 3 FT ISLAND ONE SIDE WITH 1 1/2 INCH MITERED EDGE - GORUP 5 SEE SKETCH # 2 AND 3 FOR SIDE FACING GREAT ROOM CABINETRY-Accommodate One side Waterfall
1744 711,360 27Mar25	1.0	- GRANITE - KITCHEN - GROUP 5 WITH 1 1/2 IN MITER EDGE - UPG

HARDWOOD

HAKD	HARDWOOD		
Invoice	Qty.	Description	
1744 712,432	1.0	- HARDWOOD - KITCHEN - 5 IN VINTAGE SCULPTED NSS RED OAK (CHARACTER GRADE) UVF OIL OR PEARL - UPG	
27Mar25			
		CABINETRY-Raise Cabinet; CERAMICS-Delete Std Ceramics	
1744	1.0	- HARDWOOD - SERVERY - 5 IN VINTAGE SCULPTED NSS RED OAK (CHARACTER GRADE) UVF OIL OR PEARL -	
712,434		UPG	
27Mar25			
		CABINETRY-Raise Cabinet; CERAMICS-Delete Std Ceramics; INTERIOR STAIRS-Notify	

DisciplineMS.rpt 13dec21

Page 8 of 10

19 of 52



Lot: 7125

Model: 30-2576 A The Oakwood Project/Phase: Country Lane / 7

HEATING / AIR CONDITIONING

Invoice	Qty.	Description

1744	1.0	FINISHED BASEMENT FAMILY (REC) ROOM - FIREPLACE AND MANTLE - RELOCATE ELECTRICAL FIREPLACE
389,716		
27Mar25 **		SKETCH # 1 DRYWALL-notify; ELECTRICAL-notify; FRAMING-notify; HEATING/AIR CONDITIONING-notify; INTERIC TRIM-notify; PAINTING-notify

INTERIOR STAIRS

Invoice	Qty.	Description

1744	1.0	- HARDWOOD - SERVERY - 5 IN VINTAGE SCULPTED NSS RED OAK (CHARACTER GRADE) UVF OIL OR PEARL -
712,434		UPG
27Mar25		
**		CABINETRY-Raise Cabinet; CERAMICS-Delete Std Ceramics; INTERIOR STAIRS-Notify

INTERIOR TRIM AND DOORS

Invoice	Otv.	Description	
THYUICE	Oiv.	Description	

1744	1.0	FINISHED BASEMENT FAMILY (REC) ROOM - FIREPLACE AND MANTLE - RELOCATE ELECTRICAL FIREPLACE
389,716		
27Mar25		SKETCH # 1
**		DRYWALL-notify; ELECTRICAL-notify; FRAMING-notify; HEATING/AIR CONDITIONING-notify; INTERIO
		TRIM-notify; PAINTING-notify

MODIFICATIONS

Invoice	Qty.	Description

1744	1.0	FINISHED BASEMENT FAMILY (REC) ROOM - FIREPLACE AND MANTLE - RELOCATE ELECTRICAL FIREPLACE
389,716		
27Mar25 **		SKETCH # 1 DRYWALL-notify; ELECTRICAL-notify; FRAMING-notify; HEATING/AIR CONDITIONING-notify; INTERIC
		TRIM-notify; PAINTING-notify

MODIFICATIONS - TUB/SHOWER CONVERSION

Invoice	Qty.	Description
1744	1.0	FINISHED BASEMENT BATHROOM - TUB TO SHOWER CONVERSION - CHANGE STANDARD 5 FT TUB TO FULL
389,806		SHOWER STALL (W/ 8 INCH HIGH SILL) INCLUDES CHROME-FRAMED 36 INCH WIDE PANEL AND 24 INCH HINGED DOOR
27Mar25	l	SKETCH # 1
		CERAMICS-Notify;DRYWALL-Notify;FRAMING-Notify;MIRRORS/GLASS PRODUCTS-ADDITIONAL
		SHOWER; PLUMBING-Notify

DisciplineMS.rpt 13dec21 Page 9 of 10



Lot: 7125

Model: 30-2576 A The Oakwood **Project/Phase: Country Lane / 7**

PAINTING

Invoice	Qty.	Description
1744 714,437	2.0	KITCHEN - CABINETRY - 3C-PANTRY 66CM DEEP PER FOOT (COUNTER DEPTH)-VIKING
27Mar25 **		DOUBLE THE SIZE OF EXISTING PANTRY SKETCH # 2 AND 3 DRYWAL-Notify; FRAMING-Modify Bulkhead; PAINTING-Notify
1744 700,000	1.0	SERVERY ONLY - CABINETRY - OPT SERVERY UPPER-VIKING II/III-UPG
27Mar25 **		SKETCH# 3 DRYWAL-Notify; FRAMING-Modify Bulkhead; PAINTING-Notify
1744 711,330 27Mar25	1.0	- DRYWALL - SMOOTH CEILINGS-SECOND FLOOR WITH RESILIENT CHANNEL-UPG
**		ELECTRICAL-Drop electrical boxes; PAINTING-Paint smooth ceiling
1744 389,716	1.0	FINISHED BASEMENT FAMILY (REC) ROOM - FIREPLACE AND MANTLE - RELOCATE ELECTRICAL FIREPLACE
27Mar25 **		SKETCH # 1 DRYWALL-notify; ELECTRICAL-notify; FRAMING-notify; HEATING/AIR CONDITIONING-notify; INTERIO TRIM-notify; PAINTING-notify

PLUM	PLUMBING		
Invoice	Qty.	Description	
1744 389,832 27Mar25	1.0	SERVERY ONLY - PLUMBING - BAR SINK - COMPLETE BAR SINK FOR SERVERY INCLUDES PLUMBING ROUGH-IN AND MOEN ALIGN BAR PREP FAUCET (MODEL: 5965) AND BOSCO MODEL 207029 UNDERMOUNT SINK (INCLUDING GRANITE SINK CUTOUT/POLISH) - SKETCH # 3 SEE NEW BOSCO SPEC (ORIGINAL REGINOX DISCONTINUED) CABINETRY-Accommodate Servery Sink; CONCRETE AND DRAIN-Additional Stack; GRANITE-Additional Cu	
1744 389,910 27Mar25	1.0	KITCHEN/SERVERY - PLUMBING - MOEN -ALIGN - KITCHEN - SINGLE HANDLE PULLDOWN KITCHEN FAUCET BL MATTE BLACK (MODEL: 7565 BL) - SERVERY FAUCET TO REMAIN CHROME SEE SPECS	
1744 389,822 27Mar25	6.0	MASTER ENSUITE - PLUMBING - AMERICAN STANDARD - SINK - UNDERMOUNT SINK - BOXE - WHITE - MODEL 0315 000 020 MST ENS X 2; SHARED X 2; ENS 4; BSMT SEE SPECS	
1744 389,806 27Mar25 **	1.0	FINISHED BASEMENT BATHROOM - TUB TO SHOWER CONVERSION - CHANGE STANDARD 5 FT TUB TO FULL SHOWER STALL (W/ 8 INCH HIGH SILL) INCLUDES CHROME-FRAMED 36 INCH WIDE PANEL AND 24 INCH HINGED DOOR SKETCH # 1 CERAMICS-Notify; DRYWALL-Notify; FRAMING-Notify; MIRRORS/GLASS PRODUCTS-ADDITIONAL SHOWER; PLUMBING-Notify	

DisciplineMS.rpt 13dec21 Page 10 of 10


Model: 30-2576 A The Oakwood

21 of 52



30-2576 ELEV. A

The Oakwood

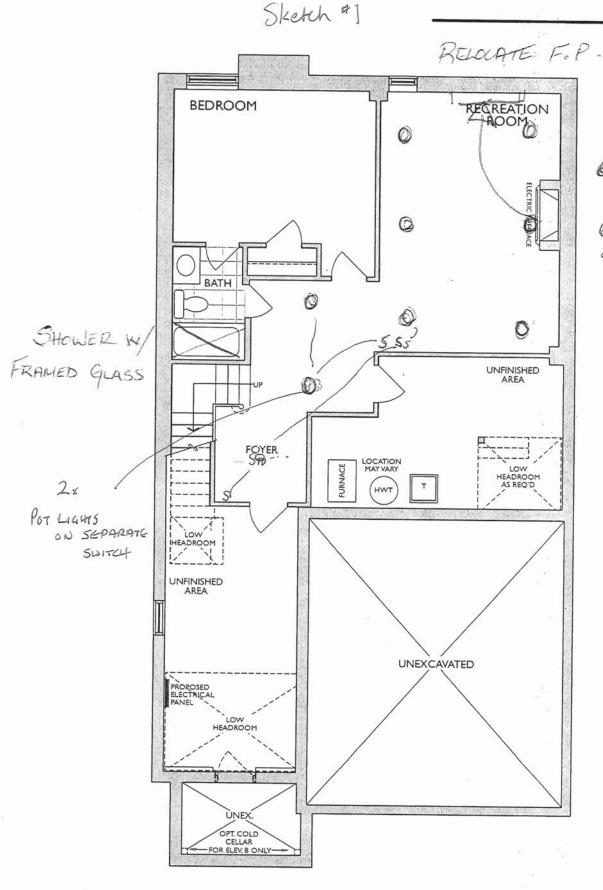

0 = POTLIGHTS

6x POT LIGHTS ON EXISTING SWITCH DELETE STO LIGHTS

FINISHED LOWER LEVEL ELEV. A & B

\$-1 ×

^{*} Floor plan may vary due to grading conditions.


Model: 30-2576 A The Oakwood

22 of 52




30-2576 ELEV. A

The Oakwood

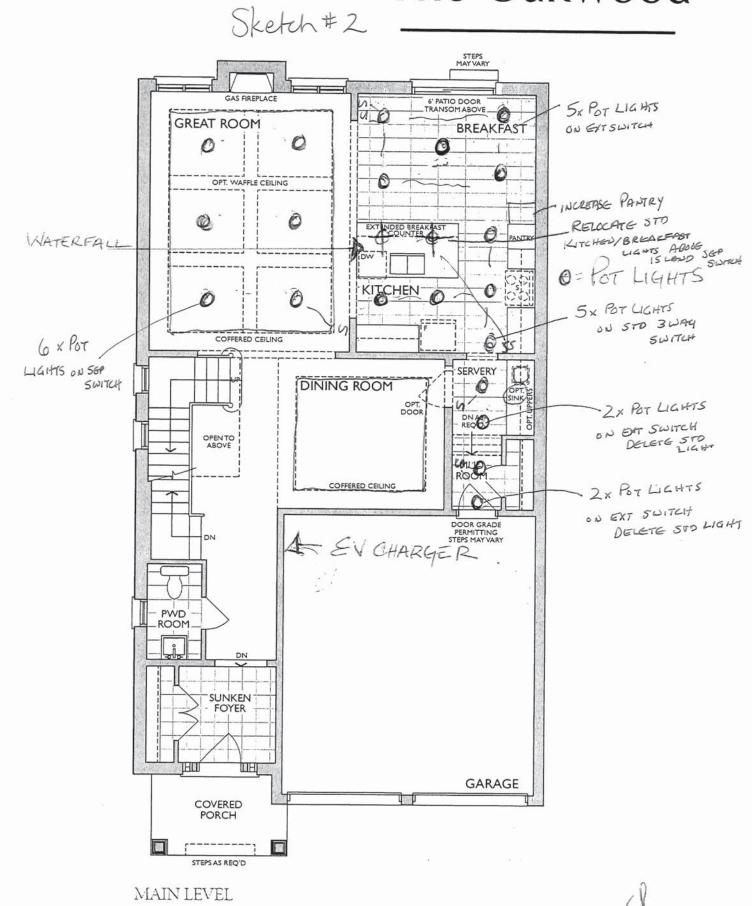

ELEV. A

^{*} Floor plan may vary due to grading conditions.

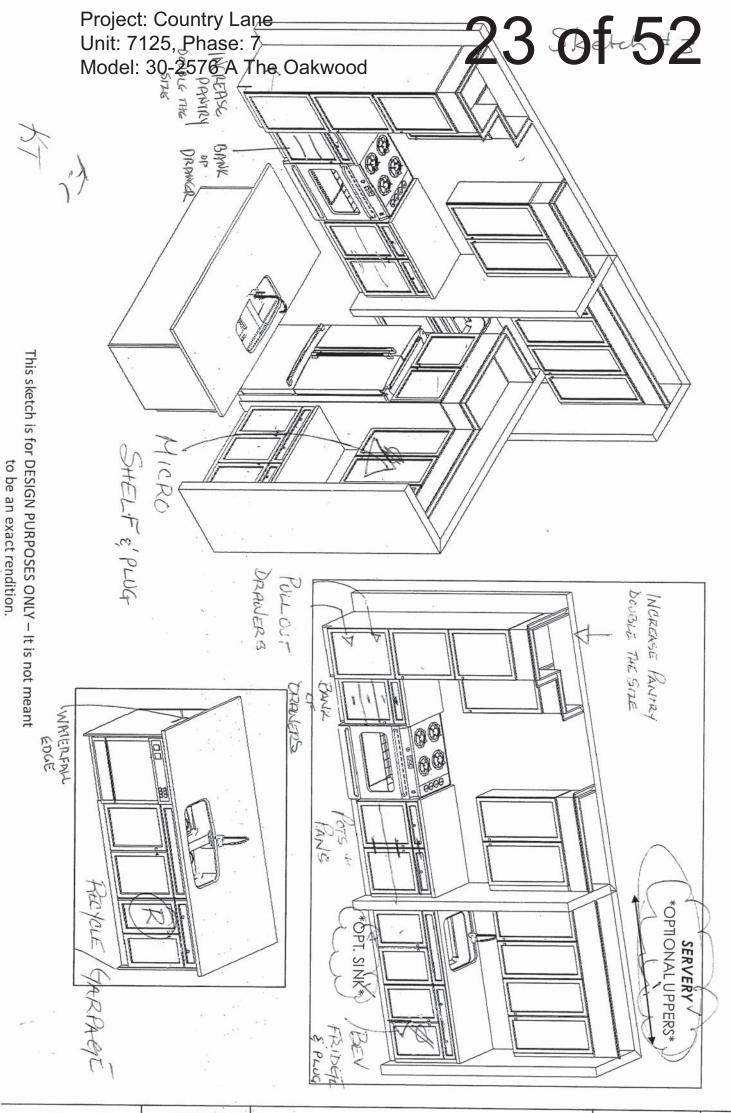

F

KIICHENS LIMITED 1350 Shawson Drive, Mississauga, OH LAW ICS [I] N D E

Heathwood Homes

Country Lane, Whitby

Model:

The Classic Series 30-2576 (3601)

Standard Features:

Tandem Box Soft Close

Crown Moulding & facia **Blumotion Hinges for Doors** Drawers

Deep Fridge Upper Top Drawer Construction

w/Deep Panel Tall upper Cabinets

Drawn By: Sepideh B Date: July 12, 2023 Scale: Not To Scale Revision:

Approved By Builder:

Date:


Model: 30-2576 A The Oakwood

24 of 52



30-2576 ELEV. A

The Oakwood

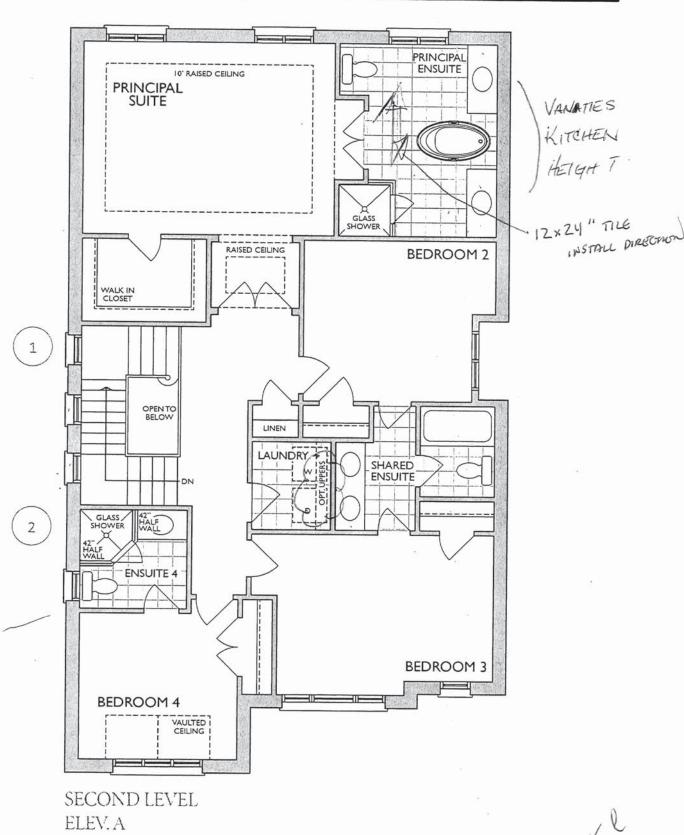

Changes made to match the Architectural plan:


- 1. Stair landing only
- 2. Half wall in ensuite 4

K. (

^{*} Floor plan may vary due to grading conditions.

Model: 30-2576 A The Oakwood

25 of 52

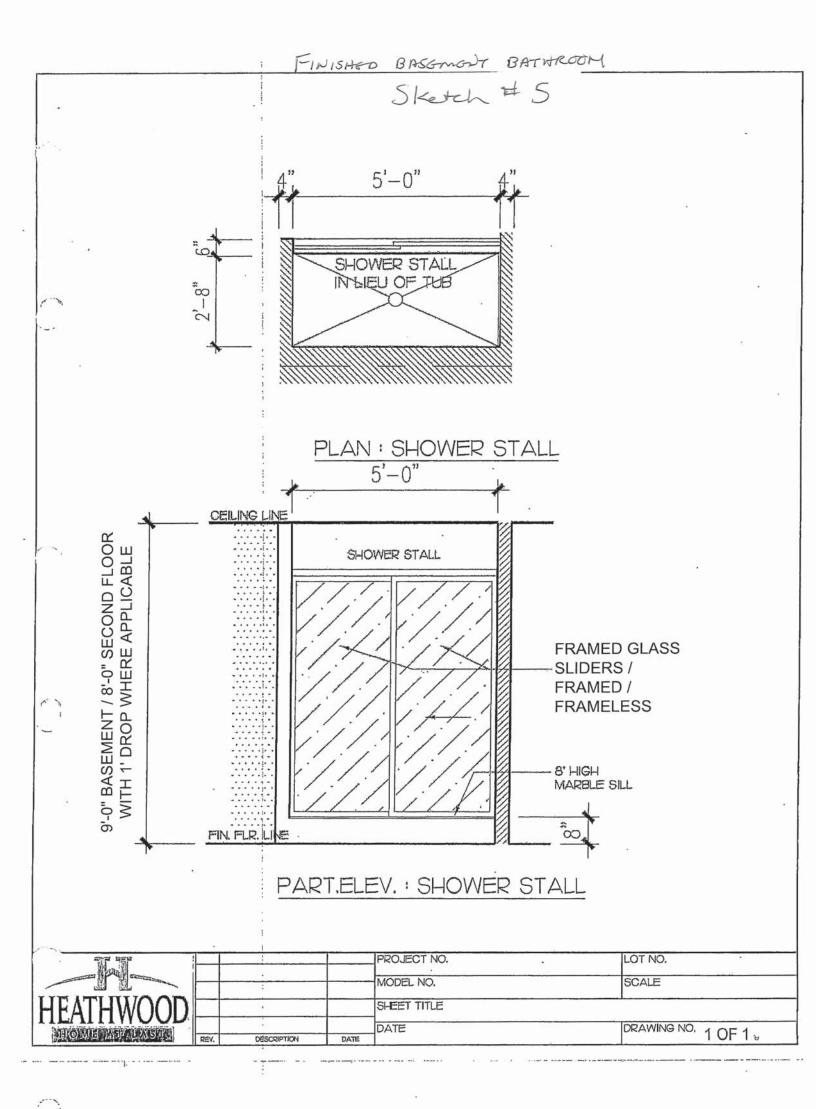


KITCHEN


26 of 52

Model: 30-2576 A The Oakwood NOTE: TOP DRAWER (AND OR SOFT CLOSE OF THE DRAWER) IS EXTRA CHARGE AND CAN ONLY BE ADDED IF THE ENTIRE KITCHEN HAS TOP DRAWER THROUGHOUT ./

18" Wide cabinet : 15B ·45cm wide pull-out door base cabinet waste/recycle centre with soft-close ([2] 35L bins per unit) (available only with 45cm wide cabinet)

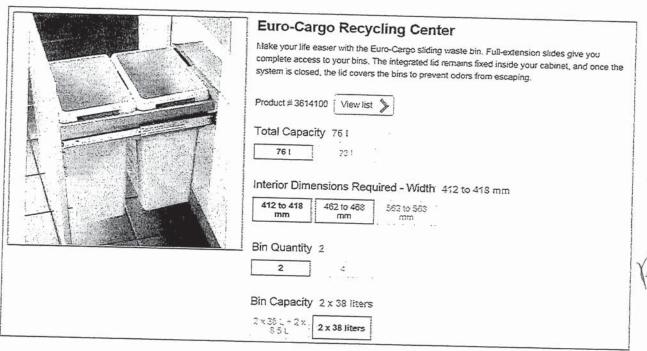

24" wide cabinet : 16B -60cm wide pull-out door base cabinet waste/recycle centre with soft-close ([4] bins total, including [2] 35L) (available only with 60cm or 24" wide cabinet)

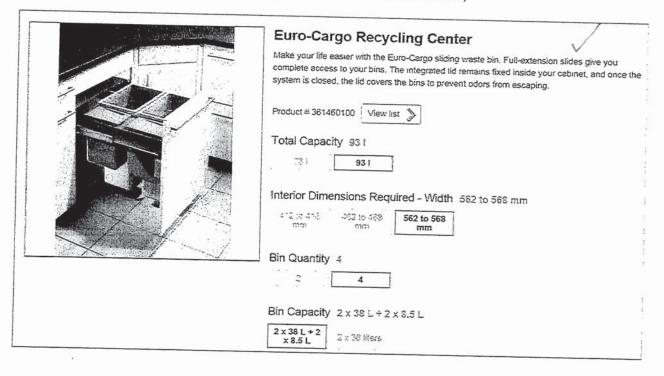

1/2



Project: Country Lane Unit: 7125, Phase: 7 Model: 30-2576 A The Oakwood 27 of 52

1 ½ MITERED Edge FULL POLISHED without side gables



3/4 SINGLE Edge PARTIAL POLISHED with 5/8" side gables on both side.



Project: Country Lane Unit: 7125, Phase: 7 Model: 30-2576 A The Oakwood

28 of 52





fl

NFAS NF17 Mantel FLAT WALL GREAT ROOM

CABINET LOWER LEVEL REC ROOM

NOTE: ELECTRIC FIREPLACE


RELOCATED

Model: 30-2576 A The Oakwood

29 of 52

NS1930U/9



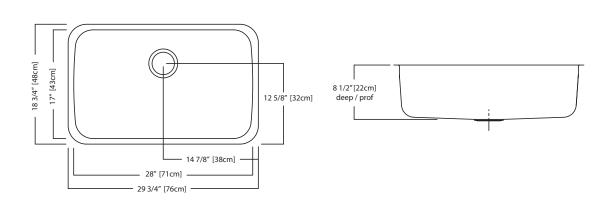

NS1930U/9 SPECIFICATION

Model NS1930U/9 is a single bowl, undermount sink manufactured for Franke Kindred Canada Limited from 18 gauge, 18-10 stainless steel. Product has mirror finished rim and brush finished bowl. Sink is fully undercoated. Basket strainer waste fitting (3 1/2", 89 mm) are included. Sink is backed with a limited buyer lifetime warranty.

- O.D. 18 3/4" x 29 3/4" x 8 1/2" (48 x 76 x 22 cm)
- Recommended for minimum 36" cabinet

Plumbing Fixture / Kitchen Sinks 15410

Model: 30-2576 A The Oakwood

30 of 52

MOEN

FAUCET DESCRIPTION

Reflex™ pulldown system offers smooth operation, easy movement and secure docking
Power Clean™ spray technology
Metal construction with various finishes identified by suffix

Quick connect installation Pulldown spray with 68" braided hose

Flexible supply lines with 3/8" compression fittings
High arc spout provides height and reach to fill or clean large pots while pulldown wand provides the maneuverability for cleaning or rinsing

360° rotating spout

Faucet designed for handle to be mounted on right side only

OPERATION

Lever style handle Temperature controlled by 100° arc of handle travel Operates with less than 5 lbs. of force

Operates in stream or spray mode in the pullout or retracted position
 FLOW

Flow is limited to 1.5 gpm (5.7 L/min) max at 60 psi

CARTRIDGE

1255™ Duralast™ cartridge
 STANDARDS

Third party certified to IAPMO Green, ASME A112.18.1/CSA B125.1 and all applicable requirements therein including NSF 61/9G & 372 Meets CalGreen and Georgia SB370 requirements

Complies with California Proposition 65 and with the Federal Safe Drinking

The backflow protection system in the device consists of two independently operating check valves, a primary and a secondary which prevent backflow

ADA (for lever handle

WARRANTY

Lifetime limited warranty against leaks, drips and finish defects to the original homeowner

10 year limited warranty when used in a multifamily installation 5 year limited warranty when used in a commercial installation

Visit www.moen.com/support for complete details and limitations

Specifications




ALIGN™ Single Handle High Arc **Pulldown Kitchen Faucet**

Models: 7565 series 7565BL MATTE BLACK

NOTE: THIS FAUCET IS DESIGNED TO BE INSTALLED THROUGH 1 HOLE, 1-1/2" (38mm) MIN. DIA. (OPTIONAL 3-HOLE ESCUTCHEON 141002 AVAILABLE)



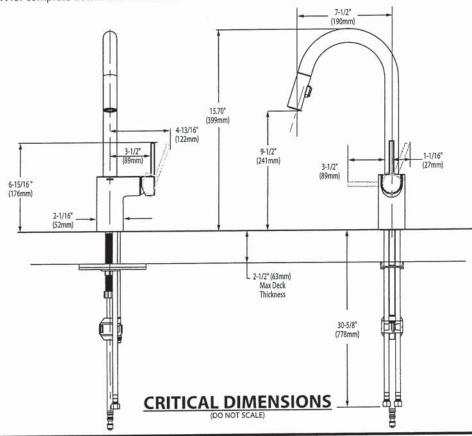

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN

Rev. 1/22

www.moen.com

Model: 30-2576 A The Oakwood

31 of 52

SERUGRY SINK





Phone: 416-742-1888 | Fax: 416-742-6888 www.boscocanada.com | info@boscocanada.com 5171 Steeles Avenue West | Toronto, Ontario M9L 1R5

Builder Series - Model:207029

Undermount

Rear positioned drain holes to maximize usable bowl and cabinet storage space below

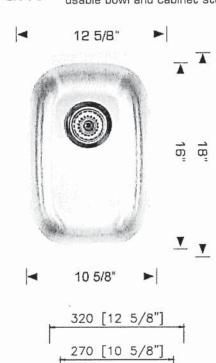

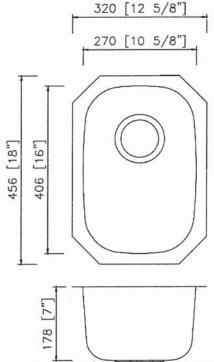

Bosco Canada Inc. is known around the world for producing high quality kitchen sinks that incorporate modern design and functional superiority in every piece they manufacture.

Specifications:

- 304 Stainless Steel
- 18 Gauge
- Strainer
- Undermount Clips
- 7" Deep

Outside:

12 5/8" x 18" x 7"

Inside:

10 5/8" x 16" x 7"

Minimum cabinet size 15"

Certification/Warranty

- ASME A 112.19.3
- CSA B45.4
- · Limited Lifetime Warranty

Optional Accessories



Model: G207029 Grid

Model: 30-2576 A The Oakwood

32 of 52

CHROME

MOEN

There is more than 1 version of this model. Page down to identify the version you have.

FAUCET DESCRIPTION

- Reflex[™] pulldown system offers smooth operation, easy movement and secure docking
- Power Clean™ spray technology
- Metal construction with various finishes identified by suffix Duralock™ quick connect
 Pulldown spray with 68" braided hose
 Flexible supply lines with 3/8" compression fittings

- High arc spout provides the perfect height and reach for prep sinks while the pulldown feature provides maneuverability for food preparation tasks 360° rotating spout provides ability to install handle on either side
- -aucet designed for handle to be mounted on right side

OPERATION

- Lever style handle
- Temperature controlled by 100° arc of handle travel Operates with less than 5 lbs. of force
- erates in stream or spray mode in the pullout or retracted position

Flow is limited to 1.5 gpm (5.7 L/min) max at 60 psi

CARTRIDGE


™ Duralast™ cartridge for Single-Handle Faucets

STANDARDS


- Third party certified to IAPMO Green, ASME A112.18.1/CSA B125.1 and all applicable requirements referenced therein including NSF 61/9G & 372 Meets CalGreen and Georgia SB370 requirements
- Complies with California Proposition 65 and with the Federal Safe Drinking
- The backflow protection system in the device consists of two independently operating check valves, a primary and a secondary which prevent backflow
- ADA for lever handle

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
- 10 year limited warranty when used in a multifamily installation 5 year limited warranty when used in a commercial installation
 Visit www.moen.com/support for complete details and limitations

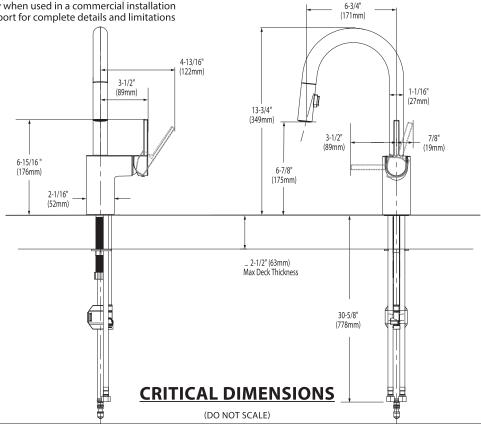

Specifications



ALIGN™ Single Handle High Arc **Pulldown Prep/Bar Faucet**

Models: 5965 series

NOTE: THIS FAUCET IS DESIGNED TO BE INSTALLED THROUGH 1 HOLE, 1-1/2" (38mm) MIN. DIA. (OPTIONAL 3-HOLE ESCUTCHEON 141002 AVAILABLE)



TO ORDER PARTS CALL: 1-800-BUY-MOEN

www.moen.com

5/19

Model: 30-2576 A The Oakwood

33 of 52



BARRIER FREE (ABOVE COUNTER OR DROP-IN ONLY)

BOULEVARD® PEDESTAL SINK VITREOUS CHINA

BOULEVARD® PEDESTAL SINK

9641.888 Faucet holes on 8" (203mm) centers (Illustrated) STD 0641-400 Faucet holes on 4" (102mm) centers

G 0641.100 Center hole only

- Classic styled rectangular pedestal lavatory
- Vitreous china
- Rear overflow
- Supplied with mounting kit
- Right Height[®] for greater comfort during use
- Faucet ledge with large deck area (faucet not included)
- Design coordinates with Boulevard® Toilet
- Basin has flat bottom to also allow use as an above counter sink or a drop-in sink (with u-shaped cut out)

Nominal Dimensions:

24" x 19" x 35-1/2" (610 x 483 x 902mm)

- ☐ 0641.008 Pedestal top-8" (203mm) centers
- ☐ 0641.004 Pedestal top-4" (102mm) centers
- ☐ 0641.001 Pedestal top-center hole only
- ☐ 0010.000 Pedestal only

Bowl sizes:

17" (432mm) wide, 12-1/2" (318mm) front to back, 5" (127mm) deep


Compliance Certifications -

Meets or Exceeds the Following Specifications:

• ASME A112.19.2 - 2008/CSA B45.1-08

To Be Specified:

- Color White Linen
- ☐ Faucet Finish:
- ☐ Supplies:
- ☐ 1-1/4" Trap:
- O Nipple:








See faucet section for additional models available

Model: 30-2576 A The Oakwood

34 of 52



BOULEVARD® PEDESTAL SINK

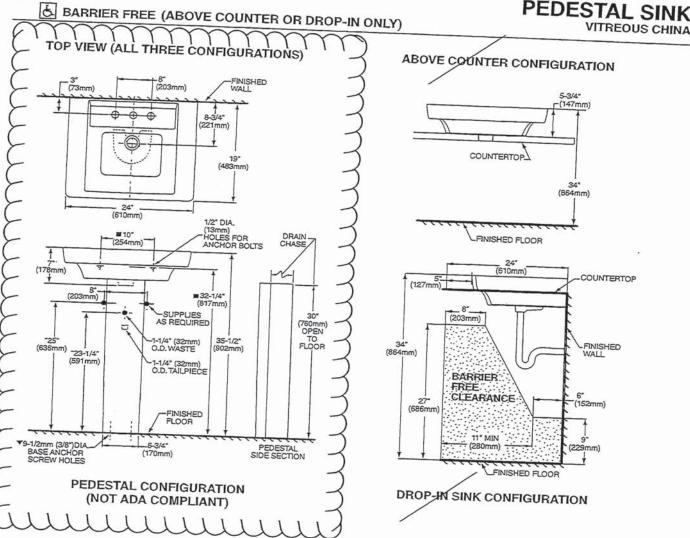

ABOVE COUNTER AND DROP-IN SINK CONFIGURATIONS MEET THE AMERICANS WITH DISABILITIES ACT GUIDELINES AND ANSI A117.1 ACCESSIBLE AND USABLE BUILDINGS AND FACILITIES - CHECK LOCAL CODES. Top of sink installed at 34" (864mm) height from finished floor. Sink installed 5" (127mm) minimum from front edge of countertop. Provide 27" (686mm) knee clearance area.

NOTES:

* DIMENSIONS SHOWN FOR LOCATION OF SUPPLIES AND "P" TRAPS ARE SUGGESTED.

* PEDESTAL ANCHORING SCREWS NOT INCLUDED.

SUITABLE FOR REINFORCEMENT ONLY. ACTUAL DIMENSIONS MUST BE TAKEN FROM FIXTURE.
FITTING NOT INCLUDED AND MUST BE ORDERED SEPARATELY.
PROVIDE SUITABLE REINFORCEMENT FOR ALL WALL SUPPORTS.
INSTALLATION INSTRUCTIONS SUPPLIED WITH LAVATORY.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerance established by ANSI Standard A112.19.2 These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

J8

© 2018 AS America Inc.

Model: 30-2576 A The Oakwood

35 of 52



Style That Works Better

BOXE UNDERCOUNTER SINK

BOXE UNDERCOUNTER SINK

VITREOUS CHINA

& BARRIER FREE

- Vitreous china
 - · Rectangular undercounter mount sink with rectangular interior and flat bottom design bowl
 - Unglazed rim
 - Front overflow
 - Supplied with template
 - · Meets OBC requirement when sink is installed with overflow to the rear
 - Mounting clips available separately (P031006000) (Faucet not included)

☐ 0315 000 Unglazed Rim

508 x 406mm (20" x 16")

Bowl size: 438mm (17-1/4") wide, 337mm (13-1/4") front to back, 127mm (5") deep

COMPLIANCE CERTIFICATIONS -Meets or exceeds the following Specifications:

■ White


ASME A112.19.2M for Vitreous China Fixtures.

CAN/CSA B45 Series.

To Be Specified

☐ Colour:

□ Faucet*: ☐ Faucet Finish:



^{*} See faucet section for additional models available

■ Supplies & Stops:

☐ Trap 1-1/4" (32 mm):



• Countertop 864mm (34") from finished floor. Sink installed 102mm (4") from front edge of countertop. Countertop thickness to be 25mm (1") maximum.

MEETS THE AMERICAN DISABILITIES ACT GUIDELINES AND ANSI A117.1 ACCESSIBLE AND USEABLE BUILDINGS AND FACILITIES - CHECK LOCAL CODES.

WE RECOMMEND USING SINK AS A TEMPLATE TO DETERMINE PROPER CONTOUR. CUT COUNTERTOP 38MM (1-1/2") INSIDE SINK CONTOUR. FAUCETS NOT INCLUDED AND MUST BE ORDERED SEPARATELY.


* DIMENSIONS SHOWN FOR LOCATION OF SUPPLIES AND "P" TRAP ARE SUGGESTED.

- UNDERCOUNTER MOUNTING KIT SUPPLIED SEPARATELY.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard A112.19.2.

These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.



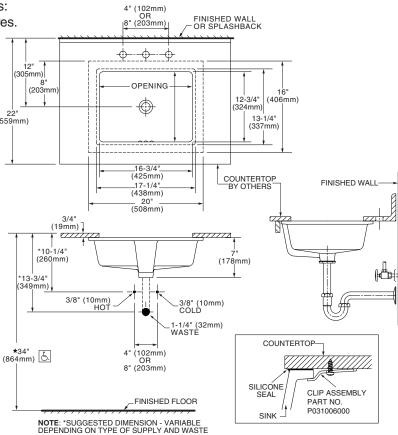

* To comply with ADA standards, overflow hole must face back.

BAS-146

© 2010 AS Canada, ULC

08/10

Model: 30-2576 A The Oakwood

36 of 52



DEMI[™] Product Specification Sheet

Two Piece Freestanding Collection

CF2007

Two Piece Freestanding Soaker

Size:

60" x 32" x 22"


1524 mm x 813 mm x 559 mm




- Vacuum formed acrylic reinforced with fiberglass
- Scratch, stain and fade resistant high gloss finish
- Installation friendly two piece design
- Accepts deck mounted faucet
- Includes integral pop up drain and rectangular overflow
- Includes levelling feet






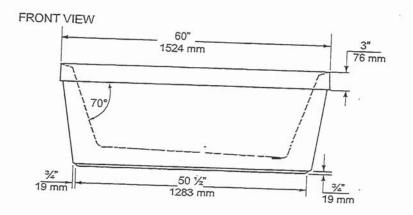

TOP VIEW

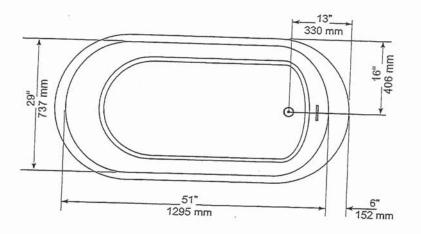

END VIEW



GENERAL SPECIFICATIONS Average Weight 90 lb 41 kg Bathing Well at bottom 43"x 20" 1092 x 508 mm Capacity Drain to Overflow 195 litres Water Depth Drain to Overflow 406 mm Drain Opening (dia.) 51 mm Overflow Opening 21/2×1/2 57 x 13 mm Drain to Floor Clearance 3 1/2" 83 mm

NOTES: Please confirm measurements on actual product to ensure proper identification. Bathtub to be installed on the floor supported by 5 self levelling feet. Adjust if required to level the bathtub for adequate drainage. Refer to installation instructions for additional information.

IMPORTANT: Dimensions of fixtures are nominal and may vary \pm ¼" (6 mm). Weight may vary \pm 5 lb (2.3 kg). Drawing is not to scale. These measurements are subject to change at manufacturer's discretion.

Compliance Certifications -

Meets or Exceeds the following Specifications:
- CAN/CSA - B45 Series





60 Shorncliffe Rd., Toronto, Ontario M8Z 5KI Telephone: 416.231.9030 Fax: 416.231.0929 www.mirolin.com

Customer Service: 416.231.5790 ada, U.S.A.: 800.MIROLIN(647-6546) Fax, Canada: 800.463.2236

R0084162 25 Sep. 2018

© 2018 Mirolin Industries Corp.

Model: 30-2576 A The Oakwood

37 of 52



H2OPTION® SIPHONIC DUAL FLUSH ELONGATED TOILET

VITREOUS CHINA

H2OPTION® SIPHONIC DUAL FLUSH **ELONGATED TOILET**

2887.218

- · Vitreous china
- Ultra high efficiency
 - Full Flush (4.8 Lpf/1.28 gpf)
 - Partial Flush (3.4 Lpf/0.92 gpf)
- · Elongated siphon action bowl with direct-fed jet
- Meets EPA WaterSense® criteria
- MaP PREMIUM listed
- Includes EverClean® antimicrobial surface
- PowerWash® rim scrubs bowl with each flush
- 305mm (12") rough-in
- Fully glazed 2" Trapway
- Generous 9" x 8" water surface area
- Chrome plated top mounted push button actuator
- Sanitary bar on bowl
- 2 color matched bolt caps
- Limited lifetime warranty on chinaware and limited five year warranty on all mechanical parts
- ☐ 2887.518 Same as above, except with Tank with AquaGuard Liner

Separate Component Parts:

- ☐ **3706.216** Bowl
- ☐ 4133A.218 Tank
- ☐ 4133A.518 Tank with AguaGuard Liner

Nominal Dimensions:

756 x 380 x 762mm (29-3/4" x 15" x 30")

Fixture only, seat and supply by others


Compliance Certifications -Meets or Exceeds the Following Specifications:

- ASME A112.19.2-2008/CSA B45.1-08 for Vitreous China Fixtures
- CALGreen and Califonia Energy Commission (CEC) Compliant
- US EPA WaterSense® criteria for UHETs

To Be Specified:

- □ Color: □ White □ Bone □ Linen
- ☐ Seat: American Standard #5257A.65C Easy Lift and Clean Elongated Seat with Cover and Slow Close hinges
- ☐ Alternate Seat:
- ☐ Supply with stop:



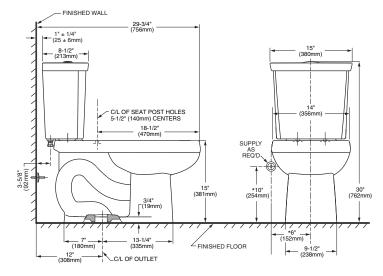

NOTES:
THIS COMBINATION IS DESIGNED TO ROUGH-IN AT A MINIMUM DIMENSION OF 305MM (12") FROM FINISHED WALL TO C/L OF OUTLET.
* DIMENSION SHOWN FOR LOCATION OF SUPPLY IS SUGGESTED.
SUPPLY NOT INCLUDED WITH FIXTURE AND MUST BE ORDERED SEPARATELY.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerance established by ANSI Standard A112.19.2 These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.





Model: 30-2576 A The Oakwood

38 of 52

MOEN

DESCRIPTION

- Metal construction with various finishes identified by suffix
- 16" long 3/8" tubing connections
- Includes metal or 50/50 pop-up type waste assembly where noted

OPERATION

- Pivot action lever style handle
- Temperature controlled through 180° degree arc of handle travel
- Flow is limited to 1.5 gpm max (5.7L/min) at 60 psi

CARTRIDGE

- 1225 cartridge design
- Nonmetallic/nonferrous and stainless steel material
- Can accommodate reversed piping and back to back installations **STANDARDS**
- Third party certified to WaterSense®, CSA B-125.1, ASME A112.18.1 and
- all applicable requirements referenced therein including NSF61/9 Complies with California Proposition 65 and with the Federal Safe Drinking Water Act

 ADA for lever handle

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations

Specifications



CHATEAU® Single-Handle Lavatory Faucet


with Metal Waste Assembly Model: L4625 series L4631BC Bulk Packed (12 per carton): L64624 series

with 50/50 Waste Assembly Bulk Packed (12 per carton): L64625 series

Less Waste Bulk Packed (12 per carton): L64600 series

NOTE: THIS FAUCET IS DESIGNED TO BE INSTALLED THRU 3-1" DIA. HOLES, 2" ON CENTER



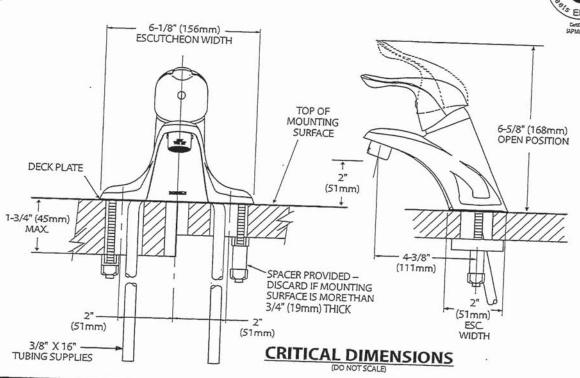

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN www.moen.com

Rev 8/15



Model: 30-2576 A The Oakwood

39 of 52

MOEN

Buy it for looks. Buy it for life.®

There is more than 1 version of this model. Page down to identify the version you have.

DESCRIPTION

Metal construction with various finishes identified by suffix

Includes non-metalic showerhead, arm, flange and non-metalic diverter tub spout

OPERATION

Handle operates counterclockwise through a 270° arc with off at 6 o'clock and maximum hot at the 9 o'clock position. Shut off in clockwise direction

Adjustable temperature limit stop to control maximum hot water

Pressure balancing mechanism maintains selected discharge temperature to $\pm 3^{\circ}$

FLOW

Showerhead is limited to 2.5 gpm (9.5 L/min) at 80 psi EP suffix models are limited to 1.75 gpm (6.6 L/min) at 80 psi

NH suffix models contain no showerhead

CARTRIDGE

1222 cartridge design Accommodates back to back installations

Nonmetallic/nonferrous and stainless steel material

STANDARDS

Third party certified to meet ASME A112.18.1/CSA B125.1 and all applicable requirements referenced therein

EP suffix models are third party certified to WaterSense®


ADA for lever handle

WARRANTY

Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser

5 year warranty if used in commercial installations


Specifications



CHATEAU POSI-TEMP Single-Handle Tub/Shower Trim Kit

Models: TL181 series - valve trim only (Bulk Packed 12 per carton) TL182 series - shower trim only (Bulk Packed 12 per carton) TL183 series - tub/shower trim (Bulk Packed 12 per carton)

Valves: 62300 series 2500 series

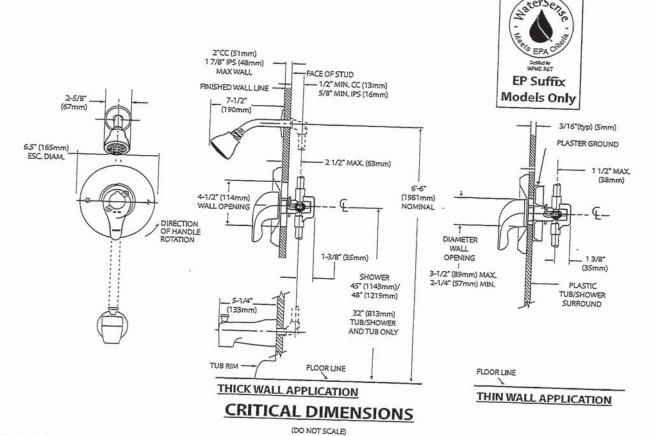

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN

www.moen.com

Model: 30-2576 A The Oakwood

40 of 52

MOEN

DESCRIPTION

Metal construction with various finishes identified by suffix

OPERATION

- Lever style handles with hot and cold color indicator
- Rotate hot side handle counterclockwise to open (clockwise to close) and the cold side handle (clockwise to open) and (counterclockwise to close)


STANDARDS

- Third party certified to: ASME A112.18.1/CSA B-125.1, and all applicable requirements referenced therein
- ADA (for lever handles

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
- 10 year limited warranty when used in a multi-family installation
- 5 year limited warranty when used in a commercial installation Visit www.moen.com/support for complete details and limitations


Specifications




CHATEAU® Two-Handle Garden Tub Trim

Models: T994 series

Valves: 4792, 4793, 4794, 4796, 4797, 4798

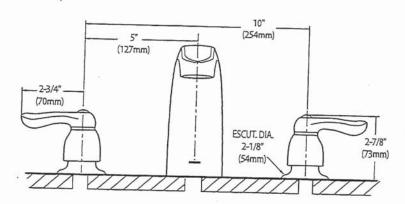



CRITICAL DIMENSIONS


FOR MORE INFORMATION CALL: 1-800-BUY-MOEN www.moen.com

Model: 30-2576 A The Oakwood

41 of 52

SC(B)514 | ALITO Collection





Wall Mount

The SC(B)514 makes a statement of strength and power with a bold frame and 550 CFM fan. Features mesh or baffle filters, two bright LED lights and a three-speed panel for total control. It is also fitted with a time-delay OFF feature up to nine minutes.

Green Features



3 Speed Push Button Control Panel




Time-Delay OFF Feature



Long-Lasting LED Lights



Grease Cup

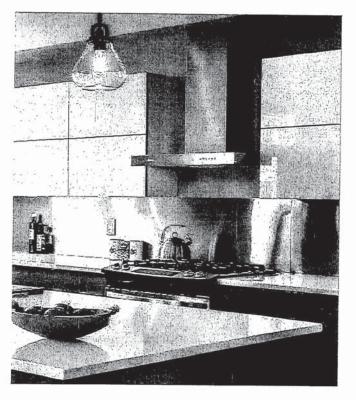

	Calculation	· · · · · · · · · · · · · · · · · · ·		THE COLD IN WEST SERVICES	
Model	Colour	Ducting	Filters	Size	CFM
The second secon	The state of the s	THE RESIDENCE OF THE PARTY OF T			AND ARROWS THE PARTY OF THE PAR

	1		1		
SCB51430	Stainless Steel	6"	Baffle	(30")	550
SCB51436	Stainless Steel	6"	Baffle	36	550

Cyclone Range Hoods Inc.

1361 Huntingwood Drive, Unit 16. Toronto, ON. M1S 3J1. Canada.

Toll Free: 1-888-293-5662 Tel: (416) 293-0933 Fax: (416) 293-4793 Website: www.CycloneRangeHoods.com





Model: 30-2576 A The Oakwood


42 of 52


SC(B)514 | ALITO Collection



Features

- · Wall mount range hood
- · 6" round duct adapter
- · Non-stick aluminum fan blades
- · 3 speed push button control
- · 2 LED lights (2 x 1.4W, 4000K)
- · Quick release aluminum mesh filters
- · Standard chimney fits up to 9 ft. ceiling
- · Up to 9 minutes time-delay OFF feature
- · Plug-in connection





Options

· Filters:

SCB514 - Quick Release Stainless Steel Baffle Filters

Chimney Flues:

B2.CH16 - short (7'-8' ceilings)

B2.CH22 - standard (8'-9' ceilings)

B2.CH32 - extended (9'-11' ceilings)

• Widths: (30", 36"

Specifications

· Air Flow Volume: 550 CFM

Electrical Connection: 120 V/60 Hz

· Power Consumption: 300 Watts

Current: 2.5 Amps

· Fan Speed: 1599 RPM

· Fan Type: Centrifugal Blower

· Finishes: Stainless Steel

- Ducting: 6" Round

Noise Level: Min. 2 Sones

Max. 6 Sones



Model: 30-2576 A The Oakwood

43 of 52



Whirlpool 20 cu. ft. French Door Refrigerator WRF540CWH



Fingerprint-Resistant Stainless WRF540CWHZ

Also available in:

-	
(White
	AALIIG

WRF540CWHW



WRF540CWHB



WRF540CWHV

Capacity			
Total Capacity	20 cu. ft.		
Refrigerator Capacity	14 cu. ft.		
Freezer Capacity	6 cu. ft.		
General Features & Prope	rties		
Interior Water Dispenser Water Filtration	with EveryDrop®		
Full-Width, Temperature-	Controlled Drawer		
Frameless Glass Shelves			
Gallon Door Bins			
Accu-Chill™ Temperature Management System			
Adaptive Defrost			
FreshFlow™ Produce Pre	server		
LED Interior Lighting			
Designed, Engineered ar U.S.A.	nd Assembled in the		
Electrical Details			
Amps	20		
Volts	115		
Certifications			

French Door
3
5
2 Fixed, 4 Adjustable
1 Wire, 1 Plastic
LED
Factory Installed
Freezer
Interior Water
70-1/8" x 35-5/8" x 29 3/8"
43"
Allow extra 1/2" on sides and top Allow extra 1" on rear

Dimension Guide

Use & Care Guide Energy Guide

Warranty

Key Features & Benefits

Fingerprint Resistant


Resists fingerprints and smudges with an easy-to-clean finish.

Counter Depth Design

Add additional kitchen space with styling that fits virtually flush with the countertop.

Humidity-Controlled Crispers

Store fruits and veggies in their ideal environment.



ENERGY STAR® Certified

NOTE: Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

®/™ © 2020. All rights reserved. Printed in the U.S.A. D200052XXC. WRF540CWHSPECSHEETV01.


Model: 30-2576 A The Oakwood




French Door Bottom Mount Refrigerator

WRF532SMH, WRF540CWH, WRF535SMH

PRODUCT DIMENSIONS



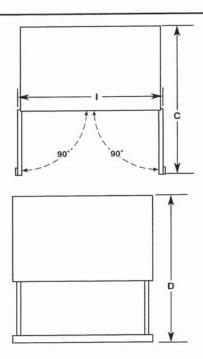

Model Number	WRF532SMH	WRF535SMH	WRF540CWH
Model Size	22.1 cu. ft.	25.2 cu. ft.	20.0 cu. ft.
Height - Overall "A"	701/s"	70½"	701/8"
	(178.1 cm)	(178.1 cm)	(178.1 cm)
Height - Top of	68%"	68%"	681/8"
Cabinet "B"	(174.9 cm)	(174.9 cm)	(174.9 cm)
Depth - Doors Open	47½"	481/s"	43"
90° "C"	(119.7 cm)	(122.2 cm)	(109.2 cm)
Depth - Drawer	521/8"	521/6"	45%"
Open "D"	(132.4 cm)	(132.4 cm)	(115.3 cm)
Depth - With	34 ¹ / ₂ "	35 ¹ / ₂ "	30 ¹ / ₂ "
Handles "E"	(87.4 cm)	(89.9 cm)	(77.5 cm)
Depth - Without	32"	33"	26 ⁷ / ₈ "
Handles "F"	(81.3 cm)	(83.8 cm)	(68.3 cm)
Depth - Cabinet	28 ¹ / ₈ "	29 ¹ / ₈ "	24 ¹ / ₈ "
Only "G"	(71.3 cm)	(73.9 cm)	(61.2 cm)
Width - Cabinet "H"	325/8"	35%"	35%"
	(82.9 cm)	(90.5 cm)	(90.5 cm)
Width - Door Open	40%"	43%"	43%"
90° "I"	(102.6 cm)	(110.2 cm)	(110.2 cm)

AWARNING



Electrical Shock Hazard

Plug into a grounded 3 prong outlet.

Do not remove ground prong.

Do not use an adapter.

Do not use an extension cord.

Failure to follow these instructions can result in death, fire, or electrical shock.

Electrical: A 115 V, 60 Hz, AC only 15 A or 20 A fused, grounded electrical supply is required. It is recommended that a separate circuit serving only your refrigerator be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.

NOTE: Before performing any type of installation, cleaning, or removing a light bulb, turn the control (Thermostat, Refrigerator or Freezer Control depending on the model) to OFF and then disconnect the refrigerator from the electrical source. When you are finished, reconnect the refrigerator to the electrical source and reset the control (Thermostat, Refrigerator or Freezer Control depending on the model) to the desired setting. See "Using the Controls."

Water: A cold water supply with water pressure between 35 psi and 120 psi (241 kPa and 827 kPa) is required to operate the water dispenser and ice maker. If you have questions about your water pressure, call a licensed, qualified plumber.

IMPORTANT: The pressure of the water coming out of a reverse osmosis system going to the water inlet valve of the refrigerator needs to be between 35 psi and 120 psi (241 kPa and 827 kPa).

Reverse Osmosis Water Supply:

If a reverse osmosis water filtration system is connected to your cold water supply, the water pressure to the reverse osmosis system needs to be a minimum of 40 psi to 60 psi (276 kPa to 414 kPa).

Model: 30-2576 A The Oakwood




French Door Bottom Mount Refrigerator

LOCATION REQUIREMENTS

Explosion Hazard

Keep flammable materials and vapors, such as gasoline, away from refrigerator.

Failure to do so can result in death, explosion, or fire.



IMPORTANT: This refrigerator is designed only for indoor, household use only.

To ensure proper ventilation for your refrigerator, allow for a 1/2" (1.25 cm) space on each side and at the top. Allow for 1" (2.54 cm) of space behind the refrigerator. If your refrigerator has an ice maker, make sure you leave some extra space at the back for the water line connections.

If you are installing your refrigerator next to a fixed wall, leave 21/2" (6.3 cm) minimum on the hinge side (some models require more) to allow for the door to swing open.

NOTE: This refrigerator is intended for use in a location where the temperature ranges from a minimum of 55°F (13°C) to a maximum of 110°F (43°C). The preferred room temperature range for optimum performance, which reduces electricity usage and provides superior cooling, is between 60°F (15°C) and 90°F (32°C). It is recommended that you do not install the refrigerator near a heat source, such as an oven or radiator.

Model: 30-2576 A The Oakwood

46 of 52

DIMENSION GUIDE

WARNING: To reduce the risk of fire, electric shock, or injury to persons, read the IMPORTANT SAFETY INSTRUCTIONS, located in your appliance's Owner's Manual, before operating this appliance.


This manual covers several models. Your model may have some or all of the items listed. Refer to this manual or the Frequently Asked Questions section of our website at **www.whirlpool.com** for more detailed instructions. In Canada, reference the Customer Service section at **www.whirlpool.ca**.

PRODUCT MODEL NUMBERS

WEE745H0L, YWEE745H0L

PRODUCT DIMENSIONS

This manual covers several models. Your model may appear different from the models depicted. Dimensions given are maximum dimensions across all models.

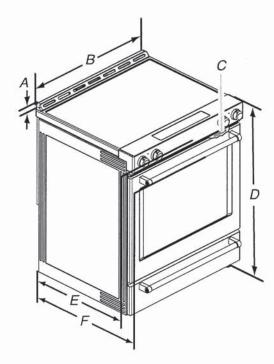

- A. 13/16" (3.0 cm) height from cooktop to top of vent
- B. 297/8" (75.9 cm)
- C. Model/serial/rating plate (located behind the oven door on the top right-hand side of the oven frame)
- D. 36" (91.4 cm) height to top of cooktop edge with leveling legs screwed all the way in*
- E. 285/16" (71.9 cm) maximum depth from front of console to back of range
- F. 287/s" (73.3 cm) maximum depth from handle to back of range

IMPORTANT: Range must be level after installation. Follow the instructions in the "Level Range" section of your Owner's Manual. Using the cooktop as a reference for leveling the range is not recommended.

*Range can be raised approximately 1" (2.5 cm) by adjusting the leveling legs.

Model: 30-2576 A The Oakwood

47 of 52





WDP540HAM


Whirlpool® 55 dBA Quiet Dishwasher with Boost Cycle and Pocket Handle Dimensions: h: 33 1/2" w: 23 7/8" d: 24 1/2"











Free up extra space with Three 5" Cup Shelves.

EXTENDED SOAK CYCLE

Presoak and wash in one cycle with the Extended Soak Cycle

HYBRID TUB WITH DARK GRAY INTERIOR

Hybrid Tub with Dark Gray Interior helps mask food stains.

EXTRAS



QUALIFYING QUESTION

Do you have enough room to fit all your cups in one load? or do you wash by hand?




MORE INFORMATION


Three 5" Cup Shelves fit six additional cups or small bowls to free up extra space in the racks below and conveniently fold down to stay out of the way when not in



DEMO

Load coffee mugs on the rack and measuring cups on the cup shelf above to show how to load more in the second rack.

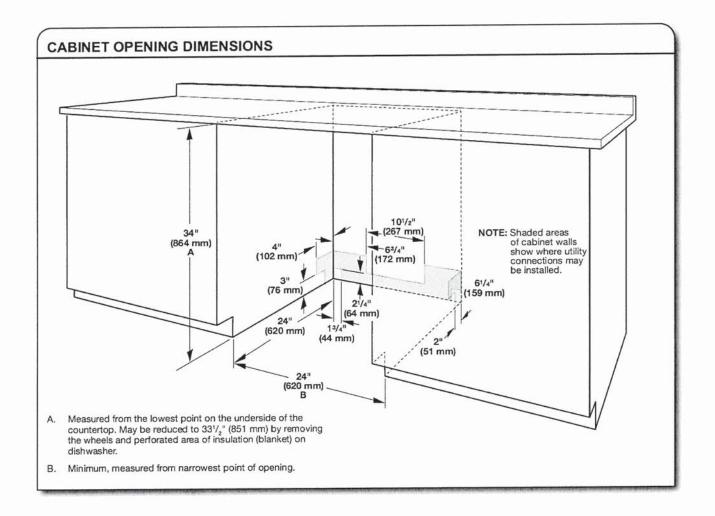

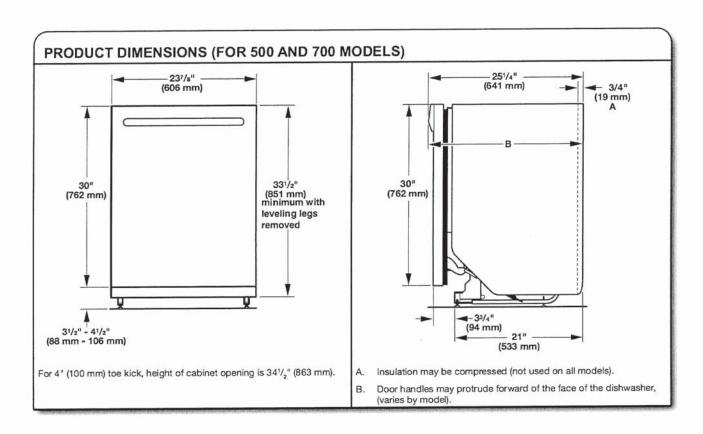

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

Model: 30-2576 A The Oakwood

49 of 52

5.0 cu.ft I.E.C. Closet-Depth Front Load Washer with Intuitive Controls

Model: WFW560CHW

Control Location

LCD Touch Screen



Specifications

Width: 6858.00, 27.0" Centimeters, Inches

Depth: 8016.88, 31-9/16" Centimeters, Inches


Centimeters, i	nonco	Centimeters, mones	
Dimensions		Compatibility	
Capacity	4-3/10	Works With	No
Depth	8016.88 cm, 31-9/16 in	Options	
Gross Weight	97068688.00 kg, 214 lbs	· · · · · · · · · · · · · · · · · · ·	
Net Weight	92532768.00 kg, 204 lbs	Number Of Washer Options	7
Width Appearance	6858.00 cm, 27.0 in	Features	
	20	Stackable	Yes
LCD Touch Screen	No	Water Faucet	No
Window	Yes	Cycles	
Details		Cycles	
Advanced Vibration Control™	No	Number Of Wash Cycles	35
Dispense System	Detergent, Fabric Softener &	Exterior	
Dispense System	Bleach	Lid/Door Lock	Yes
Eco Monitor/Efficiency Monitor	No		Left
Hoses Included	4ft 4in Drain Hose Included	Lid/Door Swing	Leit
Internal Heater	No	Modifiers	*
Maximum Spin Speed	1160	Delay Start	No
Out Of Balance Sensing	Yes	Number Of Rinse Options	2
Water Factor	3-1/5	Number Of Soil Levels	3
Cycles and Options		Number Of Spin Speeds	4
	11	Number Of Wash/Rinse Temperatures	4
Number Of Wash Cycles	35	Pre Soak	Yes
Electrical		Temperature Selections	Hot, Cold, Cool, Warm
Power Cord Included	Yes		
Controls			
Automatic Temperature Controls	Yes		

Front


No

Model: 30-2576 A The Oakwood


50 of 52

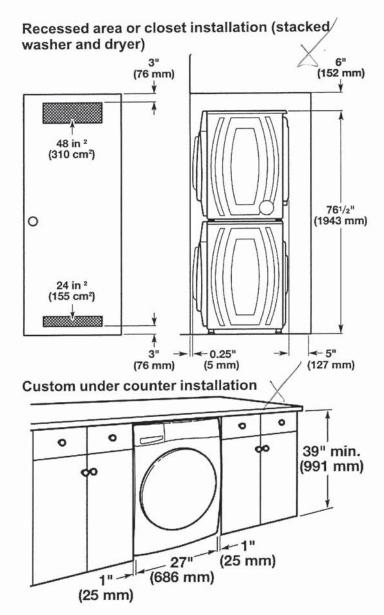

Recessed area or closet installation (washer only)

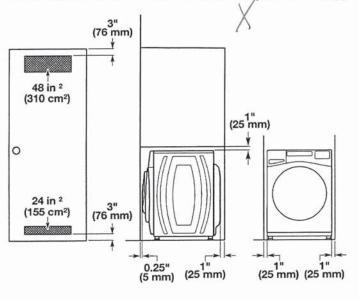

Custom cabinet installation

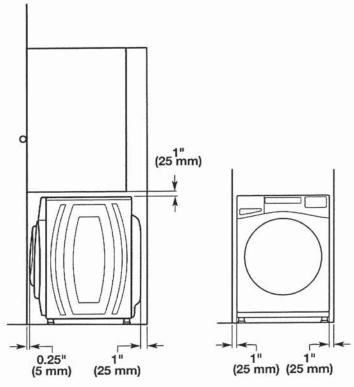


Drain System

It is the responsibility of the installer to install and secure the drain hose in to the provided plumbing/drain in a manner that will avoid the drain hose coming out of o leaking from the plumbing/drain.

Drain system can be installed using a floor drain, wall standpipe, floor standpipe, or laundry tub. Select the method you need.

IMPORTANT: To avoid siphoning, only 4.5" (114 mm) of drain hose should be inside standpipe. Always secure drain hose with cable tie.

Floor standpipe drain system

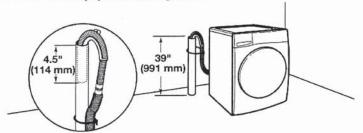


Minimum diameter for a standpipe drain: 2" (51 mm). Minimum carry-away capacity: 17 gallons (64 L) per minute. A 1/4" (6 mm) diameter to 1" (25 mm) diameter Standpipe Adapter Kit is available; refer to the Quick Start Guide for online ordering information. Top of standpipe must be at least 39" (762 mm) high; install no higher than 96" (2.4 m) from bottom of washer. If you have an overhead sewer and need to pump higher than 96" (2.4 m), a sump pump and associated hardware are needed. See "Alternate Parts."

Model: 30-2576 A The Oakwood


51 of 52

Wall standpipe drain system

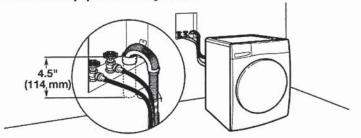


See requirements in "Floor standpipe drain system."


Laundry tub drain system



Minimum capacity: 20 gallons (76 L). Top of laundry tub must be at least 39" (991 mm) from the floor; install no higher than 96" (2.4 m) from bottom of washer.

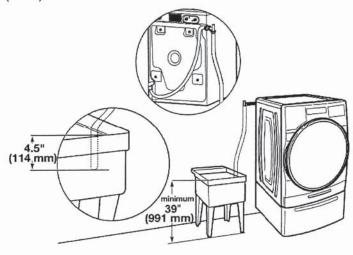

Floor drain system

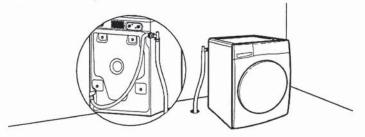

Floor drain system requires a Siphon Break Kit, 2 Connector Kits, and an Extension Drain Hose that may be purchased separately; refer to the Quick Start Guide for online ordering information. Minimum siphon break height: 28" (710 mm) from bottom of washer. (Additional hoses may be needed.)

Electrical Requirements

AWARNING



Electrical Shock Hazard

Plug into a grounded 3 prong outlet.

Do not remove ground prong.

Do not use an adapter.

Do not use an extension cord.

Failure to follow these instructions can result in death, fire, or electrical shock.

- A 120 V, 60 Hz, AC only, 15 or 20 A, fused electrical supply is required. A time-delay fuse or circuit breaker is recommended. It is recommended that a separate circuit breaker serving only this appliance be provided.
- This washer is equipped with a power supply cord having a 3-prong grounding plug.
- To minimize possible shock hazard, the cord must be plugged into a mating, 3-prong, grounding-type outlet, grounded in accordance with local codes and ordinances. If a mating outlet is not available, it is the personal responsibility and obligation of the customer to have the properly grounded outlet installed by a qualified electrician.
- If codes permit and a separate ground wire is used, it is recommended that a qualified electrician determine that the ground path is adequate.
- Do not ground to a gas pipe.
- Check with a qualified electrician if you are not sure the washer is properly grounded.
- Do not have a fuse in the neutral or ground circuit.

GROUNDING INSTRUCTIONS

For a grounded, cord-connected appliance:

This appliance must be grounded. In the event of a malfunction or breakdown, grounding will reduce the risk of electric shock by providing a path of least resistance for electric current. This appliance is equipped with a cord having an equipment-grounding conductor and a grounding plug. The plug must be plugged into an appropriate outlet that is properly installed and grounded in accordance with all local codes and ordinances.

WARNING: Improper connection of the equipmentgrounding conductor can result in a risk of electric shock. Check with a qualified electrician or serviceman if you are in doubt as to whether the appliance is properly grounded. Do not modify the plug provided with the appliance: If it will not fit the outlet, have a proper outlet installed by a qualified electrician.

For a permanently connected appliance:

This appliance must be connected to a grounded metal, permanent wiring system, or an equipment-grounding conductor must be run with the circuit conductors and connected to the equipment-grounding terminal or lead on the appliance.


SAVE THESE INSTRUCTIONS

Model: 30-2576 A The Oakwood

52 of 52

WHIRLPOOL DRYER Model #: YWED5620HW

Whirlpool Brand Canada English | Washer and Dryers | Dryers | Electric Dryers | YWED5620HW



7.4 cu. ft. Front Load Electric Dryer with Intuitive Touch Controls

Whirlpool

7.4 cu. ft. Front Load Electric Dryer with Intuitive Touch Controls

Model #: YWED5620HW

Dimensions

Depth	78.74 cm, 31.0 in
Depth With Door Open 90 Degree	138.43 cm, 54-1/2 in
Height	98.42 cm, 38-3/4 in
Width	68.58 cm, 27.0 in
Configuration and Overview	
Fuel Type	Electric
Cycles and Options	
Cycle Time Remaining	Yes
Lint Filter Indicator	No
Number of Dryer Cycles	36
Number of Dryness Levels	3
Ventilation System	
Long Vent	No
Maximum Vent Length	64
Venting Direction	Left, Right, Bottom, Rear
Electrical	
Hz	60
Power Cord Included	Yes