

HIGHCASTLE HOMES - COLOUR SCHEDULE

Purchasers: KULDIP SINGH GREWAL & KAMALPREET KAUR GREW **Property:** 19Phase: 2 of Plan - Draft Plan 21T-9005B
Telephone Res. / Bus: (905) 794-7408 / (416) 605-5990 **Project:** 2073737 Ontario Inc.
Decor Advisor: Caroline Rajcsanyi **Model and Elevation:** Dorset Elev B

KITCHEN AND VANITIES

	Cabinet	Counter	Hardware
Kitchen	Lv2 - Toronto Maple - Dark Rye CL	Lv1 - GR-San Gabriel	9677 Handle
Main Bathroom	Lv2 - Manchester Maple - Noce Nero CL	4971K-52 Bronzite	181 Knob
Ensuite Bathroom	Lv2 - Manchester Maple - Espresso CL	1874K-52 Winter Carnival	9661
Ensuite 2	Lv2 - Simcoe 3DL - Coconut	4957K-22 Mocha Fantastico	9622 Handle
Ensuite 3/4	Lv2 - Simcoe 3DL - Cafe Noir	4954K-22 Italian White Di Pasco	9677 Handle
Ensuite 5	Lv2 - Hudson 3DL - Coconut	Girona Cavern 4897K-52	12801 Handle
Laundry	Lv2 - Camden Maple - Chocolate CL	1877K-52 Autumn Carnival	9677 Handle
Opt. Breakfast Bar	Counter Height/Flush	Kitchen Hood Fan	Purchaser to supply after closing/standard electrical if
		Kitchen Upper Height	100 cm

Stove opening – if not specified will be set to builders standard opening of approximately 30 in width
 Fridge Opening – if not specified will be set to builders minimum opening of approximately 33 x 71 height (townhouses)
 - if not specified will be set to builders minimum opening of approximately 36 x 71 height (singles)

Counter top Edge

Kitchen	Double Edge (1 1/2") Double Bevelled	

Opt. Kitchen Extras

PARQUET / HARDWOOD OR BROADLOOM

Kitchen / Breakfast	N/A	Master Bedroom	*Oak Strip Lauzon Essential Expert 4 1/8" x 3/4"-Chocolate
Great Room	N/A	Bedroom 2	Lv2 - Sweet Dreams1 Lv2 - 738 Amish Linen
Living / Formal Room	*Oak Strip Lauzon Essential Expert 4 1/8" x 3/4"-Chocolate	Bedroom 3	Lv2 - Sweet Dreams1 Lv2 - 738 Amish Linen
Dining Room	*Oak Strip Lauzon Essential Expert 4 1/8" x 3/4"-Chocolate	Bedroom 4	Lv2 - Sweet Dreams1 Lv2 - 738 Amish Linen
Family Room	*Oak Strip Lauzon Essential Expert 4 1/8" x 3/4"-Chocolate	Bedroom 5	Lv2 - Sweet Dreams1 Lv2 - 738 Amish Linen
Main Hall	N/A		
Main Stairs	Oak	Fin Bsmt Area	*1-Laminate-8mm SF Trend 4 7/8" x 5/16" - Midnight
Upper Hall	*Oak Strip Lauzon Essential Expert 4 1/8" x 3/4"-Chocolate	Utility Stairs	Lv2 - Sweet Dreams1 Lv2 - 738 Amish Linen
Com. Centre/Home Office	N/A	Basement	N/A
Main Stair Landing	*Oak Strip Lauzon Essential Expert 4 1/8" x 3/4"-Chocolate	Basement Landing	*Oak Strip Lauzon Essential Expert 4 1/8" x 3/4"-Chocolate
Library/Den/Study	*Oak Strip Lauzon Essential Expert 4 1/8" x 3/4"-Chocolate	Basement Stairs	Oak
In Law Suite	N/A		

Carpet Runner ☐ Yes ☒ No

Underpad Main Floor	Underpad 2nd Floor	Underpad Main Stairs
NA	Lv1 Underpad-standard	NA

Opt. Flooring Extras

*** DEN HAS BEEN CHANGED TO A BEDROOM WITH A MAIN BATH *** SEE PLAN

FLOOR AND WALL TILES

	Floor Tile	Wall Tile	Decor	Listello
Front Foyer	*3 - 18 X 18 Castle Grey			
Main Hall	*3 - 18 X 18 Castle Grey			
Kitchen/Breakfast	*3 - 18 X 18 Castle Grey	Kitchen Backsplash	N/A	☐
Powder Room	*3 - 18 X 18 Castle Grey	Pwdr Wall if Applicable	N/A	☐
Laundry	*3 - 18 X 18 Castle Grey			

	Floor	Tub Wall	Shower Wall	Deck Skirt	Deck Splash	Decor	Listello
Main Bathroom	2-13x13, Alabastrino, Grey V	N/A	3-10x13, Alabastrino, Grey/V	N/A	NA	☐	☐
Master Ens	2-13x13, Imperial, White	N/A	3-10x13, Imperial, White	N/A	NA	☐	☐
Ensuite 2	2-13x13, Kelly, Bronze	3-10x13, Kelly, Bronze	N/A	N/A	NA	☐	☐
Ensuite 3/4	2-13x13, Alabastrino, Grey V	3-10x13, Alabastrino, Grey/V	N/A	N/A	NA	☐	☐
Ensuite 5	2-13x13, Alabastrino, Beige	3-10x13, Alabastrino, Beige	N/A	N/A	NA	☐	☐
						☐	☐

Shower - Upgrade Floor

Opt. Tile Extras

HIGHCASTLE HOMES - COLOUR SCHEDULE

Purchaser: KULDIP SINGH GREWAL & KAMALPREET KAUR GREWAL Property: Phase 2 of Plan - Draft Part 21T-6036B
 Telephone Res. / Bus: (505) 734-7409 / (416) 305-6090 Project: 2073737 Ontario Inc.
 Decor Advisor: Caroline Raicsanyi Model and Elevation: Dorset Flair B

PLUMBING / FAUCETS

Powder Room	Standard	Laundry	Standard
Main Bath	Standard	Ensuite B14	Standard
Master Ensuite	Standard	Ensuite 5	Standard
2nd Ensuite	Standard		
R.L. Bath	3 Piece		
Kitchen Sink	*Undermount		
Kitchen Faucet	Standard		

Drain for 2nd floor Laundry ☐ Yes ☒ No
 Waterline for fridge ☒ Yes ☐ No
 Supply and install all toilet paper holders, towel bars and soap dishes ☒ Yes ☐ No

Whirlpool

Opt. Plumbing Extras

PAINTING

Wall Colour	Trim Colour	Railing Colour	Pickets Colour	Stair Colour
25 Crystal	Standard	*Stained as Floor	*Wrought Iron	*Stained as Floor

Opt. Paint Extras

MISCELLANEOUS

Railing Style: RAILING - UPGRADE 1 - 1 1/2" Wrought Iron black square picket with square collar on alternating picket, 3in oak handrail and 3 1/2in oak end post.

Opt. Garage Door	*Yes-Grade Permitting	Opt. Side Door	*Yes-Grade Permitting	Stair Type	Oak
Interior Doors	Camera	Int. Door Hardware	*1 - Elite Powder Lever	Ext. Door Hardware	*Powder Exterior package
		Trim Style	STEP-7 1/4" 1st flr, 5 1/4" 2nd flr base w/3 1/2" case		Cold Cellar ☒

Smooth Ceiling 1st Floor ☒ Yes ☐ No
 Smooth Ceiling 2nd Floor ☒ Yes ☐ No
 Supply and Install Standard Mirrors ☒ Yes ☐ No
 Attic.

HEATING

Fireplace	Type	Mantle	Surround	Hearth
Family Room	36" Standard	*Stonecast	N/A	N/A

Air Conditioning ☐ Yes ☒ No
 Hood Fan Duct ☒ 6 inch ☐ 8 inch ☐ 10 inch
 Gas Provisions for Dryer ☐ Yes ☒ No
 Gas Provisions for Stove ☒ Yes ☐ No

Gas Provisions for BBQ ☒ Yes ☐ No
 Humidifier ☒ Yes ☐ No

Exterior Colour Scheme:

Pre-selected By Vendor

NOTE: The Purchaser(s) agree(s) that:

- Colours of materials are as close as possible to Vendor's selections, but not necessarily identical due to variations in manufacturing.
- Purchaser(s) has checked and acknowledges accuracy of the above selections. Where corrections occur on the original colour selection sheet Purchaser(s) acknowledge that the R.U.'s selection will be final.
- Upgrades or extras listed on this schedule will not be deemed part of the Agreement of Purchase and Sale. Any such upgrades or extras shall be null and void unless accompanied by a separate memo and amendment. Said in-lives must be paid in full.
- The Purchaser(s) further agrees that in the event that the Vendor has preselected colours prior to the purchase of the house, the preselected colours are final notwithstanding that the Purchaser may have completed a colour selection schedule.
- The Purchaser(s) acknowledges that once this colour schedule is signed and dated, no changes, additions or deletions will be permitted other than re-selection due to unavailability.

A \$350.00 (Per Occurrence) charge/administration fee will apply to above exceptions.

This Interior Colour Selection is final and approved by:

Signature: *[Signature]* Date: *SEP 22/16*

Printed 9/22/2016 13:57:58

Signature: *[Signature]* Date: *SEP 22/16*

Builder's Agent: *[Signature]* Date: *Sept 22/16*



Highcastle Homes Décor Centre Disclaimers

Unit: 19 Model Dorset Elev B in Riverwalk II - 2075337 Ontario Inc.

PURCHASERS: KULDEP SINGH GREWAL and KAMALPREET KAUR GREWAL

TEL: R25 - 905.707.3408 HL, S - 416.605.5599

Through years of doing business, we at Highcastle Homes have encountered issues beyond our control. The following disclaimers apply to all instances of Purchaser's Extras forms and all Interior Colour Scheme forms.

Fireplaces

Fireplace Marble: Due to the many variables that can affect the pattern and/or design, frequently the marble installed on the fireplace will not be identical to the samples. We will make every attempt to come as close to the samples as possible, but cannot be responsible for results which differ from the samples.

Ceramic Floor Tile

Many variables including variation can affect the colour, pattern and/or design which mean installed tiles may not be identical to the samples. We will make every attempt to come as close as possible, but cannot be responsible for results which differ from the samples.

Hardwood Flooring

The purchaser is advised that cupping and shrinkage are characteristics of hardwood flooring normal appearing some time after installation, and no warranty is provided by the flooring supplier with respect to such cupping and shrinkage. The vendor agrees to install any hardwood flooring ordered by the purchaser in good and workmanlike manner, but shall not be responsible for, and is hereby released by the purchaser from responsibility and liability for cupping and shrinkage of hardwood flooring.

Shrinking and expanding/cupping of the hardwood floors may occur if the humidity levels in the home are not kept at industry recommendations. If the hardwood floors shrink or expand due to the homeowner not complying with these levels, the hardwood floor will no longer be under warranty and it will be the homeowner's responsibility to repair the flooring.

Stain Colours

Due to many variables that can affect the outcome of a stain colour on wood, staircases, railings, and fireplaces, will not be identical to samples. Factors such as density, age, humidity, air temperature, and the uniqueness of each piece of wood can result in wide variations in darkness or lightness. We will make every attempt to come as close to the sample as possible, but cannot be responsible for results which differ from the samples.

Stain on pre-finished hardwood floors will not be an exact match to the stain colours available on stairs, pickets and rails. The purchaser is responsible for choosing the stain on these areas to their satisfaction.

Appliances

All fridge openings are set to builder's standard width. Please advise Décor Centre at time of colour appointment if custom sizing of cabinets is required for any built-in appliances. The purchaser is responsible for costs and fees associated with changes to pre-manufactured kitchens made subsequent to colour appointments.

Kitchen Cabinets

The kitchen you order/purchase will undoubtedly contain slight colour variations. The degree of these variations is virtually impossible to determine before the kitchen is installed in its intended location. The amount of and type of lighting will also affect various highlights in the finish. Note: No two pieces of wood are identical. Variations in colour tone and grain patterns make a perfect colour match virtually impossible. It is generally agreed that these variations add to the natural beauty of a wood kitchen.

Shrinking and expanding of the kitchen cabinets may occur if the humidity levels in the home are not kept at industry recommendations. If the cabinets shrink or expand due to the homeowner not complying with these levels, the cabinets will no longer be under warranty and it will be the homeowner's responsibility to repair the cabinets.

Plaster Mouldings and Medallions

Plaster mouldings will not be installed in open or above areas or areas with 2 story elements.

Metal Spindles

Due to the characteristics of wrought iron railing production, it is possible for the wrought iron to develop a scale effect. This scale may or may not be totally covered during the painting process. In effect, once the wrought iron picket is painted, the paint may in effect amplify the iron scale depending on the colour chosen. This is a natural effect of wrought iron and should not be construed as a defect or damage.

I hereby acknowledge reading and understanding the above copy and will not hold Highcastle Homes responsible for any issues in relation to above.


Purchasers Signature(s):

  Date: 2023/23/16

Lot 19
Riverwalk II

MOSCONE
MARBLE


STANDARD EDGE



Single Straight polished 3/4"




Single Bullnose 3/4"




Single Bevel 1/4" top bevel 3/4" thick


UPGRADE #1 EDGES



Double Bullnose 1.5" thick



Double Pencil 1.5" thick

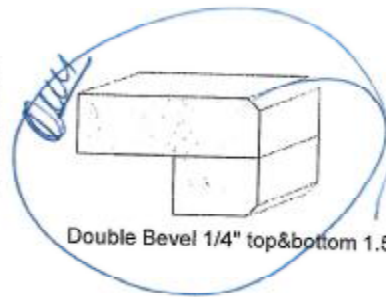

Double Bevel 1/4" top&bottom 1.5" thick

UPGRADE #2 EDGES



Double Ogee 1.5" thick




Double Quarter Moon 1.5" thick

Sign AM
Sign AM

Date 15 Sep 2011
Date 15 Sept 2011

Lot 19
Riverwalk II


Ⓡ Receptacle
Ⓛ Light R/L
Ⓟ Pendants.

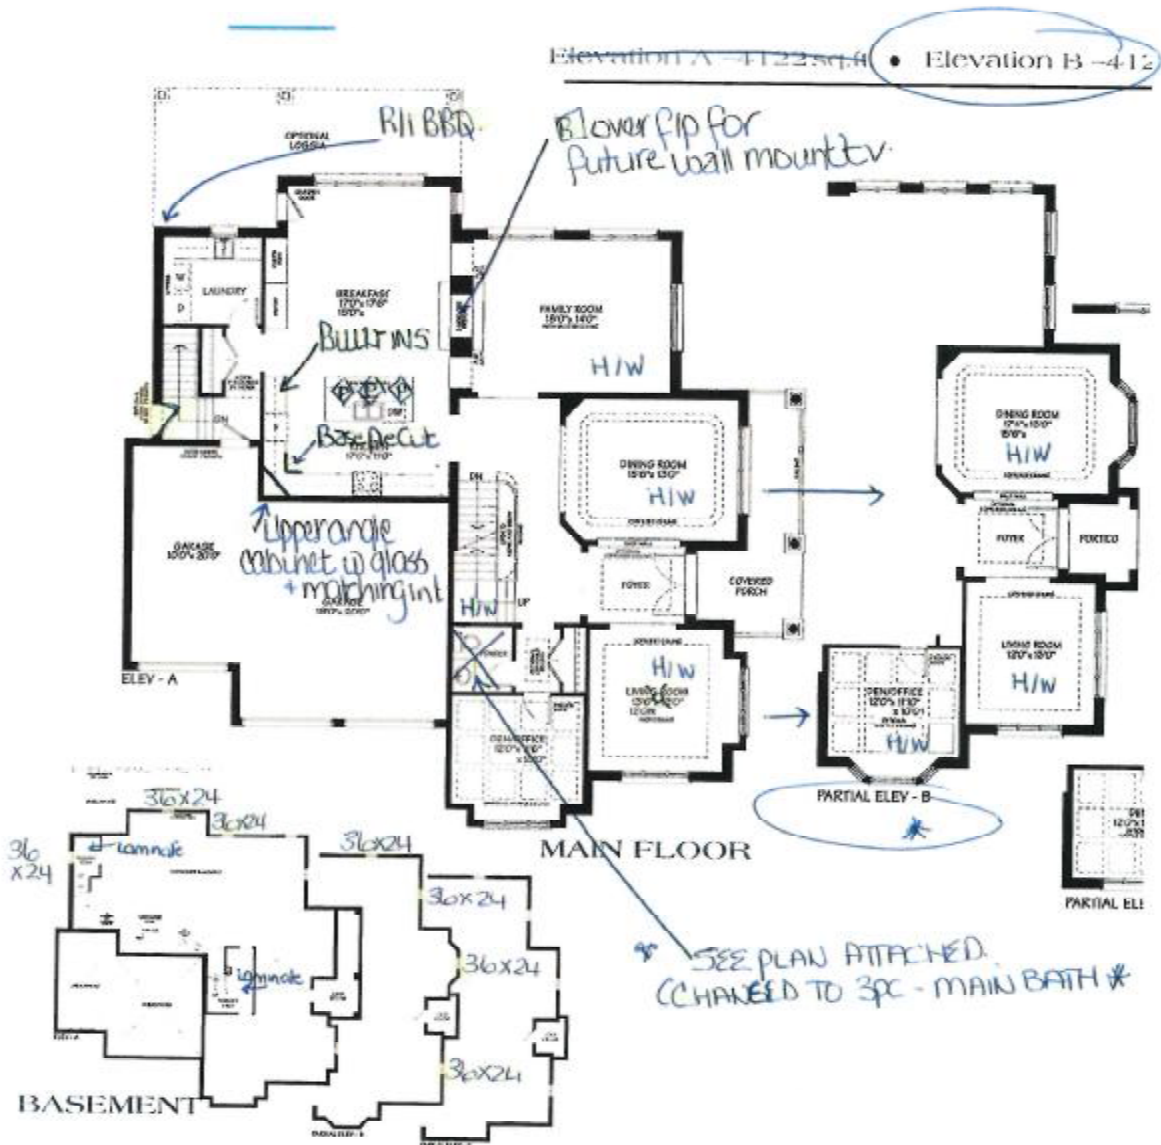

Sign 1/4/4
Sign 0

Date 08/08/16
Date

LOT 19
Riverwalk II
[B] Reapptacke

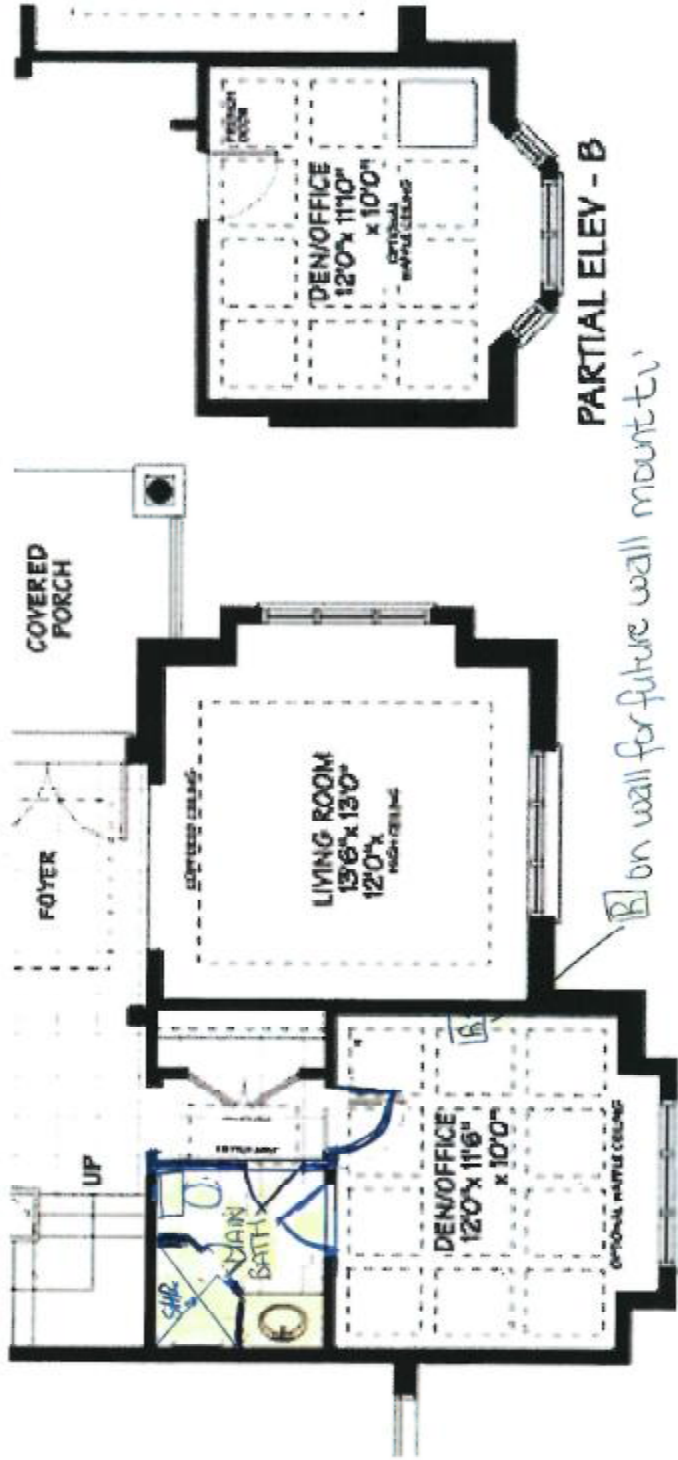


MAIN FLOOR

Date 08/08/16
Date

Sign [Signature]
Sign

Lot 19
Riverwalk II
Receptacle

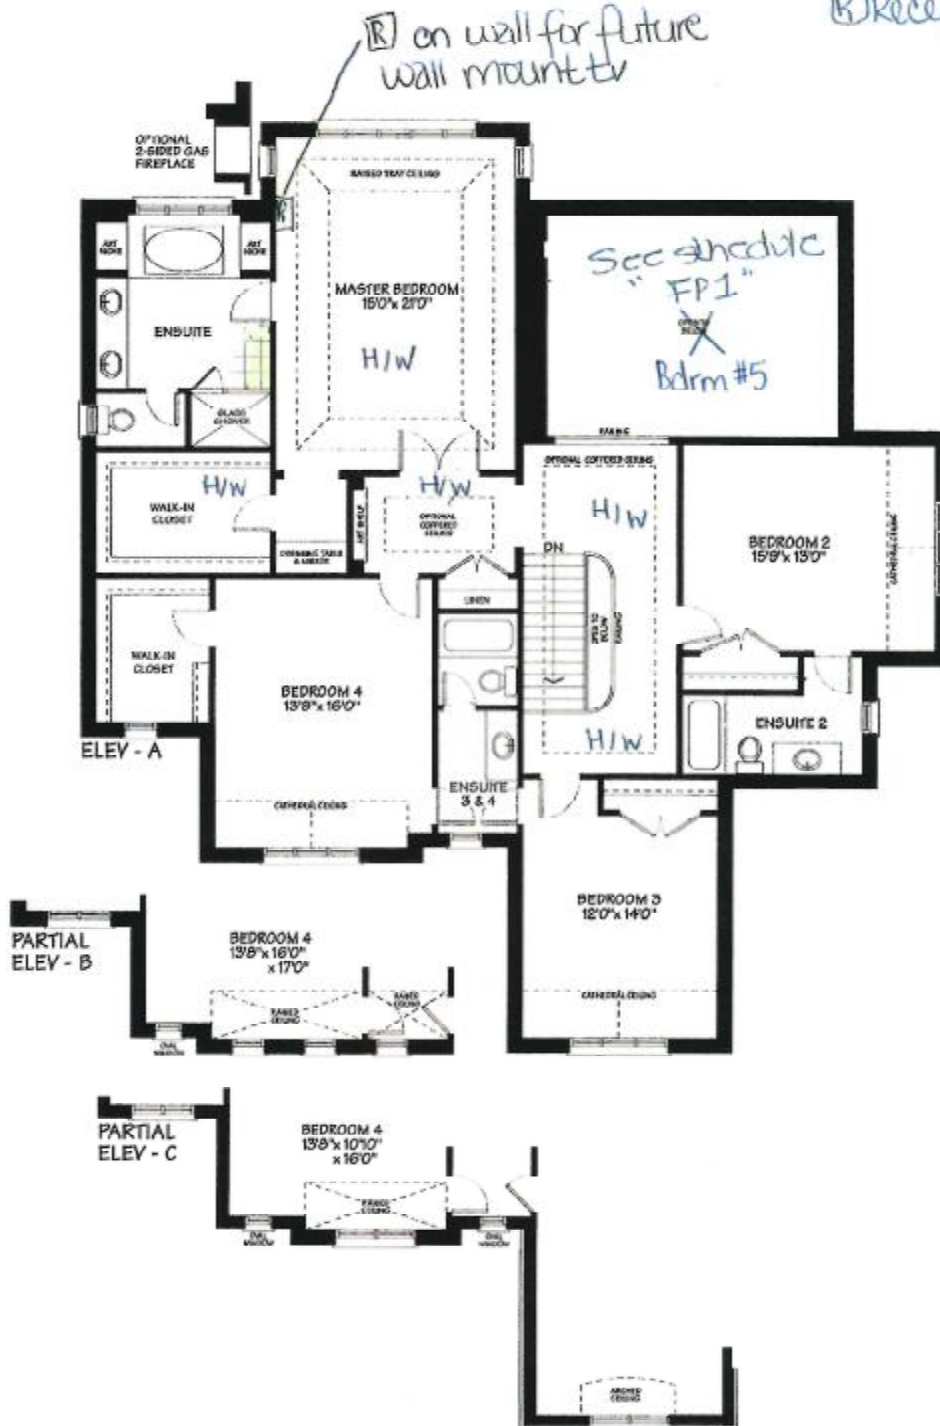

SECOND FLOOR

SECOND FLOOR


Sign
Sign

Date 08/08/16
Date

Lot :- 19
Kuldip Singh Grewal
Kamalpreet Kaur Grewal

Schedule "FP 1"

☒ Receptacle.

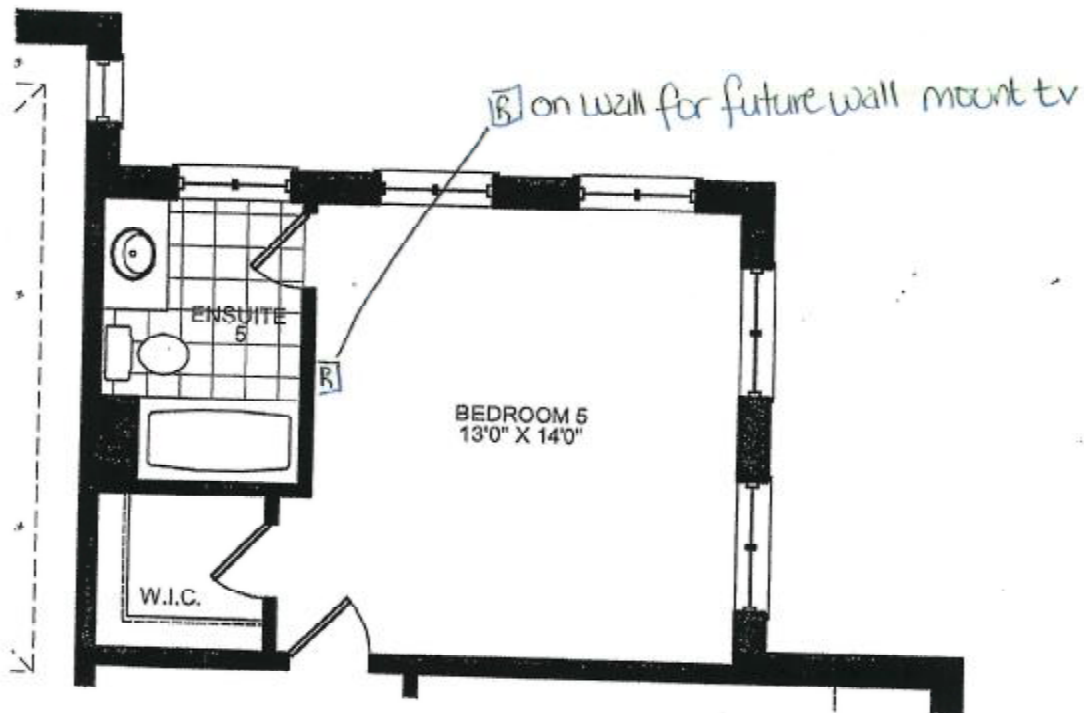

g

10/11/15



CONSTRUCTION SUMMARY

Riverside 10 - 2073337 Ontario Inc.

PURCHASERS: KULDIP SINGH GREWAL and KAMALJEET KAUR GREWAL

TEL: RES.: 905 704 2406 F.S.: 416 675 5920

LOT / PHASE	REQ. PLAN	HOUSE TYPE	CLINING DATE
15/2	Draft Plan 211-9005B	Detached Bldg	04-Jan-17

Agreement of Purchase and Sale

BUILDER TO CONVERT OPEN TO ABOVE IN FAMILY ROOM TO THE 5TH BEDROOM AND INCLUDE 3 PIECE BATHROOM AND WALK IN CLOSET AS PER SCHEDULE FF 1 TO BE FINISHED FROM BUILDERS STANDARD SAMPLES
Workshop: None

BUILDER TO CONVERT OPEN TO ABOVE IN FAMILY ROOM TO THE 5TH BEDROOM AND INCLUDE 3 PIECE BATHROOM AND WALK IN CLOSET AS PER SCHEDULE FF 1 TO BE FINISHED FROM BUILDERS STANDARD SAMPLES
Workshop: None



CONSTRUCTION SUMMARY

Riverwalk II - 367337 Ontario Inc.

PURCHASERS: KIRLOP SINGH / GURWAL 4/5 KANALPREET KAUR / GURWAL

TEL: RES: 905-794-7409 CELL: 416-625-1950

LOT / PHASE	REG. PLANS	HOUSE TYPE	CLOSING DATE
19 / 2	Draft Plan 21T-9005B	Detached Etype B	04-Jan-17

1) CONSTRUCTION

1 - CEILING - SMOOTH FINISH - 2ND FLOOR (65 & 87 MODELS)	
22Sep16 Note 11,216/31951	
1 - REMOVE BENCH IN MASTER ENSUITE	
08Aug16 Note 11,209/31764	
1 - CHANGE POWDER ROOM FROM A 2 PC TO 3PC BATH WITH FRAMEDLESS GLASS SHOWER, TILED CEILING WITH LIGHT (SEE PLAN ATTACHED, LABELLED MAIN BATH)	
08Aug16 Note 11,209/31762	

3) HEATING / AIR CONDITIONING

1 - KITCHEN - CENTRE DUCT (IF POSSIBLE) FOR PURCHASERS FUTURE CHIMNEY HOOD FAN	
22Sep16 Note 11,216/32498	
1 - R/FRONTIVE AS PER AGREEMENT - OUTSIDE OF LAUNDRY ROOM AT REAR, MAIN FLOOR (SEE PLAN)	
22Sep16 Note 11,216/32407	
1 - GAS LINE - ROUGH-IN FOR STOVE INCLUDING ELECTRICAL OUTLET	
22Sep16 Note 11,216/31973	

4) PLUMBING

1 - WATER LINE - FRIDGE - ROUGH IN ONLY	
22Sep16 Note 11,216/31976	
1 - SINK - KITCHEN - UNDERMOUNTED (RECTANGULAR SQUARE - DOUBLE EQUAL BOWL)	
22Sep16 Note 11,216/31974	

5) ELECTRICAL

4 - PLUG - INTERIOR RECEPTAL - 1 X OVER FIREPLACE IN FAMILY ROOM FOR FUTURE WALL MOUNT TV, 1 X MASTER BEDROOM WALL FOR FUTURE WALL MOUNT TV, 1 X BEDROOM 3 SON WALL FOR FUTURE WALL MOUNT TV AND 1 X DIN ON WALL FOR FUTURE WALL MOUNT TV	
22Sep16 Note 11,216/31962	
4 - LIGHT - ROUGH-IN ONLY - ON SEPARATE SINGLE SWITCH (1 X LIVING ROOM AND 3 X R/FRONT FOR PENDANT LIGHTS OVER ISLAND)	
22Sep16 Note 11,216/31961	

6) FLOORING & WALL TILE

1 - KITCHEN - DO NOT SUPPLY OR INSTALL BACKSPLASH IN KITCHEN	
22Sep16 Note 11,216/32408	
1 - OAK - 3/4" X 4 1/8" ENGINEERED - UPGRADE FROM 3/4" X 3 1/8" OAK NATURAL - - UPPER HALL (UPGRADE FROM 3/4"x3 1/8" NATURAL HARDWOOD)	
22Sep16 Note 11,216/31970	

8) FINISHING

2 - STAIN STAIR & RAILING PER FLOOR	
22Sep16 Note 11,216/31971	

9) CABINETS

1 - KITCHEN - DELETE UPPIERS OVER RANGETOP FOR PURCHASERS FUTURE CHIMNEY HOOD FAN	
22Sep16 Note 11,216/32497	



CONSTRUCTION SUMMARY

Riverwalk II - 2073737 Ontario Inc.

PURCHASERS: KULDEE BHATT GOWAL and KANAKA BHATT GOWAL

TEL: 905.503.7541 FAX: 905.416.0099

DATE/ISSUE	REVISION	ISSUE TYPE	CLOSING DATE
19/1	Draft Plan 21T-9005B	Draft Elev B	04-Jan-17

9) CABINETRY

1 - ACCESSORIES - BLUMOTION (SOFT CLOSE) FOR DOORS - KITCHEN 22Sep16 Note 11,216/32496	
1 - RANGE TOP CABINET (MODIFIED HEIGHT) WITH DRAWERS BELOW (ELECTRICAL INCLUDED) - LEVEL 1 OR LEVEL 2 22Sep16 Note 11,216/32406	
1 - UPPER CABINETS-UPPER ANGLE CORNER CABINET WITH CLEAR GLASS DOOR & MATCHING INTERIOR PRR LIMIT 41" WIDE 1 OR LEVEL 1, 2 22Sep16 Note 11,216/31947	
1 - BASE CABINETS-BASE PIE CUT CORNER-LEVEL 1 OR LEVEL 2 22Sep16 Note 11,216/31942	
1 - BUILT IN DOUBLE APPLIANCE CABINET WITH DRAWER BELOW (TRIMKIT REQUIRED)(ELECTRICAL ROUGH IN ONLY) - LEVEL 1 OR LEVEL 2 ***NOTE - BUILT INS ARE ON TRIDGE WALL, SEE PLAN*** 22Sep16 Note 11,216/31939	
1 - ACCESSORIES - ACCOMMODATE BUILT IN DESIGNED REFRIGERATOR 22Sep16 Note 11,216/31937	

Hardwood

1 - OAK - 3/4" X 4 1/8" ENGINEERED - UPGRADE FROM 3/4" X 3 1/8" OAK NATURAL - - MASTER (UPGRADE FROM 3/4"x3 1/4" NATURAL HARDWOOD)) 22Sep16 Note 11,216/31060	
1 - OAK - 3/4" X 4 1/8" ENGINEERED - UPGRADE FROM 3/4" X 3 1/8" OAK NATURAL - - LIVING ROOM (UPGRADE FROM 3/4"x3 1/4" NATURAL HARDWOOD)) 22Sep16 Note 11,216/31968	
1 - OAK - 3/4" X 4 1/8" ENGINEERED - UPGRADE FROM 3/4" X 3 1/8" OAK NATURAL - - FAMILY ROOM (UPGRADE FROM 3/4"x3 1/4" NATURAL HARDWOOD)) 22Sep16 Note 11,216/31967	
1 - OAK - 3/4" X 4 1/8" ENGINEERED - UPGRADE FROM 3/4" X 3 1/8" OAK NATURAL - - DINING ROOM (UPGRADE FROM 3/4"x3 1/4" NATURAL HARDWOOD)) 22Sep16 Note 11,216/31966	
1 - OAK - 3/4" X 4 1/8" ENGINEERED - UPGRADE FROM 3/4" X 3 1/8" OAK NATURAL - - DEN / OFFICE (UPGRADE FROM 3/4"x3 1/4" NATURAL HARDWOOD)) 22Sep16 Note 11,216/31965	

WINDOWS AND DOORS - EXTERIOR

1 - DOOR - EXTERIOR - SIDE ENTRANCE - INCLUDES EXTERIOR LIGHT 06Aug16 Note 11,209/31935	
1 - SKYLIGHT (APPROXIMATE SIZE OF 4 FEET X 4 FEET) 06Aug16 Note 11,209/31766	
7 - WINDOW - BASEMENT-ENLARGED, STANDARD TO 36 INCH (W) X 24 INCH (H) - EACH ADDITIONAL 06Aug16 Note 11,209/31759	

This Document is Extremely Time Sensitive - Printed 22 Sep 16 at 14:01

Lot 19
Riverwalk II

PRODUCT MODEL NUMBERS

KBSD602E KBSD606E KBSD608E KBSN602E KBSN608E
KBSD612E KBSD618E

Electrical: A 115 volt, 60 Hz, 40 amp, 15- or 20-amp, fused, grounded electrical supply is required. It is recommended that a separate circuit serving only your refrigerator be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.

Water Pressure: A cold water supply with water pressure between 30 and 120 psi (207 and 827 kPa) is required to operate the water dispenser, if one is chosen. If you have questions about your water pressure, call a licensed, qualified plumber.

Reverse Osmosis Water Supply:

IMPORTANT: The pressure of the water supply coming out of a reverse osmosis system going to the water inlet valve of the refrigerator needs to be between 90 and 120 psi (607 and 827 kPa).


IMPORTANT:

- It is recommended that you do not install the refrigerator near an oven, radiator, or other heat source.
- Do not install in a location where the temperature will fall below 55°F (13°C).
- Floor must support the refrigerator weight, more than 600 lbs (272 kg), door panels and contents of the refrigerator.

PRODUCT DIMENSIONS

- The depth from the front of the top grille to the back of the refrigerator cabinet is 59 1/2" (64.5 cm).
- The power cord is 84" (213 cm) long.
- Height dimensions are shown with leveling legs extended 1/4" (3 mm) below the rollers.

SIDE VIEW

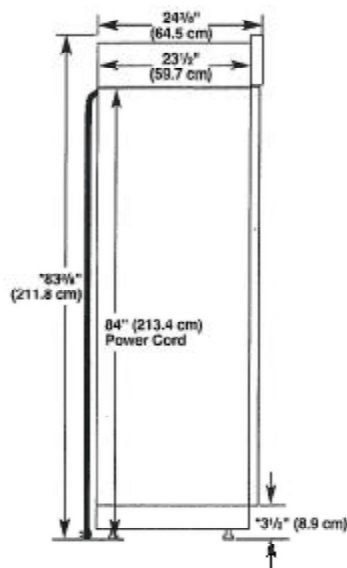


*When leveling legs are fully extended to 1 1/4" (3.2 cm) below rollers, add 1 1/2" (2.5 cm) to the height dimensions.

OPENING DIMENSIONS

To avoid flooding during use, the solid soffit must be within 1" (2.5 cm) maximum above the refrigerator. If the solid soffit is higher than 1" (2.5 cm) or one is not available, then the refrigerator must be braced. If the anti-tip braces are needed, they must be attached to the rear wall studs 80" to 90" (203 cm to 229 cm) above the floor. See "Installation Bracing" for more information.

NOTE: A clearance of 1/2" (1.2 cm) above the top grille must be maintained in order for the top grille to be removed.

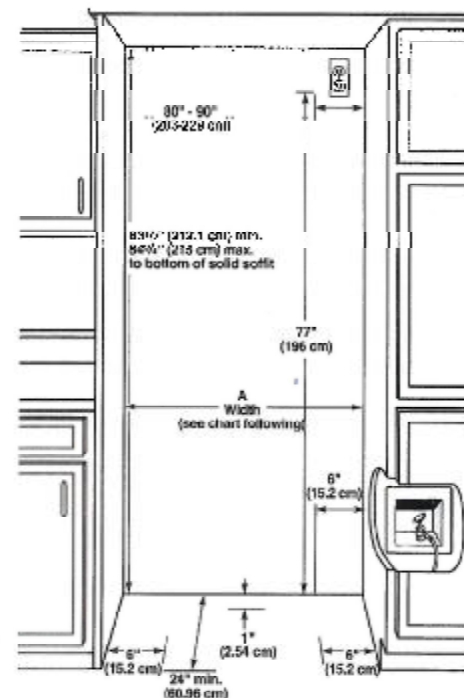


Model	Width A (as shown above)	Dimension B (as shown above)
36	35 1/2" to 35 3/4" (90.8 cm to 93.8 cm)	4" (10.2 cm)
42	41 1/2" to 41 3/4" (105.4 cm to 106.1 cm)	7 1/2" (19.1 cm)
48	47 1/2" to 47 3/4" (120.7 cm to 121.3 cm)	13 1/2" (34.3 cm)

NOTE: Flooring under refrigerator must be at same level as the room. Face of cabinet must be plumb.

Because KitchenAid® products are designed to be used in a variety of environments, we cannot assume that all environments are the same.

Dimensions are for styling purposes only. For complete details, see installation instructions packed with product. Specifications subject to change without notice.


TOP VIEW



Model	Width A
36	36 1/2" (92.7 cm)
42	42 1/2" (107.9 cm)
48	48 1/2" (123.1 cm)

FRONT VIEW

- Width dimensions were measured from trim edge to trim edge.
- Height dimensions are shown with leveling legs extended 3/8" (9.5 mm) below the rollers.

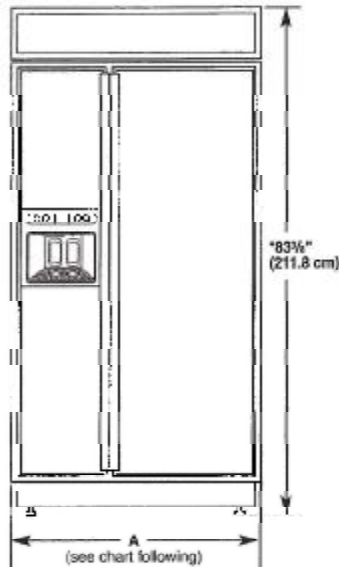


Model	Width A (Trim edge to trim edge)
36	36 1/2" (92.3 cm)
42	42 1/2" (107.5 cm)
48	48 1/2" (122.8 cm)

*When leveling legs are fully extended to 1 1/4" (3.2 cm) below rollers, add 1 1/4" (2.9 cm) to the height dimensions.


DOOR SWING DIMENSIONS

The location must permit both doors to open to a minimum of 90°. Allow 5" (12.7 cm) minimum space between the side of the refrigerator and a corner wall.
NOTE: More clearance may be required if you are using mirror panels, custom handles, or extended handles on a Classic model.
To adjust the door swings, see "Adjust Doors."


36" (91.4 cm) Models

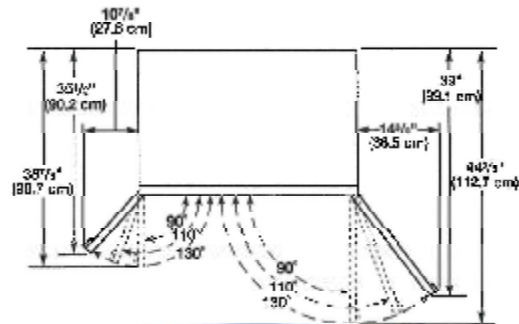

42" (106.7 cm) Models

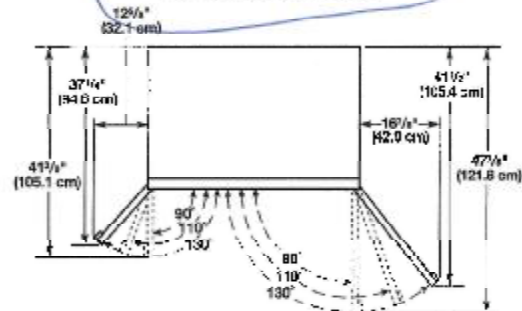

48" (121.9 cm) Models

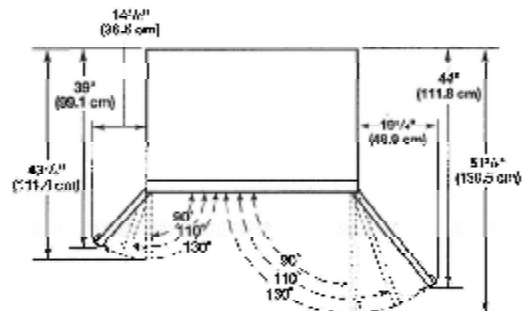

Lot 19
Riverwalk II

INSTALLATION INSTRUCTIONS

27" (68.6 CM) AND 30" (76.2 CM) ELECTRIC SINGLE AND DOUBLE BUILT-IN OVEN FLUSH INSTALLATION KIT

INSTRUCTIONS D'INSTALLATION

ENSEMBLE D'INSTALLATION EN AFFLEUREMENT POUR FOUR ÉLECTRIQUE ENCASTRÉ SIMPLE ET DOUBLE DE 27" (68,6 CM) ET 30" (76,2 CM)

Flush Installation Kit Part Number Ensemble d'installation en affleurement référence	Size and Color Dimensions et couleur	UL Listed for Model Numbers Homologation UL pour les modèles numéros
W10752680	27" (68.6 cm), black 27" (68.6 cm), noir	KODE507EBL, KODE507EEL
W10752684	27" (68.6 cm), white 27" (68.6 cm), blanc	KODE507EWH, KODE507EWH
W10752686	27" (68.6 cm), stainless steel 27" (68.6 cm), acier inoxydable	KODT100ESS, KOST100ESS, KODE300ESS, KODE500ESS, KODE500ESS
W10752681	30" (76.2 cm), black 30" (76.2 cm), noir	KODE500EBL, KODE500EEL
W10752682	30" (76.2 cm), black stainless 30" (76.2 cm), noir inoxydable	KODE500EBL, KODE500EEL
W10752680	30" (76.2 cm), white 30" (76.2 cm), blanc	KODE500EWH, KODE500EWH
W10752683	30" (76.2 cm), stainless steel 30" (76.2 cm), acier inoxydable	KODT100ESS, KOST100ESS, KODE300ESS, KODE500ESS, KODE500ESS

Table of Contents/Table des matières

BUILT-IN OVEN SAFETY.....	2	SÉCURITÉ DU FOUR ENCASTRÉ.....	10
INSTALLATION REQUIREMENTS.....	2	EXIGENCES D'INSTALLATION.....	11
Tools and Parts.....	2	Outils et pièces.....	11
Location Requirements.....	2	Exigences d'emplacement.....	11
INSTALLATION INSTRUCTIONS.....	5	INSTRUCTIONS D'INSTALLATION.....	14
Prepare Built-in Oven.....	5	Préparation du four encastré.....	14
Remove Oven Door(s).....	5	Dépose de la/des porte(s) du four.....	14
Replace Oven Door(s).....	6	Reinstallation de la/des porte(s) du four.....	14
Positioning Oven Feet.....	6	Positionnement des pieds du four.....	15
Replace Plastic Spacers.....	7	Remplacement des cales d'espacement en plastique.....	15
Install Oven.....	8	Installation du four.....	17
Install Deflector Kit Bracket.....	8	Installation du support de la trousse du déflecteur.....	18
Complete Installation.....	9	Achever l'installation.....	19

IMPORTANT:


Save for local electrical inspectors use.

IMPORTANT :

À conserver pour consultation par l'inspecteur local des installations électriques.

W10584335B

Deflector Bracket Dimensions

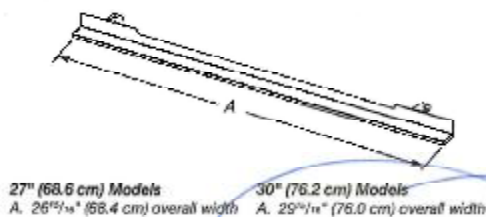


Cabinet Dimensions - Single Ovens, Flush Installations

A 25" (63.5 cm) minimum cutout depth is required. These dimensions will result in a 1/4" (6 mm) reveal on the top, a 1/4" (6 mm) reveal on the sides, and a 1/4" (3 mm) reveal on the bottom of the wall oven.

The front face of the creals and platform will be visible and should be treated as a finished surface.


Single Ovens Installed in Cabinet - Flush Installation

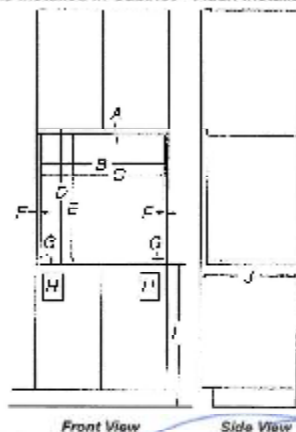

- | | |
|--|--|
| 27" (68.6 cm) Models | 30" (76.2 cm) Models |
| A. 3/4" (19 mm) top cleat* | A. 3/4" (19 mm) top cleat* |
| B. 27 1/4" (69.2 cm) minimum width of flush inset cutout | B. 30 1/4" (76.8 cm) minimum width of flush inset cutout |
| C. 26 1/2" (66.7 cm) minimum width of opening | C. 29 1/2" (73.3 cm) minimum width of opening |
| D. 22 1/4" (56.9 cm) minimum height of flush inset cutout | D. 29 1/4" (74.3 cm) minimum height of flush inset cutout |
| E. 22 1/4" (56.9 cm) recommended cutout height | E. 22 1/4" (56.9 cm) recommended cutout height |
| F. 1 1/2" x 2" (38 mm x 5.1 cm) spacer the entire depth of the cabinet | F. 1 1/2" x 2" (38 mm x 5.1 cm) spacer the entire depth of the cabinet |
| G. 1 1/2" x 2" (38 mm x 5.1 cm) spacer the entire depth of the cabinet | G. 1 1/2" x 2" (38 mm x 5.1 cm) spacer the entire depth of the cabinet |
| H. Recommended junction box location | H. Recommended junction box location |
| I. 4 1/2" - 32" (11.7 - 81.3 cm) bottom of cutout to floor | I. 4 1/2" - 32" (11.7 - 81.3 cm) bottom of cutout to floor |
| J. 25" (63.5 cm) minimum depth of cutout | J. 25" (63.5 cm) minimum depth of cutout |


* Cleats and spacers must be recessed 1 1/4" (3.2 cm) from the front of the cabinet.

Single Ovens Undercounter - Flush Installations (without cooktop installed above)



- | | |
|--|--|
| 27" (68.6 cm) Models | 30" (76.2 cm) Models |
| A. Recommended junction box location | A. Recommended junction box location |
| B. 3/4" (19 mm) top cleat* | B. 3/4" (19 mm) top cleat* |
| C. 27 1/4" (69.2 cm) minimum width of flush inset cutout | C. 30 1/4" (76.8 cm) minimum width of flush inset cutout |
| D. 26 1/2" (66.7 cm) minimum width of opening | D. 29 1/2" (73.3 cm) minimum width of opening |
| E. 22 1/4" (56.9 cm) minimum height of flush inset cutout | E. 29 1/4" (74.3 cm) minimum height of flush inset cutout |
| F. 22 1/4" (56.9 cm) recommended cutout height | F. 22 1/4" (56.9 cm) recommended cutout height |
| G. 1 1/2" x 2" (38 mm x 5.1 cm) spacer the entire depth of the cabinet | G. 1 1/2" x 2" (38 mm x 5.1 cm) spacer the entire depth of the cabinet |
| H. 1 1/2" x 2" (38 mm x 5.1 cm) spacer the entire depth of the cabinet | H. 1 1/2" x 2" (38 mm x 5.1 cm) spacer the entire depth of the cabinet |
| I. 4 1/2" - 32" (11.7 - 81.3 cm) bottom of cutout to floor | I. 4 1/2" - 32" (11.7 - 81.3 cm) bottom of cutout to floor |

* Cleats and spacers must be recessed 1 1/4" (3.2 cm) from the front of the cabinet.



- | | |
|--|--|
| 27" (68.6 cm) Models | 30" (76.2 cm) Models |
| A. 1 1/2" x 2" (38 mm x 5.1 cm) spacer the entire depth of the cabinet | A. 1 1/2" x 2" (38 mm x 5.1 cm) spacer the entire depth of the cabinet |
| B. 25" (63.5 cm) depth of cutout | B. 25" (63.5 cm) depth of cutout |
| C. 1 1/2" (3.8 cm) recess from front of cabinet | C. 1 1/2" (3.8 cm) recess from front of cabinet |
| D. 1 1/2" (3.8 cm) side cleat* | D. 1 1/2" (3.8 cm) side cleat* |

* Cleats and spacers must be recessed 1 1/4" (3.2 cm) from the front of the cabinet.

INSTALLATION INSTRUCTIONS

27" (68.6 CM) AND 30" (76.2 CM) ELECTRIC BUILT-IN MICROWAVE OVEN FLUSH INSTALLATION KIT

INSTRUCTIONS D'INSTALLATION POUR ENSEMBLE D'INSTALLATION EN AFFLEUREMENT DE FOUR À MICRO-ONDES ÉLECTRIQUE ENCASTRÉ DE 27" (68,6 CM) ET 30" (76,2 CM)

Flush Installation Kit Part Number Ensemble d'installation en affleurement référence	Size and Color Dimensions et couleur	UL Listed for Model Numbers Homologation UL pour les modèles numéro
W10752698	27" (68.6 cm), stainless steel	KMBP107ESS
	27" (68,6 cm), acier inoxydable	
W10752697	30" (76.2 cm), stainless steel	KMBP100ESS
	30" (76,2 cm), acier inoxydable	
W10839402	30" (76.2 cm), limited edition black	KMBP100EBS
	30" (76,2 cm), édition limitée en noir	

Table of Contents/Table des matières

BUILT-IN MICROWAVE OVEN SAFETY	2	SÉCURITÉ DU FOUR À MICRO-ONDES ENCASTRÉ.....	5
INSTALLATION REQUIREMENTS	2	EXIGENCES D'INSTALLATION	5
Tools and Parts	2	Outillage et pièces.....	5
Location Requirements	2	Exigences d'emplacement.....	5
INSTALLATION INSTRUCTIONS	4	INSTRUCTIONS D'INSTALLATION.....	7
Assemble Spacer Kit.....	4	Assemblage de la trousse d'entretoise	7
Install Spacer Kit	4	Installation de la trousse d'entretoise.....	7
Install Microwave Oven	4	Installation du four à micro-ondes.....	7
Complete Installation	4	Achever l'installation	7

IMPORTANT:

Save for local electrical inspector's use.


IMPORTANT :

À conserver pour consultation par l'inspecteur local des installations électriques.

W10840261A

Cabinet Dimensions - Flush Installation

A 23 3/4" (59.0 cm) minimum cutout depth is required. These dimensions will result in a 3/8" (9.5 mm) reveal on the top, a 3/4" (9.5 mm) reveal on the sides, and a 3/8" (9.5 mm) reveal on the bottom of the microwave oven. The front face of the cleats and platform will be visible and should be treated as a finished surface.

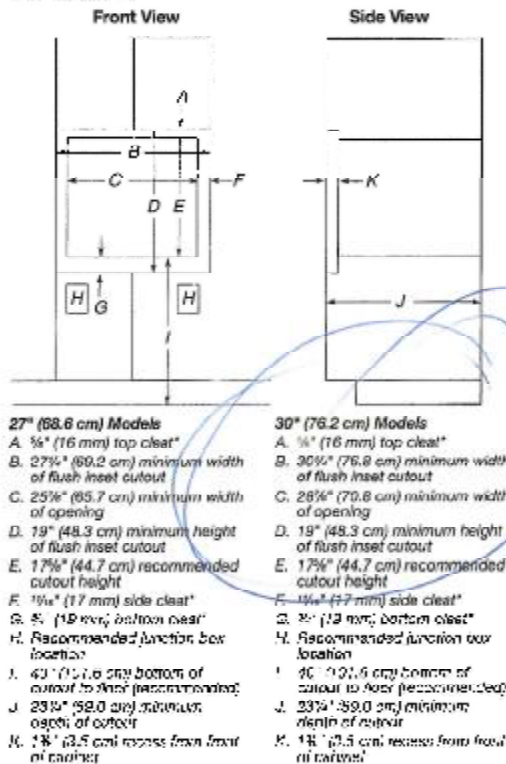

27" (68.6 cm) Models

- A. 3/8" (9.5 mm) top clear*
- B. 27 3/4" (69.2 cm) minimum width of flush inset cutout
- C. 25 1/2" (65.7 cm) minimum width of opening
- D. 19" (48.3 cm) minimum height of flush inset cutout
- E. 17 1/2" (44.7 cm) recommended cutout height
- F. 3/8" (9.5 mm) side clear*
- G. 5" (12.7 mm) bottom clear
- H. Recommended junction box location
- I. 43 1/2" (110.5 cm) bottom of cutout to floor (recommended)
- J. 23 3/4" (59.0 cm) minimum depth of cutout
- K. 1 3/8" (3.5 cm) recess from front of cabinet

30" (76.2 cm) Models


- A. 3/8" (9.5 mm) top clear*
- B. 30 3/4" (76.8 cm) minimum width of flush inset cutout
- C. 28 1/2" (70.8 cm) minimum width of opening
- D. 19" (48.3 cm) minimum height of flush inset cutout
- E. 17 1/2" (44.7 cm) recommended cutout height
- F. 3/8" (9.5 mm) side clear*
- G. 5" (12.7 mm) bottom clear
- H. Recommended junction box location
- I. 46 1/2" (118.5 cm) bottom of cutout to floor (recommended)
- J. 23 3/4" (59.0 cm) minimum depth of cutout
- K. 1 3/8" (3.5 cm) recess from front of cabinet

*Cleats must be recessed 1 3/8" (3.5 cm) from the front of the cabinet.

Minimum Installation Clearances

For proper installation, the following minimum clearances must exist below the cabinet opening.

Installation Above Single Built-In Oven

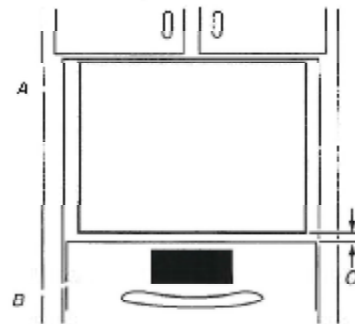

- A. Upper cabinet
- B. Lower single oven*
- C. 1" (2.5 cm) from top of oven

*Approved models: KOSE500E, KOSE507E, KOST100E, KOST107E

KitchenAid® Commercial Style Gas Cooktop

FOR THE WAY IT'S MADE.®

Lot 19
Riverwalk II

PRODUCT MODEL NUMBERS

KGCU407V	KGCU482V
KGCU462V	KGCU483V
KGCU463V	KGCU484V
KGCU467V	

Type of Gas

Natural Gas:

This cooktop is factory-set for use with Natural gas. To convert to LP gas, see the Gas Conversion instructions provided in the package containing literature. The model/serial rating plate located on the left underside of the cooktop burner base has information on the types of gas that can be used. If the types of gas listed do not include the type of gas available, check with the local gas supplier.

LP Gas conversion:

Conversion must be done by a qualified service technician. No attempt shall be made to convert the cooktop from the gas specified on the model/serial rating plate for use with a different gas without consulting the serving gas supplier. To convert to LP gas, use the LP gas conversion kit provided with the cooktop and see the "Gas Conversions" section.


Gas Supply Line

- Provide a gas supply line of 3/4" (1.9 cm) rigid pipe to the cooktop location. A smaller size pipe on longer runs may result in insufficient gas supply. With LP gas, piping or tubing size can be 1/2" (1.3 cm) minimum. Usually, LP gas suppliers determine the size and materials used in the system.

NOTE: Pipe-joint compounds that resist the action of LP gas must be used. Do not use TEFLON™ tape.


Flexible metal appliance connector:

- If local codes permit, a new CSA design-certified, 4 - 5 ft (122 - 152.4 cm) long, 3/4" (1.9 cm) or 1/2" (1.3 cm) I.D., flexible metal appliance connector may be used for connecting the cooktop to the gas supply line.



- Must include a shutoff valve:

The supply line must be equipped with a manual shutoff valve. This valve should be located in the same room but external to the cooktop enclosure or cabinet. It should be in a location that allows ease of opening and closing. Do not block access to shutoff valve. The valve is for turning on or shutting off gas to the cooktop.



A. Gas supply line
B. Shutoff valve "open" position
C. To cooktop

Electrical:

A 120-volt, 60-Hz, AC-only, 15-amp, fused electrical circuit is required. A GFI-type fuse or circuit breaker is also recommended. It is recommended that a dedicated circuit serving only this cooktop be provided.

®TEFLON is a registered trademark of E.I. Du Pont de Nemours and Company.

LOCATION REQUIREMENTS

IMPORTANT: Observe all governing codes and ordinances. Do not obstruct flow of combustion and ventilation air.

It is the installer's responsibility to comply with installation clearances specified on the model/serial rating plate. The model/serial rating plate is located on the underside of the cooktop burner base.

It is recommended that a 600 CFM or larger vent hood be installed above the cooktop.

It is not recommended that a microwave hood combination be mounted above the cooktop.


The cooktop should be installed in a location away from strong draft areas, such as windows, doors and strong heating vents or fans.

All openings in the wall or floor where cooktop is to be installed must be sealed.

Cabinet opening dimensions that are shown must be used. Given dimensions are minimum clearances.


IMPORTANT: To avoid damage to your cabinets, check with your builder or cabinet supplier to make sure that the materials used will not discolor, delaminate or sustain other damage.

PRODUCT DIMENSIONS

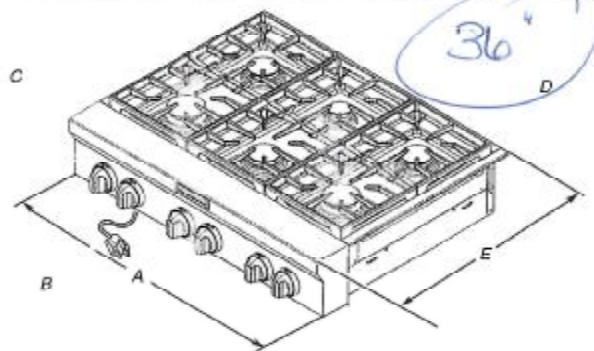

A. 30" (76.2 cm) cooktop: 29 1/4" (75.9 cm)
36" (91.4 cm) cooktop: 35 1/8" (91.1 cm)
48" (121.9 cm) cooktop: 47 1/8" (121.6 cm)
B. 36" (91.4 cm) long 3 prong grounding-type power supply cord

C. Model/serial rating plate (located on the underside of the cooktop burner base)
D. Island trim or optional backguard
E. 27 1/4" (70.5 cm)

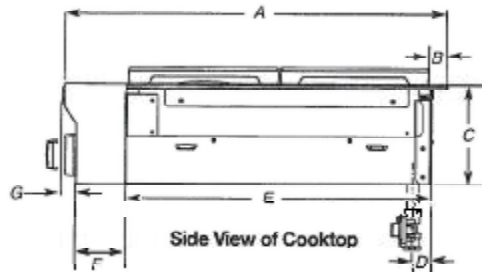

A. 27 1/4" (70.5 cm)
B. 1 1/4" (3.2 cm)
C. 7 1/4" (19.0 cm)

E. 22" (55.9 cm)
F. 3 1/2" (9.2 cm)
G. 1" (2.5 cm)

D. Gas inlet is located 1 1/8" (4.8 cm) from the back of the cooktop burner base and 4 1/8" (12.4 cm) in from left-hand side of the cooktop burner base.


Page 1 of 2

Base as illustrated is a preliminary drawing. It is not intended to be used for construction. It is recommended that a dedicated circuit serving only this cooktop be provided.

Dimensions are for planning purposes only. For complete details, see installation instructions included with product. Specifications are subject to change without notice.


© 1995 KitchenAid Inc.

CABINET REQUIREMENTS

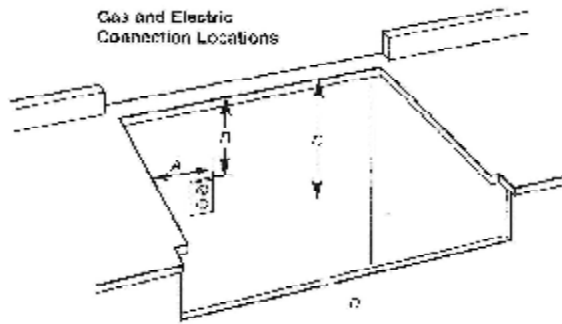

- A. Gas/electric connection must be within 18" (45.7 cm) of the cooktop for (60.0 cm) from front exterior cabinet.
- B. 18" (45.7 cm) min. clearance from cooktop to top of the cabinet.
- C. 18" (45.7 cm) min. clearance to the gas supply line. (2. Gas supply line should be located in this area on rear or side wall, or the supply line can come up through the floor.)

NOTE: Solid line and pattern of dotted enclosure for details.

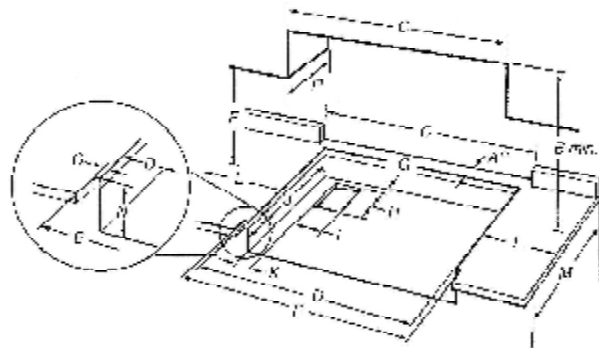

- A. See chart.
- B. See chart.
- C. See chart.
- D. See chart.
- E. See chart.
- F. 18" (45.7 cm) min. clearance upper cabinet to cooktop.
- G. 18" (45.7 cm) min. clearance upper cabinet to gas supply line.
- H. 18" (45.7 cm) min. clearance upper cabinet to gas supply line.
- I. 18" (45.7 cm) min. clearance upper cabinet to gas supply line.
- J. 18" (45.7 cm) min. clearance upper cabinet to gas supply line.
- K. 18" (45.7 cm) min. clearance upper cabinet to gas supply line.
- L. 18" (45.7 cm) min. clearance upper cabinet to gas supply line.
- M. 18" (45.7 cm) min. clearance upper cabinet to gas supply line.

Size	Model	A** Cooktop Outset to Back Wall	B** Cooktop to Cabinet	C Optional Backguard Opening	D Cabinet and Countertop	E Countertop Only
30" (76.2 cm)	KGCU407	1 1/2" (3.8 cm)**	30" (76.2 cm)	30" (76.2 cm)	28 1/2" (74.3 cm)	30" (76.2 cm) or 29 1/4" (75.9 cm) for zero clearance
36" (91.4 cm)	KGCU462 KGCU463 KGCU467	1 1/2" (3.8 cm)** 1 3/4" (4.4 cm) 1 3/4" (4.4 cm)	42" (106.7 cm)	36" (91.4 cm)	35 1/4" (89.5 cm)	36" (91.4 cm) or 35 1/4" (91.1 cm) for zero clearance
48" (121.9 cm)	KGCU482 KGCU483 KGCU484	1 1/2" (3.8 cm)** 1 3/4" (4.4 cm) 1 1/2" (3.8 cm)**	42" (106.7 cm)	48" (121.9 cm)	47 1/4" (120.0 cm)	48" (121.9 cm) or 47 1/4" (121.6 cm) for zero clearance

*NOTE: Dimension "A" can be reduced by 6" (15.2 cm) when bottom of cabinet is covered by not less than 0.23" (5.8 mm) flame resistant material (not less than No. 28 MSG sheet metal, 0.018" (0.4 mm) stainless steel, 0.024" (0.6 mm) aluminum or 0.020" (0.5 mm) copper).

If installing a range hood above the cooktop, follow the range hood instructions for dimensional clearances above the cooktop surface.

**NOTE: If backwall is constructed of combustible material and a backsplash is not installed, a minimum clearance of dimension A = 3" (7.6 cm) is required for 48" (121.9 cm) cooktops and cooktops with a grill.

Lot 19
Riverwalk Kii

KitchenAid®

FOR THE WAY IT'S MADE.™

30" (76.2 cm) and 36" (91.4 cm) Wall-Mount Canopy Range Hood

PRODUCT MODEL NUMBERS

KVWB600D

KVWB600D

Electrical: A 120 volt, 60 Hz AC only, 15-amp, fused electrical circuit is required.

VENTING METHODS

This canopy range hood is factory set for venting through the roof or through the wall.

A 6" (15.2 cm) round vent system is needed for installation (not included). The hood exhaust opening is 6" (15.2 cm) round.

NOTE: Flexible vent is not recommended. Flexible vent creates back pressure and turbulence that greatly reduce performance.

Vent system can terminate either through the roof or wall. To vent through a wall, a 90° elbow is needed.


Rear Discharge

A 90° elbow may be installed immediately above the hood.

For Non-Vented (Recirculating) Installations


If it is not possible to vent through the roof or wall, the hood can be used in the non-vented (recirculating) version, using a Recirculation Kit (which includes charcoal filters and a deflector). To order, see the "Assistance or Service" section.

Roof Venting




A. Roof cap
B. 6" (15.2 cm) round vent

Wall Venting



A. Wall cap
B. 6" (15.2 cm) round vent

Non-Vented (Recirculating)



A. Deflector
B. 6" (15.2 cm) round vent

Calculating Vent System Length

To calculate the length of the system you need, add the equivalent feet (meters) for each vent piece used in the system.

Vent System


Vent Piece 6" (15.2 cm) Round

45° elbow 2.5 ft (0.8 m)

90° elbow 3.5 ft (1.1 m)

Maximum equivalent vent length is 35 ft (10.7 m).

Example Vent System

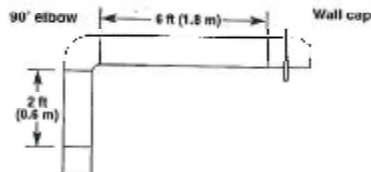

The following example falls within the maximum recommended vent length of 35 ft (10.7 m).


1 - 90° elbow = 2.5 ft (0.8 m)

1 - wall cap = 0.0 ft (0.0 m)

6 ft (2.4 m) straight = 6.0 ft (2.4 m)

Length of system = 8.5 ft (2.6 m)


PRODUCT DIMENSIONS

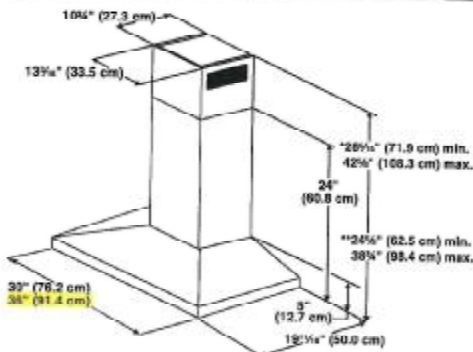

*For non-vented (recirculating) installations

**For vented installations

CABINET DIMENSIONS

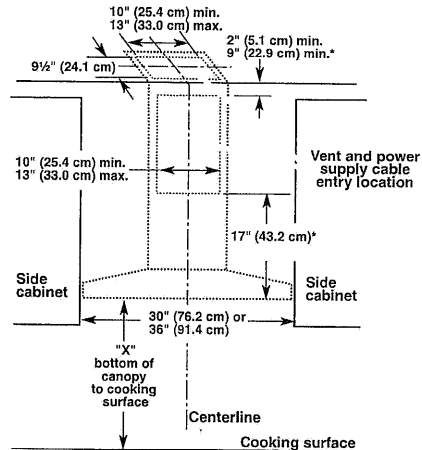

*For non-vented (recirculating) installations

IMPORTANT:

Minimum distance "X": 24" (61.0 cm) from electric cooking surface.

Minimum distance "X": 27" (68.6 cm) from gas cooking surfaces.

Suggested maximum distance "X": 36" (91.4 cm)

The chimneys can be adjusted for different ceiling heights. See the following chart.

Vented Installations		
	Min. ceiling height	Max. ceiling height
Electric cooking surface	7' 1" (2.16 m)	9' 2" (2.79 m)
Gas cooking surface	7' 4" (2.23 m)	9' 2" (2.79 m)
Non-vented (recirculating) Installations		
	Min. ceiling height	Max. ceiling height
Electric cooking surface	7' 1" (2.16 m)	9' 6" (2.9 m)
Gas cooking surface	7' 4" (2.23 m)	9' 6" (2.9 m)

***NOTE:** The range hood chimneys are adjustable and designed to meet varying ceiling or soffit heights depending on the distance "X" between the bottom of the range hood and the cooking surface. For higher ceilings, a Chimney Extension Kit is available from your dealer or an authorized parts distributor. The chimney extension replaces the chimney shipped with the range hood. To order, see the "Assistance or Service" section.

KitchenAid®

FOR THE WAY IT'S MADE®

Undercounter Dishwasher

PRODUCT MODEL NUMBERS

KDFE204E, KDFE454C, KDTE104E, KDTE204E,
KDTE254E, KDTM354E, KDTM384E, KDTM404E,
KDTM504E, KDTM704E, KDTM804E

Electrical Requirements: 120-volt, 60 Hz, AC-only, 15- or 20-amp, fused electrical supply. Copper wire only. A time delay fuse or circuit breaker and separate circuit is recommended.

If direct wiring dishwasher: Use flexible, armored or nonmetallic, sheathed copper wire with grounding wire that meets the wiring requirements for your home and local codes and ordinances.

Use a UL Listed or CSA Approved conduit connector.

If connecting dishwasher with a power supply cord:

Use power supply cord kit (Part Number 4317824) marked for use with dishwashers. Follow the kit instructions for installing the power supply cord.

Power supply cord must plug into a grounded 3 prong outlet located in the cabinet next to the dishwasher opening. Outlet must meet all local codes and ordinances.


Water Supply Requirements: A hot water line with 20 to 120 psi (138 to 862 kPa) water pressure. Water temperature must be 120°F (49°C) water at dishwasher. Use 3/8" O.D. copper tubing with compression fitting or flexible braided water supply line

Note: 1/2" minimum plastic tubing is not recommended.

Use a 90° elbow with 3/4" hose connection with rubber washer (Part Number W10273460). Do not solder within 6" (15.2 cm) from water inlet valve.

Drain Requirements: A new drain hose is supplied with your dishwasher. If this is not long enough, use a new drain hose with a maximum length of 12' (3.7 m) (Part Number 3385556) that meets all current AHAM/IAPMO test standards, is resistant to heat and detergent, and fits the 1" (2.5 cm) drain connector of the dishwasher.

Make sure to connect the drain hose to waste tee or disposer inlet above drain trap in house plumbing and 20" (50.8 cm) minimum above the floor. It is recommended




that the drain hose either be looped up and securely fastened to the underside of the counter or be connected to an air gap.

Make sure to use an air gap if the drain hose is connected to house plumbing lower than 20" (50.8 cm) above subfloor or floor.

Use 1/2" (1.3 cm) minimum I.D. drain line fittings.

If required, the air gap should be installed in accordance with the air gap installation instructions. When connecting the air gap, a rubber hose (not provided) will be needed to connect to the waste tee or disposer inlet.

PRODUCT DIMENSIONS

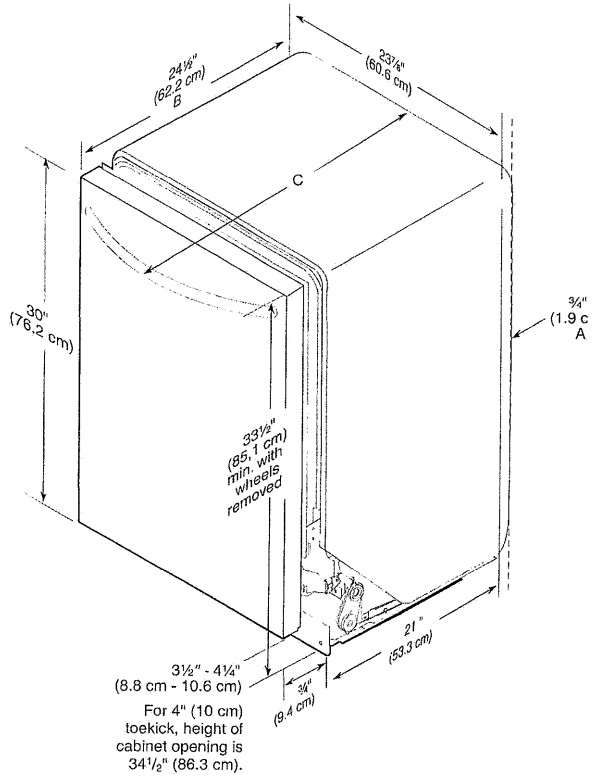

- A. Insulation may be compressed (not used on all models).
- B. For panel-ready models, dishwasher depth is 24" (60 cm) not including the 3/4" (1.9 cm) custom door panel.
- C. Door handles may protrude forward of the face of the dishwasher; varies by model.

CABINET CUTOUT DIMENSIONS

NOTE: Shaded areas of cabinet walls show where utility connections may be installed.

*Measure from the lowest point on the underside of the countertop. May be reduced to 33½" (85.1 cm) by removing the rear leveling legs from dishwasher.

**Minimum, measured from narrowest point of opening.

