

PH2-Lot 22

42" BUILT-IN SIDE-BY-SIDE REFRIGERATOR/FREEZER

SUB-ZERO

BI-42S/S

Senator
Lot 22 ★



FEATURES

- LED Lighting for brighter interior
- Dual refrigeration keeps food fresher longer
- Air purification system fights spoilage, odors
- Crispers and deli drawers in low-temp, high-humidity zones for optimum freshness
- Microprocessor control assures peak performance
- Water-filtration system reduces contaminants, chlorine taste and odor
- Freshness cards for maximum food preservation
- Rigorously tested in our U.S. manufacturing facilities to ensure decades of use
- Exceptional 24/7 support from Madison, WI-based Customer Care team
- Magnetic door seal system locks in cold air
- Automatic ice maker with "max ice" feature
- Adjustable shelves for maximum convenience

ACCESSORIES

- Air Purification Cartridge
- Egg Container
- Stainless Steel Side Panel
- White Side Panel
- Stainless steel kickplate
- Grilles for 83" or 88" finished height (84" is standard)
- Side panel mounting kit

Accessories are available through an authorized Sub-Zero dealer.
For local dealer information, visit subzero-wolf.com/locator.

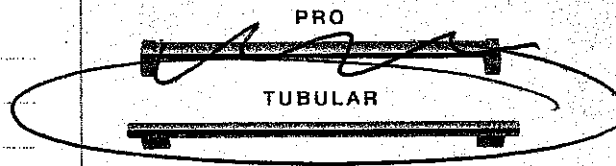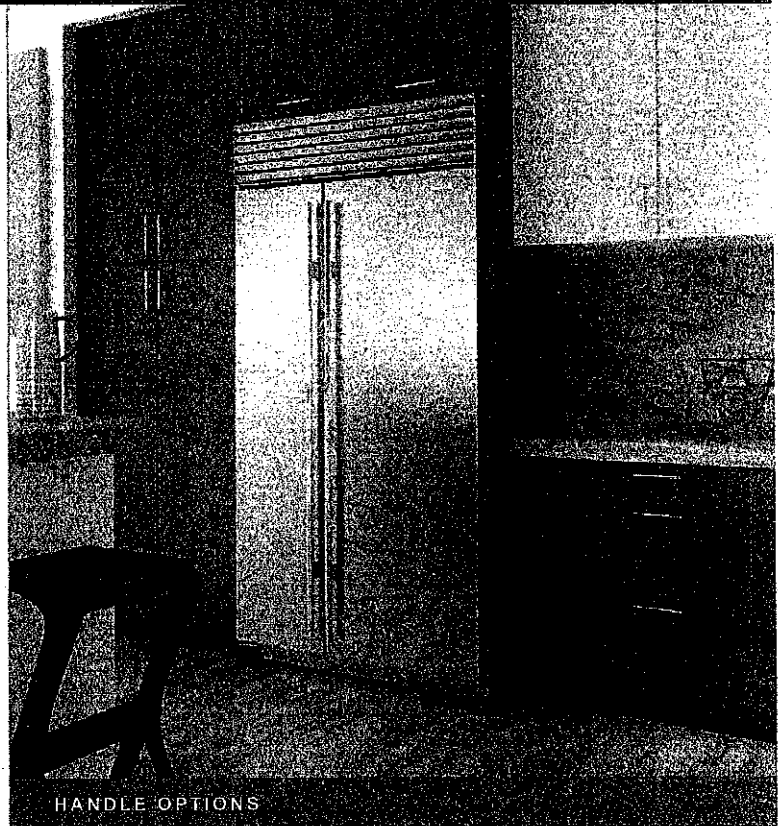

PRODUCT DETAILS

REFRIGERATOR

- 4 Adjustable glass shelves
- 1 Stationary glass shelf
- 1 High-humidity drawer with divider
- 2 Storage drawers with divider
- 3 Adjustable door shelves
- 2 Stationary door shelves
- Adjustable dairy compartment

FREEZER

- 3 Adjustable wire shelves
- 1 Stationary solid shelf
- 3 Storage drawers
- 5 Adjustable door shelves
- Automatic ice maker

42" BUILT-IN SIDE-BY-SIDE REFRIGERATOR/FREEZER


SUB-ZERO

PRODUCT SPECIFICATIONS

Model	BI-42S/S
Dimensions	42"W x 84"H x 24"D
Door Clearance	26 1/4"
Weight	582 lbs
Refrigerator Capacity	16.3 cu. ft.
Freezer Capacity	8 cu. ft.
Electrical Supply	115 VAC, 60 Hz
Electrical Service	15 amp dedicated circuit
Receptacle	3-prong grounding-type

ELECTRICAL


PLUMBING

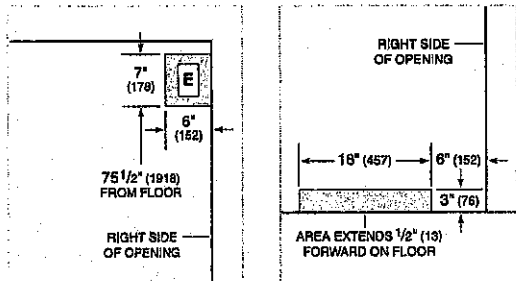

NOTE:


Dimensions in parenthesis are in millimeters unless otherwise specified

INTERIOR VIEW

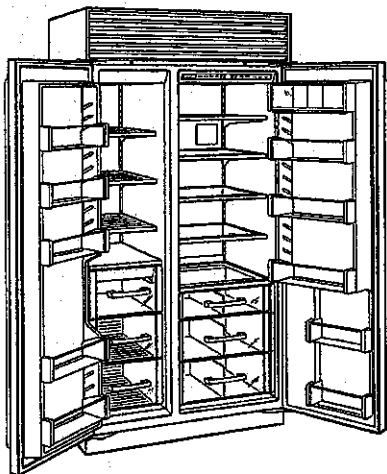


This illustration is intended for interior reference only and may not represent the exterior of the model being specified.

DIMENSIONS

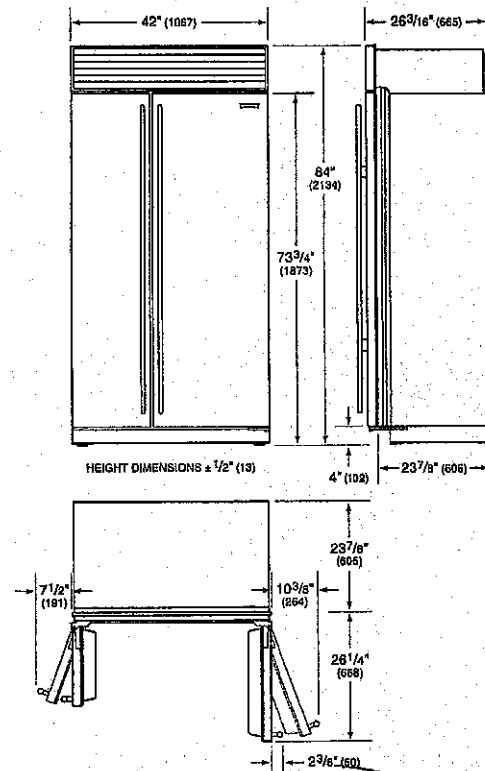

STANDARD INSTALLATION

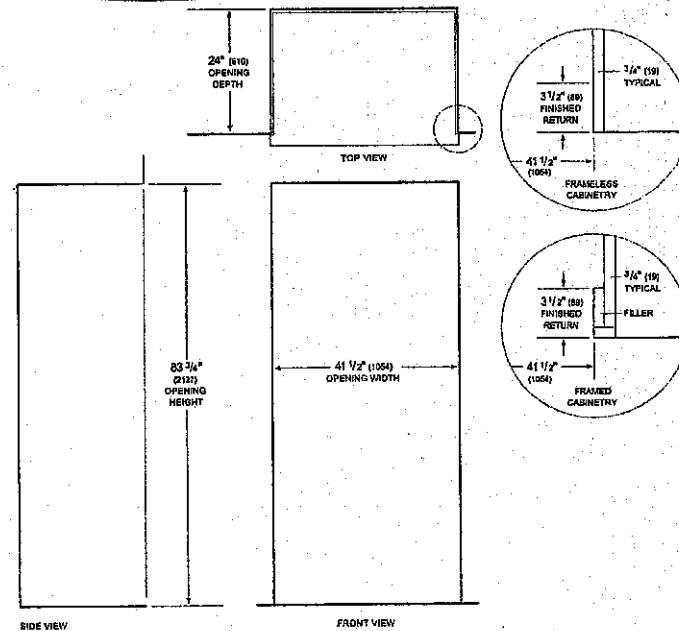

SIDE VIEW

FRONT VIEW

NOTE: 3 1/2" (90) finished returns will be visible and should be finished to match cabinetry. Shaded line represents profile of unit.

PH2-LG22

36" GAS RANGE - 6 BURNERS

GR366




FEATURES

- 6 dual-stacked, sealed burners
- Dual-stacked, sealed burners for higher highs, lower lows
- Convection oven for faster, more consistent cooking
- Infrared broiler inside oven sears quickly and evenly
- Heavy-gauge stainless steel
- Enhanced views into oven
- Rigorously tested in our U.S. manufacturing facilities for decades of use
- Exceptional 24/7 support from our Customer Care team in Madison
- Signature red infinite control knobs
- Continuous cast-iron grates for easy movement of pots and pans
- Spark ignition system re-ignites if flame goes out
- Adjustable legs for stability, plus rear casters

ACCESSORIES

- Bake stone kit (stone, rack and peel)
- Stainless steel, brass or chrome bezels
- High altitude conversion kit
- Full-extension easy glide oven rack
- Cast iron S-grates and wok grate
- Stainless steel kickplate
- Signature red, black or stainless steel control knobs
- Front leg covers
- 5" and 10" stainless steel risers, and 20" riser with shelf


Accessories available through an authorized Sub-Zero dealer.
For local dealer information, visit subzero-wolf.com/locator.

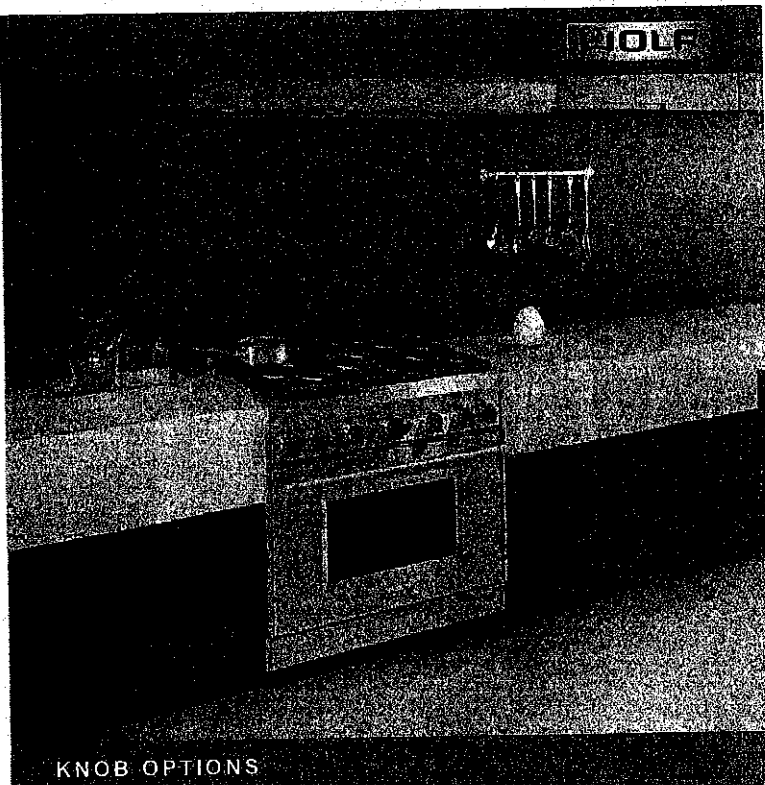

KNOB OPTIONS



TOP CONFIGURATION




RANGETOP SPECIFICATIONS

- 1 - 9,200 Btu Burner
- 5 - 15,000 Btu Burners


PRODUCT SPECIFICATIONS

Model	GR366
Dimensions	35 7/8"W x 37"H x 28 3/8"D
Oven 1 Interior Dimensions	30"W x 18 5/8"H x 17"D
Oven 1 Usable Capacity	3.7 cu. ft.
Oven 1 Overall Capacity	5.5 cu. ft.
Door Clearance	19 1/2"
Weight	470 lbs
Electrical Supply	110/120 VAC, 50/60 Hz
Electrical Service	15 amp dedicated circuit
Gas Supply	3/4" ID line
Gas Inlet	1/2" NPT female
Receptacle	3-prong grounding-type


DIMENSIONS

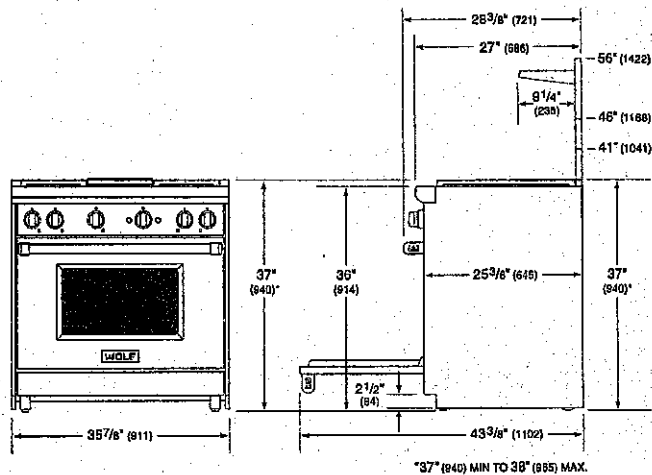

ELECTRICAL




GAS



NOTE:

Dimensions in parenthesis are in millimeters unless otherwise specified


STANDARD INSTALLATION

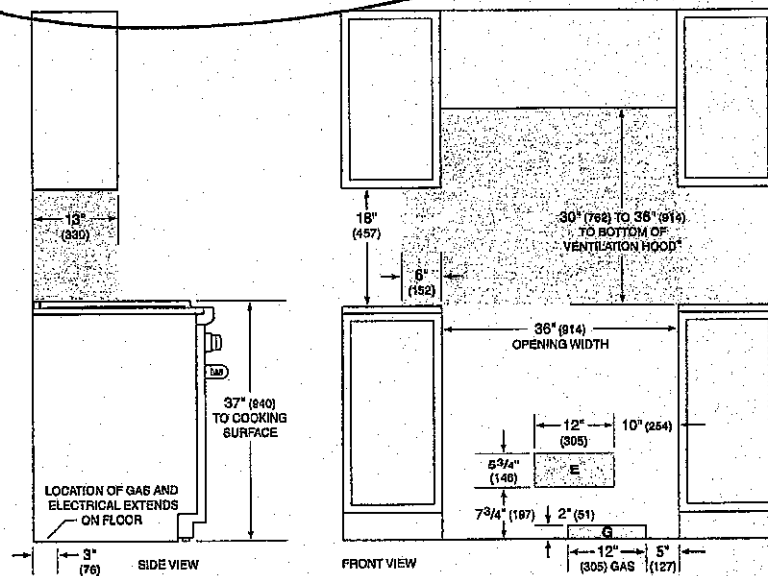

*Without ventilation hood, 42" (1067) minimum clearance countertop to combustible materials, chartroller requires non-combustible materials.

NOTE: Shaded area above countertop indicates minimum clearance to combustible surfaces, combustible materials cannot be located within this area.

For Island Installation, 12" (305) minimum clearance back of range to combustible rear wall above countertop.

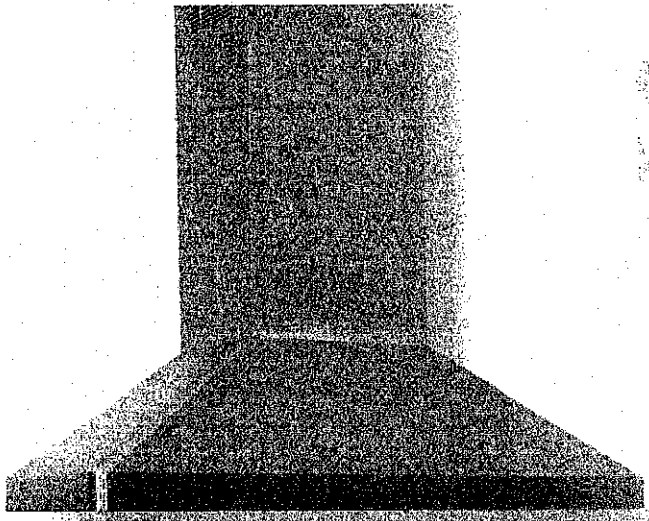

SU54

SU54

- SU54 36" 42" 48" Motor: 2 x EBM 1100 cfm (Duct Size 8")
- SU54 30" 1 x EBM 600 cfm (Duct Size 6")
- Pressure: 800 Pa
- Noise level: 66 dBA/5.1 sones





- Lighting:
2x20W Halogen lamps in 30" version
2x20W Halogen lamps in 36" version
3x20W Halogen lamps in 42" version
4x20W Halogen lamps in 48" version



- Control panel: 4 speed push-button + timer + light switch

- grease filter: commercial style baffle filters
- Stainless steel: AISI 430

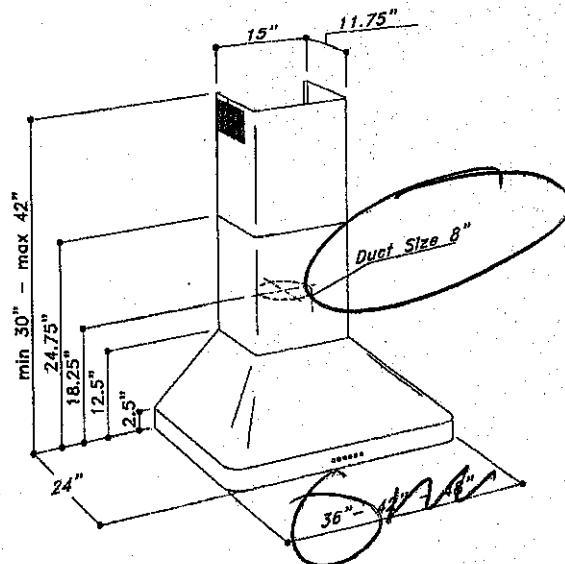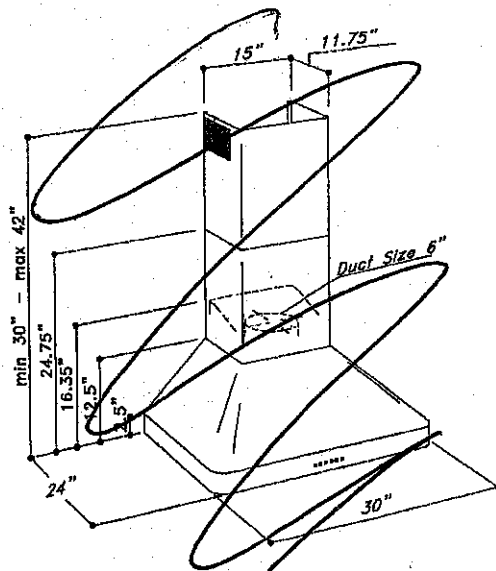

Sirius

Pha #22

24" BUILT-IN DISHWASHER—INTEGRATED HANDLE

ASKO

45" high x 24" wide x 24" deep

MODEL D5426XLS



FEATURES

Integrated handle and front controls

TouchProof™ stainless steel

Condensation drying system

15 place-setting capacity

Quiet operation—46 dB(A)

7Spray™ wash system; separate spray nozzles clean pot & pans and continuously spray cutlery basket


6 wash programs

Heavy-duty stainless steel construction with nylon-coated steel racks

Touch screen display

Remaining time and program end indicator

ADA height compliant

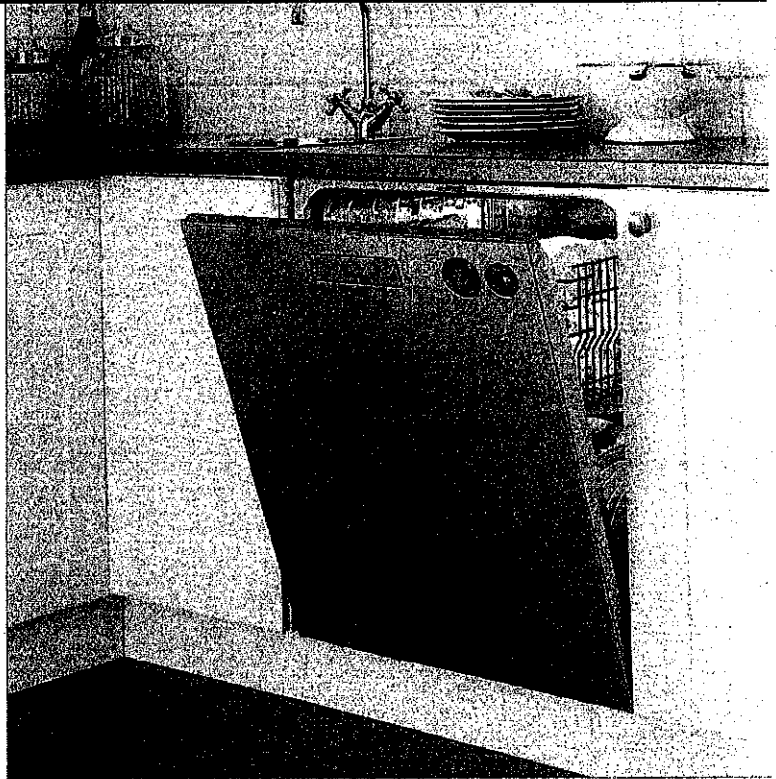

INTERIOR FEATURES

- Standard upper rack
- Standard lower rack

PROGRAMS


- Sanitation Wash
- Normal Wash
- Heavy Wash
- Quick Wash
- Eco Wash
- Rinse and Hold

PRODUCT SPECIFICATIONS


Model	D5426XLS
Width	23 ⁷ / ₈ "
Height	32 ³ / ₄ "**--34 ³ / ₄ "
Depth	22 ⁷ / ₈ "
Door Clearance	24 ⁵ / ₈ "
Weight	115 lb
Max Loading Height Upper Rack	9"
Max Loading Height Lower Rack	12 ¹ / ₄ "
Electrical Supply	115 VAC, 60 Hz
Electrical Service	15 amp circuit
Plumbing Supply	1/4" OD copper, braided stainless steel or PEX tubing
Pressure	4.2–140 psi

Electrical supply, plumbing supply and drain should be located in an adjacent cabinet. If not, they must be located within the shaded area shown in the illustrations below.

ELECTRICAL | PLUMBING

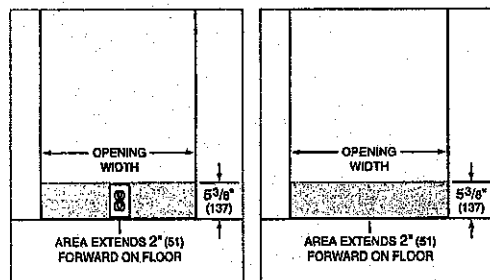


DIMENSIONS

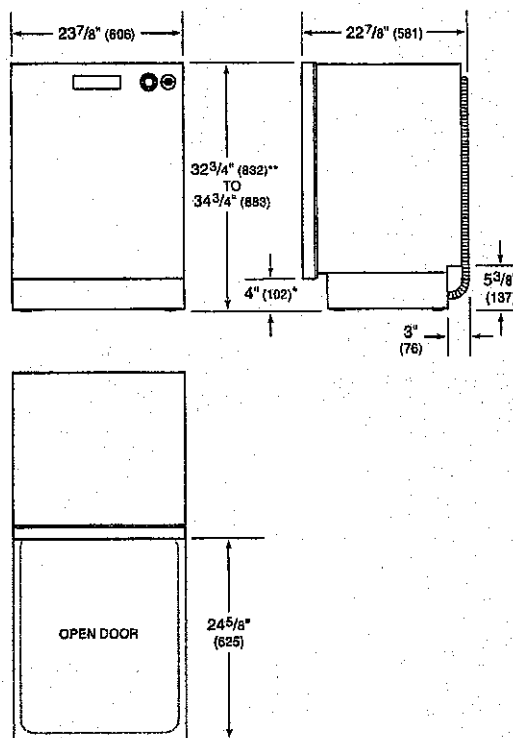

*Dimension will vary with product height.

**Can be reduced to 32¹/₄" (813) by removing top trim and lowering side trim.

INSTALLATION

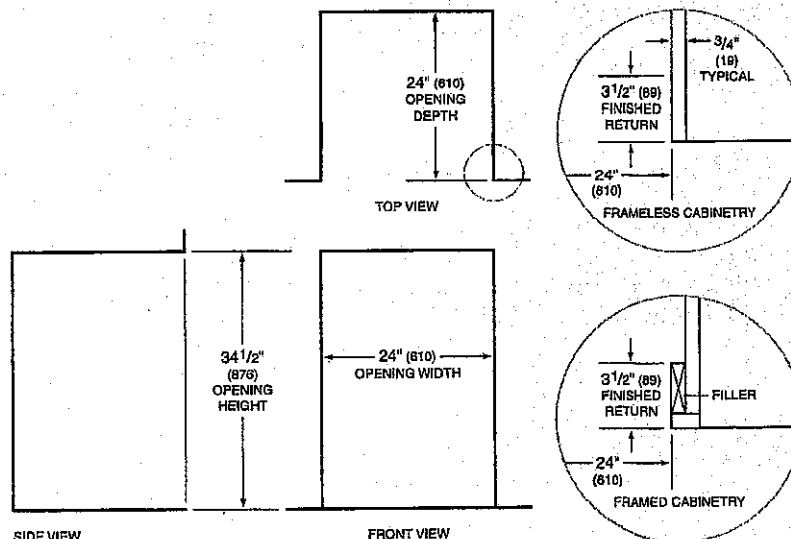

SIDE VIEW

FRONT VIEW

NOTE: 3¹/₂" (89) finished returns will be visible and should be finished to match cabinetry.