

WT-III

Halo Sliding Shower Door 44 1/2-47 x 78 3/4 in. 8 mm

Model number: 138996

Dimensions: 44 1/2-47" x 78 3/4" Installation: Alcove Door type: Slider



Standard Features:

- Glass panels 5/16 in. (8 mm) with a height of 78 3/4 in.
- Lotus easy clean protection for effortless maintenance
- Ball bearing roller technology for smooth and quiet opening
- Reversible shower door allows for left or right opening
- Also available in a corner configuration
- Available in 4 finishes: Chrome, Brushed

Product characteristics:

- Ball Bearing Roller System
- Bestseller
- Utile Compatible

Warranty:

10 Years

Certifications

MAAX products adhere to one or more of the following certifications:



Frame Finish(es):

 Chrome (084)

 Dark Bronze (173)

 Brushed Nickel (305)

 Matte Black (340)

Glass Pattern(s):

 Clear (900)





Recommended products (Visit our website for a complete list of our recommended products)

No	Description
106011	Olympia Square Base 4832
102002	Rectangular Base 4834 - 3 in.
105059	Rectangular Base 4836 - 5 in.


WT-111

Halo Sliding Shower Door 44 1/2-47 x 78 3/4 in. 8 mm

Model number: 138996

Dimensions: 44 1/2-47" x 78 3/4" Installation: Alcove Door type: Slider

STANDARD

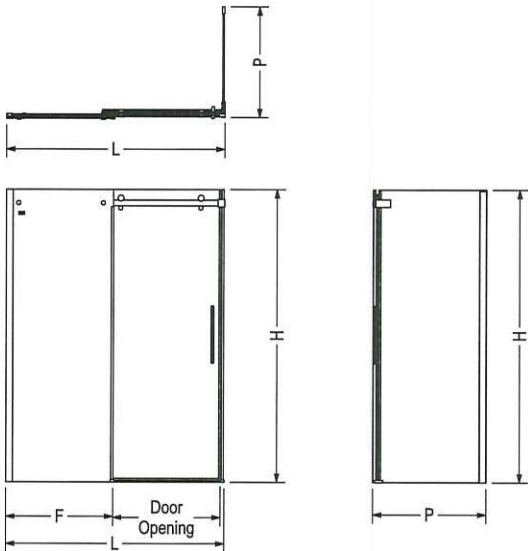

Code	Description	H	L Adjustable	F	P Adjustable	Door Opening	Wall Adjustment
138996	Halo 78 3/4" x 47"	78 3/4"	44 1/2" - 47"	22 1/2"	-	16 1/4" - 18 3/4"	1"
138997	Halo 78 3/4" x 59"	78 3/4"	56 1/2" - 59"	28 5/8"	-	22 1/8" - 24 5/8"	1"
139393	Return Panel 30"	78 3/4"	-	-	27 7/8"	-	1"
138998	Return Panel 32"	78 3/4"	-	-	29 7/8"	-	1"
139395	Return Panel 34"	78 3/4"	-	-	31 7/8"	-	1"
139396	Return Panel 36"	78 3/4"	-	-	33 7/8"	-	1"
139394	Return Panel 42"	78 3/4"	-	-	39 7/8"	-	1"

All dimensions are approximate. Structure measurements must be verified against the unit to ensure proper fit.

Dimensions:

44 1/2-47 x 78 3/4 in.
(1130-1194 x 2000 mm)

Glass Thickness:

5/16 in. (8 mm)

Weight:

132 lbs (59.86 kg)

Frame type:

Frameless

Opening:

Reversible

Door adjustment:

For out of plumb walls

Minimum access:

16 3/8 (416 mm)

Maximum access:

18 3/8 (416 mm)



Project:

Contractor:

Representative:

Date:

Tel:

Notes:

