


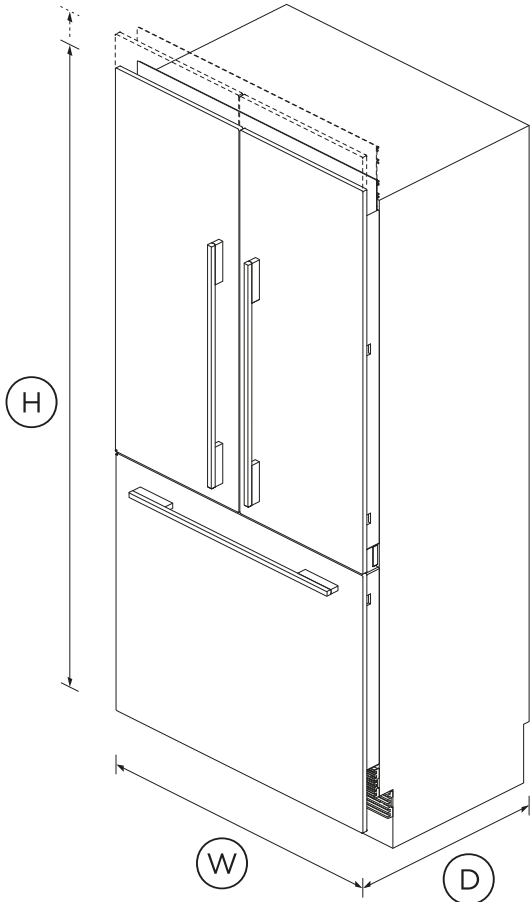

Height	79 ¹³ / ₁₆ "
Width	35 ¹¹ / ₁₆ "
Depth	23 ³ / ₄ "

ACCESSORIES

Contemporary round handle kit	AHS-ASBI-B
Contemporary square handle kit	RS36W
Professional round flush handle kit	AHP3RD36W
Professional round handle kit	AHCRS36W
Professional square handle kit	AHV2RS36W
Square fine aluminium handle kit	AHD5RD36W
Square fine black handle kit	AHD5RD36WB
Stainless steel door panel	25777 (80"") or 25782 (84"")
Stainless steel door panel set, 80" Height, Contemporary square handle	RD3680
Stainless steel door panel set, 84" Height, Contemporary square handle	RD3684

CAPACITY

Total gross capacity	16.8cu ft
Volume refrigerator	11.7cu ft

FEATURES

Adjustable door shelves	6
Adjustable glass shelves	3
Covered door shelves	2
Deli storage bins	1
Door alarm	•
Fruit and vegetable bins	2
LED lighting	•
SmartTouch control panel	•
Soft close doors	•
Stackable bottle holders	4
Water Filter	Part number 842802

FREEZER FEATURES

Automatic ice maker	•
Bottle chill	•
Fast freeze	•

PERFORMANCE

- ActiveSmart™ Foodcare
- ActiveSmart™ technology
- Adaptive defrost
- Frost free freezer
- Humidity control system
- Sabbath mode

PRODUCT DIMENSIONS

- Depth23 3/4"
- Height79 13/16"
- Width35 11/16"

WARRANTY

- Parts and labour2 years
- Sealed system parts and laboradditional 3 years

RESOURCES

☐ SELECT INDIVIDUAL FILES ☐ SELECT ALL FILES

Please note: Videos are not for downloading purposes

DESIGN PLANNING

- [Data Sheet Integrated French Door Fridge Freezer](#)
- [Planning Guide Integrated French Door Fridge Freezer](#)

CAD DOWNLOADS

2D CAD Files

Show individual item downloads ▾

3D CAD Files

Show individual item downloads ▾

GENERAL


- [Quick Reference guide](#)
- [User Guide](#)
- [Guide D'Utilisation](#)
- [Energy Label](#)
- [User Guide](#)
- [User Guide](#)
- [Energy Label](#)
- [Energy Label](#)

INSTALLATION

- [Installation Guide](#)
- [Guide D'Installation](#)
- [Installation Guide](#)
- [Installation Guide](#)
- [Install Guide - Water Filter Replacement \(FR\)](#)
- [Install Guide - Water Filter Replacement \(EN\)](#)

CUSTOMER REVIEWS



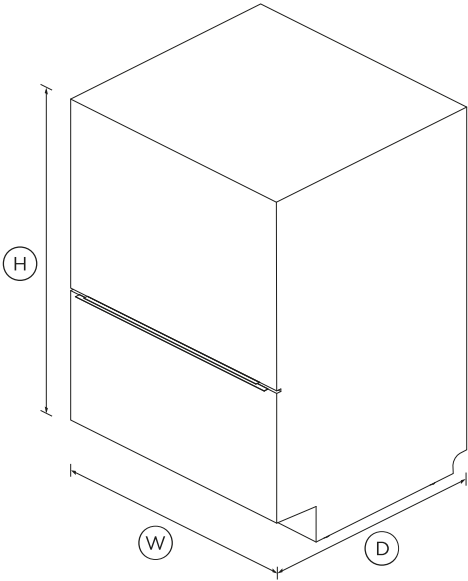

Height	34 - 36 ³ / ₈ "
Width	23 ⁹ / ₁₆ "
Depth	22 ¹ / ₂ "

ACCESSORIES

Contemporary round handle kit	Part number 81671
Contemporary square fine handle kit	Part number 82104
Contemporary square handle kit	Part number 81908
Cutlery basket	•
Kickstrip	Recessed
Knife clip and multipurpose clip	•
Optional handle	513545 D3 front mount fitting kit
Optional stainless steel door kit	81261 ADDED24DT
Professional round flush handle kit	Part number 82140
Professional round handle kit	Part number 82142
Professional square handle kit	Part number 81727

CAPACITY AND LOADING

Accommodates round plates up to	12.25" (top) 11" (bottom)
Adjustable height, foldable cupracks	•
Fold down tines	•
Pitch adjustable tines	•
Place settings	14

CONSUMPTION

Energy rating	Energy star
Energy usage	263 kWh/year

CONTROLS

Child lock	•
Electronic fault/Diagnostic indicator	•
End of cycle beeps	•
Energy saving delay start option of up to 12 hours	•
Internal wash selector	•
Knock to pause	•
Rinse aid indicator light	•

FEATURES

- Fan assisted drying
- Flow through detergent dispenser
- Quiet operation
- SmartDrive™ technology

PERFORMANCE

Noise on gentle cycle top drawer 44dBA

POWER REQUIREMENTS

Amperage	9.6A
Electric circuit	3 wire
Rated current	15A
Supply frequency	60Hz
Supply voltage	120V

PRODUCT DIMENSIONS

Depth	22 1/2"
Height	34 - 36 3/8"
Width	23 9/16"

WARRANTY

Parts and labor Limited 2 years

WASH PROGRAMS

- Delicate
- Eco
- Extra Dry
- Fast
- Heavy
- Medium
- Number of wash programs 6
- Quick
- Rinse
- Sanitize
- Wash modifiers 3

WATER CONNECTION

- Inlet water temperature max 140°F
- Supplied hose to suit 3/8" (9mm) male compression fitting

RESOURCES

☐ SELECT INDIVIDUAL FILES ☐ SELECT ALL FILES

Please note: Videos are not for downloading purposes

DESIGN PLANNING

↓ [Data Sheet Integrated Double DishDrawer](#)

CAD DOWNLOADS

2D CAD Files

Show individual item downloads ▾

3D CAD Files

Show individual item downloads ▾

GENERAL

↓ [Quick Reference guide](#)

↓ [Quick Start Guide](#)

↓ [User Guide](#)



24" Panel-Ready Undercounter Wine Cellar with Wood-Front Racks

By closing this message, you consent to our cookies on this device in accordance with our [Privacy Notice](#) unless you have disabled them.

CLOSE

KitchenAid®



☐ COMPARE



24" Panel-Ready Undercounter Wine Cellar With

KUWL214KPA

1.0 (2) [Write a review](#)



24" Panel-Ready Undercounter Wine Cellar with Wood-Front Racks

MSRP: \$3,099.99

ADD TO CART

Let you separate reds and whites to store and serve each at the temperature you enjoy. Adjust the top zone from 42–54°F for whites and the bottom zone from 42–64°F for reds.

TEMPERATURE MONITORING SYSTEM

uses sensors to monitor temperatures inside the wine cellar for added peace of mind. If the system detects temperatures above 70°F for more than 4 hours, an over-temp alarm and indicator light will alert you that service is needed.


VIEW MORE

Specifications

Height:
8731.25, 34-3/8”
Centimeters, Inches

Width:
6064.25, 23-7/8”
Centimeters, Inches

Depth:
6791.32, 26-59/80”
Centimeters, Inches



Overview

Specs

Where to Buy

Support

1.3 cu ft.

Oven capacity


1100 W

Cooking power

Auto Cook

7 Program settings

[SEE ALL SPECS](#)

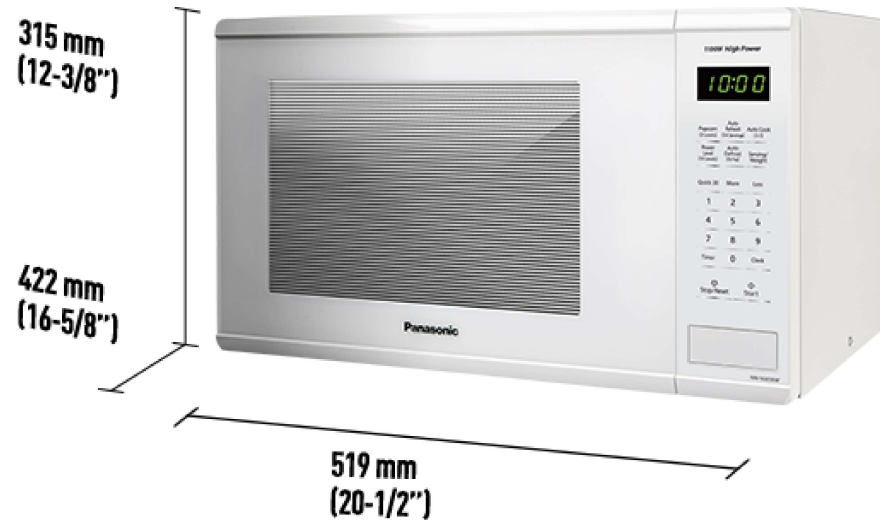

UPN90FDM
36" Nostalgie Series Freestanding Single Oven Dual Fuel Range with 5 Sealed Burners and Griddle




COOKTOP	
Fuel Type	Natural Gas / Liquid Propane
Burners/Elements	5 Sealed Burner
Surface	Deep Recessed Cooktop
Control	Knobs on Front Side
Grate Type	Cast Iron Grate

Oven	
Fuel	Electric Oven
Door Type	Removable Triple Layer Glass Door
Convection	Yes
Control Type	Knobs
Cleaning Type	Catalytic Oven Panel (Sold Separately)
Light(s)	Yes
Rack Holders	Plain
Soft Close Door	No
Broiler	Yes
Child Safety Lock	No
Timer	Yes
Built-in Thermostat	Yes
Internal Thermometer	No

INCLUDED	
Range Hood	No
Power Cord	Yes
Grates	Yes
Griddle	Yes
Legs	Yes
Backsplash	Yes
Conversion Kit	Yes
Oven Racks	Yes
Oven Trays	Yes
Rotisserie	Yes
Gas Regulator	Yes
Manual	Yes

POWER	
Voltage	240 Volts
Amperage	30 Amps
Hertz	60 Hertz
Power Cord Type	Hard Wire - 4 wire
Power Cord Length	45 11/16 inch / 116 cm

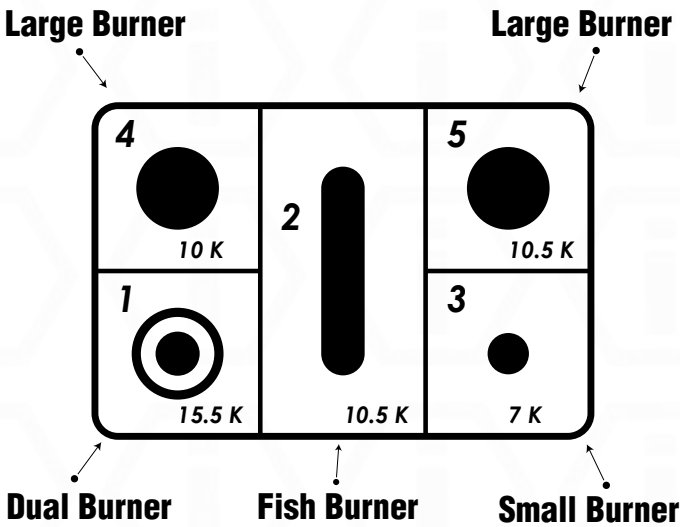

MISCELLANEOUS	
Warranty	2 Years Limited Warranty
Range Weight	270 lbs lbs
Shipping Weight	290 lbs lbs
Shipping Dimensions	37 inch W x 33 15/16 inch H x 29 5/16 inch D


DS BS


OVERALL DIMENSION	
Overall Width (A)	35 7/19 inch / 90 cm
Overall Height without Backsplash (G)	39 9/19 inch / 100.5 cm
Overall Height with Backsplash (G1)	41 15/16 inch / 106.5 cm
Overall Depth without Handles (Q)	23 10/16 inch / 60 cm
Overall Depth with Handles (Q)	25 13/16 inch / 65.5 cm

COOKTOP	
Cooktop Width (A)	35 7/16 inch / 90 cm
Cooktop Height (D) (P)	1 9/16 inch / 4 cm
Cooktop Depth without Handles (Q)	23 10/16 inch / 60 cm
Cooktop Depth with Handles (Q1)	25 13/16 inch / 65.50 cm
Cooktop Front Lip Depth over Range (M)	9/16 inch / 1.5 cm
Cooktop Back Lip Depth over Range (N)	1 6/16 inch / 3.5 cm
Cooktop Handrail Length (E)	34 10/16 inch / 88 cm

RANGE BODY	
Range Width (A)	35 7/16 inch / 90 cm
Range Height (C)	27 15/16 / 71 cm
Range Depth (H)	21 10/16 / 55 cm
Handle Length (E1)	28 15/16 inch / 73.5
Handle Length (E2)	----- / -----
Backsplash Width (A)	35 7/16 inch / 90 cm
Backsplash Height (O)	2 6/16 inch / 6 cm
Backsplash Depth (R)	9/16 inch / 1.5 cm
Power Position	From range's rear exterior bottom - 9 1/16 inch / 23 cm; From range's rear exterior left - 5 2/16inch / 13 cm
Gas Connector Position	From range's rear exterior bottom - 3 9/16 inch / 9 cm; From range's rear exterior right - 7 1/16 inch / 18 cm


LEGS	
Range Leg Type	4 / Cylinder Leg
Range Leg Height (B min)	6 2/16 inch / 15.5 cm
Range Leg Height (B max)	10 1/16 inch / 25.5 cm
Space Between Leg and Range (Side) (I)	8/16 inch / 1.2 cm
Space Between Leg and Range (Front) (K)	1 10/16 inch / 4.2 cm
Space Between Leg and Range (Back) (L)	8/16 inch / 1.2 cm

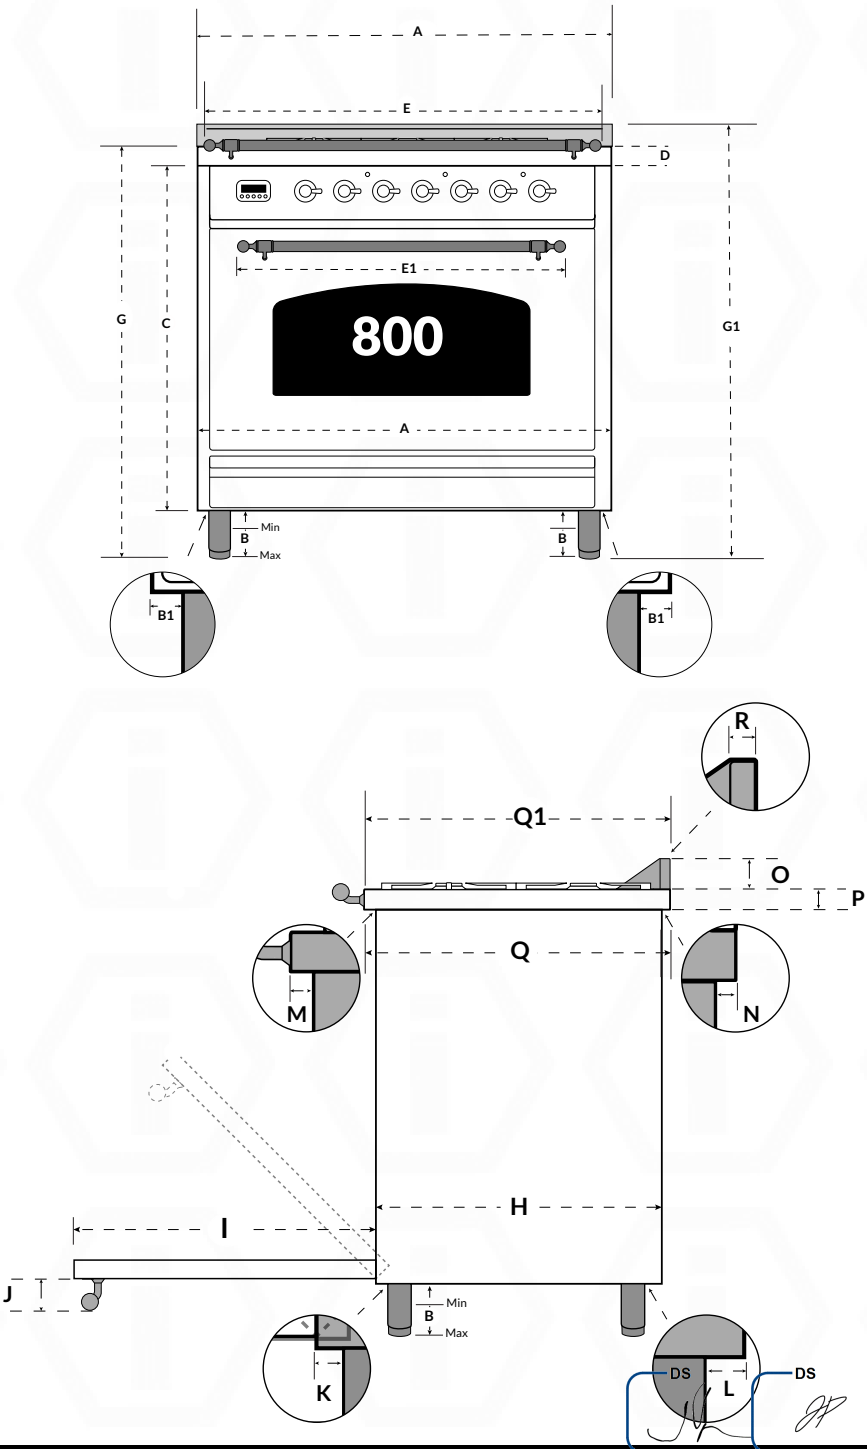


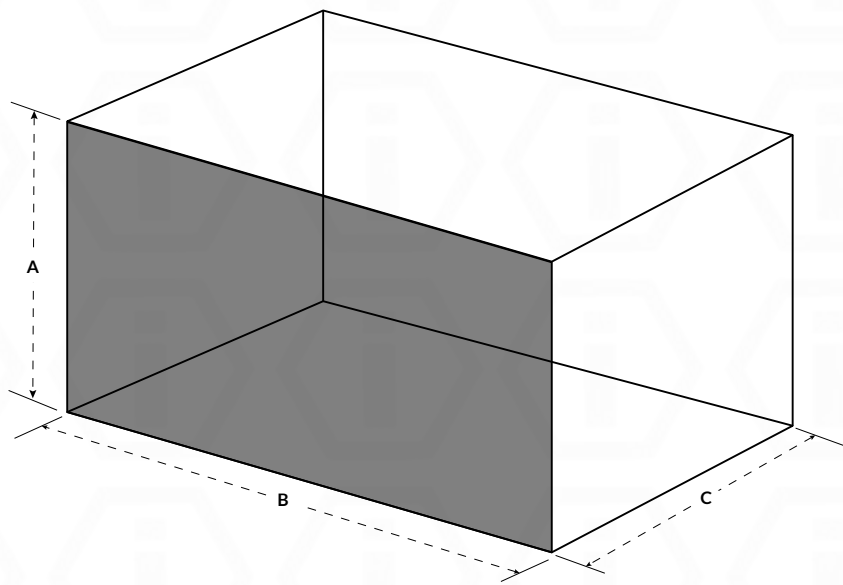


MAIN OVEN	
Capacity	3.55 cu.ft.
Convection	Yes
Door Depth Open 90°	15 6/16 inch / 39 cm
Interior Width (Actual) (B)	25 3/16 inch / 64 cm
Interior Height (Actual) (A)	13 3/16 inch / 33.5 cm
Interior Depth (Actual) (C)	16 2/16 inch / 41 cm
Interior Width (Usable)	23 7/16 inch / 59.5 cm
Interior Height (Usable)	13 3/16 inch / 33.5 cm
Interior Depth (Usable)	41 cm / 33.5 cm
Height between Rack	1 9/16 inch / 4 cm
Height between racks	1 9/16 inch / 4 cm
Height between lowest and highest rack	7 14/16 inch / 20 cm
Lights	2 LED
Broiler	900W
Racks / Trays	2 Racks / 1 Tray
Rotisserie	Yes




STORAGE	
Type	Storage
Width (A)	25 13/16 inch / 65.5 cm
Height (B)	3 2/16 inch / 8 cm
Depth (C)	16 2/16 inch / 41 cm

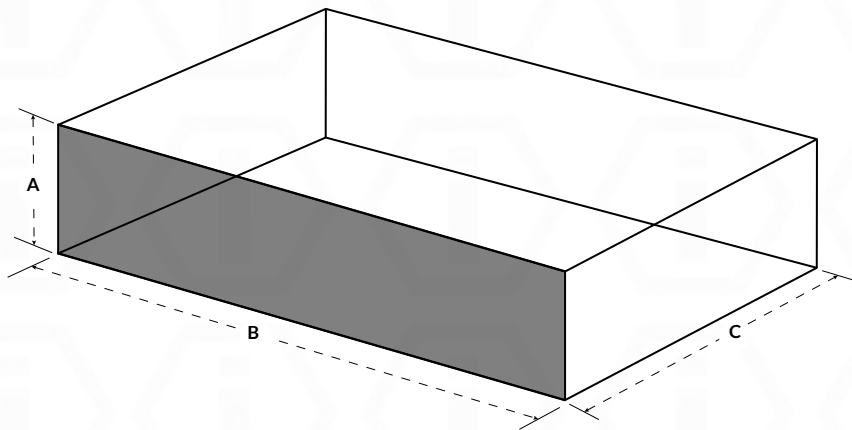

DS


DS


	DIMENSIONS	DESCRIPTION
1	14 inch / 336 mm	Recommended depth of top cabinet
2	18 inch / 547 mm	Minimum distance to bottom edge of top cabinet
3	35 1/2 inch-37 inch / 901mm-940 mm	Distance from the floor to cooktop surface
4	12 inch / 305mm	Minimum distance from cooktop surface
A	35 8/16 inch / 90.20 cm	Width of cabinet opening
B	28 inch / 71.12 cm to 32 inch / 81.28 cm	Minimum distance between the top of the cooking area and bottom of a range hood (check the hood's spec sheet for details)
C	35 8/16 inch / 90.20 cm	Width of the hood area
D	Approx. 10 13/16 inch / 274 mm	Maximum connection with right and left
E	Approx. 4 1/2 inch / 115 mm	Maximum connection height
F	Approx. 2 13/16 inch / 72 mm	Maximum connection depth

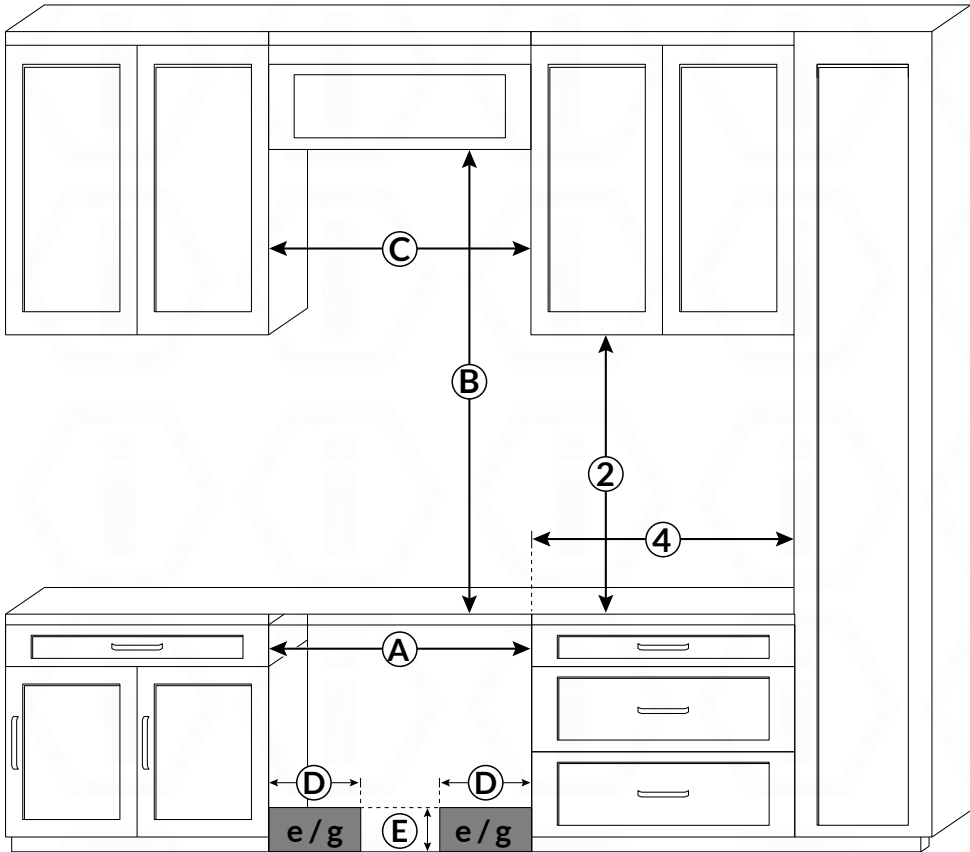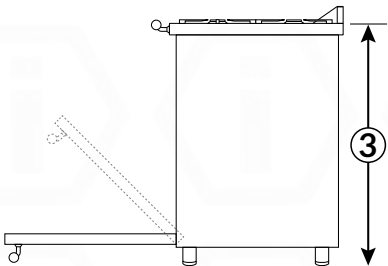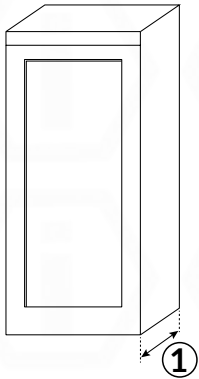

The shaded area represents the installation area for the connections
e = Electrical connection
g = Gas connection

One fuel type per side

FOLLOW US ON SOCIAL MEDIA



DS
