



Stainless Steel
KOCE500ESS

Capacity	
Oven	6.4 cu. ft.
General Features & Properties	
Temperature Probe	
EasyConvect™ Conversion System	
5.0 Cu. Ft. Total Capacity (lower oven)	
1.4 Cu. Ft. Capacity (upper oven)	
Crispwave™ Microwave Technology and Crisper Pan (upper oven)	
SatinGlide™ Roll-Out Extension Rack (lower oven)	
Electrical Details	
Amps	40
Volts	240

Technical Details	
Fuel Type	Electric
Oven Type	Combination
Number of Oven Racks	3
Cleaning Type	Adjustable Self-Cleaning
Dimensions	
Product Dimensions (H x W x D)	42-1/2" x 30" x 27-1/8"
Depth with Door Open 90°	46-3/4"
Cutout Dimensions (H x W x D)	41-5/16" x 28-1/2" x 24"
Reference Material	

[Dimension Guide](#)

[Install Guide](#)

[Use & Care Guide](#)

[Warranty](#)

Also available in:

- ☐ White **KOCE500EWH**
- ☐ Black **KOCE500EBL**
- ☐ Black Stainless **KOCE500EBS**

Key Features & Benefits

Even-Heat™ True Convection Oven (lower oven)


Provides consistent heating and even cooking on all racks with a unique bow-tie shaped design and convection fan that helps ensure the most even baking.

Microwave Convection Cooking (upper oven)

Increases the speed of cooking and provides a secondary convection cooking option.

Professionally-Inspired Design

Combines a bold blend of professionally-inspired styling with sleek touches for the home. This beautiful built-in wall oven features Satin Textured Handles and the KitchenAid® Badge, a symbol of uncompromised quality.

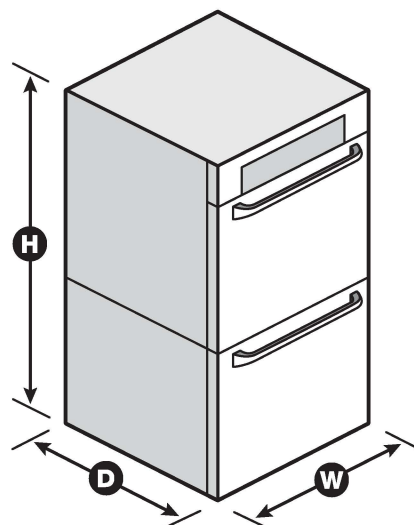

36" Gas Cooktop

800 Series – Stainless Steel NGM8656UC



BOSCH

Invented for life

PWY2- 308



NGM8656UC
Stainless Steel

Also available in:

Black w/Black NGM8646UC
Stainless
Knobs

Bosch gas cooktops are engineered to perform precisely, offering high heat and low simmer options for optimal cooking flexibility.

Features & Benefits

Powerful 19,000 BTU burner for boiling, searing and stir-frying

OptiSim® Burner – simmer delicate sauces and melt chocolate without scorching

Electronic re-ignition will automatically re-ignite the burner in case the flame goes out

Continuous grates make moving heavy pots easier

Distinctive red LED light indicates burners are on

General Properties

Knob material	Metal
Sealed burners	Yes
Grate material	Cast iron

Element Performance

Total BTU load (NG / LP)	58,500 / 47,300
Power of front left burner (NG / LP)	12,000 / 9,100
Power of back left burner (NG / LP)	10,000 / 9,100
Power of center burner (NG / LP)	19,000 / 15,000
Power of back right burner (NG / LP)	5,500 / 5,000
Power of front right burner (NG / LP)	12,000 / 9,100

Technical Details

Watts	360 W
Circuit breaker	15 A
Volts	120 V
Frequency	60 Hz
Plug type	3 prong
Power cord length	60"
Energy source	Gas
Convertible to LP (kit required)	Yes



Dimensions & Weight

Overall appliance dimensions (HxWxD)	3 13/16" x 37" x 21 1/4"
Required cutout size (HxWxD)	3 13/16" x 34 15/16" x 19 1/8"
Minimum distance from counter front	1 7/8"
Minimum distance from rear wall	3"
Net weight	39 lbs

Accessories – Included

Included	LP conversion kit
----------	-------------------

Accessories – Optional



HEZ298102
Wok ring



HEZ27751
Cooktop control knob kit,
black stainless steel

† To be fully ADA compliant, these units must be installed according to ADA guidelines. Please check current ADA requirements for guidance on installation.

Accessories: To purchase Bosch accessories, cleaners & parts please visit www.bosch-home.com/us/store or call 1-800-944-2904 (Mon to Fri 5 am to 6 pm PST, Sat 6 am to 3 pm PST).

Notes: All height, width and depth dimensions are shown in inches. BSH reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cutout.

Warranties: Please see Use & Care manual or Bosch website for statement of limited warranty.

For more information on our entire line of products, go to www.bosch-home.com/us or call 1-800-944-2904

© BSH Home Appliances Corporation. All rights reserved. Bosch is a registered trademark of Robert Bosch GmbH.

Exhibit 6032 Acrylic Drop-in Bathtub

PWY2- 308

Model number:	105513
---------------	--------

Dimensions:	59.75" x 31.875" x 20"	Installation:	Drop-in	Material:	Acrylic
-------------	------------------------	---------------	---------	-----------	---------



Standard Features:

- Rectangular shape bathtub
- Drop-in or alcove installation with tiling flange
- Minimalist look with discreet armrests and textured floor
- End drain

Product characteristics:

- Made in Canada
- Elegant Design
- Integrated Armrest

Systems:



- Whirlpool
- Product Pack
- Combined Whirlpool/Aeroeffect
- Aeroeffect

Warranty:


25 Years

MAAX Exhibit 6032 Whirlpool-
Master Ensuite

Standard Colors:

		
White (001)	Bone (004)	Biscuit (007)

Certifications



Recommended products (Visit our website for a complete list of our recommended products)

No	Description
<input type="checkbox"/> 139398	Halo 56 ½-59 x 59 in. 8 mm Sliding Tub Door for Alcove Installation
<input type="checkbox"/> 136270	Duel 56-59 x 55 ½-59 in. 8 mm Sliding Tub Door for Alcove installation
<input type="checkbox"/> 137501	Edge Square 34 x 58 in. 8 mm Tub Shield

Model number:


105513

Dimensions: 59.75" x 31.875" x 20"

Installation: Drop-in

Material: Acrylic

MAAX Exhibit 6032 Whirlpool-Master Ensuite

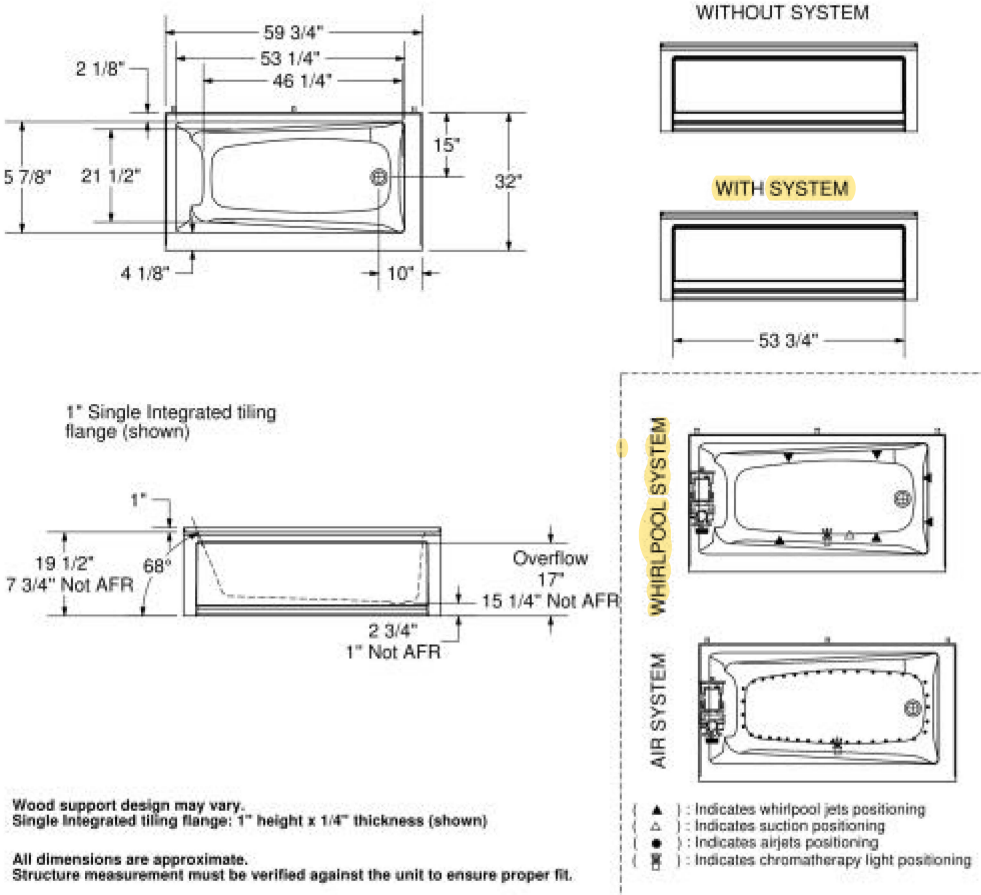

Dimensions
59 3/4 x 32 x 20 In. (1518 x 810 x 508 mm)
Water Capacity
48 gallons - 182 liters
Weight
85 lbs - 38.55 kg
Bathing Well
53 1/2 In. x 26 In. (1359 mm x 660 mm)
Deep Sump Height
16.25 In. - 413 mm
Deck Width
2.875 In. - 73 mm
Drain location:
End

Project:

Contractor:

Representative:

Date:

Rel:

Notes:

PWY2- 308- Master Ensuite

Bathroom / Showering / Shower Only

Shower Kit

MODEL#: DF-KIT20-BL-WS

Finish: **Matte Black**



PWY2- 308- Master Ensuite

- Shower and diverter valve trims with cartridges
- MultiChoice Universal rough-in and diverter rough-in
- Showerheads with shower arms and flanges
- Handshowers with slide bars, slide bar mounts and hoses
- 3-Setting diverter trim with 2 individual positions and 1 shared position
- TempAssure 17T Series shower trim has dual function thermostatic cartridge

Technology

TempAssure™ ⓘ



H2Okinetic® Technology ⓘ

Special Features

MultiChoice® Universal Valve ⓘ



ADA Compliant ⓘ



Exhibit 6032 Acrylic Drop-in Bathtub

PWY2- 308- Main Bathroom & Ensuite 2

Model number:	105513
---------------	--------

Dimensions:	59.75" x 31.875" x 20"	Installation:	Drop-in	Material:	Acrylic
-------------	------------------------	---------------	---------	-----------	---------



Standard Features:

- Rectangular shape bathtub
- Drop-in or alcove installation with tiling flange
- Minimalist look with discreet armrests and textured floor
- End drain

Product characteristics:

- Made in Canada
- Elegant Design
- Integrated Armrest




Systems:

- Whirlpool
- Product Pack
- Combined Whirlpool/Aeroeffect
- Aeroeffect



Warranty:

25 Years

Standard Colors:

		
White (001)	Bone (004)	Biscuit (007)

Certifications



ne or more of the following certifications:

Recommended products (Visit our website for a complete list of our recommended products)

No	Description
<input type="checkbox"/> 139398	Halo 56 ½-59 x 59 in. 8 mm Sliding Tub Door for Alcove Installation
<input type="checkbox"/> 136270	Duel 56-59 x 55 ½-59 in. 8 mm Sliding Tub Door for Alcove installation
<input type="checkbox"/> 137501	Edge Square 34 x 58 in. 8 mm Tub Shield


Model number:

105513

Dimensions: 59.75" x 31.875" x 20"

Installation: Drop-in

Material: Acrylic

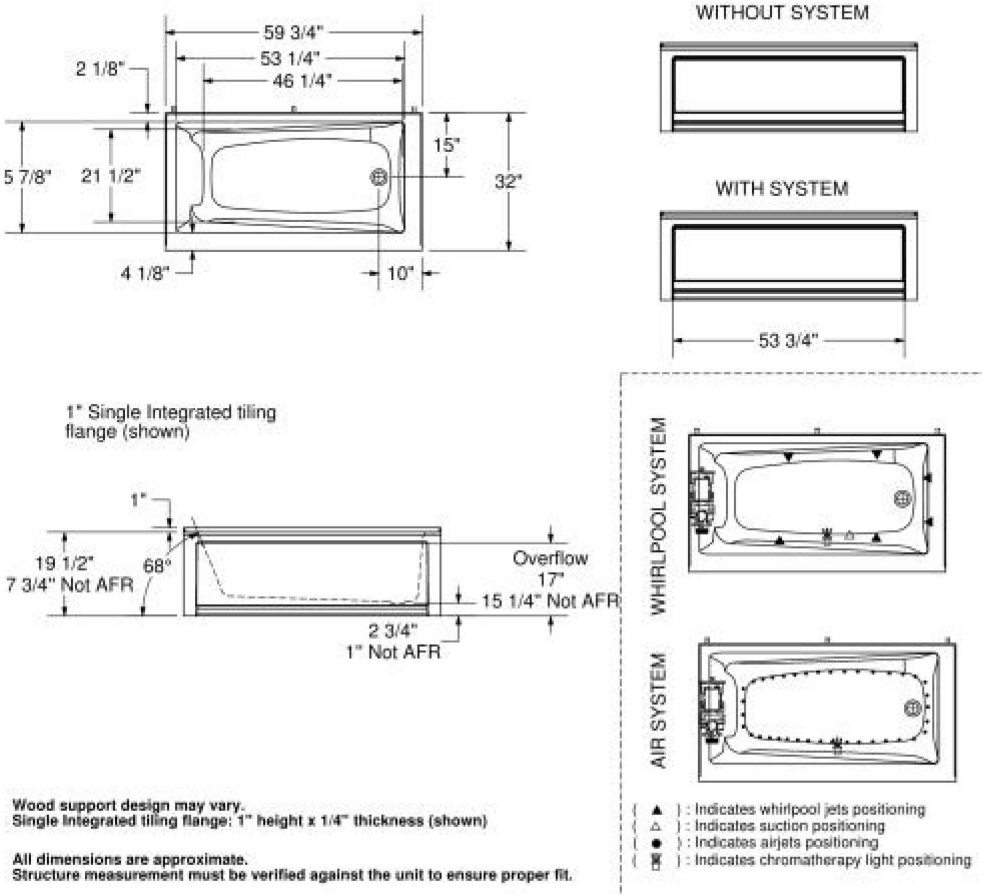

Dimensions
59 3/4 x 32 x 20 In. (1518 x 810 x 508 mm)
Water Capacity
48 gallons - 182 liters
Weight
85 lbs - 38.55 kg
Bathing Well
53 1/2 In. x 26 In. (1359 mm x 660 mm)
Deep Sump Height
16.25 In. - 413 mm
Deck Width
2.875 In. - 73 mm
Drain location:
End

Project:

Contractor:

Representative:

Date:

Rel:

Notes:

Halo Pro 56 1/2-59 x 78 3/4 in. 8mm Sliding Shower Door for Alcove Installation

Model number:	138952
---------------	--------

Dimensions:	78.75"	Installation:		Material:	
-------------	--------	---------------	--	-----------	--



Standard Features:

- 78 3/4" high luxury clear glass panel
- 5/16 in. (8 mm) tempered glass with Lotus easy clean protection
- Detachable door guide to distance the glass when cleaning
- Reversible shower door for left or right opening
- Also available in a corner configuration with a HALO return panel
- This configuration is optimized for new construction

Product characteristics:

- Ball Bearing Roller System
- Contemporary Design
- Detachable Guide

Warranty:

10 Years


PWY2- 308- Master Ensuite

Frame Finish(es):




Chrome (084)


Matte Black (340)

Glass Pattern(s):


Clear (900)

Certifications



one or more of the following certifications:

Recommended products (Visit our website for a complete list of our recommended products)

No	Description
<input type="checkbox"/> 138998	Halo Return Panel for 32 in. Base
<input type="checkbox"/> 139395	Halo Return Panel for 34 in. Base
<input type="checkbox"/> 139396	Halo Return Panel for 36 in. Base

Halo Pro 56 1/2-59 x 78 3/4 in. 8mm Sliding Shower Door for Alcove Installation

Model number:

138952


Dimensions: 78.75"

Installation:

Material:

STANDARD

PWY2- 308- Master Ensuite

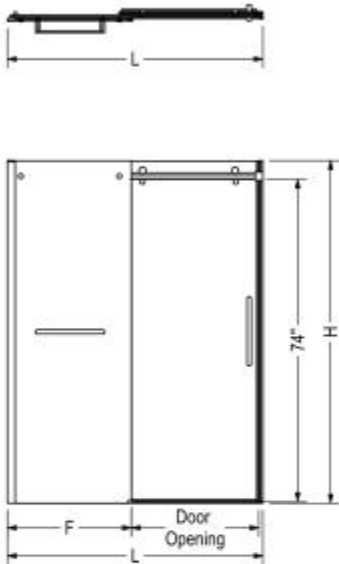

Code	Description	H	L Adjustable	F	Door Opening	Wall Adjustment
138950	Halo Pro 78 3/4" x 47" without Towel bar	78 3/4"	44 1/2" - 47"	22 1/2"	16 1/4" - 18 3/4"	1"
138954	Halo Pro 78 3/4" x 47" with Towel bar	78 3/4"	44 1/2" - 47"	22 1/2"	16 1/4" - 18 3/4"	1"
138952	Halo Pro 78 3/4" x 59" without Towel bar	78 3/4"	56 1/2" - 59"	28 5/8"	22 1/8" - 24 5/8"	1"
138956	Halo Pro 78 3/4" x 59" with Towel bar	78 3/4"	56 1/2" - 59"	28 5/8"	22 1/8" - 24 5/8"	1"

All dimensions are approximate. Structure measurements must be verified against the unit to ensure proper fit.

Dimensions

78 3/4 In.
(2000 mm)

Glass Thickness

5/16 in.

Weight

156 lbs - 73 kg

Frame Type

Frameless

Door Adjustment

Frameless

Minimum Door Access

23.5"

Maximum Door Access

24.5"

Project:

Contractor:

Representative:

Date:

Tel:

Notes: