

Incognito 57 56-59 x 56 ¾ in. 8mm Sliding Tub Door for Alcove Instal

Model number:	139354
---------------	--------

Dimensions:	56.75"	Installation:	Material:
-------------	--------	---------------	-----------



Standard Features:

- Components that connect seamlessly for an effortless assembly
- Large knob on the opposite side of the handle, to allows for an easier opening and closing
- Hand adjustment to perfect the fit in the alcove
- Fits on showers with a wall height of at least 56.75in
- Slim header and thin edges accentuate the minimalist look
- Safety features: top and bottom integrated bumper to prevent slamming

Product characteristics:

- DIY Product
- Easy Installation
- Available in Multiple Finishes

Warranty:

10 Years


Frame Finish(es):


Chrome (084)


Brushed Nickel (305)


Matte Black (340)

Glass Pattern(s):


Clear (900)

Certifications

MAAX products adhere to one or more of the following certifications:



Incognito 57 56-59 x 56 ¾ in. 8mm Sliding Tub Door for Alcove Instal

Model number:


139354

Dimensions: 56.75"

Installation:

Material:

STANDARD

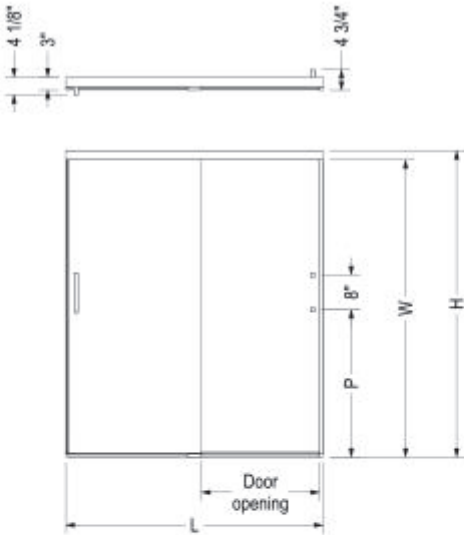

Code	Description	H	W	L Adjustable	Door Opening	P	Wall adjustment
139349	Incognito 6mm 70 1/2" x 44 - 47"	70 1/2"	68 3/8"	44" - 47"	17 1/8" - 21 1/8"	33 7/8"	1/2"
139350	Incognito 6mm 70 1/2" x 56 - 59"	70 1/2"	68 3/8"	56" - 59"	23 1/8" - 27 1/8"	33 7/8"	1/2"
139351	Incognito 6mm 56 3/4" x 56 - 59"	56 3/4"	54 5/8"	56" - 59"	23 1/8" - 27 1/8"	18 7/8"	1/2"
139352	Incognito 8mm 70 1/2" x 44 - 47"	70 1/2"	68 3/8"	44" - 47"	17 1/8" - 21 1/8"	33 7/8"	1/2"
139353	Incognito 8mm 70 1/2" x 56 - 59"	70 1/2"	68 3/8"	56" - 59"	23 1/8" - 27 1/8"	33 7/8"	1/2"
139354	Incognito 8mm 56 3/4" x 56 - 59"	56 3/4"	54 5/8"	56" - 59"	23 1/8" - 27 1/8"	18 7/8"	1/2"

All dimensions are approximate. Structure measurements must be verified against the unit to ensure proper fit.

Dimensions

56 3/4 In.
(1441 mm)

Glass Thickness

3/8 in.

Weight

120 lbs - 53.57 kg

Frame Type

Frameless

Door Adjustment

Frameless

Minimum Door Access

24"

Maximum Door Access

24"

Project:

Contractor:


Representative:

Date:


Tel:

Notes:



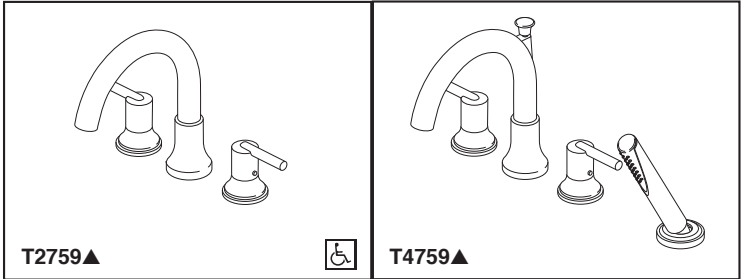

Submitted Model No.: _____
Specific Features: _____

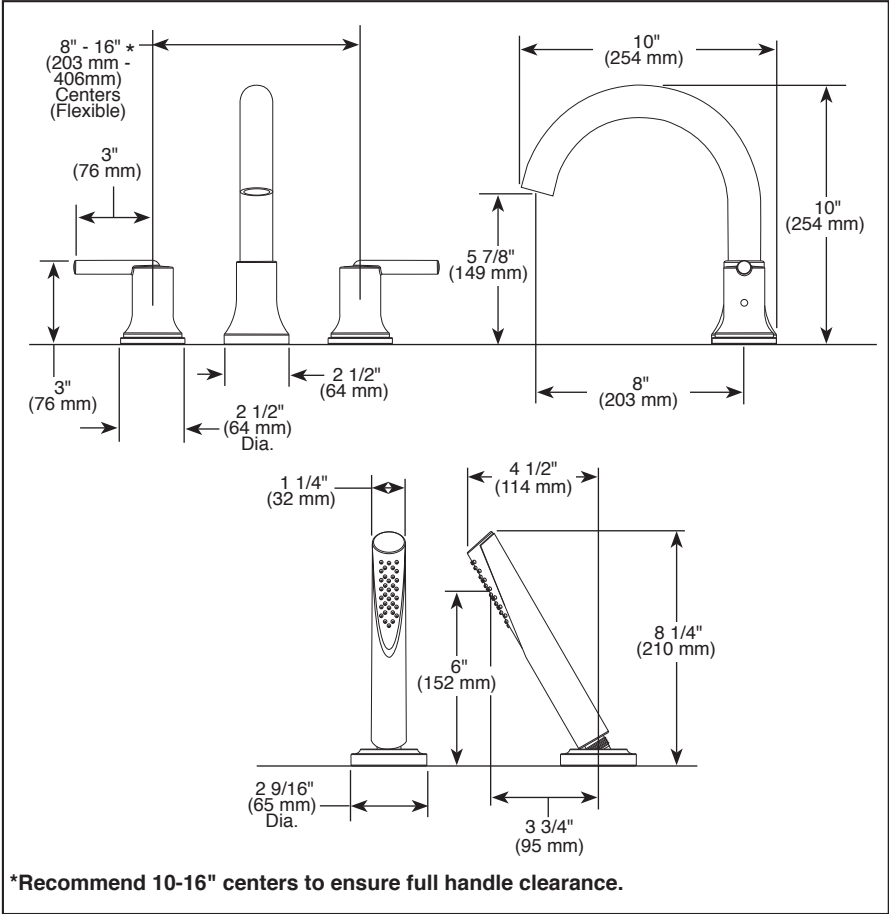

▲ Designate Proper Finish Suffix



see what Delta can doSM

ROMAN TUB/WHIRLPOOL FAUCET TRIM

- Trinsic® Collection
- Three Hole Installation (T2759 Series)
- Four Hole Installation (T4759 Series)

STANDARD SPECIFICATIONS:

- Hand shower max flow rate of 1.75 gpm @ 80 psi, 6.6 L/min @ 550 kPa
- Trim only for two handle Roman Tub faucet for concealed mounting
- Temperature and volume controlled with handles
- Red/blue indicator markings
- Rough-In kit must also be ordered to complete installation
 - R4707 for four hole
 - R2700 or R2707 for three hole
 - RP23601 for three hole 10" fixed installationThere are separate specification sheets on each rough-in kit if more details are required
- Hand shower includes double check valves for backflow prevention (T4759)

WARRANTY

- Parts and Finish - Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date of purchase.
- Electronic Parts and Batteries (if applicable) - 5 years from the date of purchase; or for commercial purchasers, 1 year from the date of purchase. No warranty is provided on batteries.



COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
- Indicates compliance to ICC/ANSI A117.1 - Valve control only
- EPA WaterSense® - Applies to T4759▲ only