



DocuSigned by:

0EBAB2E7B68548E...


WTR3 LOT 64 - FRIDGE SPEC - REVISED 22NOV2023
- NOTE: STAINLESS STEEL DOORS


11/24/2023 | 1:34 PM EST



PANEL-READY 48" BUILT-IN SIDE-BY-SIDE REFRIGERATOR

DocuSigned by:

D6F9128ECDB9453...

DocuSigned by:

0EBAB2E7B68548E...

DocuSigned by:

0EBAB2E7B68548E...

Signature Features

JBSFS48NMX

DARING OBSIDIAN INTERIOR

Inspired by volcanic glass, this industry-exclusive dark finish draws attention with high-contrast style. Fine foods and fresh produce emerge like vibrant art, with LED lighting showcasing your ingredients against the alluring interior.

PRECISION TEMPERATURE MANAGEMENT™ SYSTEM

This sensor-controlled system manages temperatures in the refrigerator and freezer, helping to keep your ingredients at their ideal preservation temperatures. The smooth-running refrigerator avoids abrupt start and stop cycles to maintain quiet tranquility in your space.

SMOOTH CLOSE CRISPER DRAWERS

Each crisper drawer within the refrigerator smoothly opens and closes quietly, even while fully loaded with produce and fresh ingredients.

MULTI-POINT CINEMATIC LIGHTING

Illuminate food items against the Daring Obsidian Interior. Breathtaking Multi-Point Cinematic Lighting ramps up in intensity as you open the door to increase visibility and highlight your ingredients.

QUIETEST LUXURY BUILT-IN SIDE-BY-SIDE REFRIGERATOR

Running at 39 dBA, this refrigerator line-up has the quietest luxury built-in side-by-side refrigerators. With no abrupt start or stop cycles, this refrigerator fades into the background and becomes an unobtrusive piece of your kitchen.

PANEL-READY

Customize the exterior of your refrigerator with the aesthetics of your kitchen—including the integrated look of custom wood cabinetry or accessory stainless panel kits and handles (sold separately).

FULLY FLUSH & INTEGRATED DESIGN

With a stealth flush, full-height door and articulating hinge, this built-in refrigerator goes incognito until open, enabling the refrigerator to install flush with cabinetry to offer a seamless appearance.

SOLID GLASS AND METAL

Each crisper drawer, shelf and door bin in the refrigerator is made up of solid glass and metal, reflecting and diffusing light against the Obsidian interior to enhance the visibility of your items. Each carefully chosen material is naturally durable and odor resistant.

GLASS SHELVING

Showcase your ingredients with full-width glass and metal shelves. The clear glass allows light to filter through the substantial shelves, enhancing the visibility of everything inside the refrigerator.



Dimensions

Depth: 62.86 cm

Height: 211.14 cm

Width: 121.28 cm

Controls

Door Ajar/Open Alarm: Yes

Automatic Defrost: Yes

Water Filter Indicator/Reset: Yes

Air Filter Indicator/Reset: No

LCD Touch Screen: No

Design Type

Design Expression: Panel-Ready

Technical Specifications

Certifications

Prop 65: Standard

Energy Star® Qualified: No

Exterior

Hidden Hinge: Yes

Number of Doors: 2

Reversible Door: No

Description

Refrigerator Type: Side-by-Side

Refrigerator Compartment

Freezer Details

Light: LED

Icemaker

Icemaker: Factory Installed

Icemaker Location: Freezer

Filters

Fresh Flow Air Filter Included: Yes

Produce Preserver: Yes

AHAM Volumes And Shelf Area

Freezer Volume: 10-3/10

Number of Interior Shelves: 4

Shelf Supports: Cantilever

Freezer Compartment

Freezer Number of Shelves: 4

Total Volume: 29-2/5

Configuration


Door Style Configuration: Side-by-Side

Refrigeration Configuration: Refrigerator


®/™ © 2023 JennAir. All rights reserved. Specifications subject to change without notice.



Product Dimension Guide for models JBSFS42NMX/48NMX

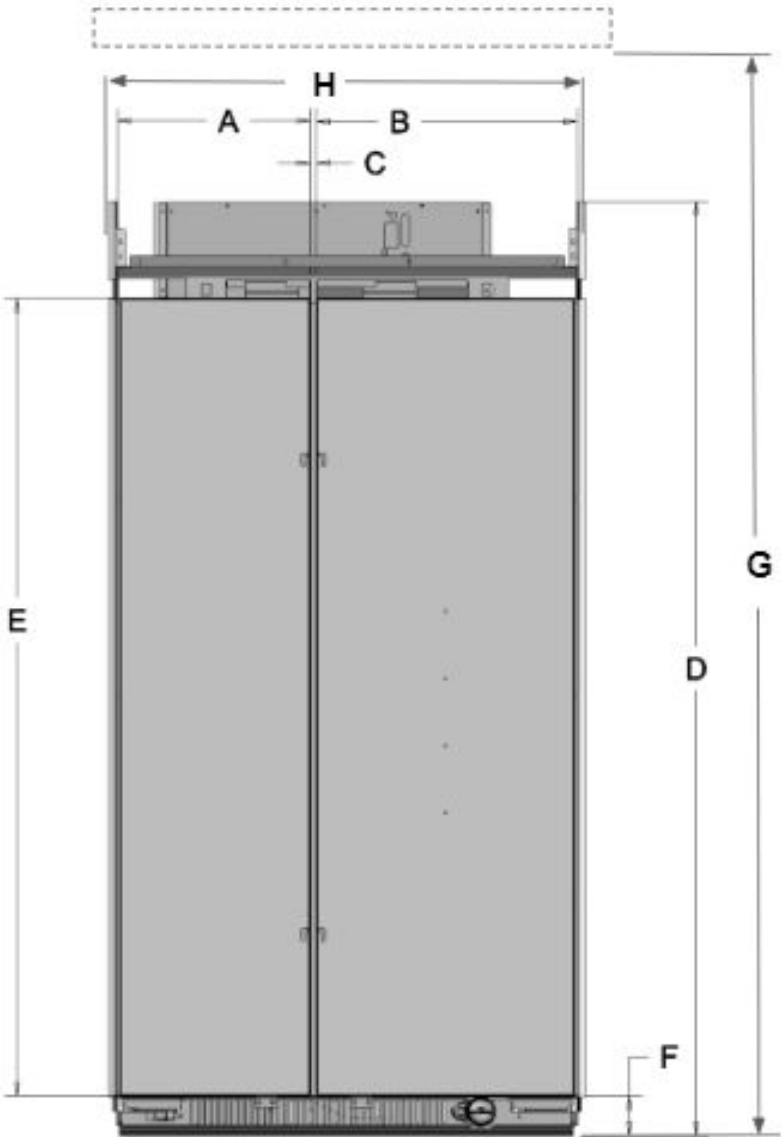


Description		Inches (cm)
A	Width of FC door	
	42"	17 ³ / ₁₆ " (43.7)
	48"	19 ³ / ₄ " (50.1)
B	Width of RC door	
	42"	23 ¹ / ₄ " (59)
	48"	26 ³ / ₄ " (67.9)
C	Space between doors	1/2" (1.3)
D	Total height	83 ⁷ / ₁₆ " (211.9)
E	Height of doors	71" (180.5)
F	Height of grille	3 ⁹ / ₁₆ " (9.0)
G	To bottom of solid soffit (minimum/maximum)	83 ¹ / ₂ " (212.1)
		84 ⁵ / ₈ " (215)
H	Overall width with side trims	
	42"	42 ³ / ₈ " (107.6)
	48"	48 ³ / ₈ " (122.8)
I	Water line location distance from side	17 ³ / ₄ " (45.0)
J	Water line location distance from front	3 ¹ / ₄ " (8.2)

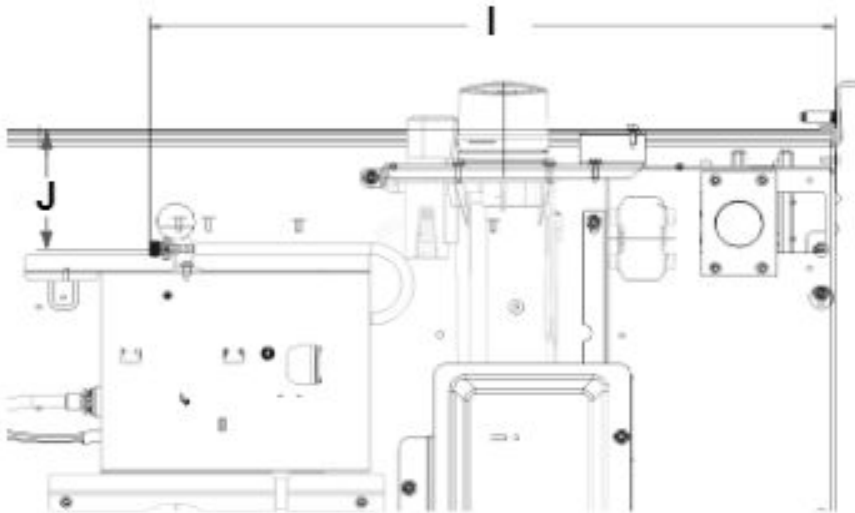

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice. Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.



Product Dimension Guide for models JBSFS42NMX/48NMX

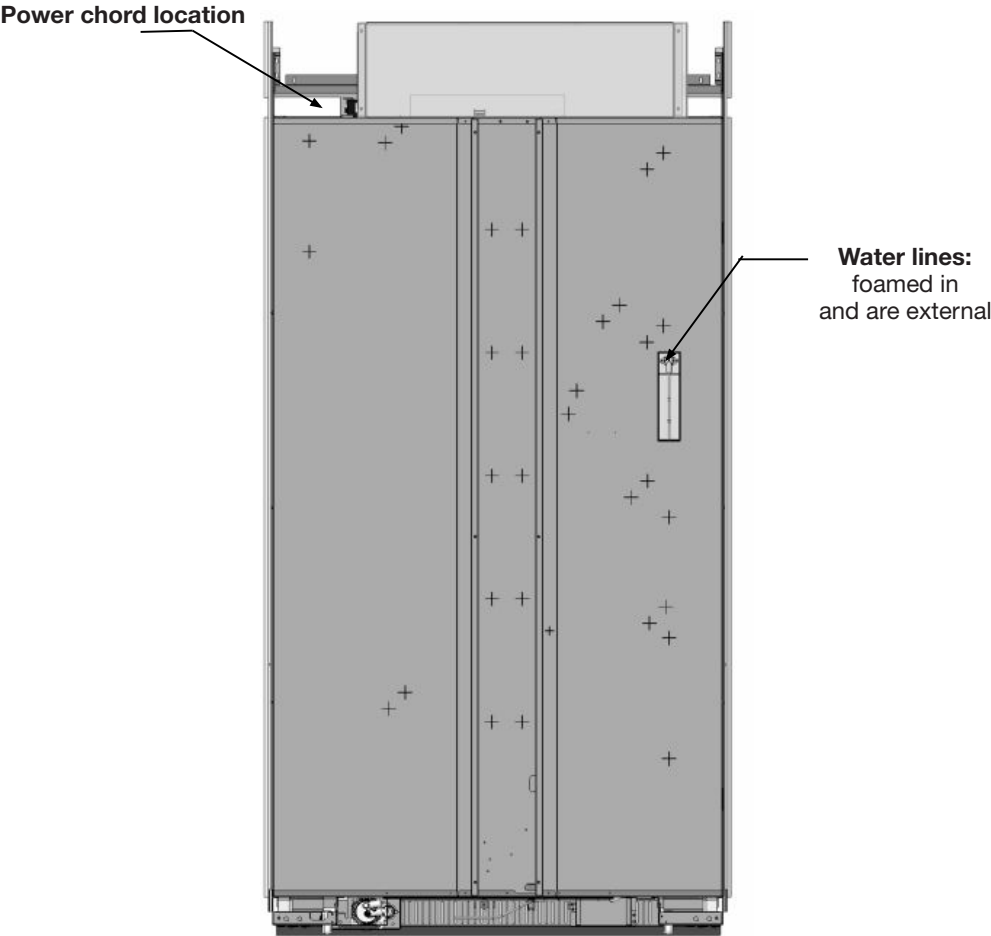

Electrical Requirements

⚠ WARNING

Electrical Shock Hazard


Plug into a grounded 3 prong outlet.

Do not remove ground prong.

Do not use an adapter.

Do not use an extension cord.

Failure to follow these instructions can result in death, fire, or electrical shock.

	Power chord	
	Type	Length
		Inches (cm)
	Standard	60" (152.5)


Electrical: A 115V, 60 Hz AC only, 15A or 20A fused, grounded electrical supply is required. It is recommended that a separate circuit serving only your refrigerator be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.

Water: A cold water supply with water pressure of between 30 psi and 120 psi (207 kPa and 827 kPa) is required to operate the water dispenser and ice maker. If you have questions about your water pressure, call a licensed, qualified plumber.

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice. Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.




Product Dimension Guide for models JBSFS42NMX/48NMX

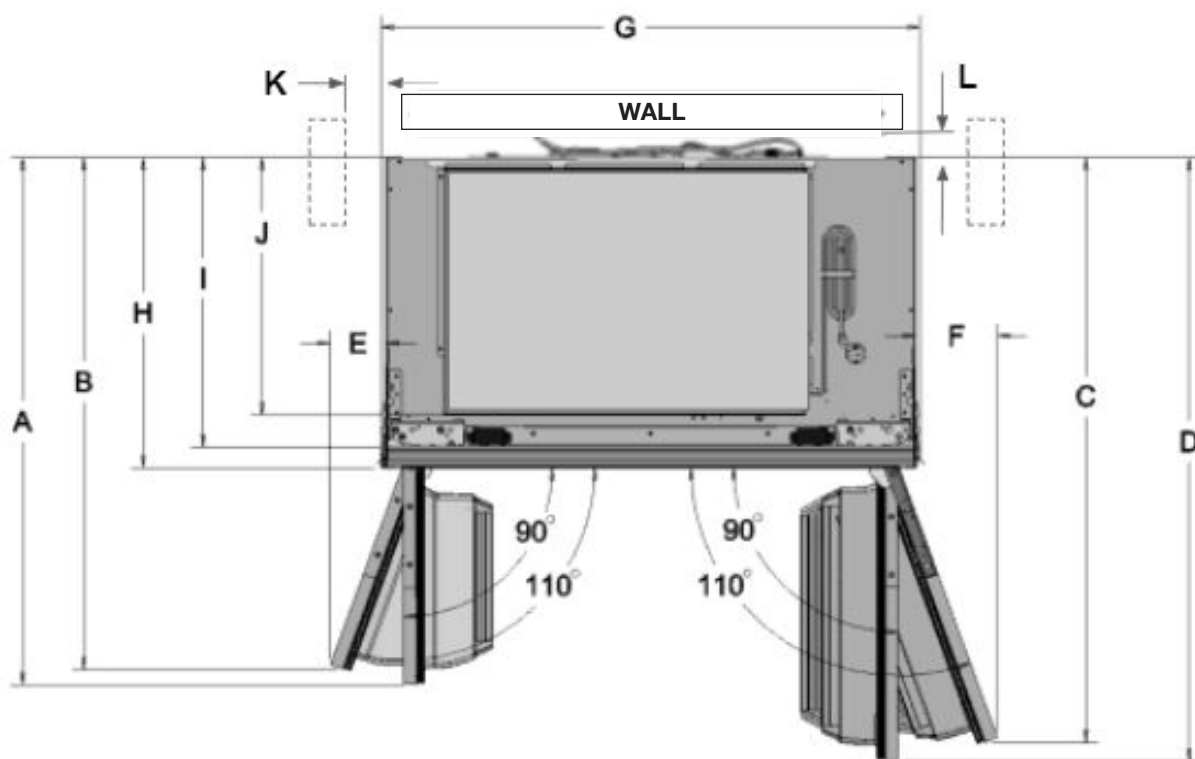

Description		Inches (cm)
A	Depth with FC door open 90°	
	42" 48"	40 ¹³ / ₁₆ " (103.7) 43 ¹ / ₈ " (109.6)
B	Depth with FC door open 110°	
	42" 48"	39 ⁵ / ₈ " (100.7) 41 ¹⁵ / ₁₆ " (106.5)
C	Depth with RC door open 110°	
	42" 48"	45 ⁵ / ₁₆ " (115.1) 48 ⁹ / ₁₆ " (123.4)
D	Depth with RC door open 90°	
	42" 48"	46 ³ / ₄ " (118.7) 50 ¹ / ₄ " (127.6)
E	From FC side of refrigerator to edge - door fully open 110°	
	42" 48"	4 ⁵ / ₁₆ " (10.9) 5 ³ / ₁₆ " (13.1)
F	From RC side of refrigerator to edge - door fully open 110°	
	42" 48"	6 ³ / ₈ " (16.2) 7 ⁹ / ₁₆ " (19.2)
G	Cabinet Width	
	42" 48"	41" (104.1) 47" (119.3)
H	Depth with doors	24" (61)
I	Depth without doors	22 ³ / ₈ " (56.8)
J	Depth to machine compartment cover	19 ¹⁵ / ₁₆ " (50.6)
K	Space required for side cabinet	6" (15.24)
L	Space required for water lines and power chord	1" (2.54)



Product Dimension Guide for models JBSFS42NMX/48NMX

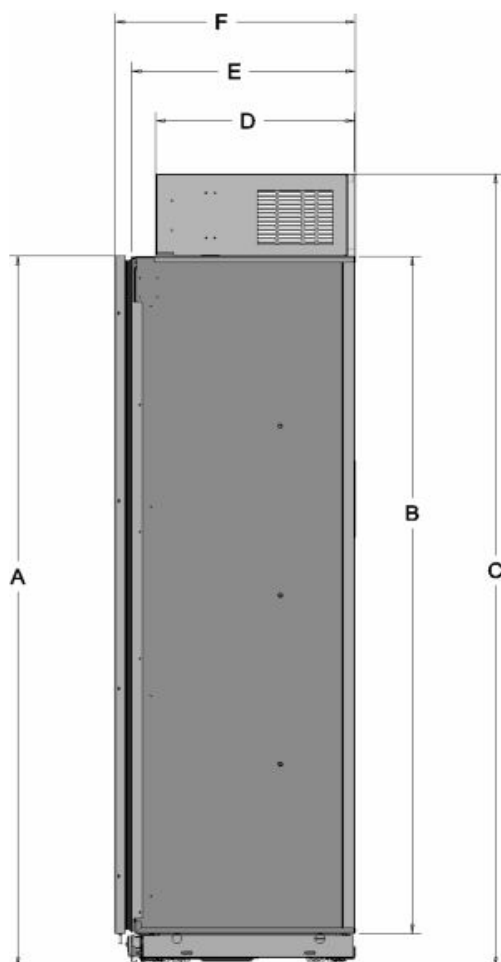

Description		Inches (cm)
A	Height to top of doors	74 ⁹ / ₁₆ " (189.4)
B	Height of Cabinet	71" (180.4)
C	Height to top of machine compartment cover	83 ³ / ₁₆ " (211.3)
D	Depth to machine compartment cover	19 ¹⁵ / ₁₆ " (50.6)
E	Depth without doors	22 ³ / ₈ " (56.8)
F	Depth with doors	24" (61)

Interior dimensions	Width Inches (cm)	Height Inches (cm)
Refrigerator Compartment		
42"	20 ¹³ / ₁₆ " (52.9)	67 ¹ / ₁₆ " (170.4)
48"	24 ⁵ / ₁₆ " (61.8)	
Freezer Compartment		
42"	14 ⁵ / ₁₆ " (36.4)	66 ³ / ₄ " (169.6)
48"	16 ¹³ / ₁₆ " (42.7)	

Location Requirements


⚠ WARNING



Explosion Hazard

Keep flammable materials and vapors, such as gasoline, away from refrigerator.

Failure to do so can result in death, explosion, or fire.

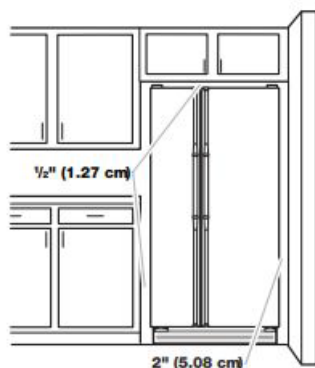

To ensure proper ventilation for your refrigerator, allow for 1/2" (1.27 cm) of space on each side and at the top. Allow for 1" (2.54 cm) of space behind the refrigerator. If your refrigerator has an ice maker, allow extra space at the back for the water line connections. When installing your refrigerator next to a fixed wall, leave a 2" (5.08 cm) minimum space on each side (depending on your model) to allow the doors to swing open.


NOTES:

■ This refrigerator is intended for use in a location where the temperature ranges from a minimum of 55°F (13°C) to a maximum of 110°F (43°C). The preferred room temperature range for optimum performance, which reduces electricity usage and provides superior cooling, is between 60°F (15°C) and 90°F (32°C). It is recommended that you do not install the refrigerator near a heat source, such as an oven or radiator.


■ Normal minimum cabinet cut-out width required for product installation is 36" (91.44 cm). However, if the product is placed against an extended wall and the ability to remove the crisper pans is desired, an additional 18" (45.72 cm) of cabinet width is required, so a total cabinet opening width of 54" (137.16 cm) is recommended.




Product Dimension Guide for models JBSFS42NMX/48NMX

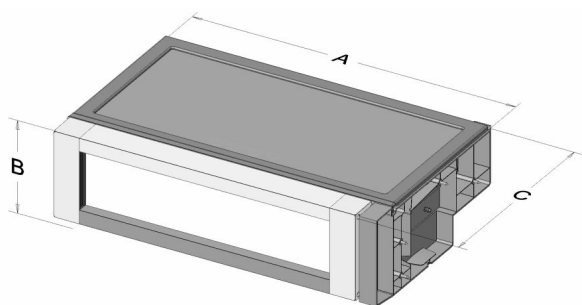

Meat Pan

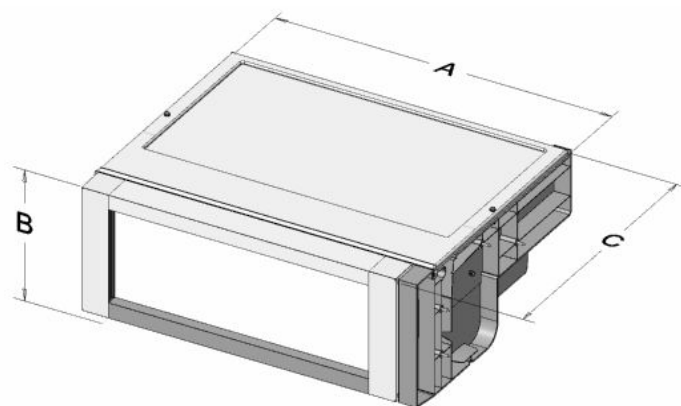

Crisper Pan

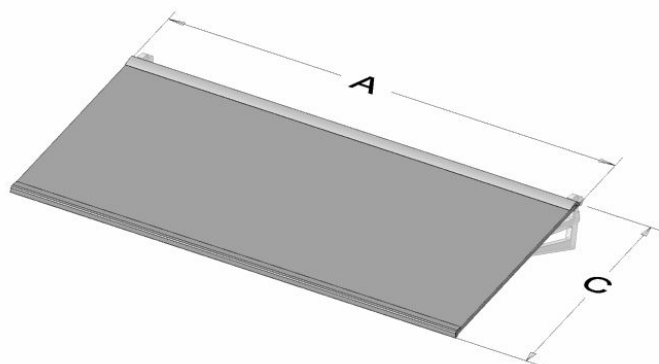


Shelf

Refrigerator Compartment Features


Description	A Width Inches (cm)	B Height Inches (cm)	C Depth Inches (cm)
Meat pan			
42"	20 ¹¹ / ₁₆ " (52.5)	6 ¹ / ₈ " (15.6)	12 ⁵ / ₈ " (32.0)
48"	24 ³ / ₁₆ " (61.4)		
Crisper pan			
42"	20 ¹¹ / ₁₆ " (52.5)	7 ¹⁵ / ₁₆ " (20.1)	16 ⁵ / ₁₆ " (41.5)
48"	24 ³ / ₁₆ " (61.4)		
Shelf			
42"	20 ³ / ₈ " (51.7)	N/A	14 ³ / ₁₆ " (36.1)
48"	23 ⁷ / ₈ " (60.6)		




Product Dimension Guide for models JBSFS42NMX/48NMX

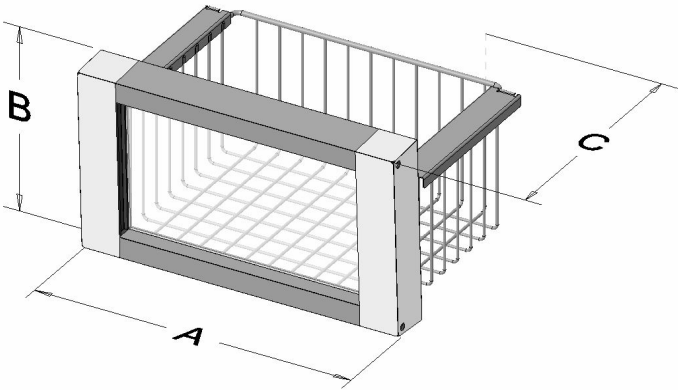


Basket Freezer

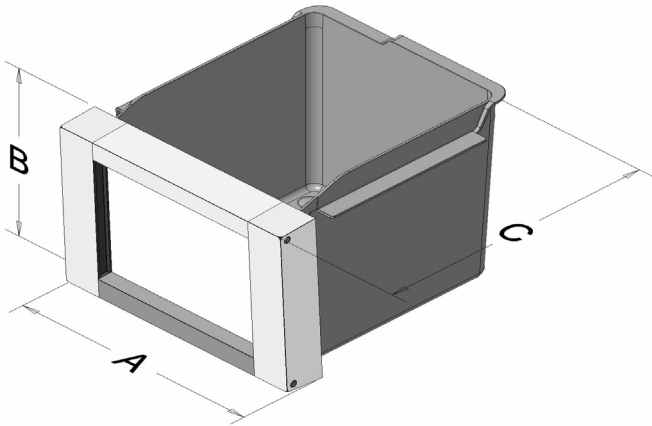

Ice Bin

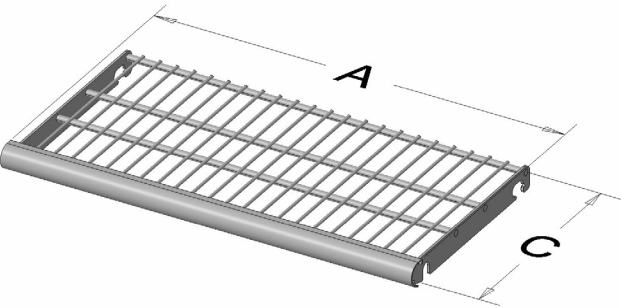

Bottom Wire Shelf

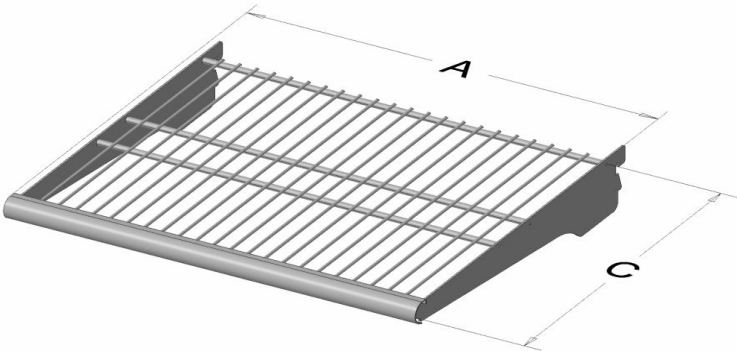

Top Wire Shelf

Freezer Compartment Features			
Description	A Width Inches (cm)	B Height Inches (cm)	C Depth Inches (cm)
Basket Freezer			
42"	11 ³ / ₁₆ " (28.4)	8 ¹ / ₁₆ " (20.5)	10 ³ / ₁₆ " (25.9)
48"	13 ¹¹ / ₁₆ " (34.7)		
Ice Bin			
42"	11 ³ / ₁₆ " (28.4)	8 ³ / ₈ " (21.3)	12 ¹ / ₂ " (31.7)
48"	13 ¹¹ / ₁₆ " (34.7)		
Bottom Wire Shelf			
42"	13 ⁷ / ₈ " (35.3)	N/A	7 ³ / ₁₆ " (18.2)
48"	16 ⁷ / ₁₆ " (41.7)		
Top Wire Shelf			
42"	13 ⁷ / ₈ " (35.3)	N/A	11 ⁹ / ₁₆ " (29.3)
48"	16 ⁷ / ₁₆ " (41.7)		