

APPLIANCE CHECKLIST

It may seem early to be thinking about appliances, but they are an important part of your kitchen design and may require upgrades to your HVAC, plumbing and electrical plans. It's important that we are provided with your appliance information during the structural and foundation part of the Design Process, so that these upgrades can be included on your invoice, if required.

ITEM	BRAND		MODEL NUMBER	
FRIDGE	KITCHENAID		KRFC302ESS	
DISHWASHER	KITCHENAID		KDTE204KPS	
RANGE	NA			
Type: Gas	Electric	Induction [Waterline Required	
Electrical: 15 Amp	40 Amp	50 Amp		
WALL OVEN	KITCHENAID		KOSE500ESS	
Type: Gas	Electric 🗸		Waterline Required 🗌	
Electrical: 30 Amp	40 Amp 🔽			
WARMING DRAWER				
Electrical: 15 Amp	Other: Specify	·		
СООКТОР	KITCHENAID		KCIG550JSS	
Type: Gas	Electric	Induction 💽		
Electrical: 15 Amp	40 Amp 🗸	50 Amp		
BUILT IN MICROWAVE	KITCHENAID		YKMBT5011KS	
Electrical: 15 Amp	20 Amp 🔲	240 Volt 🖵	120 Volt 🗸	
MICROWAVE TRIM KIT	NA			
OTR MICROWAVE	NA			
WASHING MACHINE	ELECTROLUX		ELFW7637AT	
DRYER	ELECTROLUX		ELFE763CAT	
Type: Gas	Gas Electric 🗸		Stacked	
OTHER: INSERT HOODFAN	CYCLONE		BX15522	
OTHER:				
OTHER:				

Hood Fans must be purchased through Phoenix Homes, and will require an upgrade to a make up air system for any hood fans above 300CFM. Standard hood fan vent pipe is 6".

A make up air system is a required upgraded for all gas stoves/cooktops.

Any changes from the standard kitchen plan and/or standard electrical, plumbing and electrical specifications/plans may be subject to additional fees.

Community: WHITETAIL (4) Lot #: 143

Purchaser Signature:

Purchaser Signature:


Purchaser Signature:

KitchenAid[®]

24" Dishwasher DETAILED PLANNING DIMENSIONS GUIDE

Applies to all model numbers starting with; KDFE104K, KDTE104K, KDFE204K, KDTE204K, KDTE304LPA, KDFM404K, KDTM404K, KDPM604K, KDTM604K, KDPM704K, KDTM704K, KDTM704LPA, KDPM804K, KDTM804K

PRODUCT DIMENSIONS

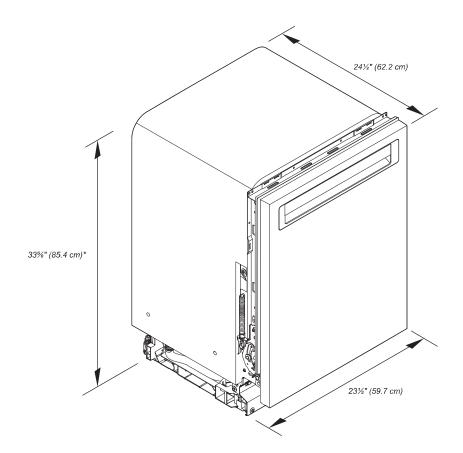

*Dishwasher can be raised $1\% _{6}"$ (3.7 cm) with feet fully extended.




Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

KitchenAid® 24" Dishwasher DETAILED PLANNING DIMENSIONS GUIDE

PRODUCT DIMENSIONS (CONTD.)

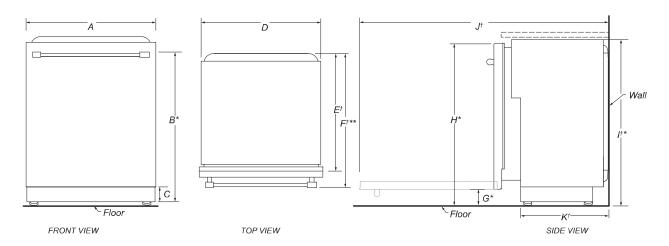

	DESCRIPTION	DIMENSIONS
Α	Width of door	23½" (59.7 cm)
В*	Height to top of handle	30 ¹³ / ₁₆ " (78.3 cm)
С	Height of adjustable toe kick	3%'₅" (8.4 cm) - min. 4¹¹½₅" (11.8 cm) - max.
D	Width of recessed dishwasher	225%" (57.4 cm)
E†	Depth without door	225/s" (57.5 cm)
	Depth with Towel Bar Handle	26%" (68.3 cm)
F ⁺ **	Depth with Pocket Handle	24½" (62.6 cm)
	Depth of Panel-Ready Models	24" (61.0 cm)
G*	Height to bottom of door (min.)	35/16" (8.4 cm)
H*	Height to top of door (min.)	337/16" (84.9 cm)
I †*	Height of recessed dishwasher (min.)	335/s" (85.4 cm)
J†	Depth with door fully open (min.)	50¾6" (127.4 cm)
K [†]	Depth with toe kick (min.)	20 ¹³ / ₁₆ " (52.9 cm)

†Insulation blanket thickness not included, can be crushed up to 1/8" (0.3 cm), or removed along the top perforate section for additional clearance.


^{*}Dishwasher can be raised $1\frac{1}{16}$ " (3.7 cm) with feet fully extended.

 $^{^{**}}$ For panel-ready models, dishwasher depth is 24" (61.0 cm), not including the 3/4" (1.9 cm) custom door panel.

KitchenAid 24" Dishwasher DETAILED PLANNING DIMENSIONS GUIDE

OPENING/CLEARANCE DIMENSIONS

IMPORTANT: Check that all surfaces have no protrusions that would prohibit dishwasher installation.

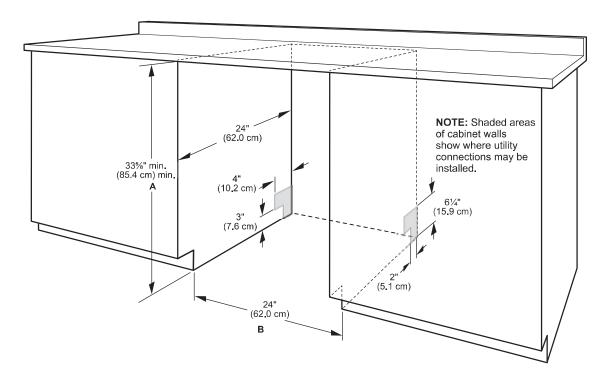

- A. Measured from the lowest point on the underside of the countertop. May be reduced to 33%" min. (85.4 cm) min. by removing the feet and perforated area of insulation (blanket) on dishwasher.
- B. Minimum, measured from narrowest point of opening.


NOTE: Corner locations require a 2" (5.1 cm) minimum clearance between the side of the dishwasher door and the wall or cabinet.

DRAIN REQUIREMENTS

■ A new drain hose is supplied with your dishwasher. If drain hose is not long enough, use a new drain hose with a maximum length of 12 ft (3.7 m) that meets all current AHAM/ IAPMO test standards, is resistant to heat and detergent, and fits the 1" (2.5 cm) drain connector of the dishwasher.

NOTE: Do not connect multiple drain hoses together.

- Make sure to connect drain hose to waste tee or disposer inlet above drain trap in house plumbing and 20" (50.8 cm) minimum above the floor. It is recommended that the drain hose either be looped up and securely fastened to the underside of the counter or be connected to an air gap.
- Make sure to use an air gap if the drain hose is connected to house plumbing lower than 20" (50.8 cm) above subfloor or floor.

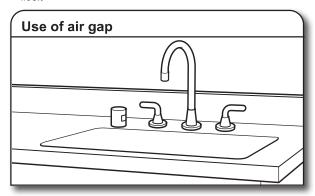

- If required, the air gap should be installed in accordance with the air gap installation instructions. When you are connecting the air gap, a rubber hose (not provided) will be needed to connect to the waste tee or disposer inlet.
- Use 1/2" (1.3 cm) minimum I.D. drain line fittings.

WATER SUPPLY REQUIREMENTS

- This dishwasher has a water heating feature and also requires a connection to a hot water supply line.
- A hot water line with 20 psi to 120 psi (138 kPa to 862 kPa) water pressure can be verified by a licensed plumber.
- 120°F (49°C) water at dishwasher.
- 3/8" (0.95 cm) O.D. copper tubing with compression fitting or flexible braided water supply line.

NOTE: 1/2" (1.3 cm) minimum plastic tubing is not recommended.

- \blacksquare A 90° elbow with 3/4" (0.95 cm) hose connection with rubber washer.
- Do not solder within 6" (15.2 cm) of the water inlet valve.
- If installed in new construction, make sure the house water supply lines have been flushed prior to connecting the dishwasher to remove any debris that may exist in the supply line.

NOTE: If replacing an existing dishwasher, it is recommended to install a new water line and drain hose (supplied) with the new dishwasher.

ELECTRICAL REQUIREMENTS

AWARNING



Electrical Shock Hazard

Plug into a grounded 3 prong outlet.

Do not remove ground prong.

Do not use an adapter.

Do not use an extension cord.

Failure to follow these instructions can result in death, fire, or electrical shock,

Be sure that the electrical connection and wire size are adequate and in conformance with the National Electrical Code, ANSI/NFPA 70 - latest edition, and all local codes and ordinances.

A copy of the above code standards can be obtained from:

National Fire Protection Association 1 Batterymarch Park Quincy, MA 02169-7471

You Must Have:

- 120 V, 60 Hz, AC only, 15 A or 20 A, fused electrical supply
- Copper wire only
- A maximum of 2 field wiring supply conductors (12 AWG largest size) plus 1 grounding conductor are permitted in the terminal

We Recommend:

■ A time-delay fuse or circuit breaker.

Circuit Requirements:


- The dishwasher may be installed on the same circuit as a garbage disposal providing that the branch circuit cannot exceed rated circuit load and must comply with all governing codes and regulations such as but not limited to National Electrical Code, ANSI/NFPA 70 latest edition.
- No electrical connections other than the dishwasher power and ground connections can be made inside of the dishwasher terminal box.

If connecting dishwasher with a power supply cord:



- Use UL Listed power cord kit marked for use with dishwasher.
- Plug into a grounded 3 prong outlet. Outlet must meet all local codes and ordinances.

If connecting dishwasher with direct wiring:





Use a UL Listed/CSA Approved metallic strain relief.

Electrolux



Dryer	
-------	--

Electric 8.0 Cu. Ft. Front Load Dryer

ELFE763CAT, ELFE763CAW

Available Colors: Titanium, White

Version: 07/21

Dryer	
Air Flow	200 CFM
Balanced Dry	Yes
Drum Back Type	Painted Steel
Drum Material	Stainless Steel
Dryness Level Selections	Yes
Lint Filter	Yes
Predictive Dry	No
Din to it Citalian	
Dryer Cycles	11
Cycle Count	11
Activewear	Yes
Air Dry	Yes
Allergen	Yes
Delicates	Yes
Fast Dry	Yes
Heavy Duty	Yes
Instant Refresh	Yes
Mixed Load	Yes
Normal	Yes
Timed Dry Time	Yes
Towels	Yes
Dryer Options	
Anti Static	Yes
Delay Start Time	1-12 Hours
Drum Light	Yes
Dry Boost	Yes
Extended Tumble	Yes
Perfect Steam	Yes
Wrinkle Release	Yes
WITTING Release	163
Drying Temperatures	
Low	Yes
Normal	Yes
High	Yes
-	

Sanitize	Yes
Eco Dry	Yes
Dryness Level	
Max	Yes
High	Yes
Normal	Yes
Low	Yes
Damp	Yes
Controls	V
Cancel	Yes
Cycle Status Lights	Yes
Delay Start	Yes
Estimated Time Remaining	Yes
Control Lock	Yes
Pause Function	Yes
Power On/Off	Yes
Start	Yes
Exterior	
Exterior Door Latch	Van
	Yes
Reversible Door	Yes
5: 17/1	
Dimensions and Volume	00"
Height	38"
Width	27"
Depth	32"
Dryer Drum Capacity	8 Cu. Ft.
Electrical Specifications	
Minimum Circuit Required	30 Amps
Voltage Rating	208/240v
Energy Data	
Energy Data	2.5 kWh
kWh/cycle	2.3 KVVII



High standards of quality at Electrolux Home Products, Inc. mean we are constantly working to improve our products. We reserve the right to change specifications or discontinue models without notice.

Electrolux Major Appliances, N.A.

Electric 8.0 Cu. Ft. Front Load Dryer

ELFE763CAT, ELFE763CAW

Version: 07/21


kWh/year	710 kWh
In stallation	
Installation	
Optional Pedestal	Yes
General Specifications	
Chime On / Chime Off	Yes
Leveling Legs	Yes
Product Weight	126 lbs
Prop 65 Label	No
Warranty - Labor	1 Year
Warranty - Parts	1 Year
Performance Certifications and	
Approvals	
ENERGY STAR Certified	Yes
Safety Certifications and Approvals	
UL Listed	Yes

High standards of quality at Electrolux Home Products, Inc. mean we are constantly working to improve our products. We reserve the right to change specifications or discontinue models without notice.

Electric 8.0 Cu. Ft. Front Load Dryer


ELFE763CAT, ELFE763CAW

Version: 07/21

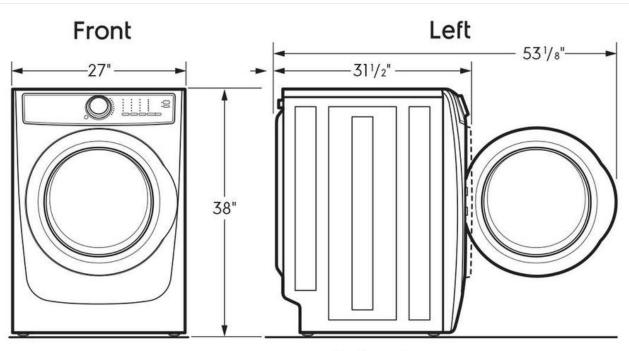

Rear 12¹/₂" 3⁷/₁₆" 13¹/₂" 13¹/₂"

Optional 15" Pedestal Drawer

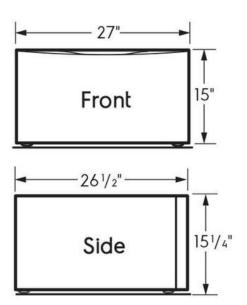

High standards of quality at Electrolux Home Products, Inc. mean we are constantly working to improve our products. We reserve the right to change specifications or discontinue models without notice.

Electrolux Major Appliances, N.A.

KitchenAid

FOR THE WAY IT'S MADE®

PRODUCT MODEL NUMBERS

KRFC302E


Electrical: A 115 volt, 60 Hz, AC only 15- or 20-amp fused, grounded electrical supply is required. It is recommended that a separate circuit serving only your refrigerator and approved accessories be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.

Water: A cold water supply with water pressure of between 35 and 120 psi (241 and 827 kPa) is required to operate the water dispenser and ice maker. If you have questions about your water pressure, call a licensed, qualified plumber.

Reverse Osmosis Water Supply: IMPORTANT: The pressure of the water supply coming out of a reverse osmosis system going to the water inlet valve of the refrigerator needs to be between 35 and 120 psi (241 and 827 kPa).


Bottom Mount Refrigerator

PRODUCT DIMENSIONS

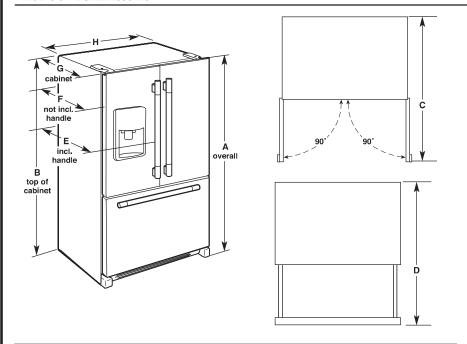

Model Size	Height - Overall "A"	Height - Top of Cabinet "B"	Depth - Doors Open 90° "C"	Depth - Drawer Open "D"	Depth - With Handles "E"	Depth - Without Handles "F"	Depth - Cabinet Only "G"	Width - Cabinet "H"
21.9	72"	713/8"	441/8"	451/4"	301/4"	27 ³ / ₄ "	245/8"	35¾"
	(182.9 cm)	(181.3 cm)	(112.1 cm)	(114.9 cm)	(76.8 cm)	(70.5 cm)	(62.5 cm)	(90.8 cm)

LOCATION REQUIREMENTS

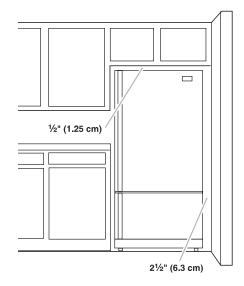

IMPORTANT: This refrigerator is designed for indoor, household use only.

To ensure proper ventilation for your refrigerator, allow for 1/2" (1.25 cm) of space on each side and at the top. Allow for 1" (2.54 cm) of space behind the refrigerator. If your refrigerator has an ice maker, allow extra space at the back for the water line connections. When installing your refrigerator next to a fixed wall, leave 21/2" (6.3 cm) minimum on the hinge side (some models require more) to allow for the door to swing open.

NOTE: This refrigerator is intended for use in a location where the temperature ranges from a minimum of 55°F (13°C) to a maximum of 110°F (43°C). The preferred room temperature range for optimum performance, which reduces electricity usage and provides superior cooling, is between 60°F (15°C) and 90°F (32°C). It is recommended that you do not install the refrigerator near a heat source, such as an oven or radiator.



DocuSign Envelope ID: 74817AED-7748-4332-9F00-8A57F76E46D3

BX155 - INSERT RANGE HOOD

The three speed push button control is located on the underside of the BX155 for easy access and control. The range hood cannot be seen from eye-level, allowing you to arrange your cabinets as though there were no fan, creating a fluid and classy look. Another innovative design unique to Cyclone.

Cyclone



Green Features



3 Speed Push Button Control




Long- lasting LED lights


Features

- · Insert range hood
- 6" round duct adapter
- · Non- stick Aluminium fan blades
- · 3-speed push button control
- 2 halogen light bulbs (2 x 25W, E26)
- · Quick-release Aluminium Mesh
- Plug-in connection

Specifications

- Air Flow Volume: 250 CFM
- Electrical Connection: 120 V/60 Hz
- Power Consumption: 240 Watts
- Current: 2.0 AmpsFan Speed: 1350 RPM
- Fan Type: Centrifugal Blower
- · Finishes: Stainless Steel
- Ducting: 6" Round
- Noise Level: Min. 2 Sones Max. 4
 - Sones

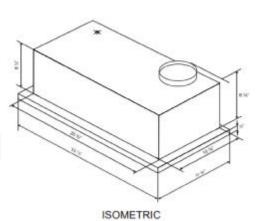



TOP

Options

• Filters: Aluminium Mesh Filters


Widths: 30", 36"Finish: Stainless Steel



Model	Colour	Ducting	Filters	Size	CFM	Fits Cabinet
BX15522	Stainless Steel	6"	Mesh	22"	250	24"

- When installing cooktop over an undercounter built-in oven, do not fasten cooktop to countertop with clamps or seal cooktop to countertop. This will make the cooktop easier to remove if future servicing becomes necessary.
- Use the countertop opening dimensions that are given with these Installation Instructions. Given dimensions are minimum clearances and provide 0" (0 cm) clearance.
- Grounded electrical supply is required. See "Electrical Requirements" section.

Product Dimensions

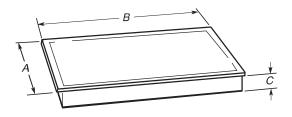


Model	Α	В	С
24"	21 ⁵ / ₁₆ " (54.1 cm)	25 ⁵ / ₈ " (65 cm)	3 ¹¹ / ₁₆ " (9.4 cm)
30"	21 ⁵ / ₁₆ " (54.1 cm)	30 ³ / ₄ " (78.2 cm)	3 ¹¹ / ₁₆ " (9.4 cm)
36"	21 ⁵ / ₁₆ " (54.1 cm)	36 ⁵ / ₁₆ " (92.2 cm)	3 ¹¹ / ₁₆ " (9.4 cm)

With frame:


	Model	Α	В	С
20"	KitchenAid	21 ¹¹ / ₁₆ " (55.1 cm)	31 ¹ / ₈ " (79.1 cm)	3 ⁹ / ₁₆ " (9.0 cm)
30"	Whirlpool	22" (55.9 cm)	30 ¹³ / ₁₆ " (78.2 cm)	3 ⁹ / ₁₆ " (9.1 cm)
36"	KitchenAid	21 ¹¹ / ₁₆ " (55.1 cm)	36 ¹¹ / ₁₆ " (93.15 cm)	3 ⁹ / ₁₆ " (9.0 cm)
	Whirlpool	-	-	-

Cabinet Dimensions

IMPORTANT: If installing a range hood or microwave hood combination above the range, follow the range hood or microwave hood combination installation instructions for dimensional clearances above the cooktop surface.

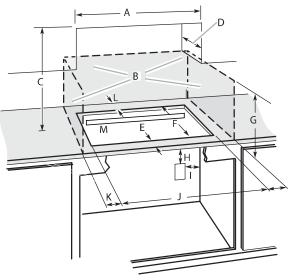

- A. 24" (65 cm) on 24" models, 30" (78.2 cm) on 30" models, 36" (92.2 cm) on 36" models
 B. Combustible area above countertop (shown by dashed box above)
 C. 30" (78.2 cm) minimum clearance between top of cooktop platform and bottom of uncovered wood or metal cabinet (24" [61 cm] minimum clearance if bottom of wood or metal cabinet is covered by not less than 1/4" [6.4 mm] flame retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015" [0.04 cm] stainless steel, or 0.024" [0.06 cm] aluminum or 0.020" [0.05 cm] copper)
 D. 13" (33.0 cm) recommended upper cabinet depth
- D. 13" (33.0 cm) recommended upper cabinet depth
- E. 2" (5.1 cm)
- For details see the Table 1
- G. 18" (45.7 cm) minimum clearance from upper cabinet to countertop within minimum horizontal clearances to cooktop
 H. Junction box or outlet; 12" (30.5 cm) minimum from bottom of
- countertop
- Junction box or outlet; 10" (25.4 cm) from right-hand side of cabinet
- J. For details see the Table 1
- K. 1" (2.5 cm) minimum distance to nearest left and right side combustible surface above cooktop
- 1" (2.5 cm) minimum clearance between back wall and countertop
- M. IMPORTANT: For proper ventilation, provide a vent cut out in the back of the cabinet per the following illustration. For standard and flush installation make sure the cut out and its cut out for ventilation have their center line aligned.



Model	M1	M2	M2 (Flush)	M3
24"	19"	2 ⁹ / ₁₆ "	2 ¹³ / ₁₆ "	13/16"
	(48,2 cm)	(6.5 cm)	(7.1 cm)	(2.1 cm)
30" and 36"	26 ³ / ₄ "	2 ⁹ / ₁₆ "	2 ¹³ / ₁₆ "	13/16"
	(68 cm)	(6.5 cm)	(7.1 cm)	(2.1 cm)




Table 1

Model	CUT OUT (range)				
	F	J			
24"	20 ⁷ / ₁₆ " (51.9 cm)- 20 ³ / ₄ " (52.7 cm)	21 ¹³ / ₁₆ " (55.4 cm)- 21 ¹⁵ / ₁₆ " (55.7 cm)			
30"	20 ⁷ / ₁₆ " (51.9 cm)- 20 ³ / ₄ " (52.7 cm)	29 ¹ / ₂ " (74.9 cm)- 29 ⁵ / ₈ " (75.2 cm)			
36"	20 ⁷ / ₁₆ " (51.9 cm)- 20 ³ / ₄ " (52.7 cm)	35 ⁷ / ₁₆ " (90.0 cm)- 35 ⁹ / ₁₆ " (90.3 cm)			


NOTE: After you make the countertop cutout, some installations may require notching down the base cabinet side walls to clear the cooktop base. To avoid this modification, use a base cabinet with sidewalls wider than the cutout.

If cabinet has a drawer, a 5% " (13 cm) depth clearance from the countertop to the top of the drawer (or other obstruction) in base cabinet is required.

Flush Installation - Frameless

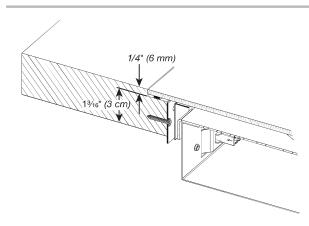

Model	Х	Υ
24"	25 ¹³ / ₁₆ " (65.5 cm)	21 ⁷ / ₁₆ " (54.5 cm)
30"	31" (78.7 cm)	21 ⁷ / ₁₆ " (54.5 cm)
36"	36 ¹ / ₂ " (92.7 cm)	21 ⁷ / ₁₆ " (54.5 cm)

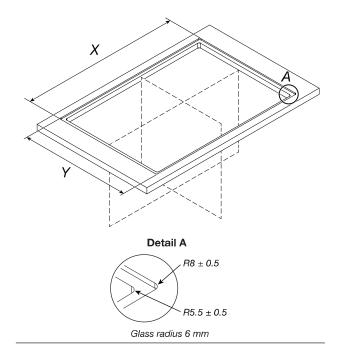

Electrical Requirements

AWARNING



Electrical Shock Hazard

Disconnect power before servicing.

Use 8 gauge copper wire.

Electrically ground cooktop.

Failure to follow these instructions can result in death, fire, or electrical shock.

If codes permit and a separate ground wire is used, it is recommended that a qualified electrical installer determine that the ground path and wire gauge are in accordance with local codes.

Check with a qualified electrical installer if you are not sure the cooktop is properly grounded.

It is not recommended to have a fuse in the neutral or ground circuit

Make sure that the electrical connection and wire size are adequate and in conformance with the National Electrical Code, ANSI/NFPA 70-latest edition or CSA Standards C22.1-94, Canadian Electrical Code, Part 1 and C22.2 No.O-M91-latest edition, and all local codes and ordinances.

A copy of the above code standards can be obtained from:

National Fire Protection Association 1 Batterymarch Park Quincy, MA 02169-7471 CSA International 8501 East Pleasant Valley Road Cleveland, OH 44131-5575

Before You Make the Electrical Connection:

To properly install your cooktop, you must determine the type of electrical connection you will be using and follow the instructions provided for it here.

A 4-wire or 3-wire, single phase, 240 V, 60 Hz, AC only electrical supply is required on a separate, 50 A circuit (36" [92.2 cm] models), 40 A circuit (30" [78.2 cm] KitchenAid models) or 30 A circuit (24" [65 cm] and 30" [78.2 cm] Whirlpool models) fused on both sides of the line.

- The cooktop should be connected directly to the junction box through flexible, armored or nonmetallic sheathed, copper cable. The flexible, armored cable extending from the fuse box or circuit breaker box should be connected directly to the junction box.
- Locate the junction box to allow as much slack as possible between the junction box and the cooktop so that the cooktop can be moved if servicing becomes necessary in the future

- Do not cut the conduit. The length of conduit provided is for serviceability of the cooktop.
- A UL listed or CSA approved conduit connector must be provided at each end of the power supply cable (at the cooktop and at the junction box). A listed conduit connector is already provided at the cooktop.
- If the house has aluminum wiring, follow the procedure below:

Connect the aluminum wiring using special connectors and/or tools designed and UL listed for joining copper to aluminum

Follow the electrical connector manufacturer's recommended procedure. Aluminum/copper connection must conform with local codes and industry accepted wiring practices.

INSTALLATION INSTRUCTIONS

Prepare Location


- Decide on the final location for the cooktop.
 NOTE: Countertop must be 1¾6" (3.0 cm) to 2" (5.1 cm)
- 2. If necessary, make cutout in countertop before installing cooktop. See "Location Requirements" section for more information.
- 3. Clean cutout of any remaining dust and debris.

Install Brackets


NOTE: Cooktop Bracket Adhesive Kit Part Number W11279478 is required for installing the cooktop into a marble countertop. See the "Assistance or Service" section of the Use and Care Guide for information on ordering.

To Install Brackets into Marble Countertop:


 Clean the brackets and cooktop cutout of any dust and debris.




Measure the center line of the vertical sides of the cooktop cutout.



3. Apply the adhesive provided in the kit to the back side of the brackets.



 Position brackets in the center of the vertical centerline and align the upper edge of the brackets so that they are flush with the countertop.




27" (68.6 CM) AND 30" (76.2 CM) ELECTRIC SINGLE AND DOUBLE BUILT-IN OVEN


PRODUCT MODEL NUMBERS

KODE300E	KODT100E	KOST100E
KODE307E	KODT107E	KOST107E
KODE500E	KOSE500E	KEBS109E
KODE507E	KOSE507E	KEBS209E

Electrical: To properly install your oven, you must determine the type of electrical connection you will be using and follow the instructions

 Oven must be connected to the proper electrical voltage and frequency as specified on the model/serial number rating plate. The model/serial number rating plate is located under the control panel on single ovens and under the control panel on the upper oven cavity on double ovens. See the following illustrations.





Single Oven

A. Model/serial number plate

Double Oven


- A. Model/serial number plate
- Models rated from 7.3 to 9.6 kW at 240 volts (5.4 to 7.4 kW at 208 volts) require a separate 40-amp circuit. Models rated at 4.8 kW and below at 240 volts (3.6 kW and below at 208 volts) require a separate 20-amp circuit.
- · A circuit breaker is recommended.
- Connect directly to the circuit breaker box (or fused disconnect) through flexible, armored or nonmetallic sheathed, copper cable (with $% \left\{ 1\right\} =\left\{ 1$ grounding wire). See "Make Electrical Connection" section.
- Flexible conduit from the oven should be connected directly to the iunction box.
- Fuse both sides of the line.
- Do not cut the conduit. The length of conduit provided is for serviceability of the oven.
- A UL listed or CSA approved conduit connector must be provided.
- If the house has aluminum wiring, follow the procedure below:
- 1. Connect a section of solid copper wire to the ends of the flexible conduit leads.
- 2. Connect the aluminum wiring to the added section of copper wire using special connectors and/or tools designed and UL listed for joining copper to aluminum.

Follow the electrical connector manufacturer's recommended procedure. Aluminum/copper connection must conform with local codes and industry accepted wiring practices.

For power requirements for models KOST107E, KOST100E KOSE507E, KOSE500E, KODE307E, KODE300E, KODE507E, KODE500E, KODT100E and KODT107E, refer to the following table.

Voltage	Single Thermal	Single Convect	Double Thermal	Double Convect	Double Convect/ Thermal
240 VAC	4100 W	4100 W	8163 W	8300 W	8300 W
208 VAC	3100 W	3100 W	6300 W	6300 W	6300 W
240 VAC	17.2 A	17.2 A	34.2 A	34.2 A	34.2 A
208 VAC	15.0 A	15.0 A	29.9 A	29.9 A	29.9 A

PRODUCT DIMENSIONS

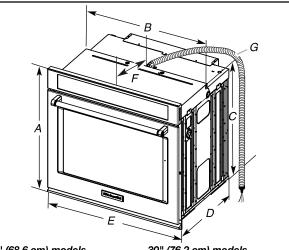

27" (68.6 cm) models

- A. 28¾" (72.8 cm) max. overall height
- B. 25⁷/₁₆" (64.6 cm) max. recessed width
- C. 26¾" (67.9 cm) recessed height
- D. 231/4" (59.1 cm) max. recessed depth
- E. 27" (68.6 cm) overall width
- F. 12" (30.5 cm) from back of control panel to start of strain
- G. 48" (121.9 cm) flexible conduit length

30" (76.2 cm) models

- A. 28¾" (72.8 cm) max. overall height
- B. 281/2" (72.4 cm) max. recessed width
- C. 263/4" (67.9 cm) recessed height
- D. 231/4" (59.1 cm) max. recessed depth
- E. 30" (76.2 cm) overall width
- F. 12" (30.5 cm) from back of control panel to start of strain relief
- G. 48" (121.9 cm) flexible conduit length

27" (68.6 cm) models A. 513/16" (130.0 cm)

- max. overall height
- B. 257/16" (64.6 cm)
- max. recessed width C. 48¹³/₁₆" (124.0 cm)
- recessed height D. 231/4" (59.1 cm)
- max. recessed depth E. 27" (68.6 cm) overall width
- F. 12" (30.5 cm) from back of control panel to start of strain relief
- G. 66" (167.6 cm) flexible conduit length

30" (76.2 cm) models

- A. 513/16" (130.0 cm) max. overall height
- B. 28½" (72.4 cm) max. recessed width
- C. 48¹³/₁₆" (124.0 cm) recessed height
- D. 231/4" (59.1 cm) max. recessed depth E. 30" (76.2 cm) overall width
- F. 12" (30.5 cm) from back of control panel to start
- of strain relief G. 66" (167.6 cm) flexible conduit length

Page 1 of 2

Because Whirlpool Corporation includes a continues commitment to improve our products, we reserve the right to change materials and specifications without notice.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

Ref. W10725670B

CABINET DIMENSIONS - SINGLE OVENS

Single Oven Undercounter (without cooktop installed above)

Α ¥ F D


27" (68.6 cm) models

- A. 27" (68.6 cm) min. cabinet width B. 11/2" (3.8 cm) min. top of cutout
- to underside of countertop C. 51/4" (13.3 cm) bottom of cutout to floor
- D. $25\frac{1}{2}$ " (64.8 cm) cutout width
- E. 28" (71.2 cm) min. cutout height

30" (76.2 cm) models

- A. 30" (76.2 cm) min. cabinet width B. 11/2" (3.8 cm) min. top of cutout
- to underside of countertop C. $5\frac{1}{4}$ " (13.3 cm) bottom of cutout to floor
- D. $28\frac{1}{2}$ " (72.4 cm) cutout width
- E. 28" (71.2 cm) min. cutout height

Single Ovens Installed in Cabinet

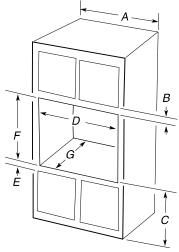

27" (68.6 cm) models

- A. 27" (68.6 cm) min. cabinet width
- B. 1" (2.5 cm) top of cutout to bottom of upper cabinet door C. 32" (81.3 cm) bottom of
- cutout to floor
- D. 25½" (64.8 cm) cutout width
- E. 1½" (3.8 cm) min. bottom of cutout to top of cabinet door
- F. 28" (71.2 cm)* recommended cutout height
- G. 24" (60.7 cm) cutout depth


30" (76.2 cm) models

- A. 30" (76.2 cm) min. cabinet width
- B. 1" (2.5 cm) top of cutout to bottom of upper cabinet door C. 32" (81.3 cm) bottom of
- cutout to floor
- D. $28\frac{1}{2}$ " (72.4 cm) cutout width
- E. 1½" (3.8 cm) min. bottom of cutout to top of cabinet door
- F. 28" (71.2 cm)* recommended cutout height
- G. 24" (60.7 cm) cutout depth

*NOTE: The cutout height can be between 2615/16" (68.4 cm) and 297/16" (74.8 cm) for single ovens.

CABINET DIMENSIONS - SINGLE OVENS

Double Ovens Installed in Cabinet

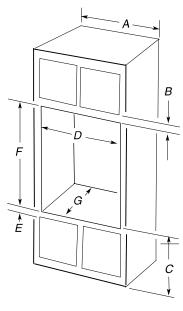

27" (68.6 cm) models

- A. 27" (68.6 cm) min. cabinet width
- B. 1" (2.5 cm) top of cutout to bottom of upper cabinet door
- C. 14¾" (37.5 cm) bottom of cutout to floor is recommended. 4"-143/4" (10.2-37.5 cm) bottom of cutout to floor is acceptable. D. 25½" (64.8 cm) cutout width
- E. 11/2 " (3.8 cm) min. bottom of cutout to top of cabinet door F. 501/4 " (127.6 cm)*
- recommended cutout height
- G. 24" (60.7 cm) cutout depth

30" (76.2 cm) models

- A. 30" (76.2 cm) min. cabinet width
- B. 1" (2.5 cm) top of cutout to bottom of upper cabinet door
- C. 14¾" (37.5 cm) bottom of cutout to floor is recommended. 4"-14¾" (10.2-37.5 cm) bottom of cutout to floor is acceptable.
- D. 28½" (72.4 cm) cutout width E. 1½ " (3.8 cm) min. bottom of
- cutout to top of cabinet door
- F. 501/4" (127.6 cm)* recommended cutout height
- G. 24" (60.7 cm) cutout depth

*NOTE: The cutout height can be between 48%" (124.1 cm) and 52%6" (132.6 cm) for double ovens.

Page 2 of 2

Because Whirlpool Corporation includes a continues commitment to improve our products, we reserve the right to change materials and specifications without notice.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

Ref. W10725670B

Electrolux



Front I	l oad	Was	her
From	i oad	VVAS	ner

4.5 Cu.Ft. Front Load Washer

ELFW7637AT, ELFW7637AW

Available Colors: Titanium, White

Version: 06/21

Washer	
Drum Light	Yes
Drum Material	Stainless Steel
Maximum Spin Speed	1,300 RPM
Water Heater	Yes
Water Level Adjustment	Yes
Washer Cycles	
Activewear	Yes
Clean Washer	Yes
Colors	Yes
Cycle Count	11
Delicates	Yes
Fast Wash	Yes
Hand Wash	Yes
Heavy Duty	Yes
Normal	Yes
Optic Whites	Yes
Rinse and Spin	Yes
Towels	Yes
Allergen	Yes
Allergen	163
Washer Options	
Washer Options Delay Start Time	1-12 Hours
Extended Refresh	Yes
Extra Rinse	Yes
Perfect Steam	Yes
Pure Rinse	Yes
Stain Soak	Yes
Steam	Yes
Steam	165
Soil Levels	
	Yes
Extra Light Light	Yes
Normal	Yes
Heavy	Yes

C. P. L. C. T.	V ·
Solid Soil	Yes
T	
Temperature Settings	V
Eco Cold	Yes
Cool	Yes
Warm	Yes
Hot	Yes
Sanitize	Yes
Washer Spin Speeds	
Spin Speed Selections	5
Max	Yes
High	Yes
Medium	Yes
Low	Yes
No Spin	Yes
140 Spili	163
Cambriala	
Controls Cancel	V
	Yes
Cycle Status Lights	Yes
Delay Start	Yes
Control Lock	Yes
Pause Function	Yes
Power On/Off	Yes
Start	Yes
Dispenser	
Bleach Dispenser	Yes
Detergent Dispenser	Yes
Fabric Softener Dispenser	Yes
Prewash Detergent Dispenser	Yes
PODs Dispenser	Yes
1 003 Disperiser	103
Exterior	
Door Latch	Yes



High standards of quality at Electrolux Home Products, Inc. mean we are constantly working to improve our products. We reserve the right to change specifications or discontinue models without notice.

Electrolux Major Appliances, N.A.

4.5 Cu.Ft. Front Load Washer

ELFW7637AT, ELFW7637AW

Version: 06/21

Dimensions and Volume	
Height	38"
Width	27"
Depth	32"
Washer Drum Capacity	4.5 Cu. Ft.
washer brain capacity	4.5 Cd. 1 C.
Electrical Specifications	
Minimum Circuit Required	15 Amps
Voltage Rating	120 V
Energy Data	
Integrated Water Factor	3.2
kWh/year	85 kWh
Modified Energy Factor	2.92
Water Usage/Year	4,248 Gallons
	•
Installation	
Optional Pedestal	Yes
Stackable	Yes
General Specifications	
Chime On / Chime Off	Yes
Leveling Legs	Yes
Product Weight	217 lbs
Prop 65 Label	No
Warranty - Labor	1 Year
Warranty - Parts	1 Year
Performance Certifications and	
Approvals	
CEE Tier	Tier 2
ENERGY STAR Certified	Yes
ENERGY STAR Most Efficient	Yes
High Efficiency	Yes
Safety Certifications and Approvals	
UL Listed	Yes
NSF Certified	Yes

High standards of quality at Electrolux Home Products, Inc. mean we are constantly working to improve our products. We reserve the right to change specifications or discontinue models without notice.

Yes


Electrolux Major Appliances, N.A.

Sanitization and Allergy Reduction


4.5 Cu.Ft. Front Load Washer


ELFW7637AT, ELFW7637AW

Version: 06/21

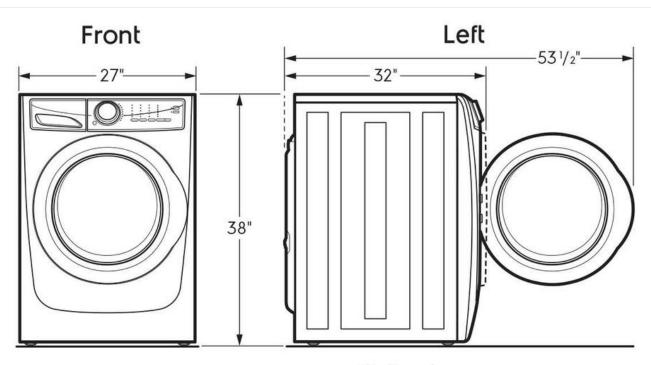

Rear Optional 15" Pedestal Drawer

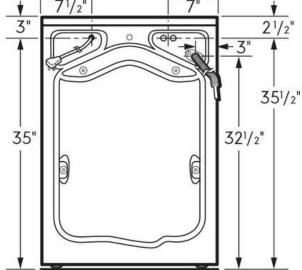

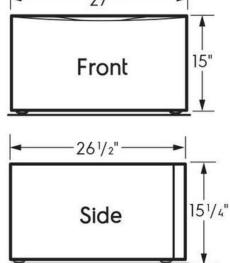



High standards of quality at Electrolux Home Products, Inc. mean we are constantly working to improve our products. We reserve the right to change specifications or discontinue models without notice.


Electrolux Major Appliances, N.A.

MICROWAVE OVEN PRODUCT DIMENSIONS

MODEL #	SLIM TRIM KIT MODELS		STANDARD TRIM KIT MODELS		
	YWMT50011K / YKMBT5011K		YWMT55511K	/ YKMBT5511K	
Unit of Measurement	in	cm	in	cm	
Overall width of microwave (A)	27 ¹³ / ₁₆	70.7	27 ¹³ / ₁₆	70.7	
Overall height of microwave (B)	10 ⁵ / ₁₆	26.2	10 ⁵ / ₁₆	26.2	
Height of the door (C)	10 ⁵ / ₁₆	26.2	10 ⁵ / ₁₆	26.2	
Depth without door (D)	16³/ ₈	41.6	16³/ ₈	41.6	
Depth with door (E)	18	45.7	18	45.7	
Depth with door open 90° (F)	421/8	107	421/8	107	
Distance from fixed wall to door open 90° (G)	1/2	1.3	1/2	1.3	

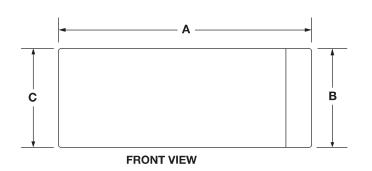

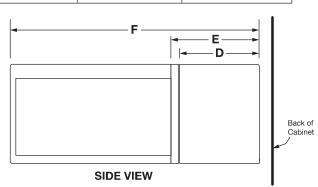

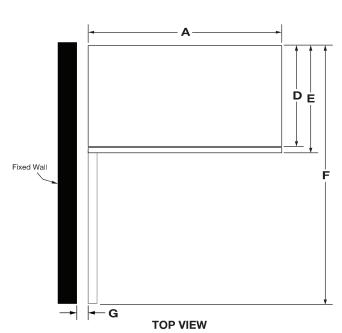



IMPORTANT: Dimensional specifications are provided for planning purposes only.

Do not make any cutouts based on this information. Refer to the Installation Guide before selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation. All Whirlpool® appliances are appropriately UL, CUL or CSA approved.

TRIM KIT FRAME DIMENSIONS


MODEL #	SLIM TRIM KIT MODELS		STANDARD TRIM KIT MODELS		
	YWMT50011K / YKMBT5011K YWMT55511K / Y		K / YKMBT5511K		
Unit of Measurement	in	cm	in	cm	
Overall width of trim kit frame (H)	293/4	75.6	29 ³ / ₄	75.6	
Overall height of trim kit frame (J)	14	35.6	19¹/ ₈	48.6	
Trim kit frame inner opening height (K)	109/16	26.9	109/16	26.9	
Width of trim kit inner opening (L)	28	71.1	28	71.1	
Depth of trim kit frame (M)	2 ⁵ / ₁₆	5.8	25/16	5.8	
Trim kit frame thickness (visible) (N)	7/8	2.2	7/8	2.2	

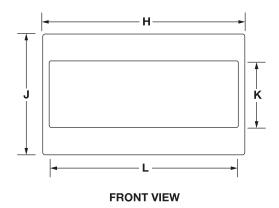





DIMENSION AS INSTALLED

MODEL #	SLIM TRIM F	KIT MODELS	STANDARD TRIM KIT MODELS	
	YWMT50011K / YKMBT5011K		YWMT55511K / YKMBT5511	
Opening/Clearance Measurement	in	cm	in	cm
Height of the door (A)	105/16	26.2	105/16	26.2
Overall heigth of trim kit frame (B)	14	35.6	19¹/ ₈	48.6
Overall heigth of microwave (C)	105/16	26.2	10 ⁵ / ₁₆	26.2
Overall height with rail (D)	119/64	28.3	119/64	28.3
Depth with door (E)	18	45.7	18	45.7
Depth with door open 90° (F)	421/8	93.7	421/8	93.7
Trim kit frame overhang-upper frame (G)	1	2.6	1	2.6
Trim kit frame overhang-lower frame (H)	1	2.6	1	2.6
Overall width of trim kit frame (J)	293/4	75.6	293/4	75.6
Overall height of microwave (K)	105/16	26.2	105/16	26.2
Overall height of trim kit frame (L)	14	35.6	191/8	48.6
Trim kit frame overhang-left frame (M)	5/8	1.6	5/8	1.6
Trim kit frame overhang-right frame (N)	5/8	1.6	5/8	1.6
Distance from fixed wall to door open 90° (P)	1/2	1.3	1/2	1.3





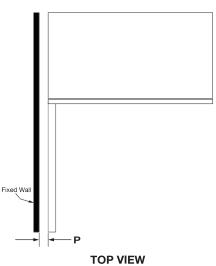



IMPORTANT: Dimensional specifications are provided for planning purposes only. **Do not make any cutouts based on this information.** Refer to the Installation Guide before selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation. All Whirlpool® appliances are appropriately UL, CUL or CSA approved.

DIMENSIONS 4 of 10

MICROWAVE INTERIOR CAVITY DIMENSIONS


MODEL #	SLIM TRIM KIT MODELS		STANDARD TRIM KIT MODELS	
	YWMT50011K / YKMBT5011K		YWMT55511K	C / YKMBT5511K
Unit of Measurement	in	cm	in	cm
Cavity Height (J)	7	17.7	7	17.7
Cavity Height from the Highest Point of the Turntable (K)	6 ⁷ /8	17.5	6 ⁷ /8	17.5
Cavity Width (L)	18 ⁷ /8	48	18 ⁷ /8	48
Cavity Depth (M)	14	35.6	14	35.6
Turntable Diameter (N)	12	30.5	12	30.5

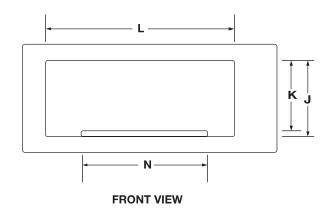



OPENING/CLEARANCE DIMENSIONS

MODEL #	SLIM TRIM KIT MODELS		STANDARDTRIM KIT MODELS	
	YWMT50011K /	YKMBT5011K	YWMT55511K / YKMBT5511K	
Unit of Measurement	in	cm	in	cm
Width of cabinet opening (min.)* (A)	30	76.2	30	76.2
Width of cutout (B)	281/2	72.4	281/2	72.4
Height of cutout (C)	12	30.5	171/8	43.5
Top of cutout to bottom of upper cabinet door (min.) (D)	2	5.1	2	5.1
Bottom of cutout to top of lower cabinet door (min.) (E)	1 9/ ₁₆	4	1 9/ ₁₆	4
Depth of cutout (min.) (F)	213/4	55.2	213/4	55.2
Bottom of cutout to floor (min.) (G)	36	91.4	36	91.4
Back of the microwave oven to the surface of junction box (H)	4" (10.2 cm) < H < 40" (102 cm)			
Recommended junction box location (e)	Upper right quadrant			
Can this product be installed flush? Flush refers to the appliance not protruding past the cabinet depth. (Y/N) (J)	N			

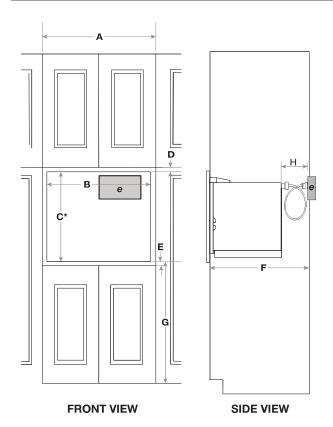


ELECTRICAL REQUIREMENTS

120 V, 60 Hz, AC only, 15 or 20 A fused, electrical supply is required. A time-delay fuse or dedicated circuit is recommended. Use a grounded 3 prong outlet. Do not use an extension cord.

LOCATION REQUIREMENTS

- This is a built-in appliance. Do not use as countertop microwave oven.
- Minimum of 36" from the floor to cut-out floor.
- Complete enclosure around the recessed portion of the microwave oven.
- This microwave oven must be installed into a wood cabinetry. The location must provide:
 - 1. Cutout opening that is plumb and square.
 - Cutout floor that is solid, level and flush with bottom of cabinet cutout.
 - Support for weight of at least 150 lbs (68 kg), which includes microwave oven and items placed inside.



IMPORTANT: Dimensional specifications are provided for planning purposes only. **Do not make any cutouts based on this information.** Refer to the Installation Guide before selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation. All Whirlpool® appliances are appropriately UL, CUL or CSA approved.