


PW2 LOT 353 - MAIN HOUSE PRIMARY ENSUITE FREESTANDING TUB  
FIXTURE (MATTE BLACK)



Submitted Model No.: \_\_\_\_\_  
Specific Features: \_\_\_\_\_

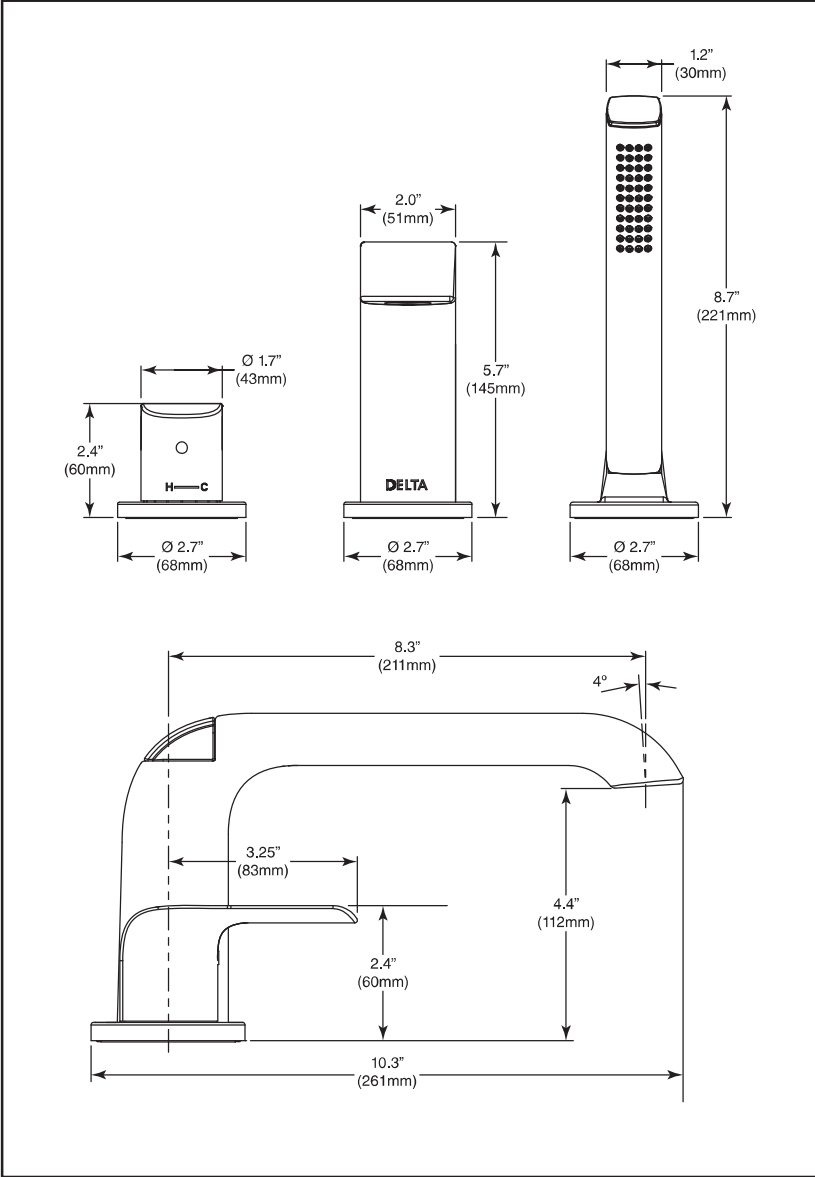

▲ Designate Proper Finish Suffix

Delta Faucet Company reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or [www.deltafaucet.com](http://www.deltafaucet.com) for finish options and product availability.  
DSP-B-T3763, Rev.A



BATHROOM FAUCETS

- Kitano™ Bath Collection
- Single Handle Roman Tub Faucet with Hand Shower
- Three Hole Installation

STANDARD SPECIFICATIONS:

- Hand Shower maximum flow rate 1.75gpm @ 80psi, 6.6 L/min @ 550kPa
- Trim only for single handle Roman Tub Faucet with Hand Shower
- Hand Shower includes double check valves for backflow prevention
- Temperature only controlled with handle
- Hot/cold indicator
- Rough-in Kit must be ordered to complete installation:
  - R3707 for flexible rough-in
  - R3707-MF for flexible PEX cold expansion rough-in
  - R3707-PX for flexible PEX crimp rough-in
  - R3716 for fixed rough-in
  - R3716-MF for fixed PEX cold expansion rough-in
  - R3716-PX for fixed PEX crimp rough-inThere are separate specification sheets on each rough-in kit, if more detail is required

WARRANTY

- Parts and Finish - Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date of purchase.
- Electronic Parts and Batteries (if applicable) - 5 years from the date of purchase; or for commercial purchasers, 1 year from the date of purchase. No warranty is provided on batteries.



COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
- EPA WaterSense®
-  Indicates compliance to ICC/ANSI A117.1

**Delta Faucet Company**  
55 E. 111th Street, Indianapolis, IN 46280  
350 South Edgeware Road, St. Thomas, ON N5P 4L1  
© 2020 Delta Faucet Company

DS  
MT F M


PW2 LOT 353 - INCOME SUITE AND MAIN HOUSE KITCHEN FAUCET (MATTE BLACK)



KITCHEN FAUCETS

- ☐ Keele™ Pull-Down Kitchen Faucet
- ☐ Single Handle Deck Mount
- ☐ MagnaTite® Magnetic Docking

SUBMITTED MODEL NO.: \_\_\_\_\_  
SPECIFIC FEATURES: \_\_\_\_\_

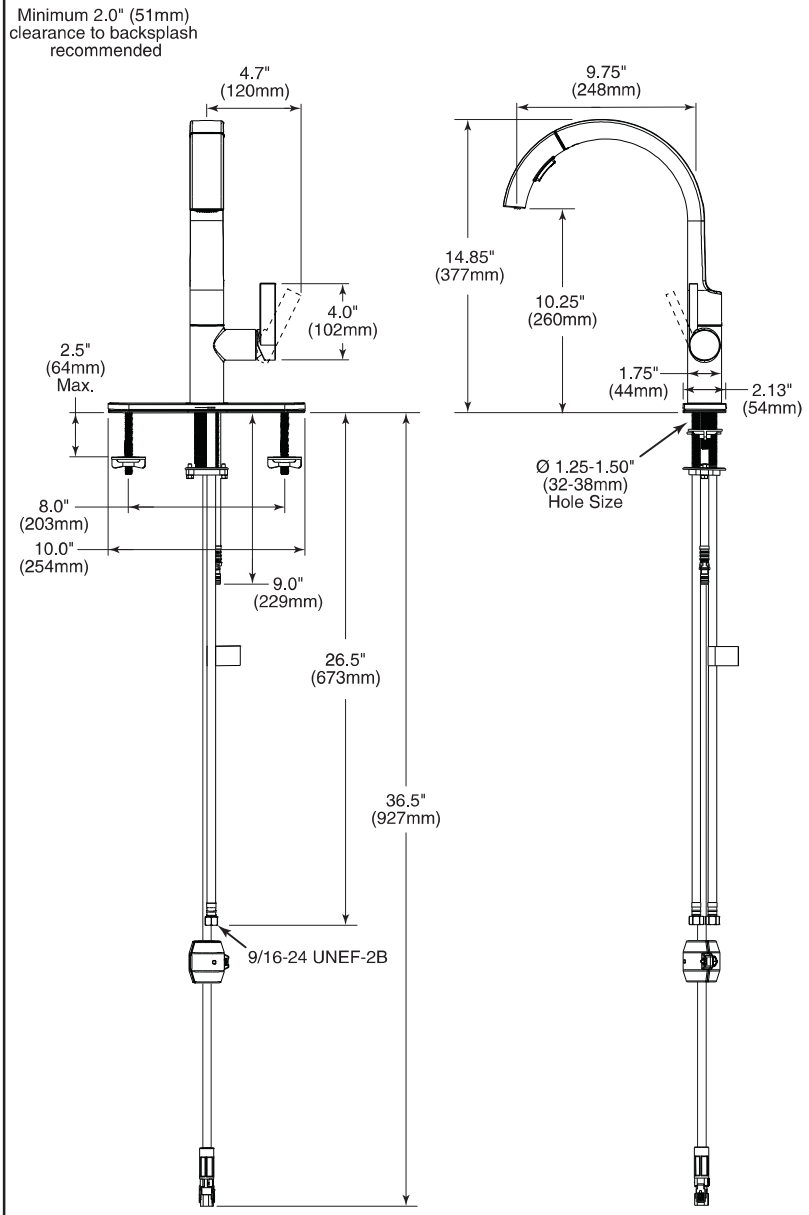

STANDARD SPECIFICATIONS:

- Single handle kitchen faucet
- One or three hole mount (RP63209 Escutcheon optional, not included)
- 8" centres with optional 10" long escutcheon (ordered separately)
- 14.85" (377 mm) high, 9.75" (248 mm) spout length, swings 360°
- Pull-down spout operates in an aerated or spray mode via an easy push toggle button
- MagnaTite magnetic docking
- Touch-Clean spray head
- Quick Snap hose installation
- Dual integral check valves
- Spout is connected to valve body with a 59" (150 cm) long hose
- Ceramic cartridge
- Standard with 3/8" compression
- Maximum flow rate 1.8 gpm @ 60 PSI, 6.8 L/min @ 414 kPa
- Maximum flow rate 1.50 gpm @ 60 psi, 5.7 L/min @ 414 kPa

COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
- ✓ Verified compliant with 0.25% weighted average Pb content regulations
- ♿ Indicates compliance to ICC/ANSI A117.1

WARRANTY

- Parts and Finish - Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date of purchase.
- Electronic Parts and Batteries (if applicable) - 5 years from the date of purchase; or for commercial purchasers, 1 year from the date of purchase. No warranty is provided on batteries.

▲ Designate Proper Finish Suffix

Delta Faucet reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or [www.deltafaucet.com](http://www.deltafaucet.com) for finish options and product availability.

**Delta Faucet Company**  
350 South Edgeware Road, St. Thomas, ON N5P 4L1  
55 E. 111th Street, Indianapolis, IN 46280  
© 2023 Delta Faucet Company

**DSP-K-940LF, Rev. A**



DS  
MT F M

PW2 LOT 353 - KITCHEN SINK

Product Specification Sheet



Virtuo Granite Double Bowl Undermount  
B300 - B301 - B302 - B327 - B334 – B341

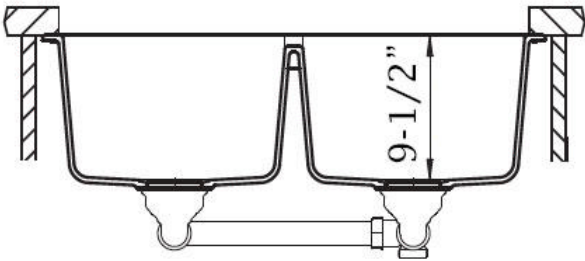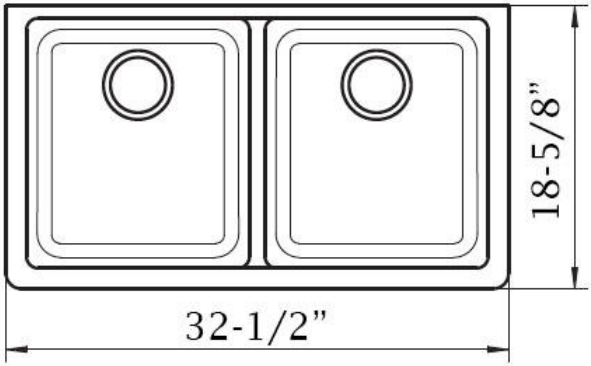

Colour Finish	Model No.	Description
Slate Grey	B300	<ul style="list-style-type: none"><li>Undermount granite double bowl sink</li><li>Outside Dimensions – 32 1/2" x 18 5/8" x 9 1/2" Deep</li><li>80% Quartz Content &amp; 20% Resin</li><li>3 1/2" drain opening</li><li>Supplied with installation clips, template &amp; strainers</li><li>Made in Germany</li><li>Scratch and heat resistant</li><li>cUPC certified</li><li>Minimum Cabinet Size: 34"</li></ul>
Pearl Back	B301	
Coffee Brown	B302	
Asphalt	B327	
Stone Taupe	B334	
White	B341	

Available accessories

- Matching Strainer
- Drying Rack
- BG300/301/302/327/334/341 - Stainless Steel Grid



MAIN LOCATION

BRISTOL SINKS  
56 Firestone Blvd  
London, Ontario  
N5W 6E6

WESTERN LOCATION

BRISTOL SINKS  
964 72nd Avenue NE  
Calgary, Alberta  
T2E 8V9

CONTACT

Tel: 1 (800) 930-0214  
Fax: 1 (866) 310-7580  
Email: sales@bristolsinks.com


DS  
Mt F M

# Halo 56 1/2-59 x 78 3/4 in. 8mm Sliding Shower Door for Alcove Insta

Model number:	138997-900-340-000
---------------	--------------------

Dimensions:	78.75"	Installation:	Alcove	Material:
-------------	--------	---------------	--------	-----------

PW2 LOT 353 - PRIMARY ENSUITE SHOWER - MATTE BLACK

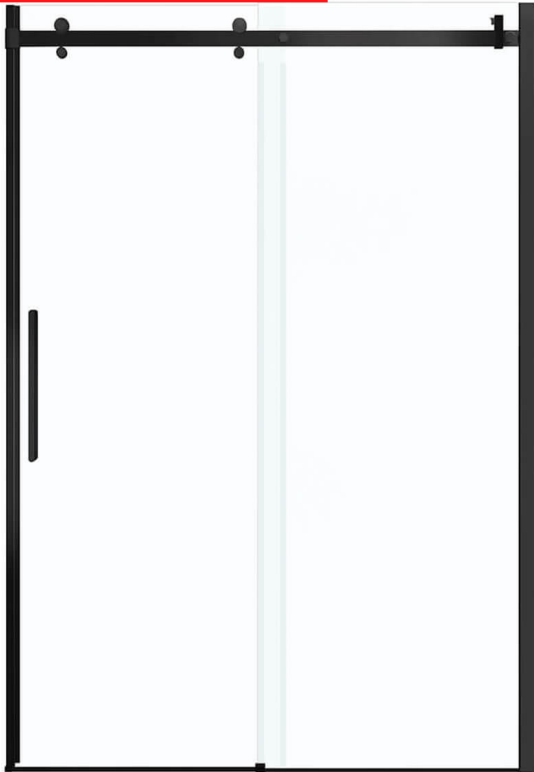


## Standard Features:


- 8 mm tempered glass panels
- Available in 4 finishes: Chrome, Brushed Nickel, Dark Bronze, Matte Black
- Compatible with MAAX's full line of shower bases and walls, making it a versatile addition to any bathroom
- Sliding door configuration features one sliding glass panel and one stationary panel
- Ball bearing roller technology along a friction-free stainless steel rail system for a smooth and quiet opening
- The frameless design brings a sense of spaciousness to the room and creates a sleek, minimalist look


## Product characteristics:


- Ball Bearing Roller System
- Bestseller
- Utile Compatible

## Frame Finish(es):

  
Brushed Nickel

  
Chrome

  
Dark Bronze

  
Matte Black

## Glass Pattern(s):

  
Clear

## Certifications

MAAX products adhere to one or more of the following certifications:



DS  
Mt

DS  
F. M.



# Halo 56 1/2-59 x 78 3/4 in. 8mm Sliding Shower Door for Alcove Insta

Model number:

138997-900-340-000


Dimensions: 78.75"

Installation: Alcove

Material:

STANDARD

PW2 LOT 353 - PRIMARY ENSUITE SHOWER - MATTE BLACK

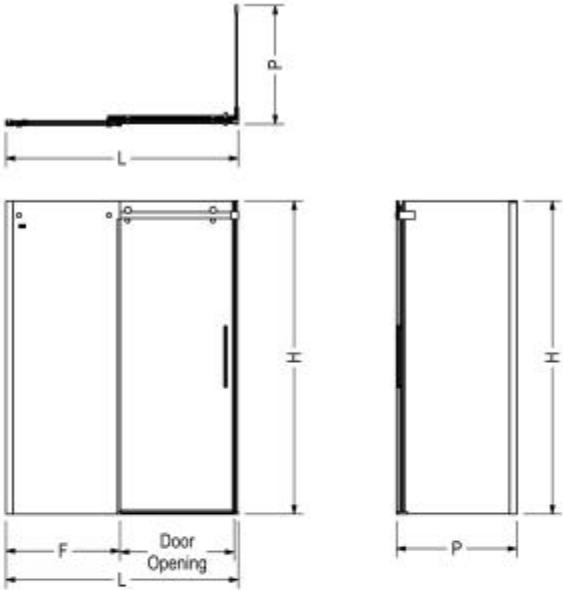

Dimensions

78 3/4 In.  
(2000 mm)

Weight

137 lbs - 62 1/4 kg

Frame Type

Frameless

Door Adjustment

Frameless

Code	Description	H	L Adjustable	F	P Adjustable	Door Opening	Wall Adjustment
138996	Halo 78 3/4" x 47"	78 3/4"	44 1/2" - 47"	22 1/2"	-	16 1/4" - 18 3/4"	1"
138997	Halo 78 3/4" x 59"	78 3/4"	56 1/2" - 59"	28 5/8"	-	22 1/8" - 24 5/8"	1"
139393	Return Panel 30"	78 3/4"	-	-	27 7/8"	-	1"
138998	Return Panel 32"	78 3/4"	-	-	29 7/8"	-	1"
139395	Return Panel 34"	78 3/4"	-	-	31 7/8"	-	1"
139396	Return Panel 36"	78 3/4"	-	-	33 7/8"	-	1"
139394	Return Panel 42"	78 3/4"	-	-	39 7/8"	-	1"

All dimensions are approximate. Structure measurements must be verified against the unit to ensure proper fit.

Project:

Contractor:

Representative:

Date:

Tel:

Notes:

DS

mt

DS




F M

MAAX

PW2 LOT 353 - INCOME BATHROOM AND MAIN HOUSE MAIN BATHROOM  
(MATTE BLACK)



Submitted Model No.: \_\_\_\_\_  
Specific Features: \_\_\_\_\_

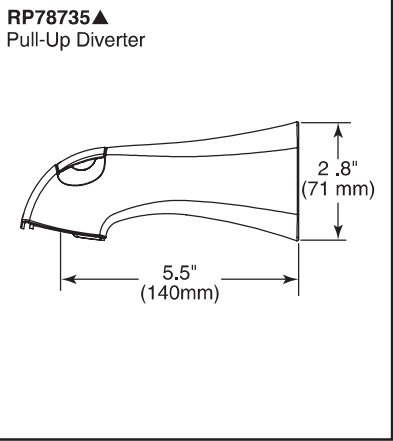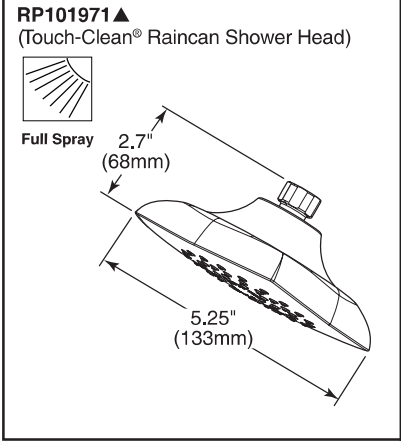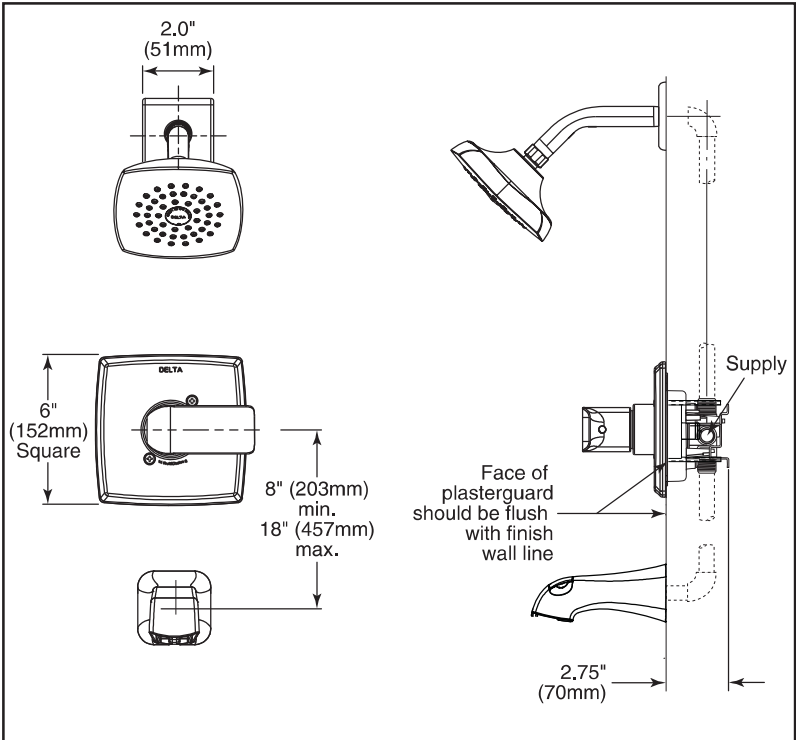

see what Delta can do™

**TUB AND SHOWER  
FAUCET TRIM**

- Kitano™ Bath Collection
- Valve Only (T14063)
- Shower Only (T14263)
- Tub/Shower (T14463 & T14463-LHD)

**STANDARD SPECIFICATIONS:**

- Monitor® 14 Series pressure balanced bath single handle mixing valve trim
- Maintains a balanced pressure of hot and cold water even when a valve is turned on or off elsewhere in the system
- For use with MultiChoice® Universal rough valve body (R10000 Series)
- Back-to-back installation capability
- Solid brass forged body
- Temperature only controlled with handle
- Red/blue temperature indicators
- Field adjustable to limit handle rotation into hot water zone
- 120° maximum handle rotation
- All parts replaceable from the front of the valve
- “-LHD” models indicate less showerhead
- Maximum 2.0 gpm @ 80 psi (7.6 L/min @ 550 kPa)

**WARRANTY**

- Parts and Finish - Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date of purchase.
- Electronic Parts and Batteries (if applicable) - 5 years from the date of purchase; or for commercial purchasers, 1 year from the date of purchase. No warranty is provided on batteries.



Valve Only  
Robinet  
Seulement

**COMPLIES WITH:**

- ASME A112.18.1 / CSA B125.1
- ASSE 1016
- EPA WaterSense®
- Indicates compliance to ICC/ANSI A117.1

▲ Designate Proper Finish Suffix

Delta Faucet Company reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or [www.deltafaucet.com](http://www.deltafaucet.com) for finish options and product availability.  
DSP-B-T14063, REV. C

**Delta Faucet Company**  
55 E. 111th Street, Indianapolis, IN 46280  
350 South Edgeware Road, St. Thomas, ON N5P 4L1  
© 2020 Delta Faucet Company

DS  
MT F M

PW2 LOT 353 - MAIN HOUSE MAIN BATHROOM AND PRIMARY ENSUITE, INCOME SUITE BATHROOM VANITY FAUCETS (MATTE BLACK)



LAVATORY FAUCETS

- ☐ Kitano™ Collection
- ☐ Single Handle Deck Mount

STANDARD SPECIFICATIONS:

- Max flow rate 1.2 gpm (4.5 L/min) (Aerated pressure compensating)
- Standard single hole mount or three hole mount with optional - 6.125" (154 mm) Escutcheon (sold seperately)
- Poly-braided supply lines
- 3.0" (75 mm) max. deck thickness
- Ceramic cartridge
- Hot-Cold indicator
- Metal lever handle
- Solid brass body
- 29.5" (751 mm) long flexible supply lines with 9/16" supply fittings
- Rigid Spout
- Models have 50/50 drain with pop-up type fitting with plated flange and stopper
- "-LPU" models are supplied less the 50/50 drain with pop-up type fitting with plated flange and stopper


OPTIONAL ACCESSORIES (sold seperately)

- RP100784▲ - 6-1/8" (154 mm) escutcheon
- 33W576▲ - push pop-up with overflow holes



COMPLIES WITH

- ASME A112.18.1 / CSA B125.1
- EPA WaterSense®
- Verified compliant with 0.25% weighted average Pb content regulations
- Indicates compliance to ICC/ANSI A117.1

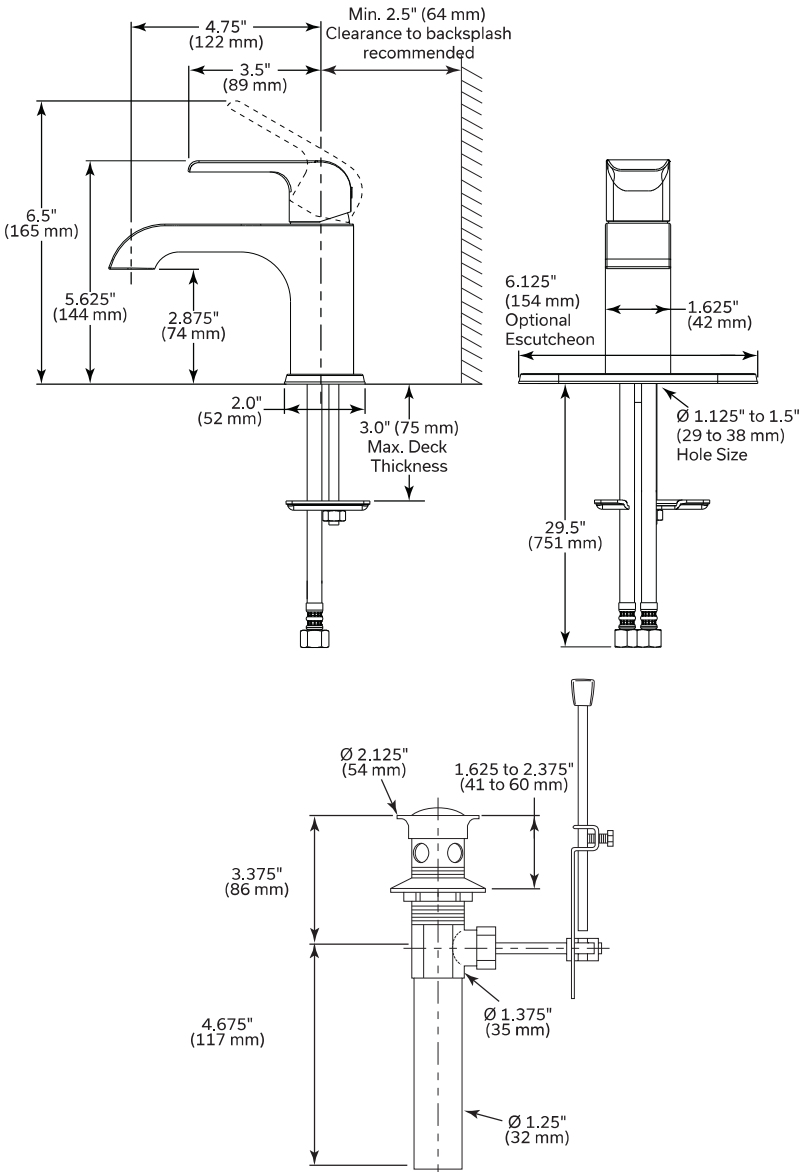

▲ Designate Proper Finish Suffix

WaterSense® is a registered trademark of the U.S. Environmental Protection Agency  
**NOTICE** Dimensions are for reference only. Measurements may vary ± 0.25" (6 mm)

Delta Faucet Company reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. See current full-line price book or [www.deltafaucet.ca](http://www.deltafaucet.ca) for finish options and product availability.

**Delta Faucet Company**  
350 South Edgeware Road, St. Thomas, ON N5P 4L1  
55 E. 111th Street, Indianapolis, IN 46280  
© 2021 Delta Faucet Company

**DSP-L-563LF, Rev. B**

DS  
Mt F M