

QUOTE BY: Jeff H

SOLD TO: PHOENIX HOMES - WHITE TAIL RIDGE

QUOTE #: JANG04942



SHIP TO: 148 FRANK FISHER CRES
OTTAWA, ON K0A 1A0


PROJECT NAME: LOT 123 PH 4 - NEWINGTON Elev R 5 BEDROOM


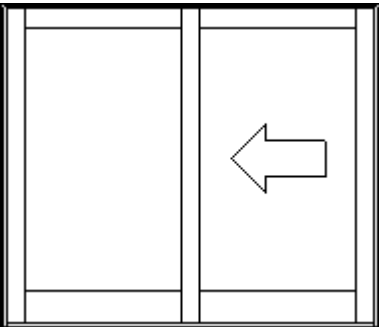


PO#:

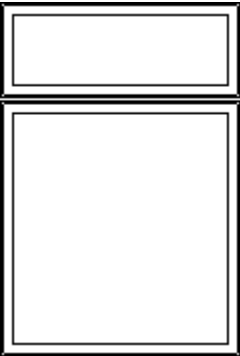


REFERENCE: G.O.L BLACK




Ship Via: Ground/Next Truck

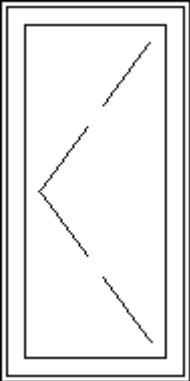

LINE NO.	LOCATION SIZE INFO	BOOK CODE DESCRIPTION	QTY
Line-1	RR-MBED	C2460-2	
	Rough Opening: 49 X 61	V Csmnt 2W (Frame= 48 x 60) Black)** : L /F , 6 5/8 , 6 5/8 ,Parent Jamb 0 Primed Jamb ,BUW= 24 - 3mmLowE/13mm/3mm **(Argon Gas)** **(Multi-Point Lock)** No Nail Fin , L/a 13.26 , , Egress: None , , U-Factor: 1.59 , Energy Rating: 31 , SHGC: 0.46 , ,WT: 90.21 lb NRCan No NR5692-12164032-ES PGR: N/A STCP1-28 STCP2-27 PEV 2024.3.0.4617/PDV 7.274 (08/28/24) UW	
			
	Viewed from Exterior. Scale: 1/4" = 1'		
			1
Line-2	RR-MBED	C2460-2	
	Rough Opening: 49 X 61	V Csmnt 2W (Frame= 48 x 60) Black)** : F /R , 6 5/8 , 6 5/8 ,Parent Jamb 0 Primed Jamb ,BUW= 24 - 3mmLowE/13mm/3mm **(Argon Gas)** **(Multi-Point Lock)** No Nail Fin , L/a 13.26 , , Egress: None , , U-Factor: 1.59 , Energy Rating: 31 , SHGC: 0.46 , ,WT: 90.21 lb NRCan No NR5692-12164032-ES PGR: N/A STCP1-27 STCP2-28 PEV 2024.3.0.4617/PDV 7.274 (08/28/24) UW	
			
	Viewed from Exterior. Scale: 1/4" = 1'		
			1

LINE NO.	LOCATION SIZE INFO	BOOK CODE DESCRIPTION	QTY
Line-3	RR-OTB	P3676	
	Rough Opening: 37 X 77	V Pict 1W (Frame= 36 x 76) Black)** : F , 6 5/8 , 6 5/8 ,Parent Jamb 0 Primed Jamb - 3mmLowE/13mm/3mm **(Argon Gas)** No Nail Fin , L/a 14.42 , , U-Factor: 1.59 , Energy Rating: 36 , SHGC: 0.53 , ,WT: 71.98 lb NRCan No NR5692-12164194-ES PGR: N/A STCP1-27 Product Qualifies For Canadian ENERGY STAR PEV 2024.3.0.4617/PDV 7.274 (08/28/24) UW	
			
	Viewed from Exterior. Scale: 1/4" = 1'		1
Line-4	RR-OTB	P6076	
	Rough Opening: 61 X 77	V Pict 1W (Frame= 60 x 76) Black)** : F , 6 5/8 , 6 5/8 ,Parent Jamb 0 Primed Jamb - 6mmLowE/13mm/6mm **(Argon Gas)** No Nail Fin , L/a 26.05 , , U-Factor: 1.59 , Energy Rating: 34 , SHGC: 0.5 , ,WT: 189.65 lb NRCan No NR5692-9874674-ES PGR: N/A STCP1-29 Product Qualifies For Canadian ENERGY STAR PEV 2024.3.0.4617/PDV 7.274 (08/28/24) UW	
			
	Viewed from Exterior. Scale: 1/4" = 1'		1
Line-5	RR-OTB	P3676	
	Rough Opening: 37 X 77	V Pict 1W (Frame= 36 x 76) Black)** : F , 6 5/8 , 6 5/8 ,Parent Jamb 0 Primed Jamb - 3mmLowE/13mm/3mm **(Argon Gas)** No Nail Fin , L/a 14.42 , , U-Factor: 1.59 , Energy Rating: 36 , SHGC: 0.53 , ,WT: 71.98 lb NRCan No NR5692-12164194-ES PGR: N/A STCP1-27 Product Qualifies For Canadian ENERGY STAR PEV 2024.3.0.4617/PDV 7.274 (08/28/24) UW	
			
	Viewed from Exterior. Scale: 1/4" = 1'		1

LINE NO.	LOCATION SIZE INFO	BOOK CODE DESCRIPTION	QTY
Line-6	RR-BED3	C2460-3	
	Rough Opening: 73 X 61	V Csmnt 3W (Frame= 72 x 60) Black)** : F /L /F , 6 5/8 , 6 5/8 ,Parent Jamb 0 Primed Jamb ,BUW= 24 - 3mmLowE/13mm/3mm **(Argon Gas)** **(Multi-Point Lock)** No Nail Fin , L/a 19.89 , , Egress: None , , U-Factor: 1.59 , Energy Rating: 31 , SHGC: 0.46 , ,WT: 134.78 lb NRCan No NR5692-12164032-ES PGR: N/A STCP1-27 STCP2-28 STCP3-27 PEV 2024.3.0.4617/PDV 7.274 (08/28/24) UW	
			
	Viewed from Exterior. Scale: 1/4" = 1'		1
Line-7	RR-BKST	VPD2 80610	
	Rough Opening: 96.5 X 82.5	V PD 2 Wide (Frame= 95 1/2 x 81 1/2) FX / OP , Black)** ,Jamb= 6 5/8 , 4mmLowETemp/13mm/4mmTemp A-Gas , (Std Lock , , ScrnCol: ** Black ** , L/a 42.48 , PGR: R-PG55 , Air: A3 , DP: +2640/-2640 Pa , Water: 400 Pa SHGC: 0.53 , , U-Factor 1.65 , , Energy Rating: 34 ,WT 269.22 lb This product qualifies for Canadian ENERGY STAR PEV 2024.3.0.4617/PDV 7.274 (08/28/24) UW	
			
	Viewed from Exterior. Scale: 1/4" = 1'		1
Line-8	RR-GREAT	Main Line Item	
	Rough Opening: 37 X 89	V Csmnt Mull (NoShp) (OA Frame= 36 x 88) Factory Mull Int= , Black)** , ,Jamb= 6 5/8 , , 6 5/8 ,BOX= NO MODEL ,MODEL= NO MODEL ,REINFORCEMENT= NO Primed Jamb No Nail Fin PEV 2024.3.0.4617/PDV 7.274 (08/28/24) UW	
	 		
	Viewed from Exterior. Scale: 1/4" = 1'		1

LINE NO.	LOCATION SIZE INFO	BOOK CODE DESCRIPTION	QTY
Line-9	RR-GREAT	Main Line Item	
	Rough Opening: 61 X 89	V Csmnt Mull (NoShp) (OA Frame= 60 x 88) Factory Mull Int= , Black)** , ,Jamb= 6 5/8 , , 6 5/8 ,BOX= NO MODEL ,MODEL= NO MODEL ,REINFORCEMENT= NO Primed Jamb No Nail Fin PEV 2024.3.0.4617/PDV 7.274 (08/28/24) UW	
			
	Viewed from Exterior. Scale: 1/4" = 1'		1
Line-10	RR-GREAT	Main Line Item	
	Rough Opening: 37 X 89	V Csmnt Mull (NoShp) (OA Frame= 36 x 88) Factory Mull Int= , Black)** , ,Jamb= 6 5/8 , , 6 5/8 ,BOX= NO MODEL ,MODEL= NO MODEL ,REINFORCEMENT= NO Primed Jamb No Nail Fin PEV 2024.3.0.4617/PDV 7.274 (08/28/24) UW	
			
	Viewed from Exterior. Scale: 1/4" = 1'		1
Line-11	RR-INLAW	VPD2 60610	
	Rough Opening: 72.5 X 82.5	V PD 2 Wide (Frame= 71 1/2 x 81 1/2) OP / FX , Black)** ,Jamb= 6 5/8 , 3mmLowETemp/13mm/3mmTemp A-Gas , (Std Lock , , ScrnCol: ** Black ** , L/a 30.62 , PGR: R-PG55 , Air: A3 , DP: +2640/-2640 Pa , Water: 400 Pa SHGC: 0.55 , , U-Factor 1.7 , , Energy Rating: 34 ,WT 179.88 lb This product qualifies for Canadian ENERGY STAR PEV 2024.3.0.4617/PDV 7.274 (08/28/24) UW	
			
	Viewed from Exterior. Scale: 1/4" = 1'		1


LINE NO.	LOCATION SIZE INFO	BOOK CODE DESCRIPTION	QTY
Line-12	RR-BSMT	C3664-1	
Rough Opening: 37 X 65		V Csmnt 1W (Frame= 36 x 64) Black)** : L , 6 5/8 , 6 5/8 ,Parent Jamb 0 Primed Jamb - 3mmLowE/13mm/3mm **(Argon Gas)** Dual Arm Operator **(Multi-Point Lock)** No Nail Fin , L/a 11.94 , , Egress: 3rd Floor , , U-Factor: 1.59 , Energy Rating: 31 , SHGC: 0.46 , ,WT: 69.55 lb NRCan No NR5692-12164032-ES PGR: CW-PG70-C , Air: A3 , DP: +3360/-3360 Pa , Water: 730 Pa STCP1-28 PEV 2024.3.0.4617/PDV 7.274 (08/28/24) UW	
			
Viewed from Exterior. Scale: 1/4" = 1'			1
Line-13	RR-BSMT	VPD2 60610	
Rough Opening: 72.5 X 82.5		V PD 2 Wide (Frame= 71 1/2 x 81 1/2) OP / FX , Black)** ,Jamb= 6 5/8 , 3mmLowETemp/13mm/3mmTemp A-Gas , (Std Lock , , ScrnCol: ** Black ** , L/a 30.62 , PGR: R-PG55 , Air: A3 , DP: +2640/-2640 Pa , Water: 400 Pa SHGC: 0.55 , , U-Factor 1.7 , , Energy Rating: 34 ,WT 179.88 lb This product qualifies for Canadian ENERGY STAR PEV 2024.3.0.4617/PDV 7.274 (08/28/24) UW	
			
Viewed from Exterior. Scale: 1/4" = 1'			1
Line-14	RR-BSMT	C3664-1	
Rough Opening: 37 X 65		V Csmnt 1W (Frame= 36 x 64) Black)** : R , 6 5/8 , 6 5/8 ,Parent Jamb 0 Primed Jamb - 3mmLowE/13mm/3mm **(Argon Gas)** Dual Arm Operator **(Multi-Point Lock)** No Nail Fin , L/a 11.94 , , Egress: 3rd Floor , , U-Factor: 1.59 , Energy Rating: 31 , SHGC: 0.46 , ,WT: 69.55 lb NRCan No NR5692-12164032-ES PGR: CW-PG70-C , Air: A3 , DP: +3360/-3360 Pa , Water: 730 Pa STCP1-28 PEV 2024.3.0.4617/PDV 7.274 (08/28/24) UW	
			
Viewed from Exterior. Scale: 1/4" = 1'			1

LINE NO.	LOCATION SIZE INFO	BOOK CODE DESCRIPTION	QTY
Line-15 Rough Opening: 25 X 61 	SD-SHARE/BATH	C2460-1 V Csmnt 1W (Frame= 24 x 60) Black)** : L , 6 5/8 , 6 5/8 ,Parent Jamb 0 Primed Jamb - 3mmLowE/13mm/3mm **(Argon Gas)** **(Multi-Point Lock)** No Nail Fin , L/a 6.63 , , Egress: None , , U-Factor: 1.59 , Energy Rating: 31 , SHGC: 0.46 , ,WT: 48.10 lb NRCan No NR5692-12164032-ES PGR: CW-PG70-C , Air: A3 , DP: +3360/-3360 Pa , Water: 730 Pa STCP1-28 PEV 2024.3.0.4617/PDV 7.274 (08/28/24) UW	1
Line-16 Rough Opening: 25 X 49 	SD-INLAW/ENS	C2448-1 V Csmnt 1W (Frame= 24 x 48) Black)** : L , 6 5/8 , 6 5/8 ,Parent Jamb 0 Primed Jamb - 3mmLowE/13mm/3mm **(Argon Gas)** **(Multi-Point Lock)** No Nail Fin , L/a 5.15 , , Egress: None , , U-Factor: 1.59 , Energy Rating: 31 , SHGC: 0.46 , ,WT: 39.89 lb NRCan No NR5692-12164032-ES PGR: CW-PG70-C , Air: A3 , DP: +3360/-3360 Pa , Water: 730 Pa STCP1-28 PEV 2024.3.0.4617/PDV 7.274 (08/28/24) UW	1
Line-17 Rough Opening: 25 X 61 	SD-BED4/ENS	C2460-1 V Csmnt 1W (Frame= 24 x 60) Black)** : L , 6 5/8 , 6 5/8 ,Parent Jamb 0 Primed Jamb (Bars: 5/8" Int: Custom Colonial 2 W x 2 H Black)**) - - 3mmLowE/13mm/3mm **(Argon Gas)** **(Multi-Point Lock)** No Nail Fin , L/a 6.63 , , Egress: None , , U-Factor: 1.65 , Energy Rating: 29 , SHGC: 0.43 , ,WT: 48.10 lb NRCan No NR5692-12164059-ES PGR: CW-PG70-C , Air: A3 , DP: +3360/-3360 Pa , Water: 730 Pa STCP1-28 PEV 2024.3.0.4617/PDV 7.274 (08/28/24) UW	1

LINE NO.	LOCATION SIZE INFO	BOOK CODE DESCRIPTION	QTY
----------	-----------------------	--------------------------	-----

Line-18 SD-OFFICE

Rough Opening: 73 X 65



Viewed from Exterior. Scale: 1/4" = 1'


C2464-3

V Csmnt 3W (Frame= 72 x 64) Black)** : F /R /F , 6 5/8 , 6 5/8
 ,Parent Jamb 0 Primed Jamb
 ,BUW= 24 (Bars: 5/8" Int: Custom Colonial 2 W x 2 H Black)**) -
 - 3mmLowE/13mm/3mm **(Argon Gas)**
 (Multi-Point Lock) No Nail Fin , L/a 21.39 ,
 , Egress: None , , U-Factor: 1.59 , Energy Rating: 33 , SHGC: 0.49 ,
 ,WT: 142.73 lb NRCan No NR5692-12164221-ES
 PGR: N/A STCP1-27 STCP2-28 STCP3-27
 PEV 2024.3.0.4617/PDV 7.274 (08/28/24) UW

1

Line-19 SD-DIN

Rough Opening: 31 X 65



Viewed from Exterior. Scale: 1/4" = 1'


C3064-1

V Csmnt 1W (Frame= 30 x 64) Black)** : L , 6 5/8 , 6 5/8 ,Parent
 Jamb 0 Primed Jamb
 (Bars: 5/8" Int: Custom Colonial 2 W x 2 H Black)**) -
 - 3mmLowE/13mm/3mm **(Argon Gas)**
 Dual Arm Operator **(Multi-Point Lock)** No Nail Fin , L/a 9.53 ,
 , Egress: Bedroom , , U-Factor: 1.65 , Energy Rating: 29 , SHGC: 0.43
 , ,WT: 60.68 lb NRCan No NR5692-12164059-ES
 PGR: CW-PG70-C , Air: A3 , DP: +3360/-3360 Pa , Water: 730 Pa
 STCP1-28
 PEV 2024.3.0.4617/PDV 7.274 (08/28/24) UW

1

Line-20 SD-DIN

Rough Opening: 31 X 65









Viewed from Exterior. Scale: 1/4" = 1'

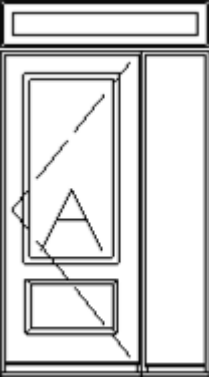


P3064

V Pict 1W (Frame= 30 x 64) Black)** : F , 6 5/8 , 6 5/8 ,Parent Jamb
 0 Primed Jamb
 (Bars: 5/8" Int: Custom Colonial 2 W x 2 H Black)**) -
 - 3mmLowE/13mm/3mm **(Argon Gas)**
 No Nail Fin , L/a 9.53 ,
 , U-Factor: 1.59 , Energy Rating: 33 , SHGC: 0.49 , ,WT: 52.95 lb
 NRCan No NR5692-12164221-ES
 PGR: N/A STCP1-27
 PEV 2024.3.0.4617/PDV 7.274 (08/28/24) UW


1

LINE NO.	LOCATION SIZE INFO	BOOK CODE DESCRIPTION	QTY
Line-21	SD-BSMT	C3640-1	
Rough Opening: 37 X 41		V Csmnt 1W (Frame= 36 x 40) Black)** : L , 6 5/8 , 6 5/8 ,Parent Jamb 0 Primed Jamb - 3mmLowE/13mm/3mm **(Argon Gas)** **(Multi-Point Lock)** No Nail Fin , L/a 6.98 , , Egress: Bedroom , , U-Factor: 1.59 , Energy Rating: 31 , SHGC: 0.46 , ,WT: 47.40 lb NRCan No NR5692-12164032-ES PGR: CW-PG70-C , Air: A3 , DP: +3360/-3360 Pa , Water: 730 Pa STCP1-28 PEV 2024.3.0.4617/PDV 7.274 (08/28/24) UW	
			
Viewed from Exterior. Scale: 1/2" = 1'			1
Line-22	FR-BED5	C3072-2	
Rough Opening: 61 X 73		V Csmnt 2W (Frame= 60 x 72) Black)** : L /F , 6 5/8 , 6 5/8 ,Parent Jamb 0 Primed Jamb ,BUW= 30 (Bars: 5/8" Int: Custom Colonial 2 W x 2 H Black)**) - - 3mmLowE/13mm/3mm **(Argon Gas)** Dual Arm Operator **(Multi-Point Lock)** No Nail Fin , L/a 21.72 , , Egress: Bedroom , , U-Factor: 1.59 , Energy Rating: 33 , SHGC: 0.49 , ,WT: 126.36 lb NRCan No NR5692-12164221-ES PGR: N/A STCP1-28 STCP2-27 PEV 2024.3.0.4617/PDV 7.274 (08/28/24) UW	
			
Viewed from Exterior. Scale: 1/4" = 1'			1
Line-23	FR-BED5	C3072-2	
Rough Opening: 61 X 73		V Csmnt 2W (Frame= 60 x 72) Black)** : F /R , 6 5/8 , 6 5/8 ,Parent Jamb 0 Primed Jamb ,BUW= 30 (Bars: 5/8" Int: Custom Colonial 2 W x 2 H Black)**) - - 3mmLowE/13mm/3mm **(Argon Gas)** Dual Arm Operator **(Multi-Point Lock)** No Nail Fin , L/a 21.72 , , Egress: Bedroom , , U-Factor: 1.65 , Energy Rating: 29 , SHGC: 0.43 , ,WT: 126.36 lb NRCan No NR5692-12164059-ES PGR: N/A STCP1-27 STCP2-28 PEV 2024.3.0.4617/PDV 7.274 (08/28/24) UW	
			
Viewed from Exterior. Scale: 1/4" = 1'			1

LINE NO.	LOCATION SIZE INFO	BOOK CODE DESCRIPTION	QTY
Line-24	FR-BED4	C2460-3	
Rough Opening: 73 X 61		V Csmnt 3W (Frame= 72 x 60) Black)** : F /L /F , 6 5/8 , 6 5/8 ,Parent Jamb 0 Primed Jamb ,BUW= 24 (Bars: 5/8" Int: Custom Colonial 2 W x 2 H Black)**) - - 3mmLowE/13mm/3mm **(Argon Gas)** **(Multi-Point Lock)** No Nail Fin , L/a 19.89 , , Egress: None , , U-Factor: 1.59 , Energy Rating: 33 , SHGC: 0.49 , ,WT: 134.78 lb NRCan No NR5692-12164221-ES PGR: N/A STCP1-27 STCP2-28 STCP3-27 PEV 2024.3.0.4617/PDV 7.274 (08/28/24) UW	
			
Viewed from Exterior. Scale: 1/4" = 1'			1
Line-25	FR-BED4	C2460-3	
Rough Opening: 73 X 61		V Csmnt 3W (Frame= 72 x 60) Black)** : F /R /F , 6 5/8 , 6 5/8 ,Parent Jamb 0 Primed Jamb ,BUW= 24 (Bars: 5/8" Int: Custom Colonial 2 W x 2 H Black)**) - - 3mmLowE/13mm/3mm **(Argon Gas)** **(Multi-Point Lock)** No Nail Fin , L/a 19.89 , , Egress: None , , U-Factor: 1.59 , Energy Rating: 33 , SHGC: 0.49 , ,WT: 134.78 lb NRCan No NR5692-12164221-ES PGR: N/A STCP1-27 STCP2-28 STCP3-27 PEV 2024.3.0.4617/PDV 7.274 (08/28/24) UW	
			
Viewed from Exterior. Scale: 1/4" = 1'			1
Line-26	FR-MBED/ENS	C3060-1	
Rough Opening: 31 X 61		V Csmnt 1W (Frame= 30 x 60) Black)** : R , 6 5/8 , 6 5/8 ,Parent Jamb 0 Primed Jamb (Bars: 5/8" Int: Custom Colonial 2 W x 2 H Black)**) - - 3mmLowE/13mm/3mm **(Argon Gas)** Dual Arm Operator **(Multi-Point Lock)** No Nail Fin , L/a 8.87 , , Egress: Bedroom , , U-Factor: 1.65 , Energy Rating: 29 , SHGC: 0.43 , ,WT: 57.47 lb NRCan No NR5692-12164059-ES PGR: CW-PG70-C , Air: A3 , DP: +3360/-3360 Pa , Water: 730 Pa STCP1-28 PEV 2024.3.0.4617/PDV 7.274 (08/28/24) UW	
			
Viewed from Exterior. Scale: 1/4" = 1'			1

LINE NO.	LOCATION SIZE INFO	BOOK CODE DESCRIPTION	QTY
Line-27	FR-FOYR	Main Line Item	
	Rough Opening: 53.375 X 94.6875	V Integrated Mull Mull (W/Shp) Rect (OA Frame= 52 3/8 x 93 11/16) Factory Mull Int= , Black)** , ,Jamb= 6 5/8 , Standard Jamb Extension ,BOX= 2 Box ,MODEL= 2A ,REINFORCEMENT= NO Install: NONE PEV 2024.3.0.4617/PDV 7.274 (08/28/24) UW	
			
	Viewed from Exterior. Scale: 1/4" = 1'		1
Line-28	FR-OFFICE	C2464-2	
	Rough Opening: 49 X 65	V Csmnt 2W (Frame= 48 x 64) Black)** : L /F , 6 5/8 , 6 5/8 ,Parent Jamb 0 Primed Jamb ,BUW= 24 (Bars: 5/8" Int: Custom Colonial 2 W x 2 H Black)**) - - 3mmLowE/13mm/3mm **(Argon Gas)** **(Multi-Point Lock)** No Nail Fin , L/a 14.26 , , Egress: None , , U-Factor: 1.59 , Energy Rating: 33 , SHGC: 0.49 , ,WT: 95.47 lb NRCan No NR5692-12164221-ES PGR: N/A STCP1-28 STCP2-27 PEV 2024.3.0.4617/PDV 7.274 (08/28/24) UW	
			
	Viewed from Exterior. Scale: 1/4" = 1'		1
Line-29	FR-OFFICE	C2464-2	
	Rough Opening: 49 X 65	V Csmnt 2W (Frame= 48 x 64) Black)** : F /R , 6 5/8 , 6 5/8 ,Parent Jamb 0 Primed Jamb ,BUW= 24 (Bars: 5/8" Int: Custom Colonial 2 W x 2 H Black)**) - - 3mmLowE/13mm/3mm **(Argon Gas)** **(Multi-Point Lock)** No Nail Fin , L/a 14.26 , , Egress: None , , U-Factor: 1.65 , Energy Rating: 29 , SHGC: 0.43 , ,WT: 95.47 lb NRCan No NR5692-12164059-ES PGR: N/A STCP1-27 STCP2-28 PEV 2024.3.0.4617/PDV 7.274 (08/28/24) UW	
			
	Viewed from Exterior. Scale: 1/4" = 1'		1


LINE NO.	LOCATION SIZE INFO	BOOK CODE DESCRIPTION	QTY
Line-30	FR-DIN	C3064-1	
Rough Opening: 31 X 65		V Csmnt 1W (Frame= 30 x 64) Black)** : L , 6 5/8 , 6 5/8 ,Parent Jamb 0 Primed Jamb (Bars: 5/8" Int: Custom Colonial 2 W x 2 H Black)**) - - 3mmLowE/13mm/3mm **(Argon Gas)** Dual Arm Operator **(Multi-Point Lock)** No Nail Fin , L/a 9.53 , , Egress: Bedroom , , U-Factor: 1.65 , Energy Rating: 29 , SHGC: 0.43 , ,WT: 60.68 lb NRCan No NR5692-12164059-ES PGR: CW-PG70-C , Air: A3 , DP: +3360/-3360 Pa , Water: 730 Pa STCP1-28 PEV 2024.3.0.4617/PDV 7.274 (08/28/24) UW	



Viewed from Exterior. Scale: 1/4" = 1'

1

Line-31	INT-G/HSE	WS-B	
Rough Opening: 38.3125 X 82.625		W Sng36" B01 (Frame= 37 5/16 x 81 5/8) LH , 6 5/8 Steel Slab Primed DB (NI) Spring Assist Chrome , L/a 0 , Dr 'U' Factor: 0.85 , Dr SHGC: 0.01 Energy Star Zone: 3 Install: NONE PGR: N/A Dr NRCan JEL-M-2-07953-00001 ,WT 65.00 lb This product qualifies for Canadian ENERGY STAR PEV 2024.3.0.4617/PDV 7.274 (08/28/24) UW	



Viewed from Exterior. Scale: 1/4" = 1'

1

Total Units: 31

Patio doors on this quote have protective film. Direct sunlight may cause protective film to permanently adhere to surface. Remove film immediately after installation.

It is the responsibility of the Builder/Purchaser to ensure that all windows and doors in the quote above are in accordance with, but not limited to, the following:

1. All current Zoning requirements.
2. All current Fire Regulations.
3. All current Building Standard Regulations, including, but not limited to, the Local Building code.

Presented by: _____

Date: _____

Purchaser: _____

Date: _____