

ELECTRIC WALL OVEN INSTALLATION INSTRUCTIONS
(with side-by-side and cooktop combination specialty installations)

INSTALLATION AND SERVICE MUST BE PERFORMED BY A QUALIFIED INSTALLER.
IMPORTANT: SAVE FOR LOCAL ELECTRICAL INSPECTOR'S USE.
READ AND SAVE THESE INSTRUCTIONS FOR FUTURE REFERENCE.

United States
and Canada



WARNING FOR YOUR SAFETY: Do not store or use gasoline or other flammable vapors and liquids in the vicinity of this or any other appliance.

Your new wall oven has been designed to fit a variety of cutout sizes to make the job of installing easier. The first step of your installation should be to measure your current cutout dimensions and compare them to the cutout dimensions chart below for your model. You may find little or no cabinet work being necessary.

SINGLE WALL OVEN - SINGLE INSTALLATION
For specialty installations, see pages 8-10

WARNING Do not remove spacers (if equipped) on the side walls of the built-in oven. These spacers center the oven in the space provided. The oven must be centered to prevent excess heat buildup that may result in heat damage or fire.

- NOTES:
- 1. Base must be capable of supporting 150 pounds (68 kg) for 27" models and 200 pounds (90 kg) for 30" models.
 - 2. Allow at least 21" (53.3 cm) clearance in front of oven for door depth when it is open.
 - 3. Dimension G (cutout depth) is critical to the proper installation of the built-in oven. If the oven trim does not butt against the cabinet, or if noise is heard on convection models, verify dimension G to assure it is the required depth.
 - 4. For a cutout height greater than the maximum (H), add one 2" (5 cm) wide wood shim of appropriate height to each side of the opening under the appliance side rails. You can order a larger bottom trim through a Service Center.

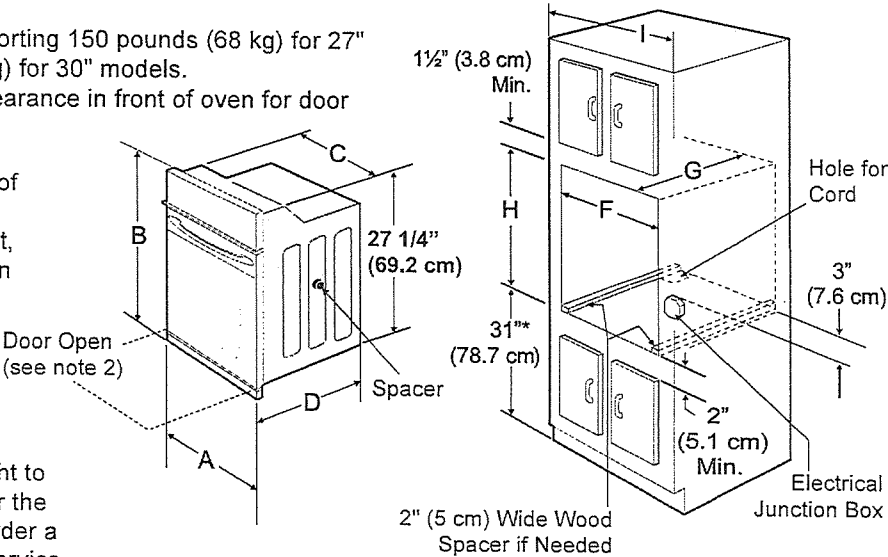


Figure 1
27" and 30" Single Wall Ovens

PRODUCT DIMENSIONS						
MODEL	A		B	C		D
27" (68.6 cm)	27 (68.6)		29½ (74.9)	24⅝ (62.5)		24¾ (62.9)
30" (76.2 cm)	30 (76.2)		29 (73.7)	28¼ (71.8)		24¾ (62.9)
CUTOUT DIMENSIONS AND CABINET WIDTH						
MODEL	F		G	H. Standard Height (**Others, see notes 4 & 5)		I
	Min.	Max.	Min.	Min.	Max.	
27" (68.6 cm)	24⅞ (63.2)	25¼ (64.1)	24 (61.0)	27¼ (69.2)	28¼ (71.8)	27⅝ (68.9) Min
* 30" (76.2 cm)	28½ (72.4)	29 (73.7)	24 (61.0)	27¼ (69.2)	28⅝ (71.4)	30⅝ (76.5) Min

All dimensions are in inches (cm).
Printed in U.S.A.

PN 807153706 Rev. B (2019/10)
English – pages 1-10
Español – páginas 11-20
Français – pages 21-30

RL 304 Jan 24/2020

BUILT-IN MICROWAVE INSTALLATION INSTRUCTIONS

- NOTES:
- 1. The base must be capable of supporting 155 pounds (70 kg).
 - 2. Allow at least 21" (53.3 cm) clearance in front of the oven for door depth when it is open.
 - 3. Dimension G (cutout depth) is critical to the proper installation of the built-in oven. If the oven decorative trim does not lie flush against the cabinet, or if noise is heard on models, verify dimension G to assure that it is the required depth.

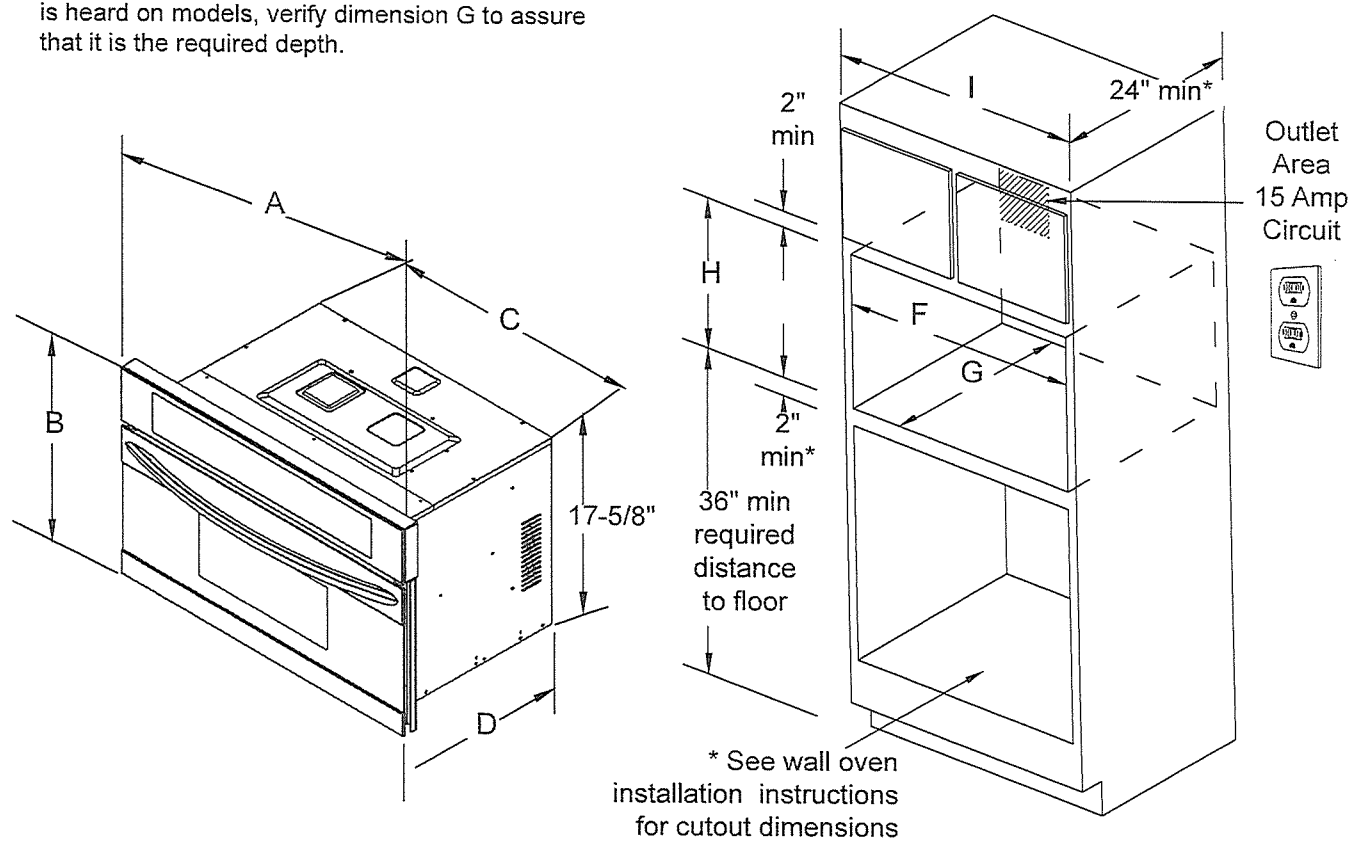


Figure 3: Microwave with Wall Oven

PRODUCT DIMENSIONS						
MODEL	A		B	C		D
Microwave Oven	30		19-1/4	24-5/8		19-3/4
CUTOUT DIMENSIONS AND CABINET WIDTH						
MODEL	F		G	H		I
	Min.	Max.	Min	Min.	Max.	Min.
* Microwave Oven	28	28-3/8	22	17-3/4	18	30-1/8

All dimensions are in inches (cm).

RL 304 Jan 24³/2020

FGIC3066TB
Frigidaire Gallery 30" Induction
Cooktop

FRIGIDAIRE
GALLERY

General Specifications

Shipping Weight (lbs)	60
Power Type	Induction
Size	30"
Installation Type	Drop-In
Collection	Frigidaire Gallery
Dimensions: Cut-Out	
Height	3-5/8"
Width	28-1/2" - 29-7/8"
Depth	19-5/8" - 20-1/2"
Cooktop	
Center Rear	10" 2500/3800 Watts (Induction)
Right Front	7" 1800/2600 Watts (Induction)
Left Front	7" 1800/2600 Watts (Induction)
Cooking Surface	Black Vitroceramic Glass
Hot-Surface Indicator Light	4 (integrated in display)
Left Rear	6" - 1450/2000 Watts (Induction)

Electrical Specifications

Connection Location	Right Rear
Connected Load @ 240V	7.2/6.2
Amps @ 240 Volts	35.0 / 35.1
Voltage Rating	240V / 208V 60Hz
Min Circuit Required	30A

Certifications & Approvals

Sabbath Mode	No
ADA Compliant - All Brands	Yes
Agency Approval(All Brands)	UL/cUL

Dimensions: Exterior


Height	2-7/8"
Width	30-5/8"
Depth	21-3/8"

Controls

Control Location	Center front
Control Type	Glass-Touch - Slew Pad
Display Type	Digital (Red LED)

Installation Type

Oven Combo Approved	Yes
---------------------	-----



Note: For planning purposes only. Always consult local and national electric, gas and plumbing codes. Refer to Product Installation Guide for detailed installation instructions on the web at frigidaire.com / frigidaire.ca.
Specifications subject to change. Accessories information available on the web at frigidaire.com / frigidaire.ca

FRIGIDAIRE

USA • 10200 David Taylor Drive • Charlotte, NC 28262 • 1-800-FRIGIDAIRE • frigidaire.com
CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4 • 1-800-265-8352 • frigidaire.ca

FGIC3066TB
©2017 Electrolux Home Products, Inc.

RL 304 Jan 24/2020