



CONSTRUCTION SUMMARY

North Oakville - 44 - 1 - PEACHTREE (38-05) ELEV A

Registere Plan Number: Municipal Address: Closing: 30-Jul-20

CABINETRY

Inv. 30 21 Line 541 22Oct19 / 18Nov19	1 - KITCHEN: INSTALL ADDITIONAL UPPER CABINETRY DUE TO THE DELETION OF SERVERY WALL AND MOVING THE KITCHEN WALL INTO THE DINING ROOM BY 1 FOOT Note:
Inv. 30 22 Line 542 22Oct19 / 18Nov19	1 - KITCHEN: INSTALL ADDITIONAL BASE CABINETRY DUE TO THE DELETION OF SERVERY WALL AND MOVING THE KITCHEN WALL INTO THE DINING ROOM BY 1 FOOT Note:
Inv. 30 28 Line 548 22Oct19 / 18Nov19	1 - KITCHEN: DELETE UPPER CABINETS ABOVE STOVE FOR FUTURE CHIMNEY STYLE FAN Note:
Inv. 30 29 Line 549 22Oct19 / 18Nov19	1 - KITCHEN: INSTALL VALANCE UNDER CABINETS Note: NOTE: PAID FOR AT THE STRUCTURAL APPOINTMENT
Inv. 30 30 Line 550 22Oct19 / 18Nov19	20 - KITCHEN: INSTALL STACKED CABINETRY. SEE SKETCH FOR DIMENTIONS. INCLUDES ADDITIONAL CABINETRY Note:
Inv. 30 31 Line 552 22Oct19 / 18Nov19	1 - KITCHEN: INSTALL CROWN MOULDING ON STACKED CABINETS, INCLUDES ADDITONAL CABINETRY Note:
Inv. 30 32 Line 553 22Oct19 / 18Nov19	1 - KITCHEN: INSTALL DEEP FRIDGE ENCLOSURE WITH 1 GABLE (04H) Note:
Inv. 30 24 Line 544 22Oct19 / 18Nov19	1 - KITCHEN: DEEPEN THE CABINETS ON THE WALL BACKING INTO THE FAMILY ROOM FROM 18" TO 24" TO ACCOMODATE A WALL OVEN UNIT. Note:
Inv. 30 25 Line 545 22Oct19 / 18Nov19	1 - KITCHEN: INSTALL WALL OVEN UNIT (18H). SEE SKETCH FOR LOCATION Note:
Inv. 30 26 Line 546 22Oct19 / 18Nov19	1 - KITCHEN: INSTALL 36" COOKTOP CABINET WITH POT DRAWERS BELOW (24H). SEE SKETCH FOR LOCATION Note:
Inv. 45 47 Line 749 29Nov19 / 29Nov19	1 - KITCHEN: INSTALL 60CM FRIDGE GABLE BETWEEN FRIDGE AND WALL (02H) Note:

CERAMIC TILE

Inv. 30 39 Line 560 22Oct19 / 18Nov19	1 - ENTRY/ POWDER ROOM: INSTALL 5TH UPGRADE TILE THROUGHOUT ENTRY AND POWDER ROOM Note:
--	--



CONSTRUCTION SUMMARY

North Oakville - 44 - 1 - PEACHTREE (38-05) ELEV A

Registere Plan Number: Municipal Address: Closing: 30-Jul-20

Inv.30	1 - KITCHEN: INSTALL 5TH UPGRADE TILE THROUGHOUT KITCHEN, IN LIEU OF
40	STANDARD HARDWOOD
Line 561	Note:
22Oct19 / 18Nov19	

CONSTRUCTION

Inv.13	1 - STAIRCASE: CLOSE OPEN TO BELOW AREA OF STAIRS. FROM MAIN FLOOR T
15	BASEMENT. SEE SKETCH
Line 252	Note:
3Jul19 / 12Aug19	
Inv.13	1 - MASTER BEDROOM: REINFORCE STANDARD LIGHT IN MASTER BEDROOM FOR FUTURE
16	CEILING FAN
Line 263	Note:
3Jul19 / 12Aug19	
Inv.13	1 - KITCHEN: DELETE WALL BETWEEN KITCHEN CABINETS AND SERVERY. ADD
7	ADDITIONAL CABINETS/GRANITE, AS NEEDED
Line 79	Note:
3Jul19 / 12Aug19	
Inv.13	1 - KITCHEN: MOVE WALL BETWEEN KITCHEN AND DINING ROOM INTO DINING ROOM
10	APPROXIMATELY ONE (1) FOOT. WALL SHOULD NOW ALIGN WITH THE WALL OF THE
Line 240	LIBRARY. SEE SKETCH
3Jul19 / 12Aug19	Note:

COUNTERTOP

Inv.30	1 - KITCHEN: INSTALL ADDITIONAL STANDARD GRANITE DUE TO THE DELETION OF
23	SERVERY WALL AND MOVING THE KITCHEN WALL INTO THE DINING ROOM BY 1 FOOT
Line 543	Note:
22Oct19 / 18Nov19	
Inv.30	1 - KITCHEN: GRANITE CUT OUT FOR 36" COOKTOP
27	
Line 547	Note:
22Oct19 / 18Nov19	

ELECTRICAL

Inv.13	1 - KITCHEN: INSTALL RECEPTACLES - ADDITIONAL 15 AMP 120 VOLT RECEPTABLE- FOR
12	GAS STOVE
Line 249	Note:
3Jul19 / 12Aug19	
Inv.13	1 - KITCHEN: INSTALL ELECTRICAL - ROUGH-IN FOR 30 - 40 AMP BUILT-IN WALL OVEN OR
13	COOK TOP. SEE SKETCH FOR LOCATION
Line 250	Note:
3Jul19 / 12Aug19	
Inv.13	1 - CABINET LIGHTING - UNDERMOUNT T-5 LED VALANCE LIGHT (\$200 PER LIGHT)
8	
Line 80	Note:
3Jul19 / 12Aug19	
Inv.13	1 - VALANCE LIGHTING - UNDER CABINET - DOES NOT INCLUDE LIGHTING
9	
Line 81	Note:
3Jul19 / 12Aug19	



CONSTRUCTION SUMMARY

North Oakville - 44 - 1 - PEACHTREE (38-05) ELEV A

Registere Plan Number: Municipal Address: Closing: 30-Jul-20

Inv.13	1 - BELL AND CABLE LOCATION SKETCH. LOCATIONS MAY VARY SLIGHTLY DUE TO JOIST LOCATIONS	Note:
Line 73		
3Jul19 / 12Aug19		
Inv.13	1 - IP 6 CHANNEL ROUGH-IN ONLY	
4		
Line 76		Note:
3Jul19 / 12Aug19		

HARDWOOD FLOORING

Inv.30	1 - GREAT ROOM: INSTALL LEVEL 3 HARDWOOD IN GREAT ROOM	
33		
Line 554		Note:
22Oct19 / 18Nov19		
Inv.30	1 - DINING ROOM: INSTALL LEVEL 3 HARDWOOD IN DINING ROOM	
34		
Line 555		Note:
22Oct19 / 18Nov19		
Inv.30	1 - MAIN HALL: INSTALL LEVEL 3 HARDWOOD IN MAIN HALL	
35		
Line 556		Note:
22Oct19 / 18Nov19		
Inv.30	1 - LIBRARY: INSTALL LEVEL 3 HARDWOOD IN IN LIBRARY	
36		
Line 557		Note:
22Oct19 / 18Nov19		
Inv.30	1 - STAIRCASE: INSTALL SANDED OAK LANDINGS	
37		
Line 558		Note:
22Oct19 / 18Nov19		

HVAC

Inv.13	1 - KITCHEN: INSTALL GAS PIPING AND OTHER - GAS LINE R/I FOR BASEMENT OR MAIN FLOOR - STOVE - UP TO 3/4 INCH LINE	Note:
Line 248		
3Jul19 / 12Aug19		

INTERIOR DOORS & TRIM

Inv.30	2 - LIBRARY: INSTALL TWO (2) 1 PANEL SHAKER FRENCH DOORS	
43		
Line 564		Note:
22Oct19 / 18Nov19		

MISCELLANEOUS

Inv.30	1 - BONUS PACKAGE: \$7500.00 WORTH OF UPGRADES FROM VALERYHOMES DECOR CENTRE IS BEING APPLIED TOWARD THE COLOUR APPOINTMENT	Note:
Line 565		
22Oct19 / 18Nov19		
Inv.30	1 - Purchaser has attended a Colour appointment at the Decor Centre & has DECLINED any additional upgrades and accepts and acknowledges that there will be no further structural changes/additions/deletions to be made	Note:
Line 566		
22Oct19 / 18Nov19		



CONSTRUCTION SUMMARY

North Oakville - 44 - 1 - PEACHTREE (38-05) ELEV A

Registere Plan Number: Municipal Address: Closing: 30-Jul-20

Inv.30	1 - Purchasers are aware & accepts that ANY changes made to upgrades after signing this Purchasers
46	Extra Form are subject to a minimum administration fee of \$500. PLUS a 10% holdback fee
Line 567	Note:
22Oct19 / 18Nov19	
Inv.13	1 - Purchaser has attended a Structural appointment at the Decor Centre & has DECLINED any additional
18	upgrades and accepts and acknowledges that there will be no further structural
Line 266	changes/additions/deletions to be made upon signing on August 8, 2019.
3Jul19 / 12Aug19	Note:
Inv.13	1 - Purchasers are aware & accepts that ANY changes made to upgrades after signing this Purchasers
19	Extra Form are subject to a minimum administration fee of \$500. PLUS a 10% holdback fee.
Line 267	Note:
3Jul19 / 12Aug19	

PAINT

Inv.30	2 - STAIRCASE: STAIN STAIRS TO MOCHACCINO
38	
Line 559	**NOTE: PURCHASER IS AWARE THAT TH ESTAIN ON THE MAPLE FLOORS SELECTED CAN NEVER BE EXACTLY MATCHED ON A RED OAK STAIRCASE
22Oct19 / 18Nov19	Note:

PLUMBING

Inv.30	1 - KITCHEN: INSTALL UPGRADED KITCHEN FAUCET:
41	
Line 562	MOEN ARBOR SINGLE HANDLE PULLDOWN #7594C
22Oct19 / 18Nov19	Note:
Inv.30	1 - KITCHEN: INSTALL UPGRADE KITCHEN SINK:
42	
Line 563	KOHLER STRIVE: K-5285
22Oct19 / 18Nov19	Note:
Inv.13	1 - EXTRA ROUGH-IN LINE FOR FRIDGE ICE MAKER WITH SHUT-OFF
5	
Line 77	Note:
3Jul19 / 12Aug19	
Inv.13	1 - BACKFLOW PREVENTER VALVE
6	
Line 78	Note:
3Jul19 / 12Aug19	

RAILING

Inv.30	1 - STAIRCASE: INSTALL *DISPLAY 3A KNUCKLE SERIES, 1/2" METAL SINGLE
20	KNUCKLE/DBL KNUCKLE, TEXTURED BLACK, ELORA POST
Line 436	Note:
22Oct19 / 18Nov19	

VACCUM/BELL

Inv.13	1 - INTERCOM WIRING - CAT-5E NETWORK CABLE
14	
Line 251	Note:
3Jul19 / 12Aug19	



CONSTRUCTION SUMMARY

North Oakville - 44 - 1 - 1 - PEACHTREE (38-05) ELEV A

Registere Plan Number: Municipal Address: Closing: 30-Jul-20







Inv.13	1 - LIBRARY: INSTALL INTERNET - CAT-6 NETWORK CABLE TO GO IN LIBRARY
2	
Line 74	Note: LOCATIONS MAY VARY SLIGHTLY DUE TO JOIST LOCATIONS
3Jul19 / 12Aug19	
Inv.13	1 - WIRELESS ACCESS POINT PACKAGE - 2-CAT6 NETWORK CABLES AND 2-UBIQUITI AC
3	LITE ACCESS POINTS
Line 75	Note:
3Jul19 / 12Aug19	

WINDOWS

Inv.13	1 - BASEMENT: INSTALL BASEMENT WINDOW - EXTRA STANDARD WINDOW - 30 X 16
17	
Line 265	NOTE: TO BE APPROVED BY CONSTRUCTION. MAY REQUIRE A WINDOW WELL
	Note:
3Jul19 / 12Aug19	

Electrical—(E)
 Cable—(C)
 Telephone—(T)

Lot 44 

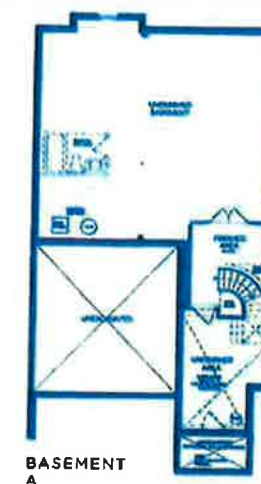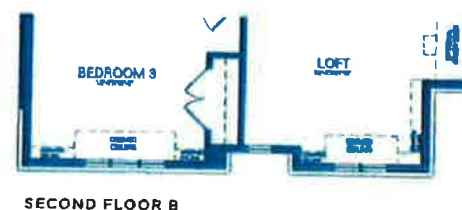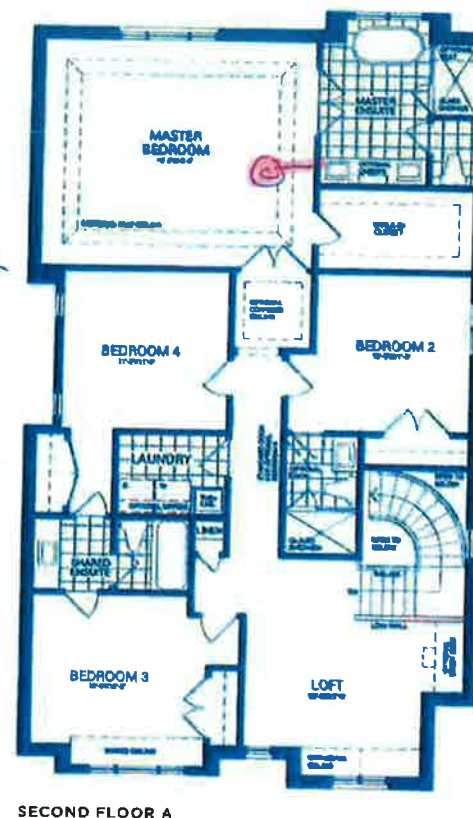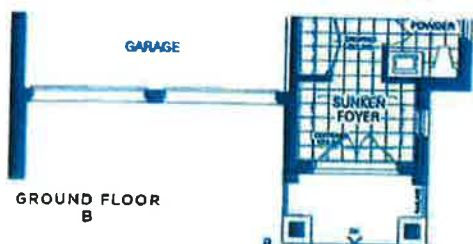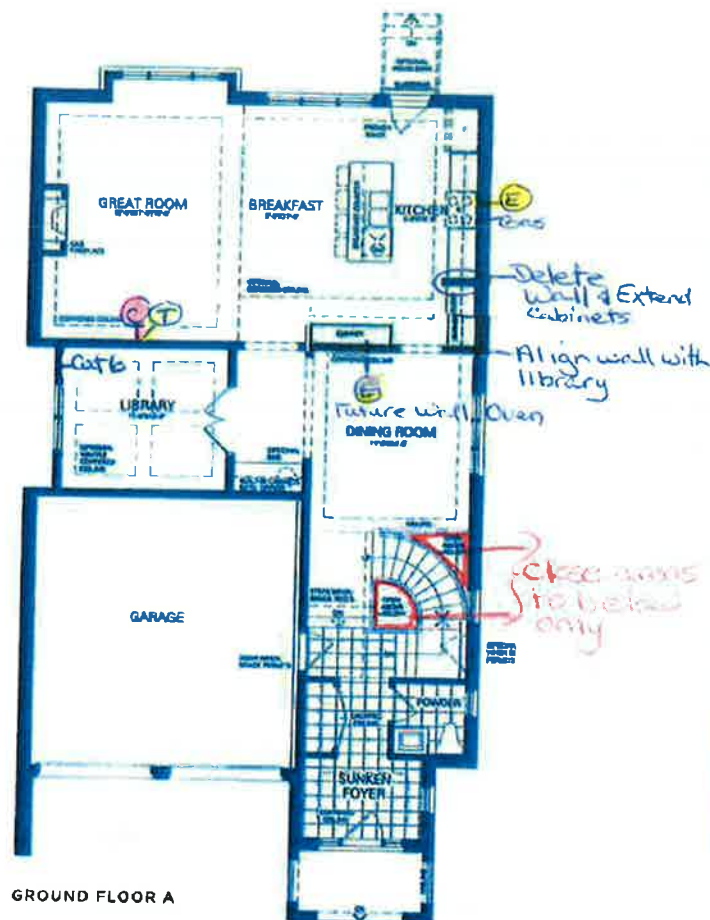

Additional window—
 30 x 16



Peachtree

Elevation A

2,917 Sq.ft.

Includes 110 Sq.ft. of Finished Basement

Elevation B

2,933 Sq.ft.

Includes 110 Sq.ft. of Finished Basement

Disclaimer: All dimensions are approximate and subject to normal construction variances. Dimensions may exceed the useable floor area. Sizes and specifications subject to change without notice. Furniture is displayed for illustration purposes only and does not necessarily reflect the electrical plan for the suite. Suites are sold unharshish. Balcony and facade variations may apply, contact a sales representative for further details. E&O.E. ©Valery Homes 2018. All rights reserved.

LOT 44

KitchenAid®

FOR THE WAY IT'S MADE.™

30" (72.6 cm) and 36" (91.4 cm) Wall-Mount Canopy Range Hood

PRODUCT MODEL NUMBERS

KVWB600D

KVWB606D

Electrical: A 120 Volt, 60 Hz., AC only, 15-amp, fused electrical circuit is required.

VENTING METHODS

This canopy range hood is factory set for venting through the roof or through the wall.

A 6" (15.2 cm) round vent system is needed for installation (not included). The hood exhaust opening is 6" (15.2 cm) round.

NOTE: Flexible vent is not recommended. Flexible vent creates back pressure and air turbulence that greatly reduce performance.

Vent system can terminate either through the roof or wall. To vent through a wall, a 90° elbow is needed.

Rear Discharge

A 90° elbow may be installed immediately above the hood.


For Non-Vented (Recirculating) Installations

If it is not possible to vent cooking fumes and vapors to the outside, the hood can be used in the non-vented (recirculating) version, using a Recirculation Kit (which includes charcoal filters and a deflector). To order, see the "Assistance or Service" section.

Roof Venting

Wall Venting

Non-Vented (Recirculating)

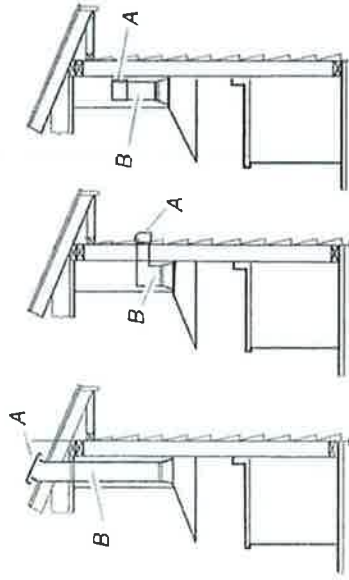

A. Roof cap
B. 6" (15.2 cm)
round vent

A. Wall cap
B. 6" (15.2 cm)
round vent

A. Diverter
B. 6" (15.2 cm)
round vent

Calculating Vent System Length

To calculate the length of the system you need, add the equivalent feet (meters) for each vent piece used in the system.

Vent System

Vent Piece
45° elbow

6" (15.2 cm) Round
2.5 ft
(0.8 m)




90° elbow

5.0 ft
(1.5 m)



Maximum equivalent vent length is 35 ft (10.7 m).

Example Vent System

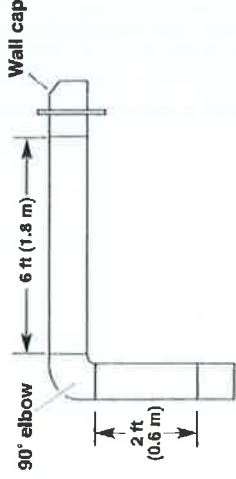

The following example falls within the maximum recommended vent length of 35 ft (10.7 m).


1 - 90° elbow = 5.0 ft (1.5 m)

1 - wall cap = 0.0 ft (0.0 m)

8 ft (2.4 m) straight = 8.0 ft (2.4 m)

Length of system = 13.0 ft (3.9 m)

PRODUCT DIMENSIONS

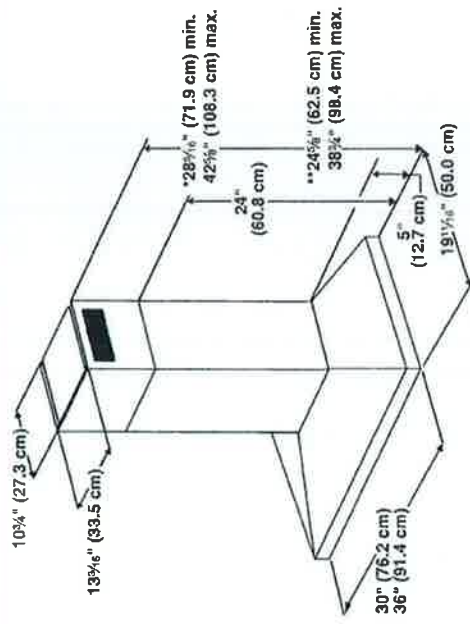

*For non-vented (recirculating) installations


**For vented installations

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

Handwritten signature or mark.

CABINET DIMENSIONS

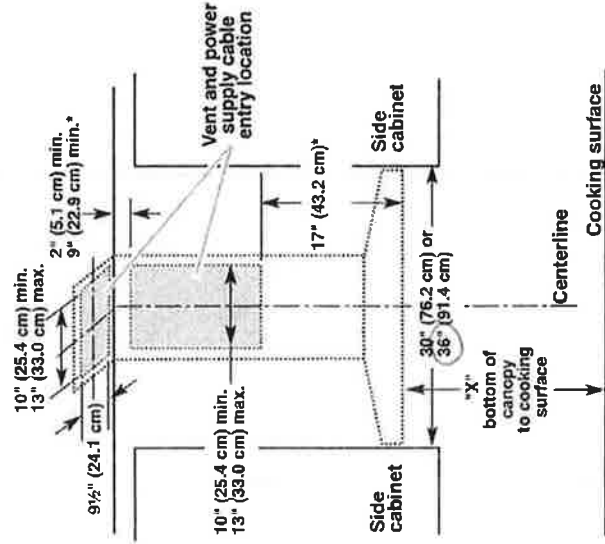

*For non-vented (recirculating) installations

IMPORTANT:

- Minimum distance "X": 24" (61.0 cm) from electric cooking surface.
- Minimum distance "X": 27" (68.6 cm) from gas cooking surfaces.
- Suggested maximum distance "X": 36" (91.4 cm)

The chimneys can be adjusted for different ceiling heights. See the following chart.

Vented Installations			
	Min. ceiling height	Max. ceiling height	
Electric cooking surface	7' 1" (2.16 m)	9' 2" (2.79 m)	
Gas cooking surface	7' 4" (2.23 m)	9' 2" (2.79 m)	
Non-vented (recirculating) Installations			
	Min. ceiling height	Max. ceiling height	
Electric cooking surface	7' 1" (2.16 m)	9' 6" (2.9 m)	
Gas cooking surface	7' 4" (2.23 m)	9' 6" (2.9 m)	

***NOTE:** The range hood chimneys are adjustable and designed to meet varying ceiling or soffit heights depending on the distance "X" between the bottom of the range hood and the cooking surface. For higher ceilings, a Chimney Extension Kit is available from your dealer or an authorized parts distributor. The chimney extension replaces the chimney shipped with the range hood. To order, see the "Assistance or Service" section.

30" (76.2 CM) AND 36" (91.4 CM) GAS BUILT-IN COOKTOP

PRODUCT MODEL NUMBERS

KCGS350E	KCGS950E	MGC9530D	WCG75US0D
KCGS356E	KCGS956E	MGC9536D	WCG97US0D
KCGS550E	MGC7430D	WCG51US0D	WCG97US6D
KCGS556E	MGC7536D	WCG51US6D	

GAS SUPPLY REQUIREMENTS

Type of Gas

Natural Gas:

- This cooktop is factory set for use with Natural gas. If converting to LP gas, see the "LP Gas Conversion" instructions provided in the package containing the model/serial rating plate located on the underside of the cooktop base has information on the types of gas that can be used. If the types of gas listed do not include the type of gas available, check with the local gas supplier.

LP Gas Conversion:

Conversion must be done by a qualified service technician.

No attempt shall be made to convert the cooktop from the gas specified on the model/serial rating plate for use with a different gas without consulting the serving gas supplier. See the Gas Conversion instructions provided in the package containing literature.

Gas Supply Line

- Provide a gas supply line of 3/4" (1.9 cm) rigid pipe to the cooktop location. A smaller size pipe on longer runs may result in insufficient gas supply. Pipe-joint compounds that resist the action of LP gas must be used. Do not use TEFLON[®] tape. With LP gas, piping or tubing size should be 1/2" minimum. Usually, LP gas suppliers determine the size and materials used in the system.

Flexible metal appliance connector:

- If local codes permit, use a 1/2" or 3/4" I.D. flexible stainless steel tubing gas connector, designed by CSA to connect the cooktop to the rigid gas supply line.




- A 1/2" male pipe thread is needed for connection to the female pipe threads of the inlet to the cooktop pressure regulator.
- Do not kink or damage the flexible metal tubing when moving the cooktop.

Handwritten signature

- Must include a shutoff valve:

The supply line must be equipped with a manual shutoff valve. This valve should be located in the same room but external to the cooktop opening, such as an adjacent cabinet. It must be accessible without removing the cooktop, and it should be in a location that allows ease of opening and closing. Do not block access to shutoff valve. The valve is for turning on or shutting off gas to the cooktop.



- A. Gas supply line
- B. Shutoff valve "open" position
- C. To cooktop

¹TEFLON is a registered trademark of E.I. Du Pont De Nemours and Company.


ELECTRICAL REQUIREMENTS

- A 120 volt, 60 Hz, AC only, 15-amp, fused electrical circuit is required. A time-delay fuse or circuit breaker is also recommended. It is recommended that a separate circuit serving only this cooktop be provided.
- Electronic ignition systems operate within wide voltage limits, but proper grounding and polarity are necessary. Check that the outlet provides 120-volt power and is correctly grounded.

Lot 44


PRODUCT DIMENSIONS

KCGS550ESS and KCGS950ESS Models

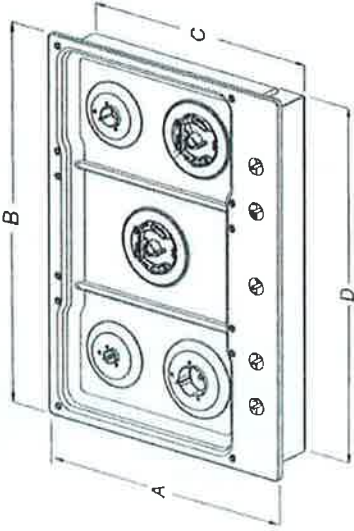


- A. 21" (53.3 cm)
- B. 30" (76.2 cm)
- C. 19 3/8" (49.2 cm)
- D. 28 3/8" (72.1 cm)

- E. 3 5/8" (9.2 cm)
- F. 4 5/8" (11.6 cm)
- G. 1 1/2" (3.4 cm)



KCGS556ESS and KCGS956ESS Models

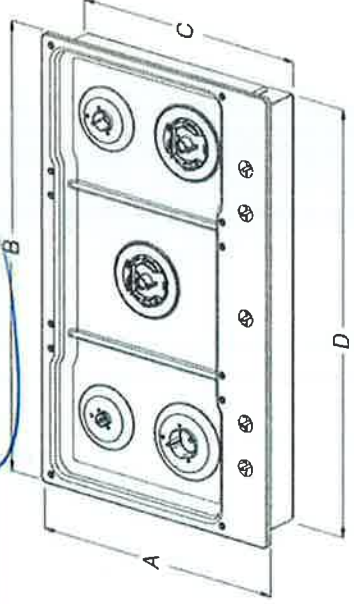


- A. 21" (53.3 cm)
- B. 36 1/2" (92.0 cm)
- C. 19 3/8" (49.2 cm)
- D. 34 3/8" (88.1 cm)

- E. 3 5/8" (9.2 cm)
- F. 4 5/8" (11.6 cm)
- G. 1 1/2" (3.6 cm)



All Other 30" (76.2 cm) Models

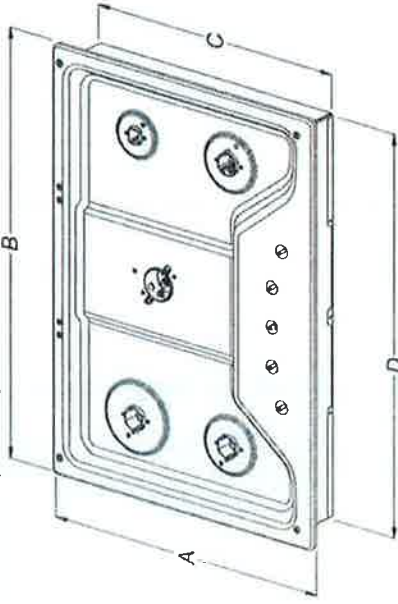


- A. 21" (53.3 cm)
- B. 30" (76.2 cm)
- C. 18 7/8" (48.0 cm)
- D. 28 3/8" (72.1 cm)

- E. 3 5/8" (8.6 cm)
- F. 4 1/8" (10.5 cm)
- G. 1 1/2" (3.8 cm)



All Other 36" (91.4 cm) Models

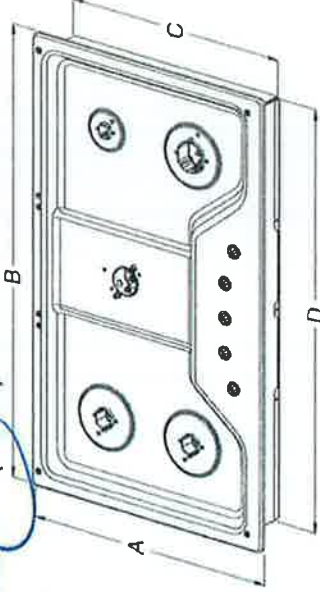

- A. 21" (53.3 cm)
- B. 36" (91.4 cm)
- C. 18 7/8" (48.0 cm)
- D. 33 3/4" (85.7 cm)


- E. 3 5/8" (8.6 cm)
- F. 4 1/8" (10.5 cm)
- G. 1 1/2" (3.8 cm)



imagine


Lot 44

CABINET DIMENSIONS

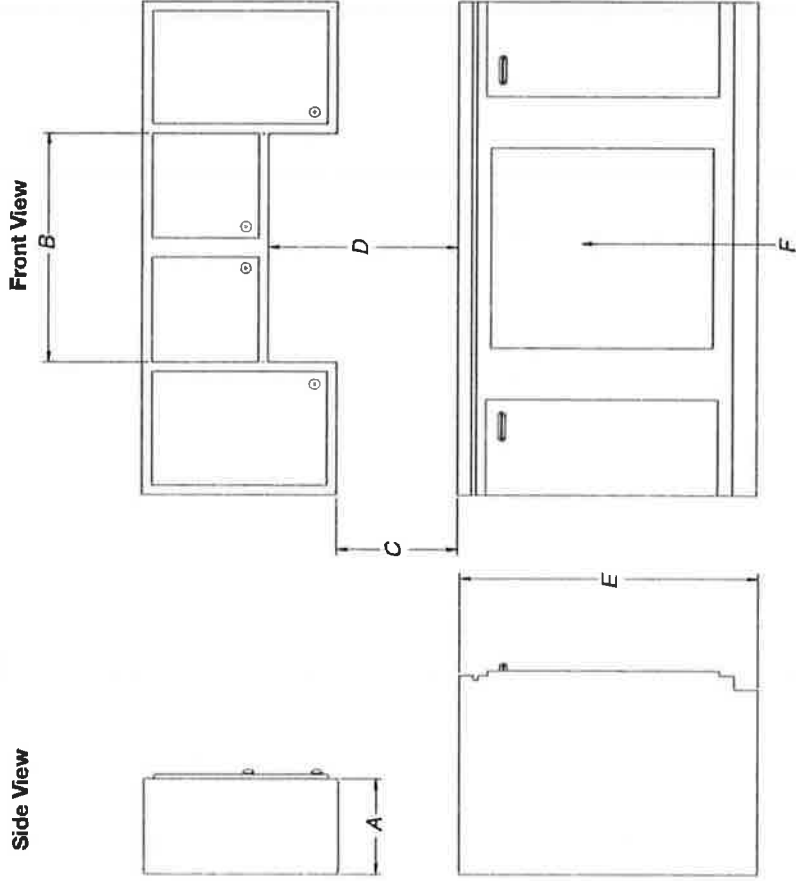

- A. 13" (33.0 cm) recommended upper cabinet depth.
- B. 30" (76.2 cm) for 30" models; 36" (91.4 cm) for 36" models.
- C. 18" (45.7 cm) minimum clearance from upper cabinet to countertop within minimum horizontal clearances to cooktop.
- D. 30" (76.2 cm) minimum clearance between top of cooktop platform and bottom of uncovered wood or metal cabinet. 24" (61 cm) minimum clearance if bottom of wood or metal cabinet is covered by not less than 1/4" (0.6 cm) flame retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015" (0.04 cm) stainless steel, or 0.024" (0.06 cm) aluminum or 0.020" (0.05 cm) copper.
- E. 36" (91.4 cm) top of countertop to floor.
- F. Gas line opening - Wall: anywhere 5" (12.7 cm) below underside of countertop. Cabinet floor: anywhere within 6" (15.2 cm) of rear wall is recommended.

lot 44

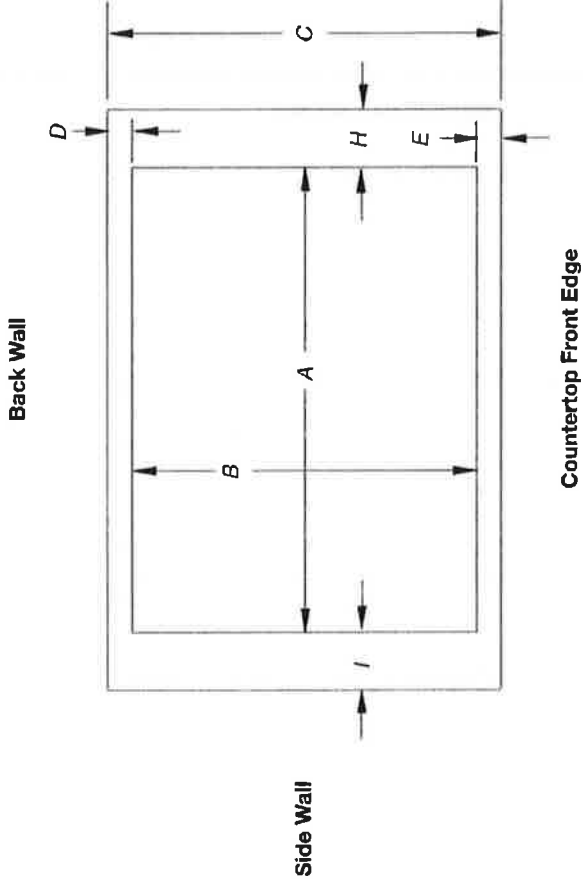

Cutout (Product Opening) Dimensions						
30" (76.2 cm) Models						
Models	A			B		
	Min	Recommended	Max	Min	Recommended	Max
KCGS550 and KCGS950 All Other 30" (76.2 cm) Models	28 1/2" (72.4 cm)	28 7/8" (73.4 cm)	29 3/8" (74.3 cm)	19 1/2" (49.5 cm)	19 3/16" (50.2 cm)	20" (50.8 cm)
	28 1/2" (72.4 cm)	28 7/8" (73.4 cm)	29 3/8" (74.3 cm)	19" (48.3 cm)	19 1/2" (49.5 cm)	20" (50.8 cm)
36" (91.4 cm) Models						
KCGS556 and KCGS956 All Other 36" (91.4 cm) Models	34 7/8" (88.4 cm)	35 3/8" (89.4 cm)	35 3/8" (90.3 cm)	19 1/2" (49.5 cm)	19 3/16" (50.2 cm)	20" (50.8 cm)
	33 7/8" (86.0 cm)	34 3/8" (87.0 cm)	35 1/4" (89.5 cm)	19" (48.3 cm)	19 1/2" (49.5 cm)	20" (50.8 cm)

Side Walls (Combustible Surfaces)	
Models	H and I
KCGS5 and KCGS9	H and I added together must be at least 48" (122.0 cm), with each side individually being at least 8" (20.3 cm).
KCGS350, KCGS356, MCG9536, WCG97US0, WCG97US6	H and I added together must be at least 48" (122.0 cm), with each side individually being at least 12" (30.5 cm).
All Other Models	Both have to be 8" (20.3 cm) or more.

Back Wall and Countertop Front Dimensions			
Models	C	D	E
KCGS550 and KCGS950	25" (63.5 cm)	2 7/8" (7.3 cm)	2 3/4" (6.9 cm)
All Other Models			3 1/8" (7.9 cm)

NOTES: After making the countertop cutout, some installations may require notching down the base cabinet side walls to clear the cooktop base. To avoid this modification, use a base cabinet with sidewalls wider than the cutout. If cabinet has a drawer, a 4" (10.2 cm) depth clearance from the countertop to the top of the drawer (or other obstruction) in base cabinet is required. The drawer depth may need to be shortened to avoid interfering with the regulator.

IMPORTANT: If a built-in wall oven is to be installed below this cooktop, the grounded outlet and gas supply piping must be located in an adjacent cabinet.

This cooktop and its gas and electrical supply sources must be installed before the undercounter built-in wall oven is installed.

Lot 44

KitchenAid® 27" (68.6 cm) and 30" (76.2 cm) Electric Built-In Microwave/Oven Combination

PRODUCT DIMENSIONS

PRODUCT MODEL NUMBERS
KEMS309E KOCE500E KOCE507E

ELECTRICAL CONNECTION


If codes permit and a separate ground wire is used, it is recommended that a qualified electrical installer determine that the ground path and the wire gauge are in accordance with local codes. Check with a qualified electrical installer if you are not sure the oven is properly grounded.

This oven must be connected to a grounded metal, permanent wiring system.

Be sure that the electrical connection and wire size are adequate and in conformance with the National Electrical Code, ANSI/NFPA 70-latest edition or CSA Standards C22.1-94, Canadian Electrical Code, Part 1 and C22.2 No. 0-M91-latest edition, and all local codes and ordinances.

To properly install your oven, you must determine the type of electrical connection you will be using and follow the instructions provided for it here.

- Oven must be connected to the proper electrical voltage and frequency as specified on the model/serial/rating plate. See the following illustration.



A. Model/serial/rating plate

- Models rated from 7.3 to 9.6 kW at 240 volts (5.4 to 7.4 kW at 208 volts) require a separate 40-amp circuit. Models rated at 4.8 kW and below at 240 volts (3.6 kW and below at 208 volts) require a separate 30-amp circuit.
 - A circuit breaker is recommended.
 - Connect directly to the fused disconnect (or circuit breaker box) through flexible, armored or nonmetallic sheathed, copper cable (with grounding wire). See "Make Electrical Connection" section.
 - Flexible conduit from the oven should be connected directly to the junction box.
 - Do not cut the conduit. The length of conduit provided is for serviceability of the oven.
 - A UL listed or CSA approved conduit connector must be provided.
 - If the house has aluminum wiring, follow the procedure below:
 1. Connect a section of solid copper wire to the pigtail leads.
 2. Connect the aluminum wiring to the added section of copper wire using special connectors and/or tools designed and UL listed for joining copper to aluminum.
- Follow the electrical connector manufacturer's recommended procedure. Aluminum/copper connection must conform with local codes and industry accepted wiring practices.

For power requirements, refer to the following table.

Model	Voltage	Amperage (L1)*	Amperage (L2)*	Rating (W)
KOCE507E/KOCE500E	120/240	32	30	8000
KOCE507E/KOCE500E	120/208	30	28	6600


*Amperage values noted above are for information purposes only: the units are rated in watts.

Because Whirlpool Corporation includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

Handwritten signature


Dimensions are for planning purposes only. For complete details, see installation instructions packed with product. Specifications subject to change without notice.

Ref. W107256835
2/10/15

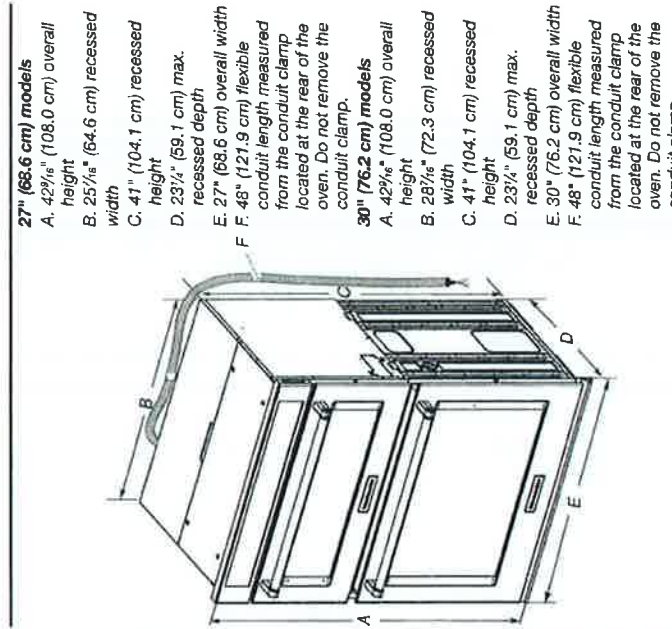

- 27" (68.6 cm) models**
A. 42⁵/₁₆" (108.0 cm) overall height
B. 25⁷/₁₆" (64.6 cm) recessed width
C. 41" (104.1 cm) recessed height
D. 23¹/₄" (59.1 cm) max. recessed depth
E. 27" (68.6 cm) overall width
F. 48" (121.9 cm) flexible conduit length measured from the conduit clamp located at the rear of the oven. Do not remove the conduit clamp.
- 30" (76.2 cm) models**
A. 42⁵/₁₆" (108.0 cm) overall height
B. 28⁷/₁₆" (72.3 cm) recessed width
C. 41" (104.1 cm) recessed height
D. 23¹/₄" (59.1 cm) max. recessed depth
E. 30" (76.2 cm) overall width
F. 48" (121.9 cm) flexible conduit length measured from the conduit clamp located at the rear of the oven. Do not remove the conduit clamp.

Cabinet Dimensions

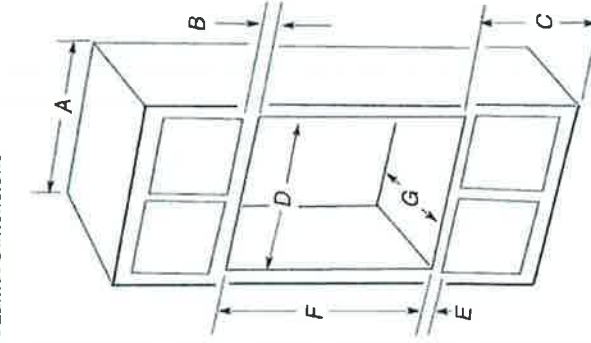

- 27" (68.6 cm) models**
A. 27" (68.6 cm) min. cabinet width
B. 1" (2.5 cm) top of cutout to bottom of upper cabinet door
C. 19¹/₂" (48.9 cm) bottom of cutout to floor is recommended.
4"-19¹/₂" (10.2-48.9 cm) bottom of cutout to floor is acceptable.
D. 25¹/₂" (64.8 cm) cutout width
E. 1¹/₂" (3.8 cm) min. bottom of cutout to top of cabinet door
F. 41⁵/₁₆" (105 cm)* recommended cutout height
G. 24" (60.7 cm) cutout depth
- 30" (76.2 cm) models**
A. 30" (76.2 cm) min. cabinet width
B. 1" (2.5 cm) top of cutout to bottom
C. 19¹/₂" (48.9 cm) bottom of cutout to floor is recommended.
4"-19¹/₂" (10.2-48.9 cm) bottom of cutout to floor is acceptable.
D. 28¹/₂" (72.4 cm) cutout width
E. 1¹/₂" (3.8 cm) min. bottom of cutout
F. 41⁵/₁₆" (105 cm)* recommended cutout
G. 24" (60.7 cm) cutout depth

* NOTE: The cabinet height can be between 41" (104.1 cm) and 41¹/₂" (105.6 cm) for microwave/oven combination.